

**SONY®**

---

DIGITAL CAMCORDER

**DSR-390**  
**DSR-390P**  
**DSR-370**  
**DSR-370P**  
**DSR-300A**  
**DSR-300AP**

---

**SERVICE MANUAL**

Volume 2 1st Edition (Revised 2)

---

**Power HAD**

**DVCAM™**



## **⚠ 警告**

このマニュアルは、サービス専用です。

お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。

危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

設置や保守、点検、修理などを行う前に、別冊のサービスマニュアルVolume 1の「安全のために」と別冊の取扱説明書の「安全のために」を必ずお読みください。

## **⚠ WARNING**

This manual is intended for qualified service personnel only.

To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

## **⚠ WARNUNG**

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.

Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

## **⚠ AVERTISSEMENT**

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.



## 目次 / Table of Contents

### このマニュアルについて

本書の目的 .....	5 (J)
関連マニュアル .....	5 (J)
構成 .....	7 (J)

### Manual Structure

Purpose of this manual .....	5 (E)
Related manuals .....	5 (E)
Contents .....	7 (E)

### 1. Spare Parts

1-1. 補修部品注意事項 .....	1-1
1-1. Notes on Repair Parts .....	1-1
1-2. Exploded Views .....	1-2
1-3. Electrical Parts List .....	1-25
1-4. Supplied Accessories List .....	1-122
1-5. Optional Fixtures List .....	1-122

### 2. Semiconductor Pin Assignments

Index .....	2-1
IC .....	2-6

### 3. Block Diagrams

Index .....	3-1
Camera Overall .....	3-2
VTR Overall (1/2) .....	3-4
VTR Overall (2/2) .....	3-5
VA-199 .....	3-6
DPR-141C/141A (1/3) .....	3-8
CP-373/315 (1/7), ES-31 (1/3)	
DPR-141C/141A (2/3) .....	3-10
DPR-141C/141A (3/3) .....	3-11
ES-31 (2/3) .....	3-12
ES-31 (3/3) .....	3-13
CN-2277/1519, CP-373/315 (2/7) (3/7) (4/7)	

AT-150 .....	3-14
SE-566 .....	
Audio (1/2) .....	3-16
CP-373/315 (5/7), FP-118A/122 (1/4), SW-19 .....	
Audio (2/2) .....	3-17
AA-104, CP-373/315 (6/7), CN-1867, FP-118A/122 (2/4), LE-221 (2/2) .....	
System Control (1/2) .....	3-18
FP-118A/122 (3/4), KY-405, LE-221 (1/2) .....	
RP-91 .....	3-20
Servo (1/3) .....	3-21
CC-68, HN-227 (1/3), MT-114 (1/2), SE-295, SE-297, SV-213 (1/3) .....	
Servo (2/3) .....	3-22
HN-227 (2/3), SV-213 (2/3) .....	
Servo (3/3) .....	3-23
DU-36, HN-227 (3/3), MB-833, MT-114 (2/2), SV-213 (3/3) .....	
DV-21C/21A .....	3-24

#### 4. Schematic Diagrams and Frame Wiring

Index .....	4-1
Frame Wiring .....	4-2
PA-205 (R) .....	4-3
PA-206 (G) .....	4-3
PA-207 (B) .....	4-3
TG-187/187P .....	4-4
VA-199 .....	4-6
DPR-141C/141A .....	4-12
ES-31/31P .....	4-30
AT-150 .....	4-38
SE-566 .....	4-38
AT-142 .....	4-42
CN-1811 .....	4-45
FP-118A .....	4-46
KY-405 .....	4-46
FP-122 .....	4-56
FP-99 .....	4-65
GCN-16 .....	4-65
SW-929 .....	4-65
RP-91 .....	4-66
SE-298 .....	4-70
SV-213 .....	4-70
CC-68 .....	4-78
HN-227 .....	4-78

MT-114 .....	4-78
SE-295 .....	4-78
SE-297 .....	4-78
AA-104 .....	4-79
CN-1866 .....	4-79
CN-1867 .....	4-79
LE-221 .....	4-79
SW-18 .....	4-79
CN-1864 .....	4-80
CN-1865 .....	4-80
IR-33 .....	4-80
PSW-71 .....	4-80
SW-19 .....	4-80
CP-373 .....	4-81
CN-2277 .....	4-86
CP-315 .....	4-87
CN-1519 .....	4-89
CN-1873 .....	4-89
CN-1874 .....	4-89
PS-570 .....	4-89
CN-1823 .....	4-90
DV-21C/21A .....	4-90
MB-833 .....	4-92
DU-36 .....	4-94

## 5. Board Layouts

Index .....	5-1
AA-104 .....	5-2
AT-150 .....	5-3
AT-142 .....	5-4
CN-1823 .....	5-5
CN-1864 .....	5-5
CN-1865 .....	5-5
CN-2277 .....	5-5
CC-68 .....	5-6
CN-1519 .....	5-6
CN-1866 .....	5-6
CN-1867 .....	5-6
CN-1873 .....	5-6
CN-1874 .....	5-6
DU-36 .....	5-7

DV-21 .....	5-7
FP-99 .....	5-7
GCN-16 .....	5-7
CP-373 .....	5-8
CP-315 .....	5-9
DPR-141 .....	5-10
ES-31 .....	5-12
FP-118 .....	5-14
FP-122 .....	5-16
IR-33 .....	5-18
KY-405 .....	5-18
LE-221 .....	5-18
PA-205 .....	5-18
PA-206 .....	5-18
PA-207 .....	5-18
HN-227 .....	5-19
MT-114 .....	5-19
SE-295 .....	5-19
SE-297 .....	5-19
SE-298 .....	5-19
PS-570 .....	5-20
PSW-71 .....	5-20
SE-566 .....	5-20
MB-833 .....	5-21
SV-213 .....	5-22
RP-91 .....	5-24
SW-18 .....	5-24
SW-19 .....	5-24
SW-929 .....	5-24
TG-187 .....	5-25
VA-199 .....	5-26

## このマニュアルについて

### 本書の目的

本書はデジタルカムコーダDSR-390/370/300A, のサービスマニュアルVol.2です。本書は、サービスエンジニアの方々にご使用いただくことを想定し、部品レベルまでのサービスを前提とした情報（パーツリスト、半導体、ブロック図、回路図、マウント図）を記載しています。

### 関連マニュアル

この「サービスマニュアル Vol.2」の他に、下記のマニュアルが用意されています。入手を希望される方は、ソニーの営業窓口にお問い合わせください。

- ・取扱説明書 DSR-390 (DSR-390 に付属)

DSR-390 を実際に運用および操作するのに必要なマニュアルです。  
入手を希望される方は、ソニーの営業窓口にお問い合わせください。  
部品番号：3-776-645-0X

- ・CD-ROM マニュアル DSR-390 (別途用意)

DSR-390 の日本語、英語、フランス語、ドイツ語、イタリア語、およびスペイン語の取扱説明書 (PDF) が含まれています。  
入手を希望される方は、ソニーの営業窓口にお問い合わせください。  
部品番号：3-776-663-0X

- ・取扱説明書 DSR-370 (DSR-370 に付属)

DSR-370 を実際に運用および操作するのに必要なマニュアルです。  
入手を希望される方は、ソニーの営業窓口にお問い合わせください。  
部品番号：3-206-359-0X

- ・CD-ROM マニュアル DSR-370 (別途用意)

DSR-370 の日本語、英語、フランス語、ドイツ語、イタリア語、およびスペイン語の取扱説明書 (PDF) が含まれています。  
入手を希望される方は、ソニーの営業窓口にお問い合わせください。  
部品番号：3-691-094-0X

- ・サービスマニュアル Vol.1 DSR-390/DSR-370 (別途用意)

DSR-390/370 の部品の交換方法および調整などに関する情報を記載しています。  
入手を希望される方は、ソニーの営業窓口にお問い合わせください。  
部品番号：9-967-973-0X

- ・サービスマニュアル Vol.1 DSR-300A (別途用意)

DSR-300Aの取り扱い、操作方法と部品の交換方法および調整などに関する情報を記載しています。  
入手を希望される方は、ソニーの営業窓口にお問い合わせください。  
部品番号：9-955-209-1X

- ・ **サービスマニュアル DSBK-301A (別途用意)**

インデックスピクチャーボード DSBK-301A の取り付け方法と部品レベルまでのサービスを前提とした情報 (パーツリスト, 半導体, ブロック図, 回路図, マウント図) を記載しています。

入手を希望される方は, ソニーの営業窓口にお問い合わせください。

部品番号: 9-955-216-0X

- ・ **サービスマニュアル DSBK-501 (別途用意)**

アナログコンボジットインプットボード DSBK-501 の取り付け方法と部品レベルまでのサービスを前提とした情報 (パーツリスト, 半導体, ブロック図, 回路図, マウント図) を記載しています。

入手を希望される方は, ソニーの営業窓口にお問い合わせください。

部品番号: 9-955-217-0X

- ・ **サービスマニュアル DXF-801 (別途用意)**

ビューファインダ DXF-801 の部品レベルまでのサービスを前提とした情報 (部品交換方法, 調整要項, パーツリスト, 半導体, ブロック図, 回路図, マウント図) を記載しています。

入手を希望される方は, ソニーの営業窓口にお問い合わせください。

部品番号: 9-955-212-0X

- ・ **サービスマニュアル CA-370 (別途用意)**

インターカムアダプタ CA-370 の部品レベルまでのサービスを前提とした情報 (調整要項, パーツリスト, 半導体, ブロック図, 回路図, マウント図) を記載しています。

入手を希望される方は, ソニーの営業窓口にお問い合わせください。

部品番号: 9-967-978-0X

- ・ **サービスマニュアル CA-WR855 (別途用意)**

カメラアダプタ CA-WR855 の部品レベルまでのサービスを前提とした情報 (パーツリスト, 半導体, ブロック図, 回路図, マウント図) を記載しています。

入手を希望される方は, ソニーの営業窓口にお問い合わせください。

部品番号: 9-955-215-0X

- ・ **サービスマニュアル VCT-U14 (別途用意)**

三脚アタッチメント VCT-U14 のパーツリストです。

入手を希望される方は, ソニーの営業窓口にお問い合わせください。

部品番号: 9-977-221-0X

- ・ **サービスマニュアル VCL-718BX (別途用意)**

ズームレンズ VCL-718BX のパーツリストです。

入手を希望される方は, ソニーの営業窓口にお問い合わせください。

部品番号: 9-955-211-0X

- “Semiconductor Pin Assignments” CD-ROM 版（別途用意）

この“Semiconductor Pin Assignments” CD-ROM 版は、B&P カンパニーの機器に使用されている半導体を検索することができます。

このCD-ROMで検索できない半導体は、その半導体を使用されている機種の手冊に記載されています。手冊には、その機種に使用されているすべての半導体一覧とそのID番号を記載していますので、このCD-ROM版と合わせて使用してください。

部品番号：9-968-546-XX

---

## 構成

本書の構成を把握していただくために、全章の概略を以下に説明します。

### Section 1 Parts List

分解図および機構部品リスト、電機部品リストを記載しています。

### Section 2 Semiconductor Pin Assignments

本機で使用している半導体の型名一覧とその半導体標準図検索用ID番号を記載しています。

別売の“Semiconductor Pin Assignments” CD-ROM 版と合わせてご覧ください。また、本書作成時に、CD-ROM版に含まれていない半導体標準図がある場合は、本章に追加掲載しています。

### Section 3 Block Diagrams

各基板の機能や信号の流れを示すブロック図を記載しています。

### Section 4 Schematic Diagrams and Frame Wiring

全プリント基板の回路図とフレーム図を記載しています。

### Section 5 Board Layouts

基板のマウント図を記載しています。

## Manual Structure

---

### Purpose of this manual

This manual is the Service Manual Vol. 2 of the digital camcorder DSR-390/390P/370/370P/300A/300AP.

This manual is intended for use by trained service engineers, and describes information (parts lists, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts) on the premise of component level service.

---

### Related manuals

Besides to this Service Manual Vol. 2, the following manuals are provided.  
For obtaining, contact your local Sony Sales Office/Service Center.

- **Operating Instructions DSR-390/390P (Supplied with the DSR-390/390P)**

This manual is necessary for application and operation of the DSR-390/390P.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 3-776-645-1X

- **CD-ROM Manual DSR-390/390P (Supplied with the DSR-390/390P)**

This manual contains the Japanese, English, French, German, Italian, and Spanish operating instructions (PDF) of the DSR-390/390P.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 3-776-663-0X

- **Operating Instructions DSR-370/370P (Supplied with the DSR-370/370P)**

This manual is necessary for application and operation of the DSR-370/370P.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 3-206-359-1X

- **CD-ROM Manual DSR-370/370P (Supplied with the DSR-370/370P)**

This manual contains the Japanese, English, French, German, Italian, and Spanish operating instructions (PDF) of the DSR-370/370P.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 3-691-094-0X

- **Service Manual Vol. 1 DSR-390/390P/370/370P (Available on request)**

Contains the information on operation, the part replacement and adjustments of the DSR-390/390P/370/370P.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-967-974-0X

- **Service Manual Vol. 1 DSR-300A/300AP (Available on request)**

Contains the information on operation, the part replacement and adjustments of the DSR-300A/300AP.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-955-210-1X



- **Service Manual DSBK-301A (Available on request)**

Contains the information on installation, and the information on the premise of component level service (parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts) of the index picture board DSBK-301A.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-955-216-0X

- **Service Manual DSBK-501/501P (Available on request)**

Contains the information on installation, and the information on the premise of component level service (parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts) of the analog composite input board DSBK-501/501P.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-955-217-0X

- **Service Manual DXF-801/801CE (Available on request)**

Contains the information on the premise of component level service (part replacement, alignment, parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts) of the viewfinder DXF-801/801CE.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-955-212-0X

- **Service Manual CA-370 (Available on request)**

Contains the information on the premise of component level service (alignment, parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts) of the intercom adaptor CA-370.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-967-978-0X

- **Service Manual CA-WR855 (Available on request)**

Contains the information on the premise of component level service (parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts) of the camera adaptor CA-WR855.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-955-215-0X

- **Service Manual VCT-U14 (Available on request)**

Contains the parts list of the tripod adaptor VCT-U14.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-977-221-0X

- **Service Manual VCL-718BX (Available on request)**

Contains the parts list of the zoom lens VCL-718BX.

For obtaining, contact your local Sony Sales Office/Service Center.

Part No. 9-955-211-0X

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**

This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in B&P Company equipment.

Semiconductors that cannot be searched for on this CD-ROM are listed in the service manual for the corresponding unit. The service manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.

Part number: 9-968-546-XX

---

## **Contents**

The following is a summary of all the sections for understanding the contents of this manual.

### **Section 1 Parts List**

Contains the exploded views, the mechanical parts list, and the electrical parts list.

### **Section 2 Semiconductor Pin Assignments**

Contains information on semiconductors used for the unit.

It includes a complete list of the semiconductors and their ID Nos. for retrieving information on “Semiconductor Pin Assignments” CD-ROM, which is available separately.

Please refer to this section together with the “Semiconductor Pin Assignments” CD-ROM.

Information on the semiconductors not contained in the CD-ROM at the time of issue of this manual, if any, is given in this section as well.

### **Section 3 Block Diagrams**

Contains the block diagrams which show each board function and signal flow.

### **Section 4 Schematic diagrams and Frame Wiring**

Contains the schematic diagrams of all circuit boards and the frame wiring.

### **Section 5 Board Layouts**

Contains the board layouts for the unit.

## Section 1

### Spare Parts

#### 1-1. Notes on Repair Parts

##### 1. Safety Related Components Warning

###### **WARNING**

Components marked  $\Delta$  are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

##### 2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

Parts list has the present standardized repair parts.

##### 3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

##### 4. Harness

Harnesses with no part number are not registered as spare parts.

In need of repair, get components shown in the list and repair using them.

#### 1-1. 補修部品注意事項

##### 1. 安全重要部品

###### **$\Delta$ 警告**

$\Delta$  印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

##### 2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。

これは部品の共通化、改良等によるものです。

部品表には現時点での共通化された補修用部品が記載されています。

##### 3. 部品の在庫

部品表のSP (Supply code) 欄に "o" で示される部品は在庫していないことがあり、納期が長くなることがあります。


##### 4. ハーネス

部品番号が記載されていないハーネスは、サービス部品として登録されていません。

これらは、リストに展開されているコンポーネント部品で補修してください。

## Left/Right Panel Block

### 1-2. Exploded Views

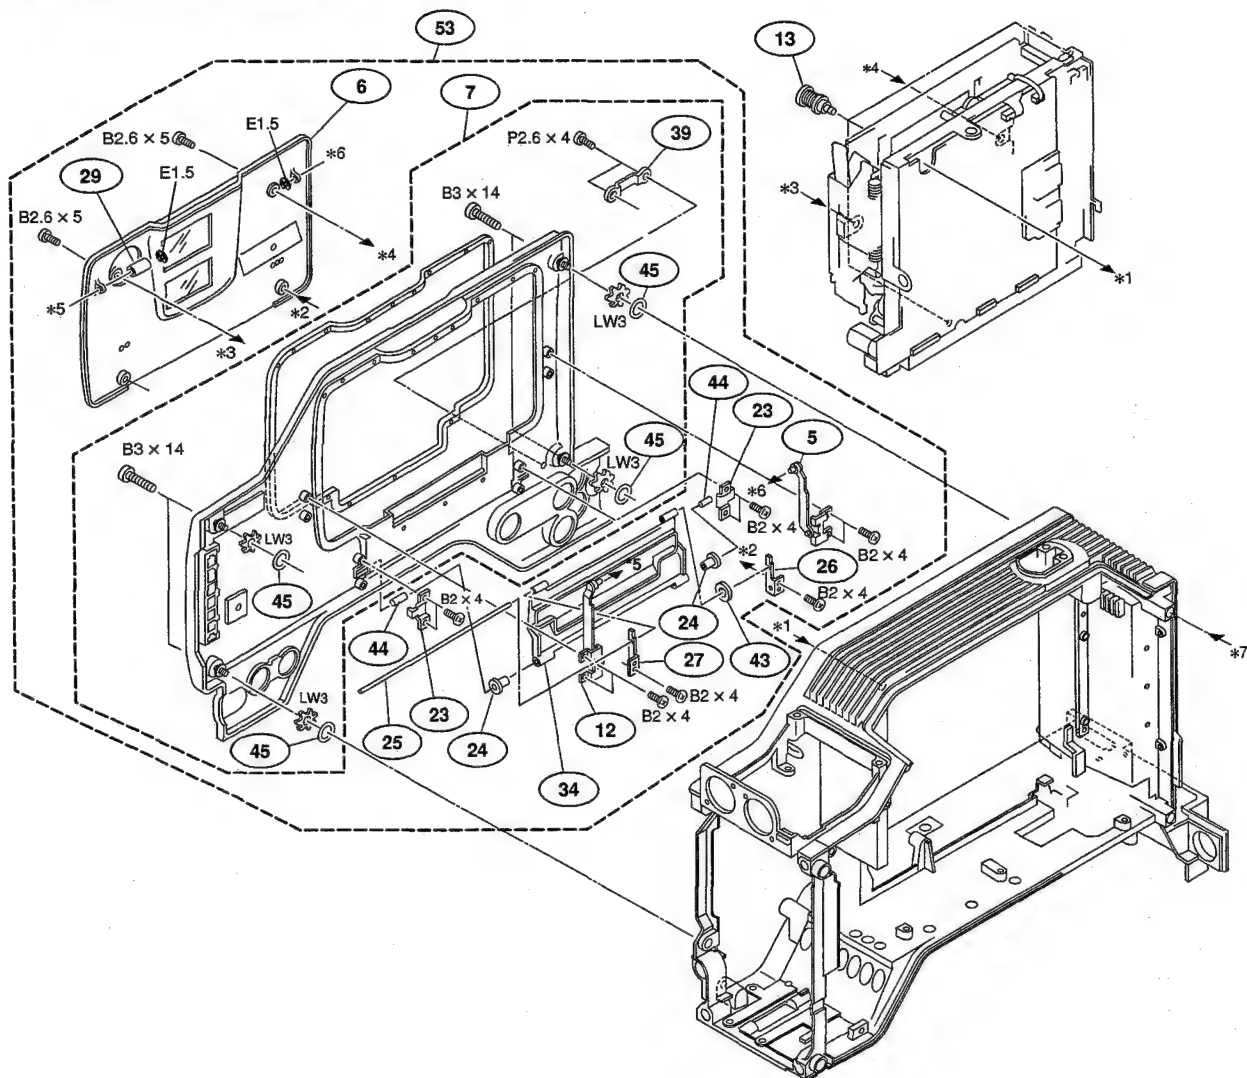


No.	Part No.	SP Description
1	A-8324-994-A	o MOUNTED CIRCUIT BOARD, FP-122 [for DSR-300A/300AP]
	A-8329-963-A	s MOUNTED CIRCUIT BOARD, FP-118A [for DSR-390/390P/370/370P]
2	A-8318-188-A	o MOUNTED CIRCUIT BOARD, KY-405
3	A-8322-170-A	o MOUNTED CIRCUIT BOARD, GCN-16
4	A-8318-233-A	o MOUNTED CIRCUIT BOARD, FP-99
5	X-3604-530-1	o SUPPORT L-M ASSEMBLY, ARM
6	X-3604-535-4	s LID ASSEMBLY, CASSETTE COMPARTMENT [for DSR-300A/300AP]
	X-3608-412-1	s LID ASSY, CASSETTE COMPARTMENT [for DSR-390/390P/370/370P]
7	X-3604-536-7	o L PANEL SUB ASSEMBLY [for DSR-300A/300AP]
	X-3608-409-2	o PANEL SUB ASSY, L [for DSR-390/390P/370/370P]
8	3-612-570-03	o PAD, R
9	X-3604-538-5	s COVER ASSEMBLY, FP [for DSR-300A/300AP]
	X-3608-410-2	s COVER ASSY, FP [for DSR-370/370P]
	X-3608-603-1	s ASSY, SIDE PANEL [for DSR-390/390P]

No.	Part No.	SP Description
10	X-3605-822-5	s R PANEL SUB ASSEMBLY(A) [for DSR-300A/300AP]
	X-3608-413-4	o SUB ASSY, R PANEL (B) [for DSR-390/390P/370/370P]
11	X-3605-818-1	o KEY PANEL SUB ASSEMBLY [for DSR-300A/300AP]
	X-3608-411-2	o SUB ASSY, KEY PANEL [for DSR-390/390P/370/370P]
12	X-3678-799-5	o SUPPORT L ASSEMBLY, ARM
13	X-3678-976-3	s SCREW ASSEMBLY, MD
14	1-473-406-11	s ENCODER, ED JOG, SW-929
15	1-544-559-11	s SPEAKER
16	1-550-414-31	s HOLDER, BATTERY
17	1-528-174-31	s BATTERY, LITHIUM(CR2032 TYPE)
18	1-777-902-11	o CABLE, FLAT TYPE(10-CORE)
19	1-783-363-11	s CABLE, FLAT TYPE(10-CORE)
20	3-176-488-01	s SHEET, VR
21	3-604-358-01	o KNOB(H), SW
22	3-604-373-03	o COVER, BATTERY
23	3-604-805-01	o CLAMP B, SHAFT
24	3-604-806-01	o SUPPORT, SHAFT


[illegible]DSR-390/390P/370/370P/300A/300AP V2

## Bottom/Rear Frame

No.	Part No.	SP Description
101	A-8278-413-E	s PLATE, CP ASSEMBLY
102	A-8278-790-C	o PANEL ASSEMBLY, BOTTOM [for DSR-300A/300AP]
	A-8279-670-A	o PANEL ASSY, BOTTOM (A) [for DSR-390/390P/370/370P]
103	A-8278-792-D	o PANEL ASSEMBLY, REAR
104	A-8278-807-D	s PAD ASSEMBLY, SHOULDER
105	A-8317-811-A	o MOUNTED CIRCUIT BOARD, CN-1519 [for DSR-300A/300AP]
	A-8329-788-A	s MOUNTED CIRCUIT BOARD, CN-2277 [for DSR-390/390P/370/370P]
106	A-8318-040-A	o MOUNTED CIRCUIT BOARD, CP-315 [for DSR-300A/300AP]
	A-8329-787-A	s MOUNTED CIRCUIT BOARD, CP-373 [for DSR-390/390P/370/370P]
107	A-8322-176-A	o MOUNTED CIRCUIT BOARD, PS-570
108	A-8327-543-A	s CONVERTER ASSY, DD
109	1-563-929-11	s CONNECTOR, 4P FEMALE "DC OUT"
110	1-572-042-11	s SWITCH, SLIDE
111	1-573-590-13	s CONNECTOR, S-TERMINAL 4P FEMALE "S VIDEO OUT"
112	1-673-955-11	o PRINTED WIRING BOARD, CN-1873
113	1-766-386-14	s CONNECTOR, XLR 3P FEMALE "AUDIO IN CH-1/CH2"
114	1-766-566-11	o CONNECTOR, 26P MALE "EXT VTR"
115	1-778-787-13	o CONNECTOR, COAXIAL BNC "GENLOCK IN /TC IN/TC OUT/MONITOR OUT"
116	1-778-788-11	o JACK, 2P "AUDIO OUT CH-1/CH-2"
117	1-958-497-12	s HARNESS, SUB (BATTERY)
118	3-604-359-01	o ADAPTOR, SW
119	3-604-376-01	o PLATE, CP
121	3-613-330-01	s ALOCK SCREW, PRECISION +P2.6X6
122	3-613-650-01	s SPACER
123	3-679-648-02	o SPRING, COMPRESSION
124	3-679-688-02	o LEVER, RELEASE
125	3-680-952-02	o KNOB, RELEASE LEVER
126	3-711-703-01	o STOPPER
127	3-718-694-01	s PIN, PUSH BUTTON
128	3-729-076-01	s SCREW, (+B2X3)
129	3-622-445-02	s SCREW, (+B3X18)
130	4-622-069-01	s SUPPORT, MODEM
131	1-958-496-12	s HARNESS, SUB (POWER LINE)
132	3-625-924-01	s ALOCK SCREW, +B2.6 NI
133	A-8322-181-B	o MOUNTED CIRCUIT BOARD, CN-1823
134	3-617-827-02	s COVER, DV
135	3-617-828-02	o BOX, DV [for DSR-300A/300AP]
	3-617-828-11	o BOX, DV [for DSR-390/390P/370/370P]
136	3-719-381-11	s SCREW, (M2X5)
137	7-627-553-38	s SCREW, PRECISION +P2X3
138	3-364-941-01	s SCREW (+B) (2.6X5), NYLOK

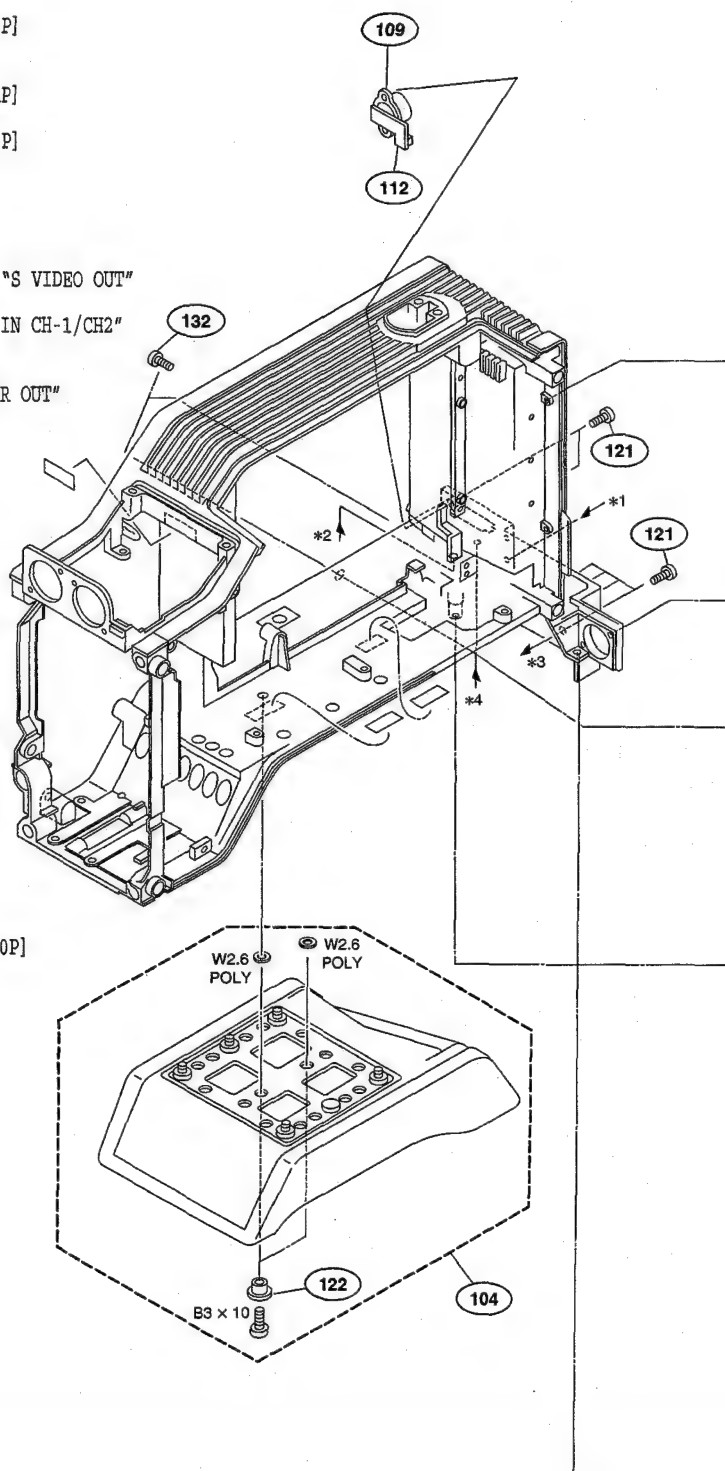


# Bottom/Rear Frame

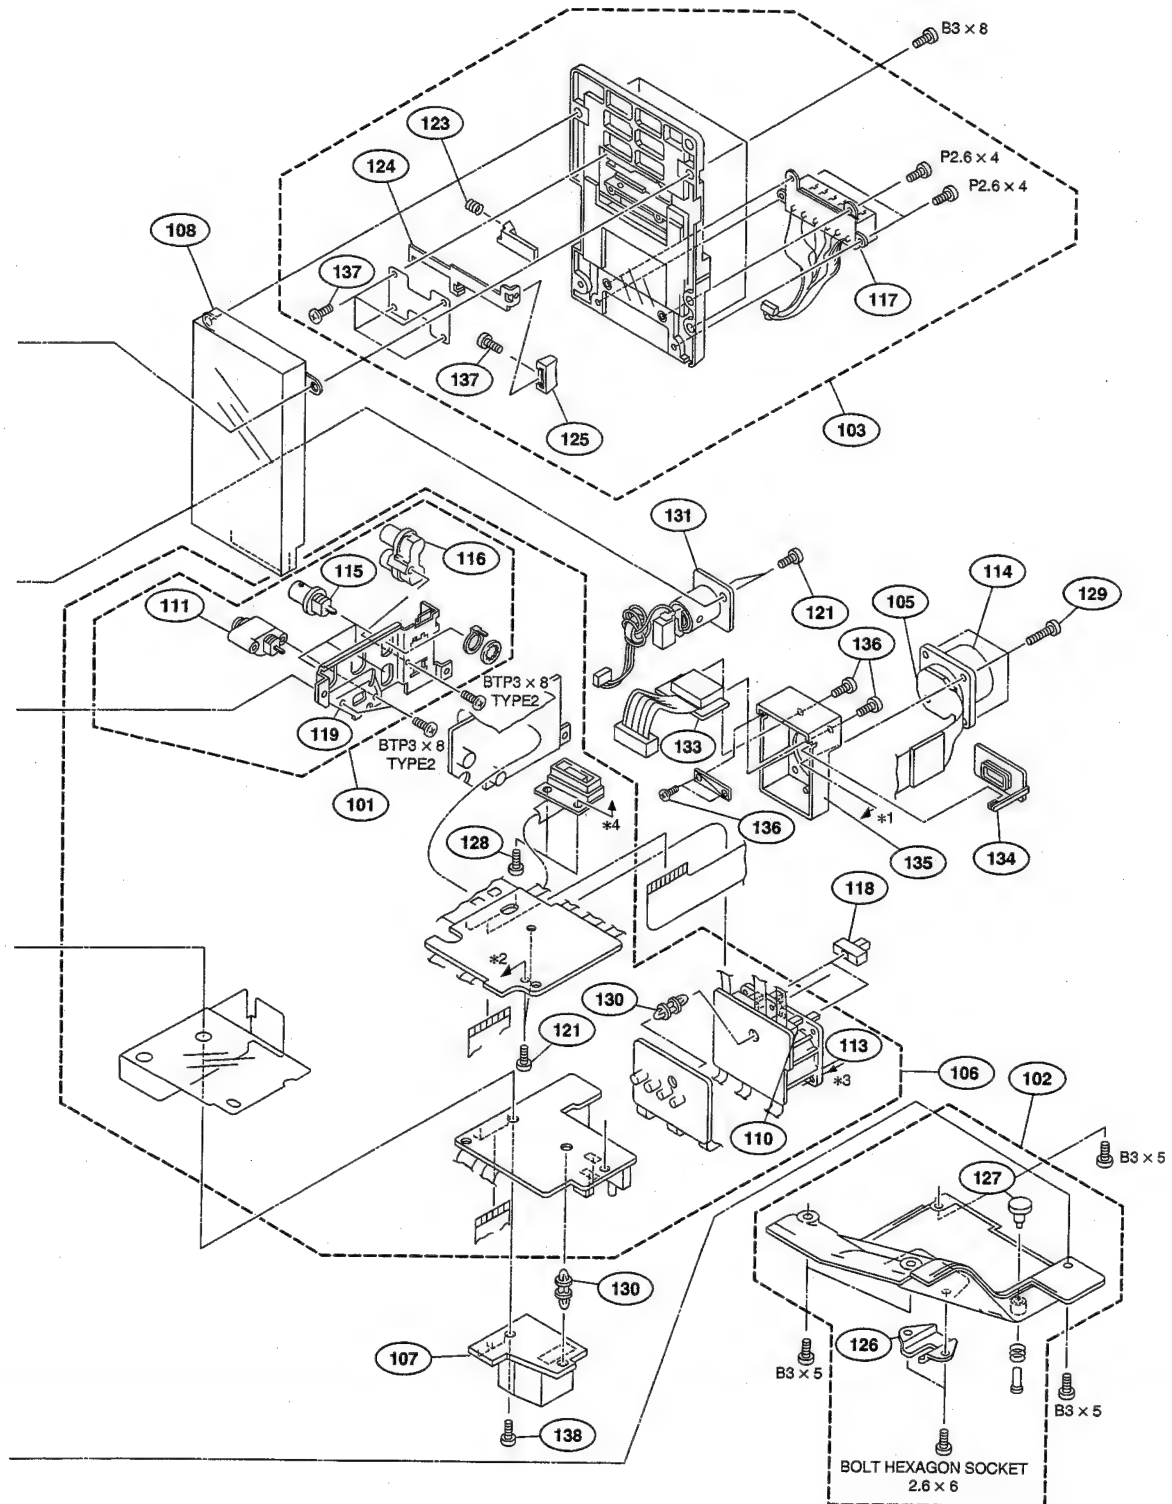

## Front Frame/Chassis Block/Boards

No.	Part No.	SP Description	No.	Part No.	SP Description
201	A-8322-150-B	o MOUNTED CIRCUIT BOARD, MB-833	211	A-8325-104-A	o MOUNTED CIRCUIT BOARD, DV-21C/21A [for DSR-300A/300AP]
202	A-8324-988-A	o MOUNTED CIRCUIT BOARD, DPR-141A [for DSR-300A/300AP]		A-8344-126-A	s MOUNTED CIRCUIT BOARD, DV-21C [for DSR-390/390P/370/370P]
	A-8344-130-A	s MOUNTED CIRCUIT BOARD, DPR-141C [for DSR-390/390P/370/370P]	212	3-729-013-41	s SCREW (M1.4X3.5), WASHERHEAD (+P)
203	A-8324-990-A	o MOUNTED CIRCUIT BOARD, ES-31 [for DSR-390/370/300A]	213	1-562-221-31	s CONNECTOR, 12P FEMALE "LENS"
	A-8324-992-A	o MOUNTED CIRCUIT BOARD, ES-31 (P) [for DSR-390P/370P/300AP]	214	1-562-382-31	s CONNECTOR, BNC "VIDEO OUT"
204	A-8324-984-A	o MOUNTED CIRCUIT BOARD, VA-199	215	1-565-443-11	s CONNECTOR, 10P FEMALE "REMOTE"
205	A-8324-996-A	o MOUNTED CIRCUIT BOARD, AT-142 [for DSR-300A/300AP]	216	1-570-984-11	s SWITCH, TOGGLE
	A-8329-857-A	s MOUNTED CIRCUIT BOARD, AT-150 [for DSR-390/390P/370/370P]	217	1-673-954-11	o PRINTED WIRING BOARD, DU-36
206	A-8322-177-A	o MOUNTED CIRCUIT BOARD, SW-19	218	1-764-394-11	s CONNECTOR, XLR 3P FEMALE "MIC IN +48V"
207	A-8322-168-A	o MOUNTED CIRCUIT BOARD, CN-1865	219	1-777-865-13	s CABLE, FLEXIBLE FLAT (40-CORE)
208	A-8322-167-A	o MOUNTED CIRCUIT BOARD, CN-1864	220	1-777-866-12	s CABLE, FLEXIBLE FLAT (45-CORE)
209	A-8322-165-B	o MOUNTED CIRCUIT BOARD, AA-104	221	1-777-867-12	s CABLE, FLEXIBLE FLAT (50-CORE)
210	A-8322-174-A	o MOUNTED CIRCUIT BOARD, PSW-71	222	1-783-282-14	s CABLE, FLEXIBLE FLAT (50-CORE)
			223	1-783-283-13	s CABLE, FLEXIBLE FLAT (50-CORE)
			224	1-677-405-11	s FLEXIBLE PRINTED WIRING BOARD, CN-1981
			225	1-783-285-13	s CABLE, FLEXIBLE FLAT (50-CORE)

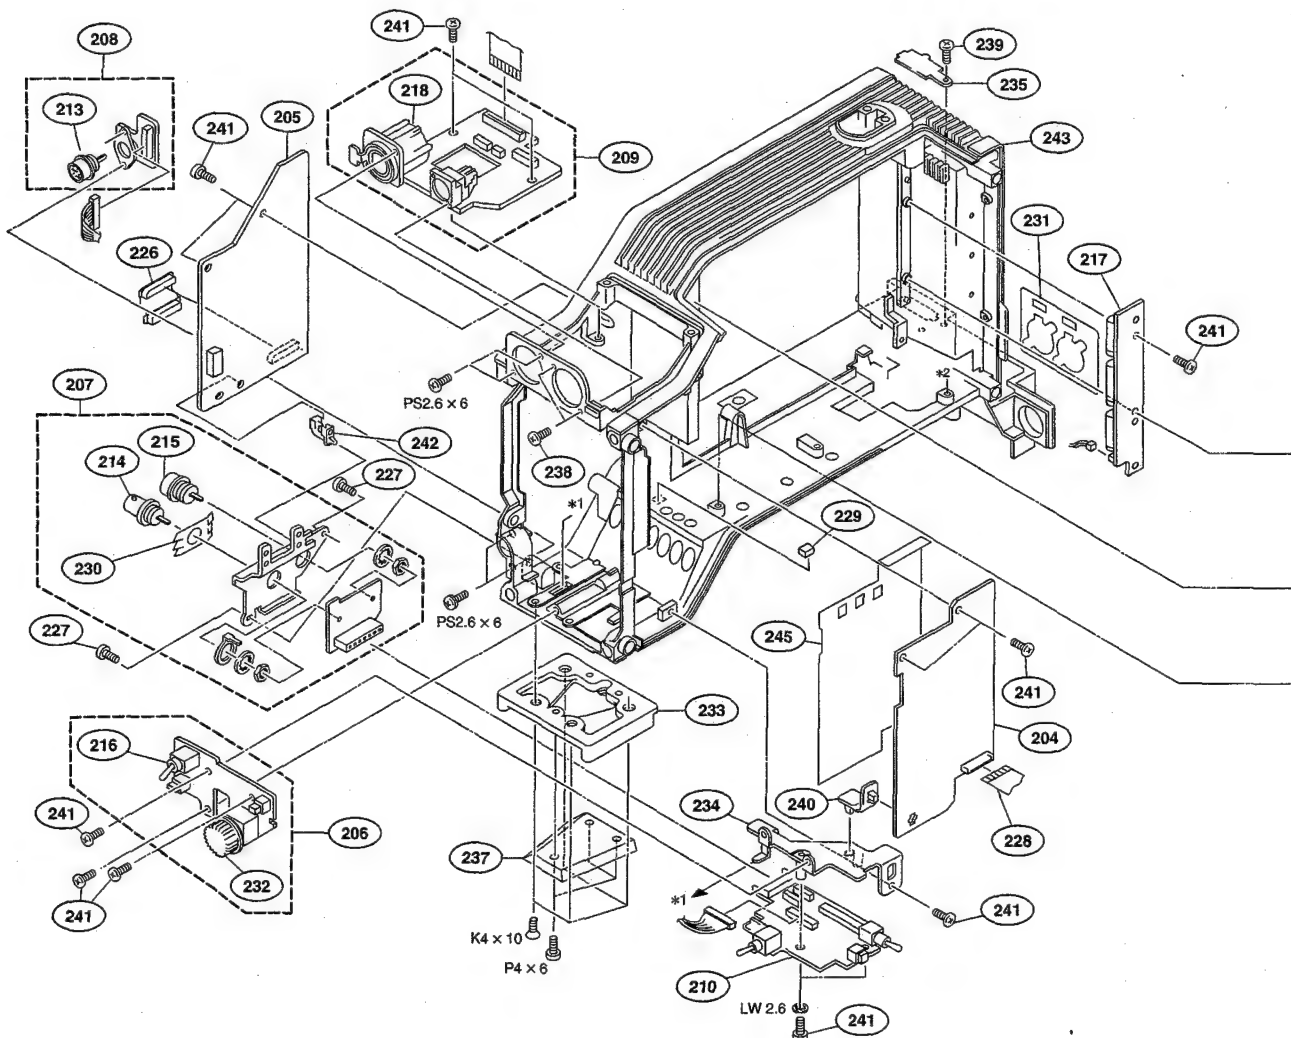




## Front Frame/Chassis Block/Boards


No.	Part No.	SP Description
226	A-8322-163-A	s MOUNTED CIRCUIT BOARD, CN-1811
227	3-614-427-01	s ALOCK SCREW, +B3X6
228	1-783-288-13	s CABLE, FLEXIBLE FLAT (30-CORE)
229	3-625-908-01	o SPACER
230	3-604-416-01	o SHIELD FINGER (CN)
231	3-612-575-01	o LABEL, BOX
232	3-612-604-01	s KNOB, VR (AUDIO)
233	3-612-631-01	o SHOE(S), CAMERA
234	3-612-663-02	s BRACKET, PSW
235	3-612-698-02	o COVER, CN (WIRELESS)
236	3-612-743-03	s SHEET, FP-122
237	3-716-391-01	o WEDGE, MOUNTING
238	3-729-076-21	s SCREW, +B2X6
239	3-965-077-01	s SCREW, SPECIAL (M2)
240	4-313-732-00	o CLIP, HINGE, CIRCUIT BOARD


No.	Part No.	SP Description
241	3-625-924-01	s ALOCK SCREW, +B2.6NI
242	3-175-660-01	o HINGE, PC BOARD
243	3-613-310-15	o FRAME [for DSR-300A/300AP]
	3-613-310-22	o FRAME [for DSR-390/390P/370/370P]
244	X-3604-621-1	o SHEET, DUST PROTECTION ASSEMBLY
245	3-690-627-01	o SHEET, VA

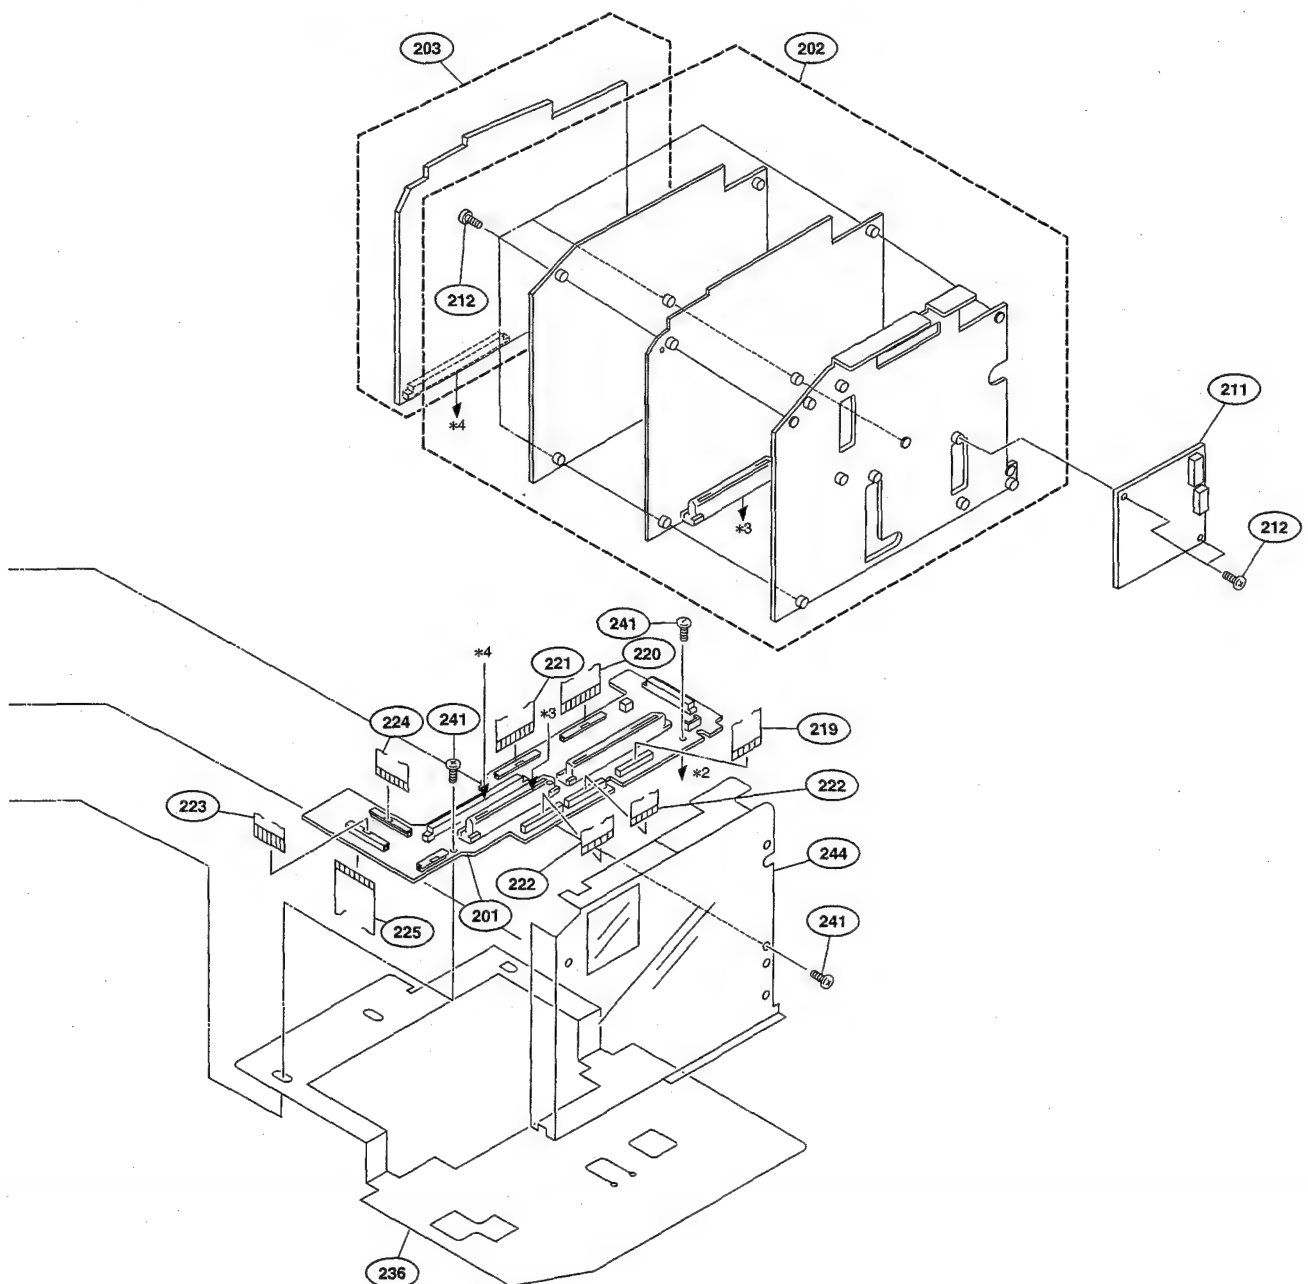


## CCD Block

No.	Part No.	SP Description
301	A-8325-511-A	s CCD UNIT-R300A(N) [for DSR-370/300A]
	A-8325-512-A	s CCD UNIT-R300A(P) [for DSR-370P/300AP]
	A-8346-741-A	s CCD UNIT-R390(N) [for DSR-390]
	A-8346-742-A	s CCD UNIT-R390(P) [for DSR-390P]
302	1-547-463-22	o FILTER UNIT, OPTICAL
303	3-604-391-01	o COVER, SW(M)
304	3-184-550-31	s SCREW, + B2.6NI
305	3-612-608-01	o FIXING PLATE, FILTER
306	3-612-636-01	o GLASS, FILTER(5600K+1/8ND)
	3-612-636-11	o GLASS, FILTER(5600K+1/64ND)
	3-708-372-01	o GLASS, FILTER(3200K)
	3-708-372-21	o GLASS, FILTER(5600K)
	3-200-281-01	o GLASS, FILTER(CROSS) [OPTIONAL]
307	3-612-853-02	o PANEL, FRONT [for DSR-300A/300AP]
	3-612-853-11	o PANEL, FRONT [for DSR-390/390P/370/370P]
308	3-672-221-02	s PACKING, VR
309	3-672-250-01	s RING (M2.6), O
310	A-8318-219-A	s MOUNTED CIRCUIT BOARD, TG-187 [for DSR-390/370/300A]
	A-8318-242-A	s MOUNTED CIRCUIT BOARD, TG-187P [for DSR-390P/370P/300AP]
311	3-678-684-00	o HOLDER, CABLE
312	3-686-269-02	s STOPPER, MOUNT
313	3-688-781-02	s KNOB, FILTER
314	3-699-144-02	s CAP, MOUNT
315	3-701-506-01	s SET SCREW, DOUBLE POINT 3X4
316	7-627-452-28	s SCREW, PRECISION +K2X4
317	7-627-552-88	s SCREW, PRECISION +P1.7X2.2
318	3-175-632-01	o PLATE, GUIDE
319	3-626-792-01	o RING, MOUNT(D)
320	7-627-551-78	o SCREW, PRECISION +P1.4X4
321	3-729-076-11	s SCREW +B2X4(STEEL)

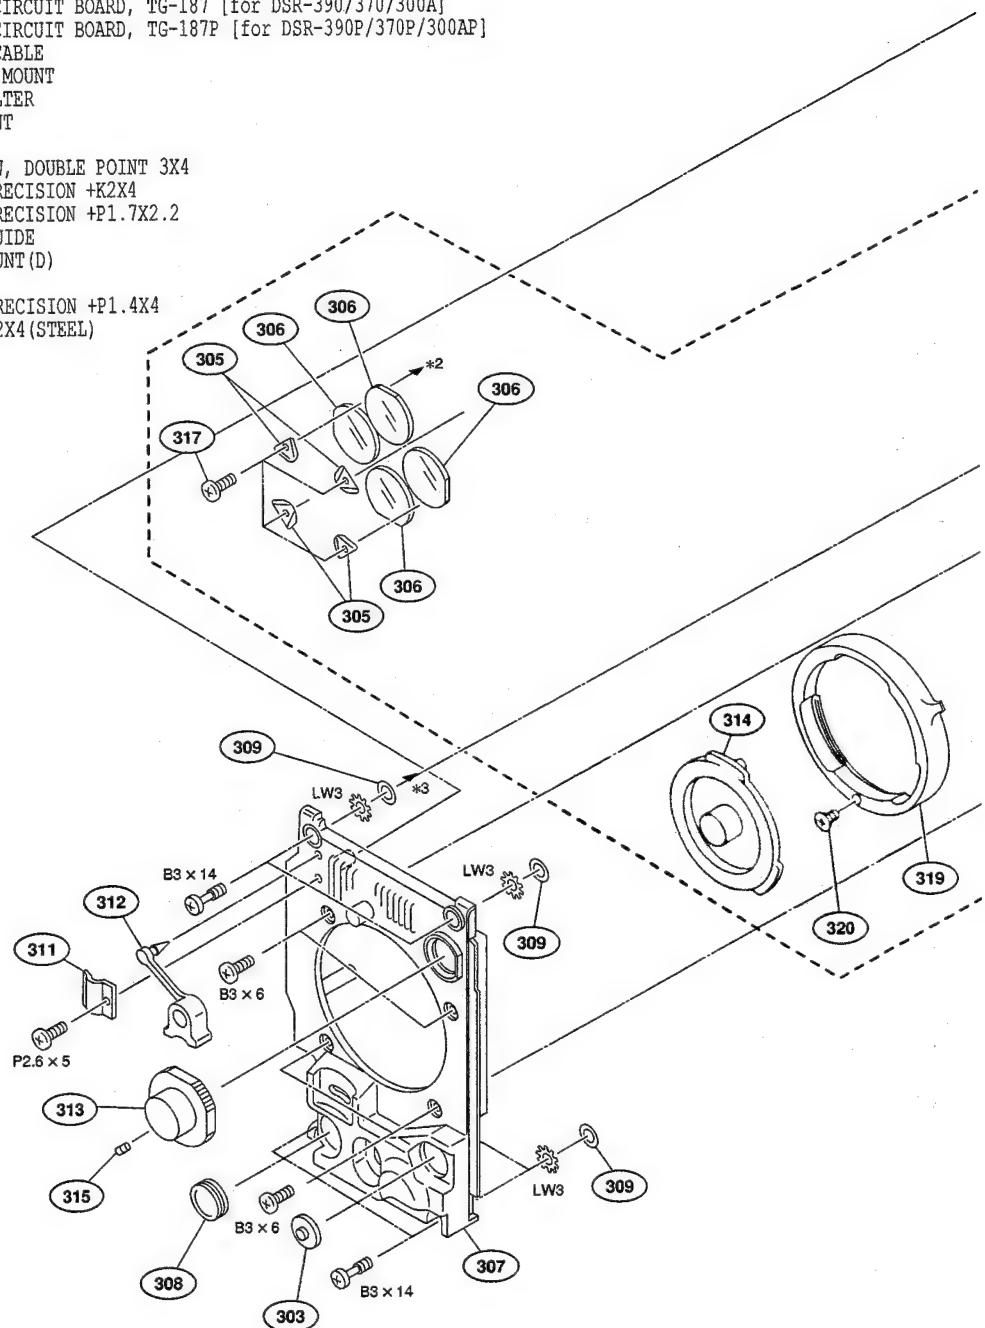


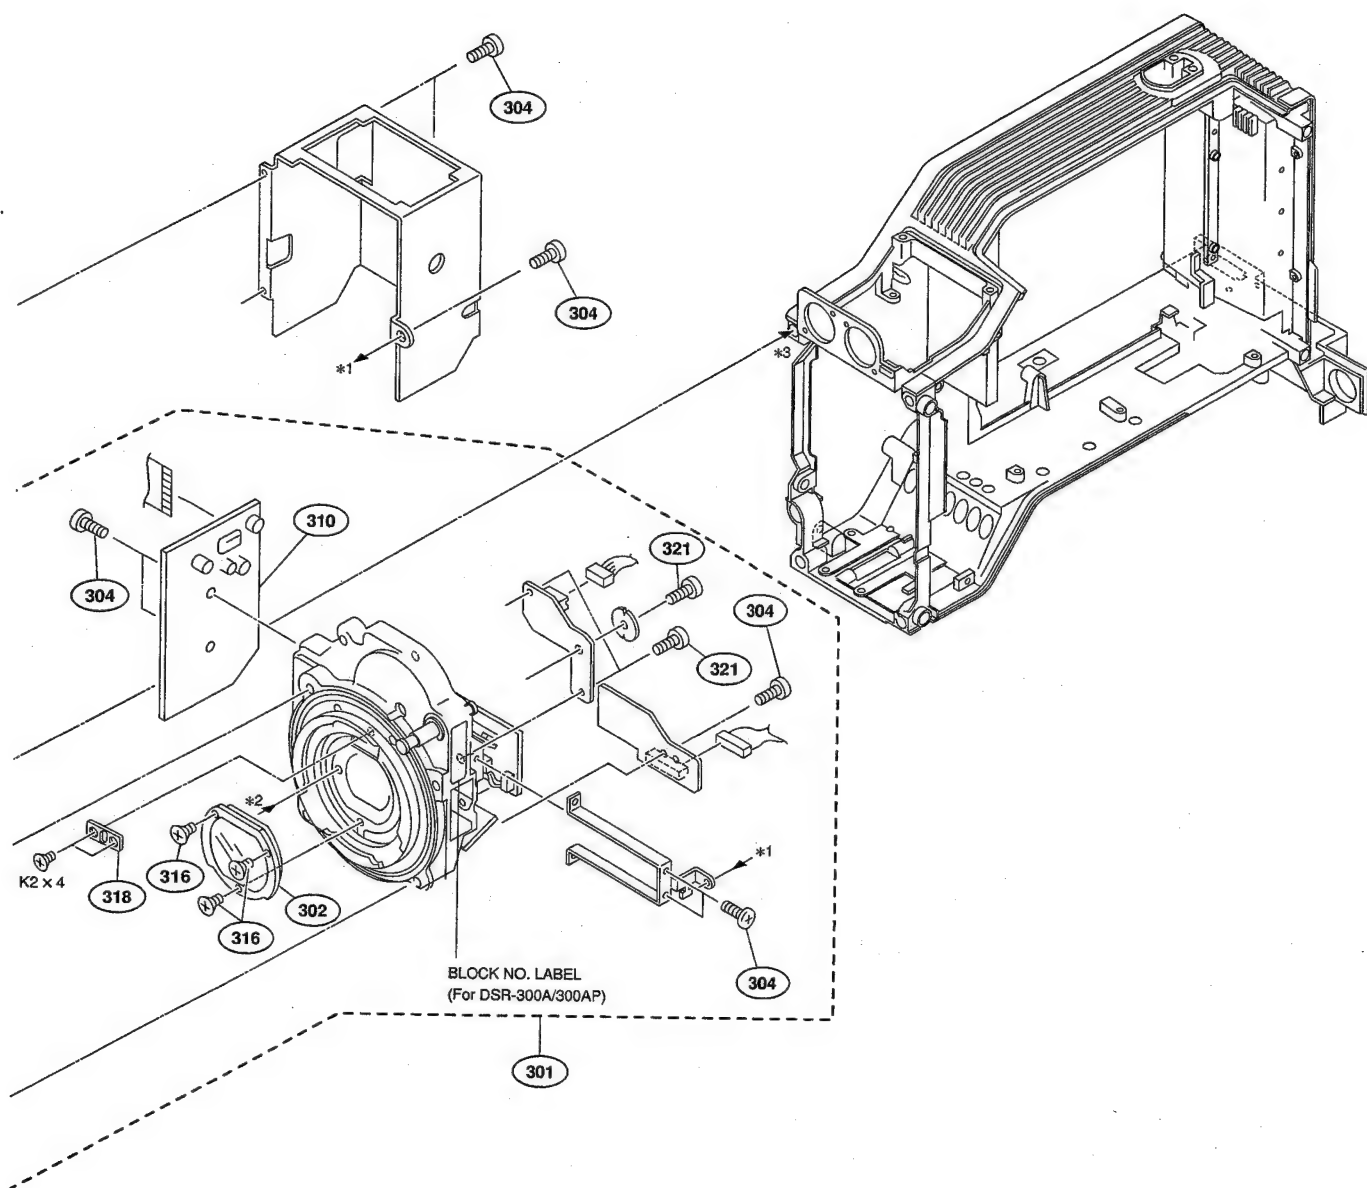


## Handle Block

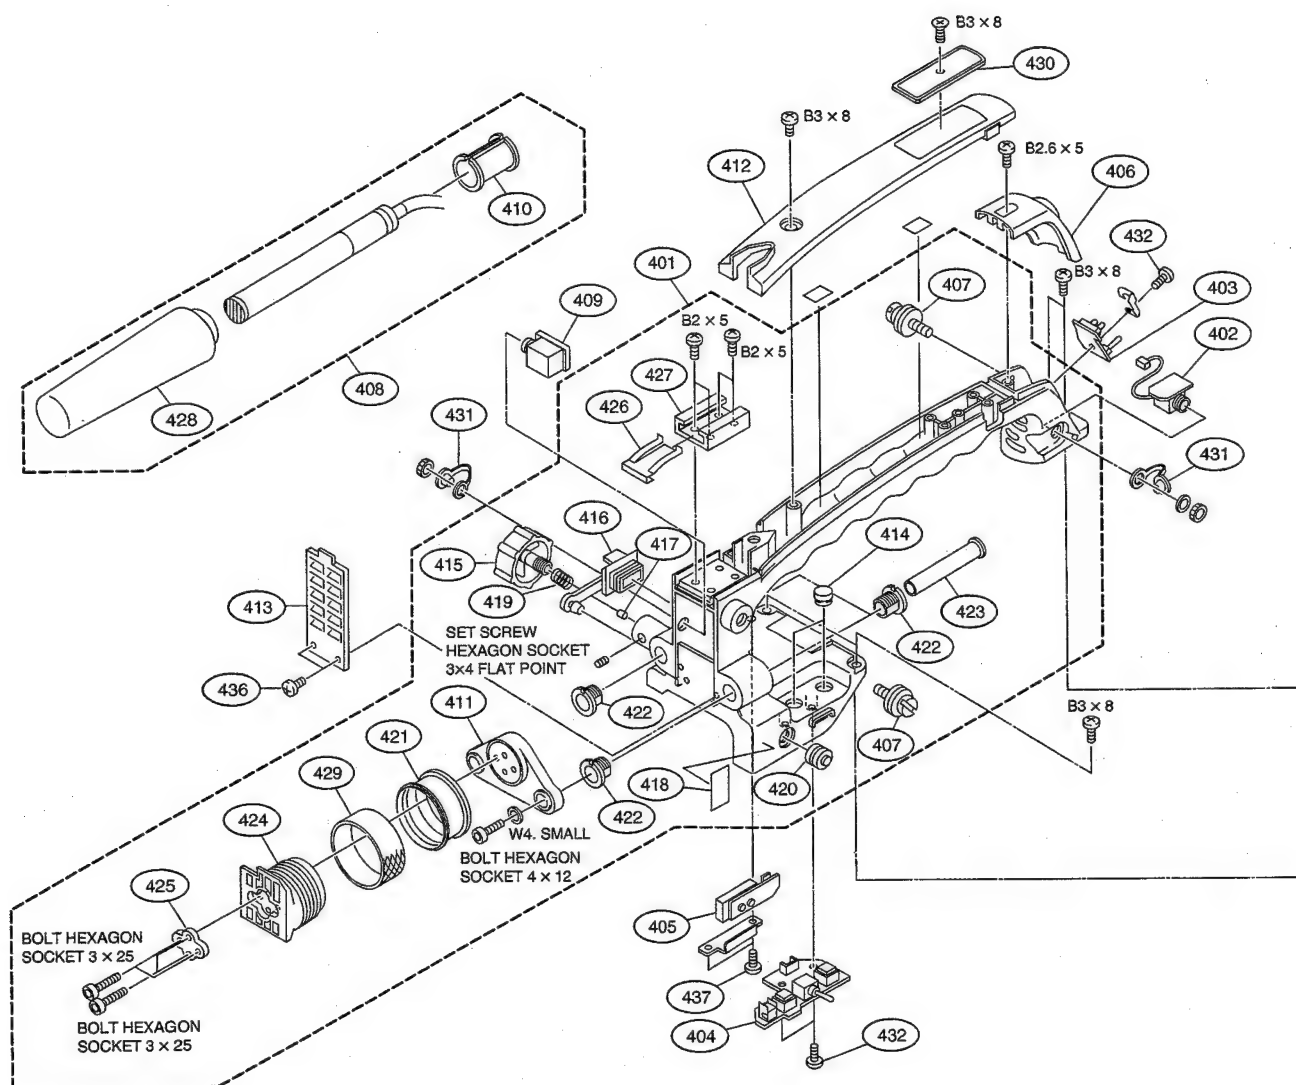


# Gear (1)

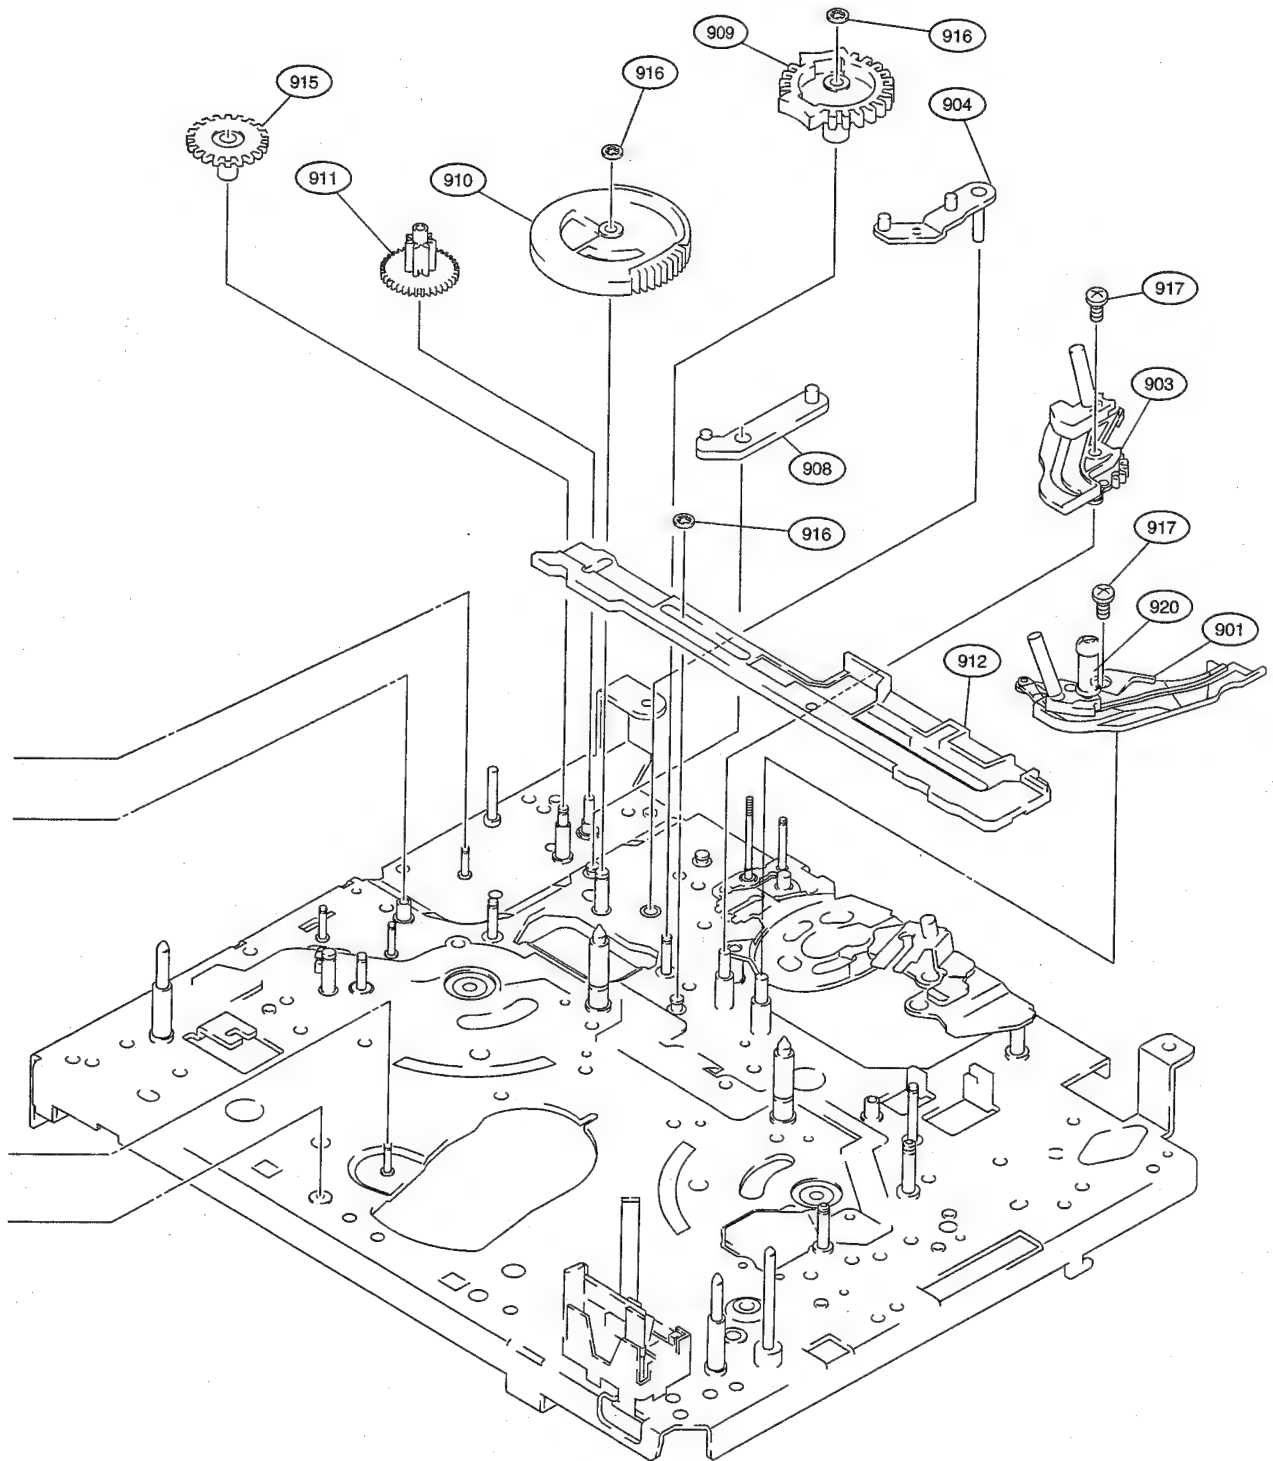


## Gear (2)

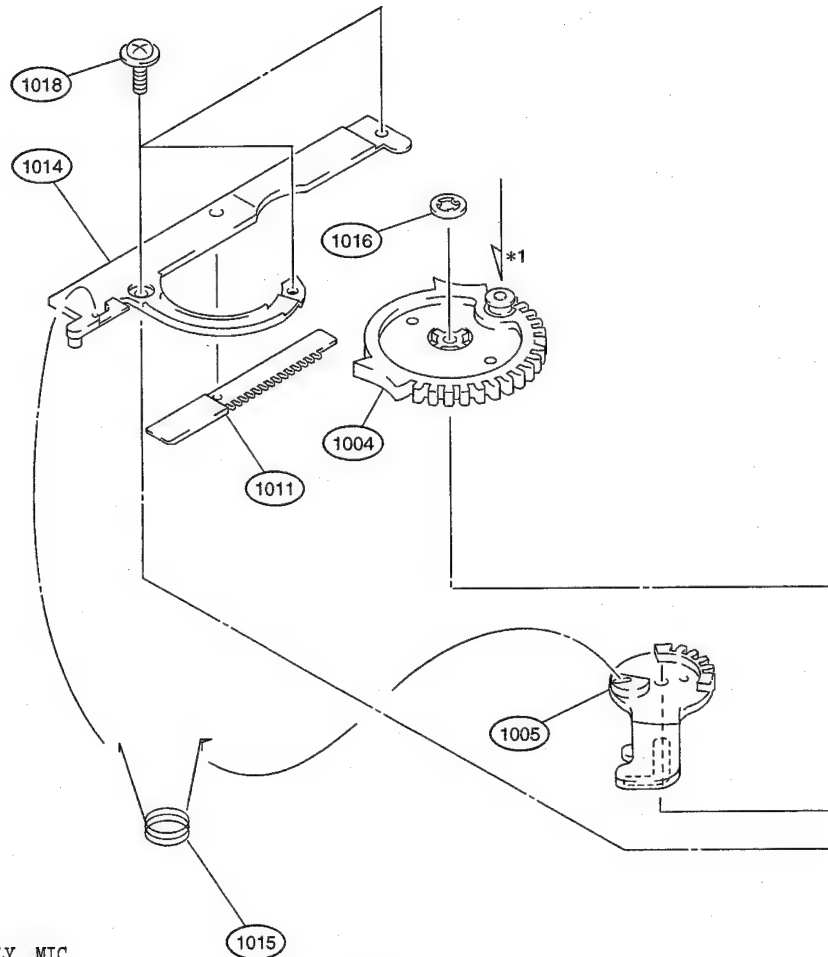


No.	Part No.	SP Description
1001	A-8311-396-C	o HOLDER (C) BLOCK ASSEMBLY, MIC
1002	X-3678-878-1	o REEL MOVE ARM ASSEMBLY
1003	X-3678-879-1	o REEL PLATE PRESS LINK ASSEMBLY
1004	X-3678-888-2	o GEAR ASSEMBLY, DRIVE B
1005	3-603-962-01	o LEVER, MIC
1006	3-603-968-01	o GEAR, B
1007	3-603-969-01	o GEAR, C
1008	3-603-970-01	o GEAR, A
1009	3-604-826-01	o SHAFT, NO.1 GEAR
1010	3-604-839-01	o DETENT, #1
1011	3-604-849-01	o RACK
1012	3-604-853-01	o GEAR, E
1013	3-605-312-01	o DRIVING GEAR A, REEL
1014	3-605-313-02	o CASE, RACK
1015	3-605-331-01	o SPRING, COMPRESSION, MIC
1016	3-669-465-01	s WASHER (1.5), STOPPER
1017	3-726-829-01	s WASHER, STOPPER
1018	3-729-013-21	s SCREW (M1.4X2.5), WASHERHEAD (+P)
1019	3-730-141-01	s SCREW (PSW2X4)
1020	3-729-078-11	s SPRING, TENSION

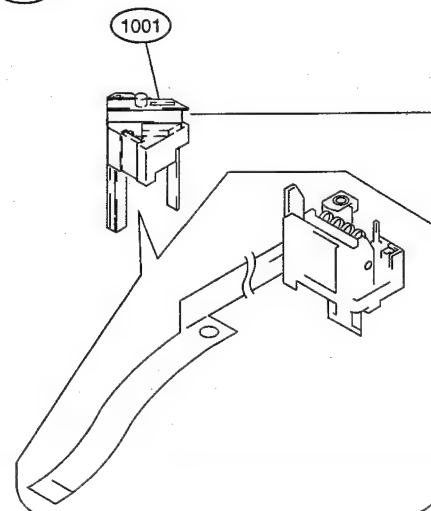

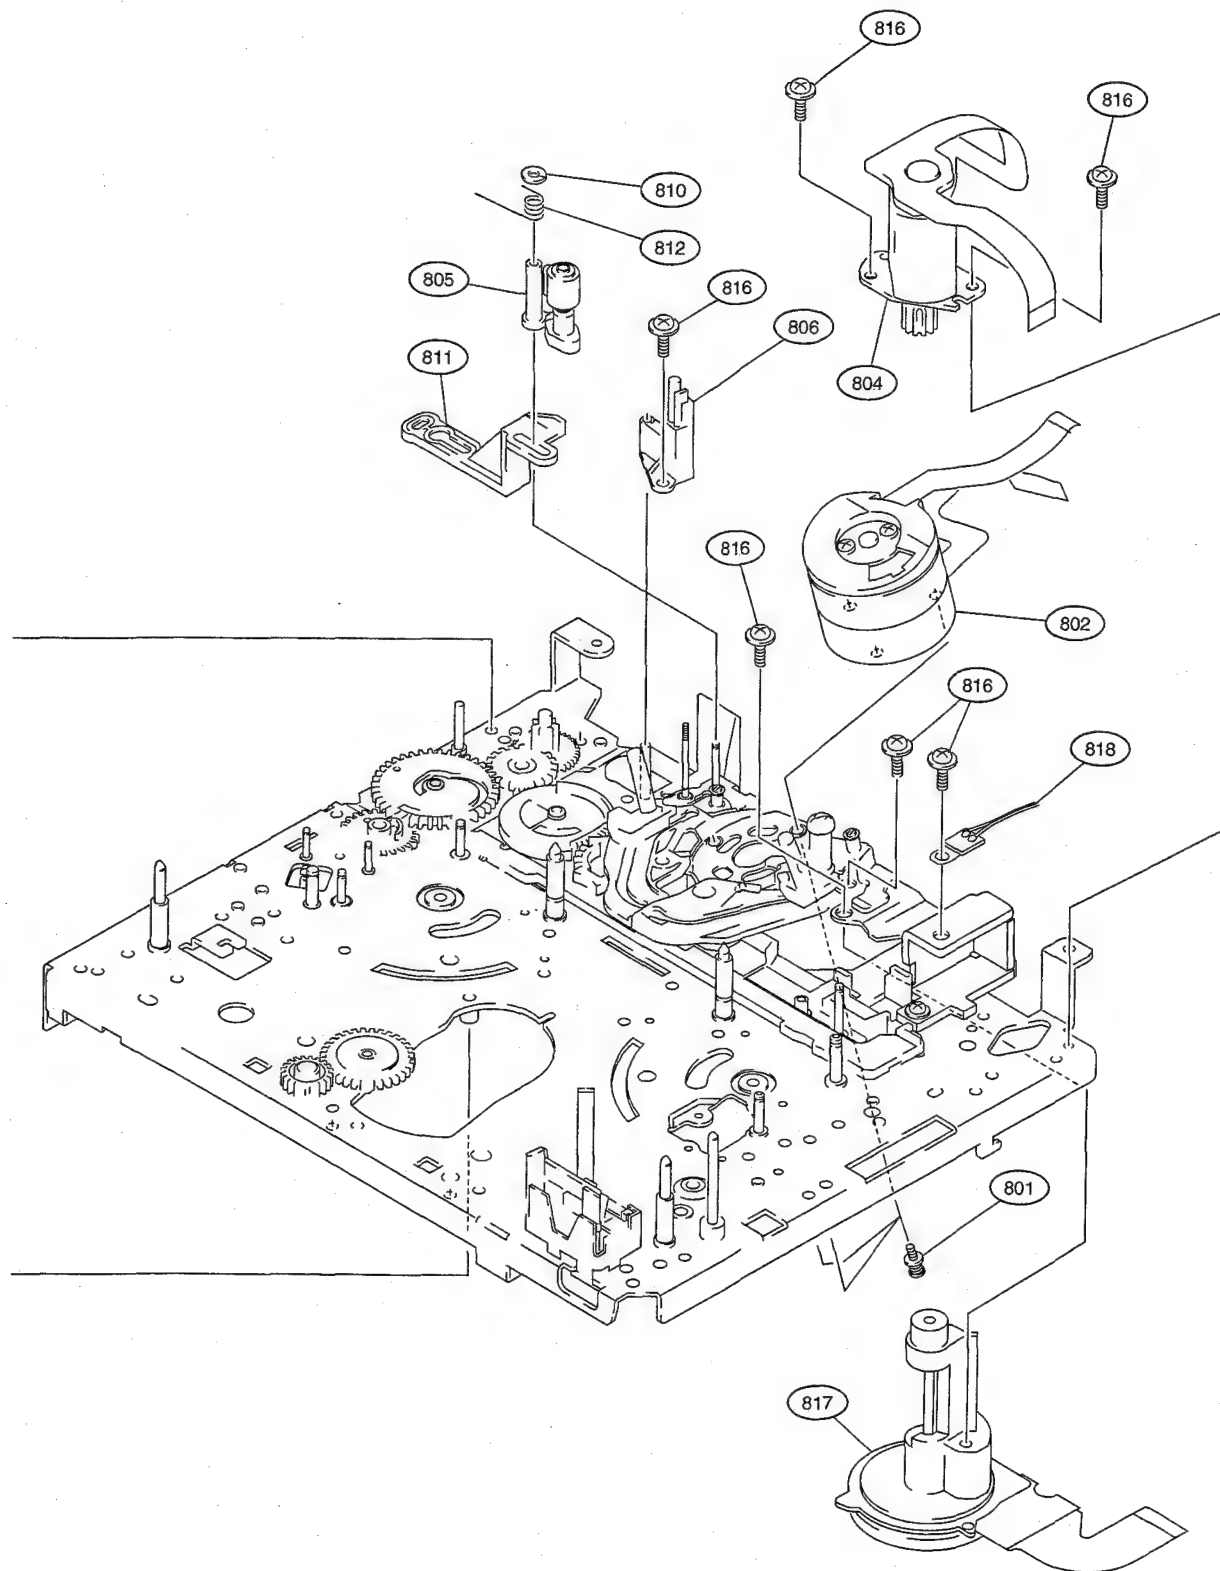

## Gear (1)


No.	Part No.	SP Description
901	A-8319-580-A	s GL(T)BLOCK ASSEMBLY(2)
902	A-8344-460-A	s MOUNTED CIRCUIT BOARD, SE-295A
903	A-8311-397-C	s GL(S)BLOCK ASSEMBLY
904	X-3678-776-4	o ARM ASSEMBLY,SLIDER
905	X-3608-224-1	o GEAR ASSEMBLY,MODE
906	3-388-596-01	s SPRING, COMPRESSION
907	3-603-969-01	o GEAR,C
908	3-604-707-01	o ARM(A),HC
909	3-604-713-01	o GEAR,THREADING
910	X-3605-670-2	o CAM GEAR ASSEMBLY
911	3-604-825-01	o GEAR,NO.1
912	3-604-829-01	o SLIDER,MODE
913	3-604-856-01	o GEAR,D
914	3-604-858-01	o CAM GEAR,RELEASE
915	X-3678-962-1	o GEAR ASSEMBLY,HC
916	3-669-465-01	s WASHER(1.5), STOPPER
917	3-703-816-42	s SCREW(M1.4X2.5), SPECIAL HEAD
918	3-726-829-01	s WASHER, STOPPER
919	3-729-013-21	s SCREW(M1.4X2.5),WASHERHEAD(+P)
920	X-3604-927-1	s TG5 ASSEMBLY 2

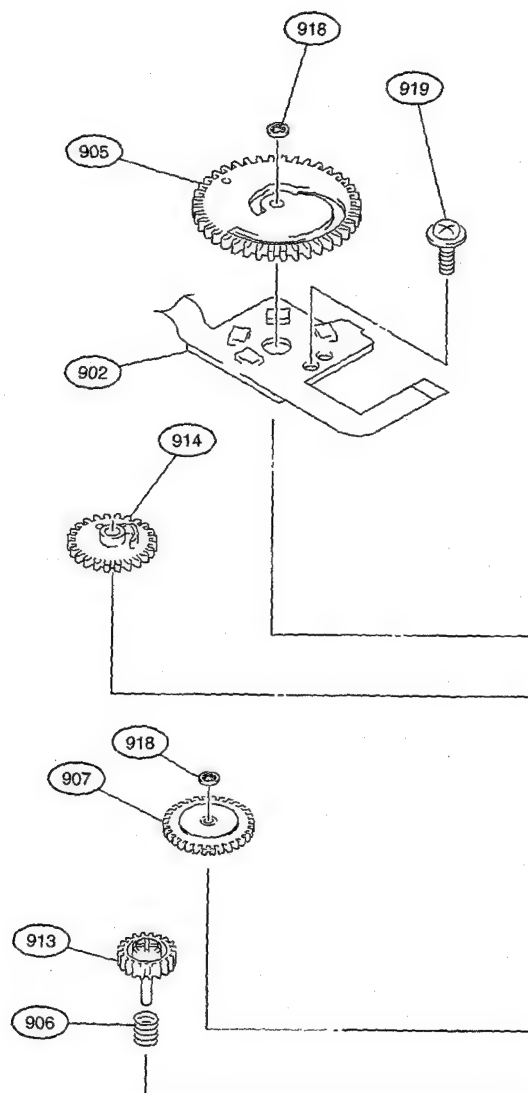




# Handle Block

No.	Part No.	SP Description
401	A-8278-801-K	o HANDLE ASSEMBLY, SUB
402	1-673-950-11	o PRINTED WIRING BOARD, CN-1867
403	A-8322-171-A	o MOUNTED CIRCUIT BOARD, LE-221
404	A-8322-166-A	o MOUNTED CIRCUIT BOARD, SW-18
405	1-673-956-11	o PRINTED WIRING BOARD, CN-1874
406	X-3604-541-1	s COVER ASSEMBLY, HANDLE
407	X-3744-307-1	s SUSPENSION ASSEMBLY
408	1-542-296-23	o MICROPHONE
409	1-673-947-12	o PRINTED WIRING BOARD, CN-1866
410	3-179-882-01	o SPACER, MICROPHONE
411	3-612-600-01	s FIXING BASE, VF SHOE
412	3-612-624-04	s COVER, HANDLE(2)
413	3-612-629-02	s COVER, HANDLE(3)
414	3-612-632-02	s COVER, SW(H)
415	3-612-635-02	o FIXING KNOB, VF
416	3-612-664-01	s COVER, CN(ANTON)
417	3-612-665-01	o CUSHION(2)
418	3-604-403-01	o LABEL, FILTER
419	3-612-822-01	s SPRING, COMPRESSION
420	3-676-244-03	s COVER, SWITCH
421	3-679-543-11	o RING(D), LOCK
422	3-679-684-01	o REST, ARM
423	3-686-197-01	o ARM, SLIDE
424	3-686-261-03	s SHOE3, SLIDE, VF
425	3-687-070-01	o WASHER, SHOE
426	3-688-754-11	s SPRING
427	3-688-755-13	s SHOE, ACCESSORY
428	3-624-426-01	s SCREEN, WIND
429	3-720-919-01	o RUBBER, LOCK RING
430	3-626-743-01	s COVER, HANDLE(4)
431	3-849-405-00	s COVER, EARPHONE JACK
432	3-625-924-01	s ALOCK SCREW, +B2.6NI
433	1-475-344-21	o REMOTE COMMANDER (RM-LG1) [for DSR-300A/300AP]
434	9-980-573-01	o HOLDER ASSEMBLY [for DSR-300A/300AP]
435	3-608-925-01	o LABEL, RM ("VTR", "MARK", "CUE", "NG") [for DSR-300A/300AP]
436	3-370-476-11	s SCREW (NYLOCK +B2X5)
437	3-725-295-21	s SCREW, (+) (B3)

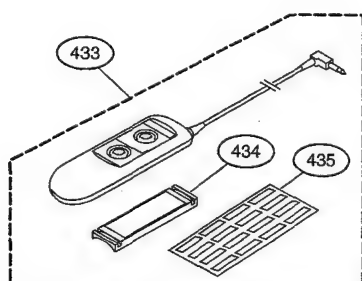


for DSR-300A/300AP

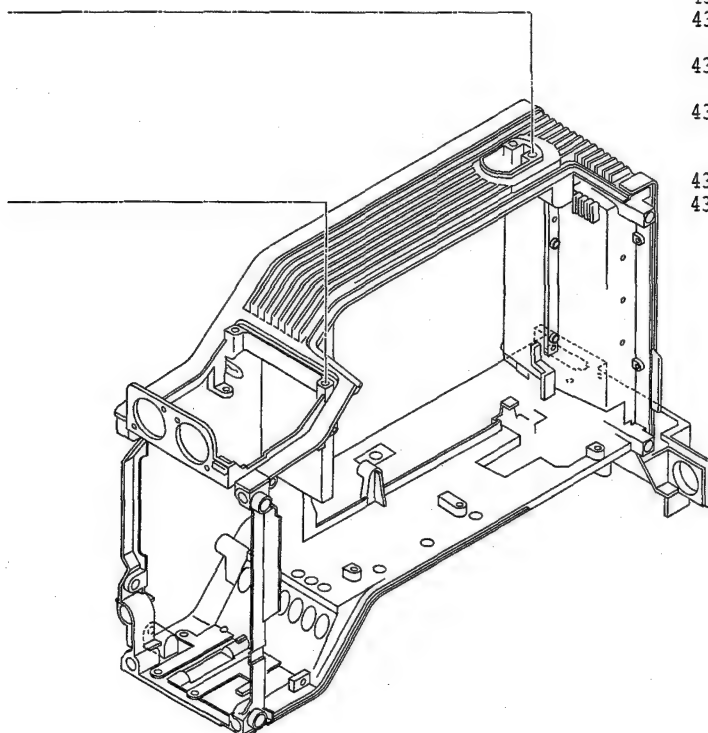


## Cassette Compartment/Boards

No.	Part No.	SP Description
501	A-8277-832-C	o MOUNTED CIRCUIT BOARD, CC-68
502	A-8277-852-A	o MOUNTED CIRCUIT BOARD, RP-91
503	A-8277-853-A	o MOUNTED CIRCUIT BOARD, HN-227
504	A-8322-140-B	o MOUNTED CIRCUIT BOARD, SV-213
505	A-8315-150-L	s CASSETTE COMPARTMENT ASSEMBLY
506	1-777-864-11	s CABLE, FLEXIBLE FLAT (20-CORE)
507	3-729-013-21	s SCREW (M1.4X2.5), WASHERHEAD (+P)

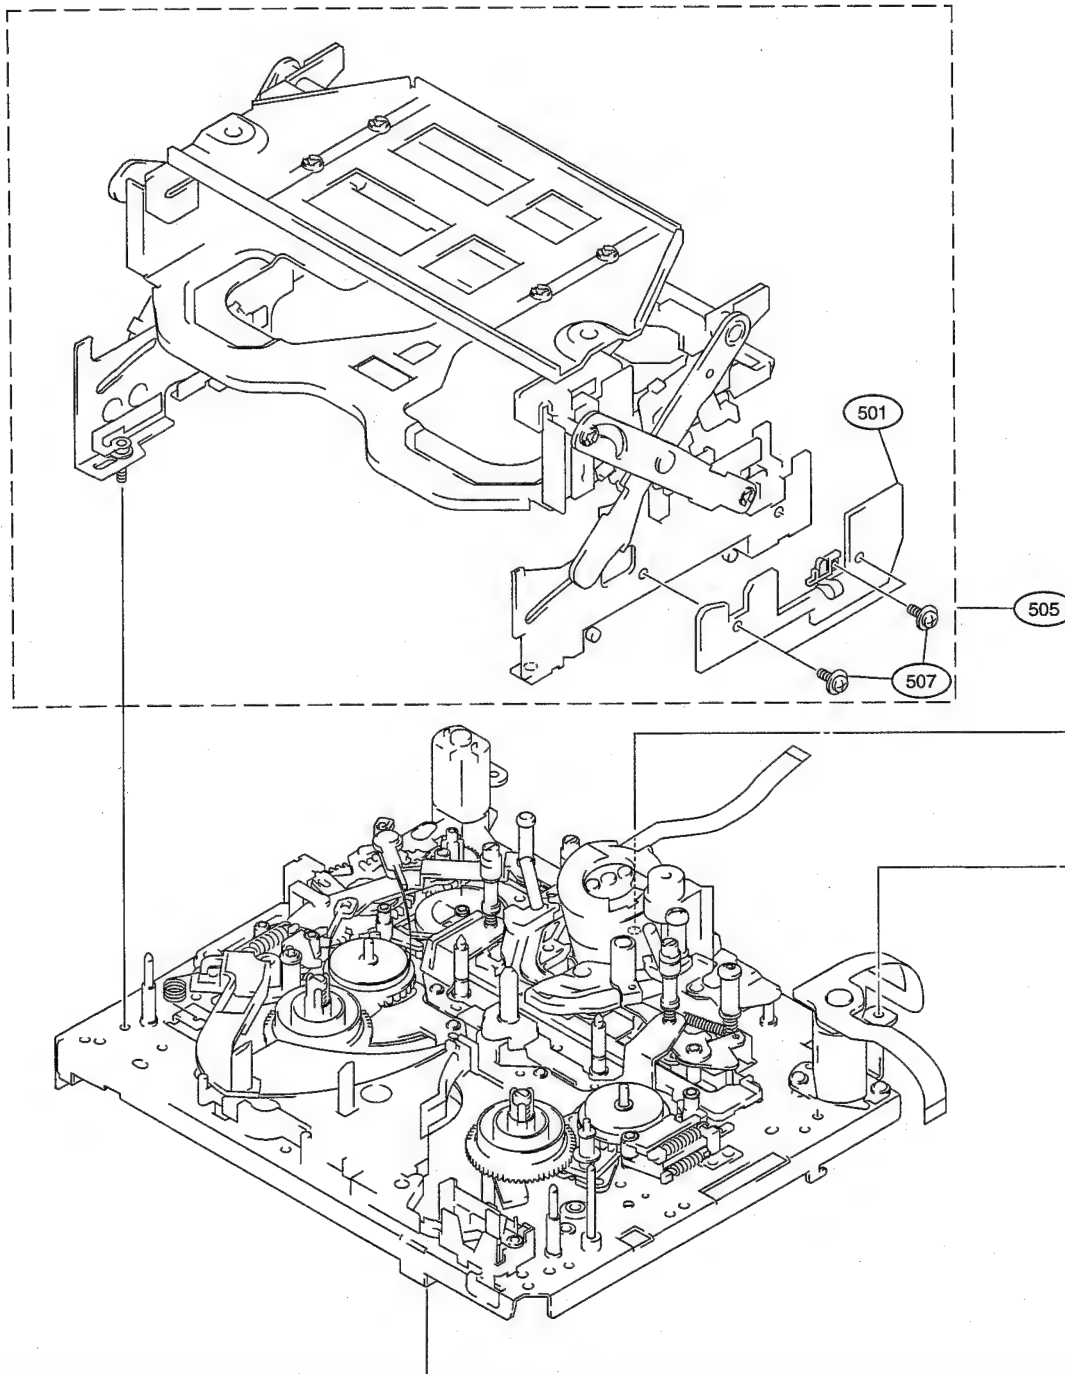

## Cassette Compartment/Boards

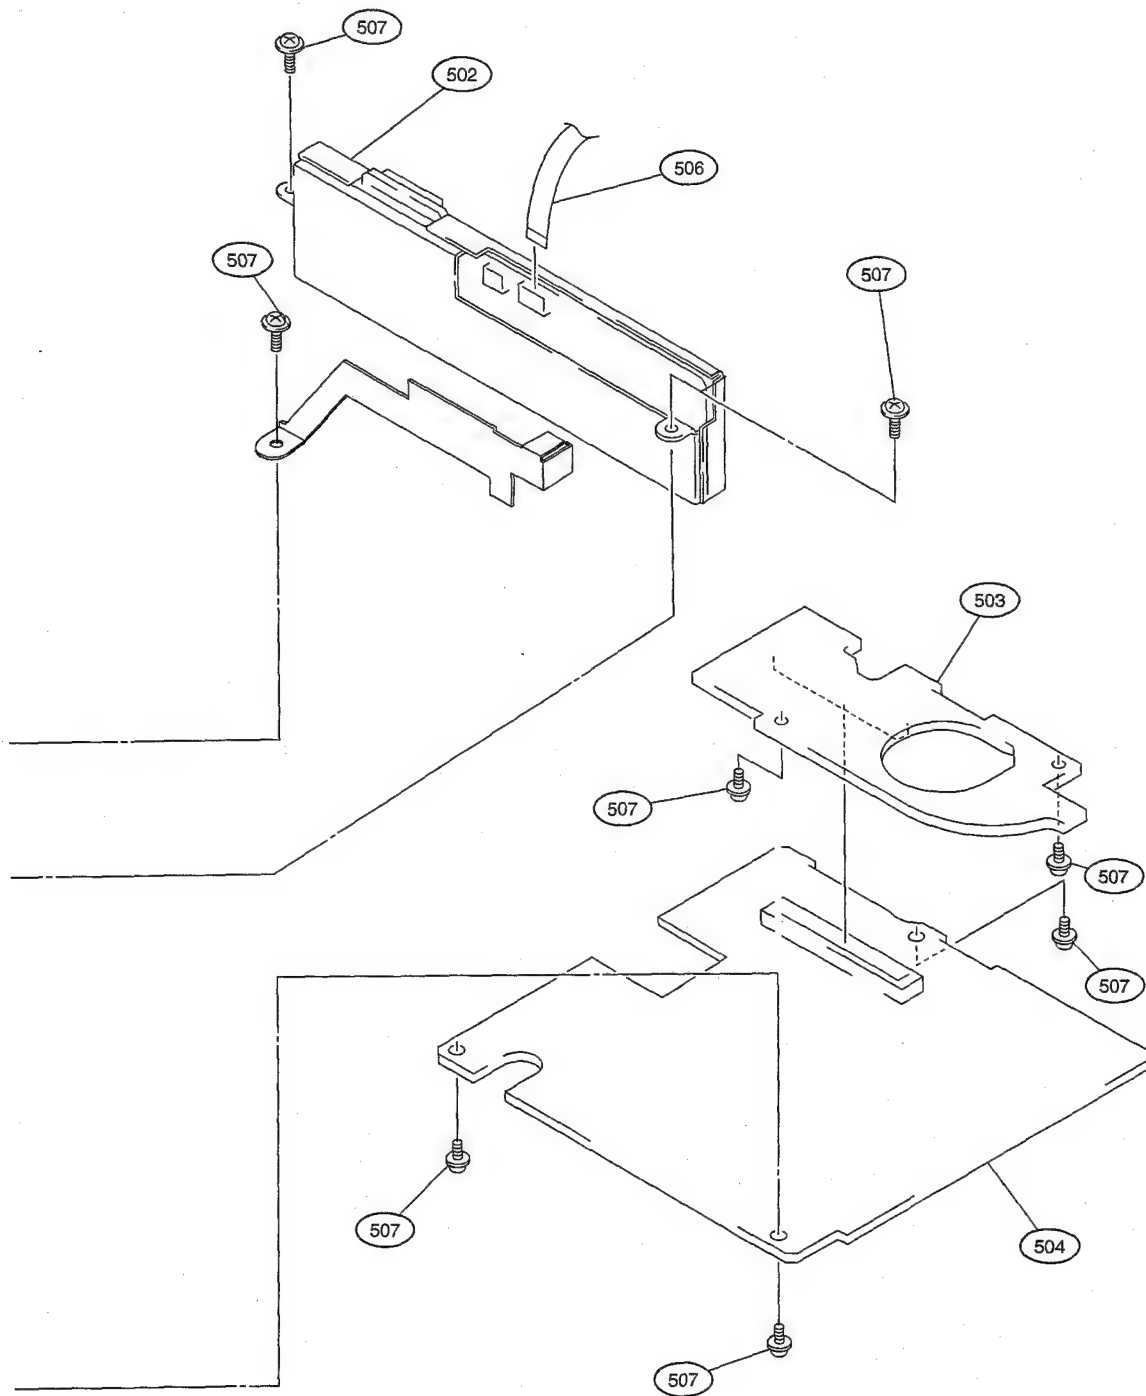


## Guide

No.	Part No.	SP Description
601	A-8278-429-F	o ARM ASSEMBLY, TR
602	X-3678-777-2	s BAND ASSEMBLY, TR
603	X-3678-788-3	s ARM ASSEMBLY, PINCH
604	X-3678-791-1	o ARM ASSEMBLY, TG7
605	X-3678-872-1	o BRACKET ASSEMBLY, SENSOR

606	X-3678-880-1	o TG#1/#8 BASE ASSEMBLY
607	X-3678-908-1	o WEIGHT ASSEMBLY, COUNTER
608	3-548-757-00	s SPRING, TENSION
609	3-604-702-02	s ROLLER, TG18
610	3-604-703-01	s LOWER FLANGE, TG1/8

611	3-604-704-01	s UPPER FLANGE, TG18
612	3-608-304-02	s SLEEVE, TG18
613	3-973-948-01	s UPPER FLANGE (2), TG13
614	3-966-099-11	s ROLLER, TG13
615	3-604-796-01	o SPRING (PINCH), TORSION


616	3-606-146-01	o SPRING (TG7), TORSION
617	3-604-832-01	o RETAINER, CAP
618	3-604-833-01	o CAP
619	3-604-861-02	o HOLDER, PRISM
620	3-604-953-01	s DETENT, TG7

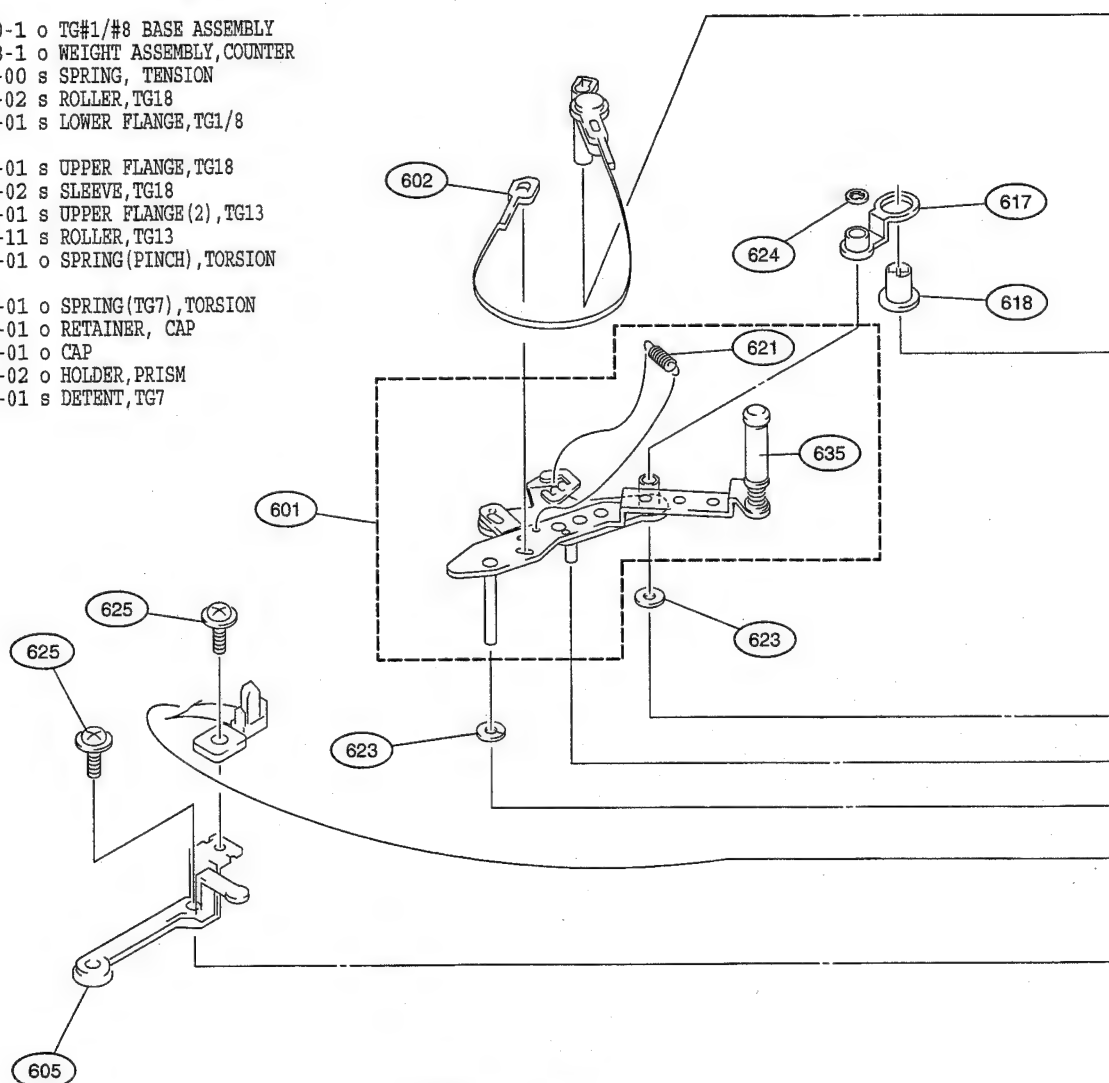


621	3-607-208-01	s SPRING (TR) 9, EXTENSION
622	3-605-319-01	o PRISM
623	3-701-436-11	s WASHER, 1.6 POLYETHYLENE
624	3-726-829-01	s WASHER, STOPPER
625	3-729-013-21	s SCREW (M1.4X2.5), WASHERHEAD (+P)

626	3-729-013-61	s SCREW (M1.4X4.5), WASHERHEAD (+P)
627	3-748-777-02	s TG7
628	3-940-891-01	s SPRING, COMPRESSION
629	3-964-614-02	s FLANGE, TG7 LOWER
630	3-966-100-11	s SLEEVE, TG13


631	3-623-839-01	s NUT, TG13
632	3-966-106-01	s FLANGE, TG3 LOWER
633	3-966-107-01	s SPRING, COMPRESSION
634	3-966-194-01	s FLANGE, TG7 UPPER
635	3-604-718-01	o ROLLER, TG2



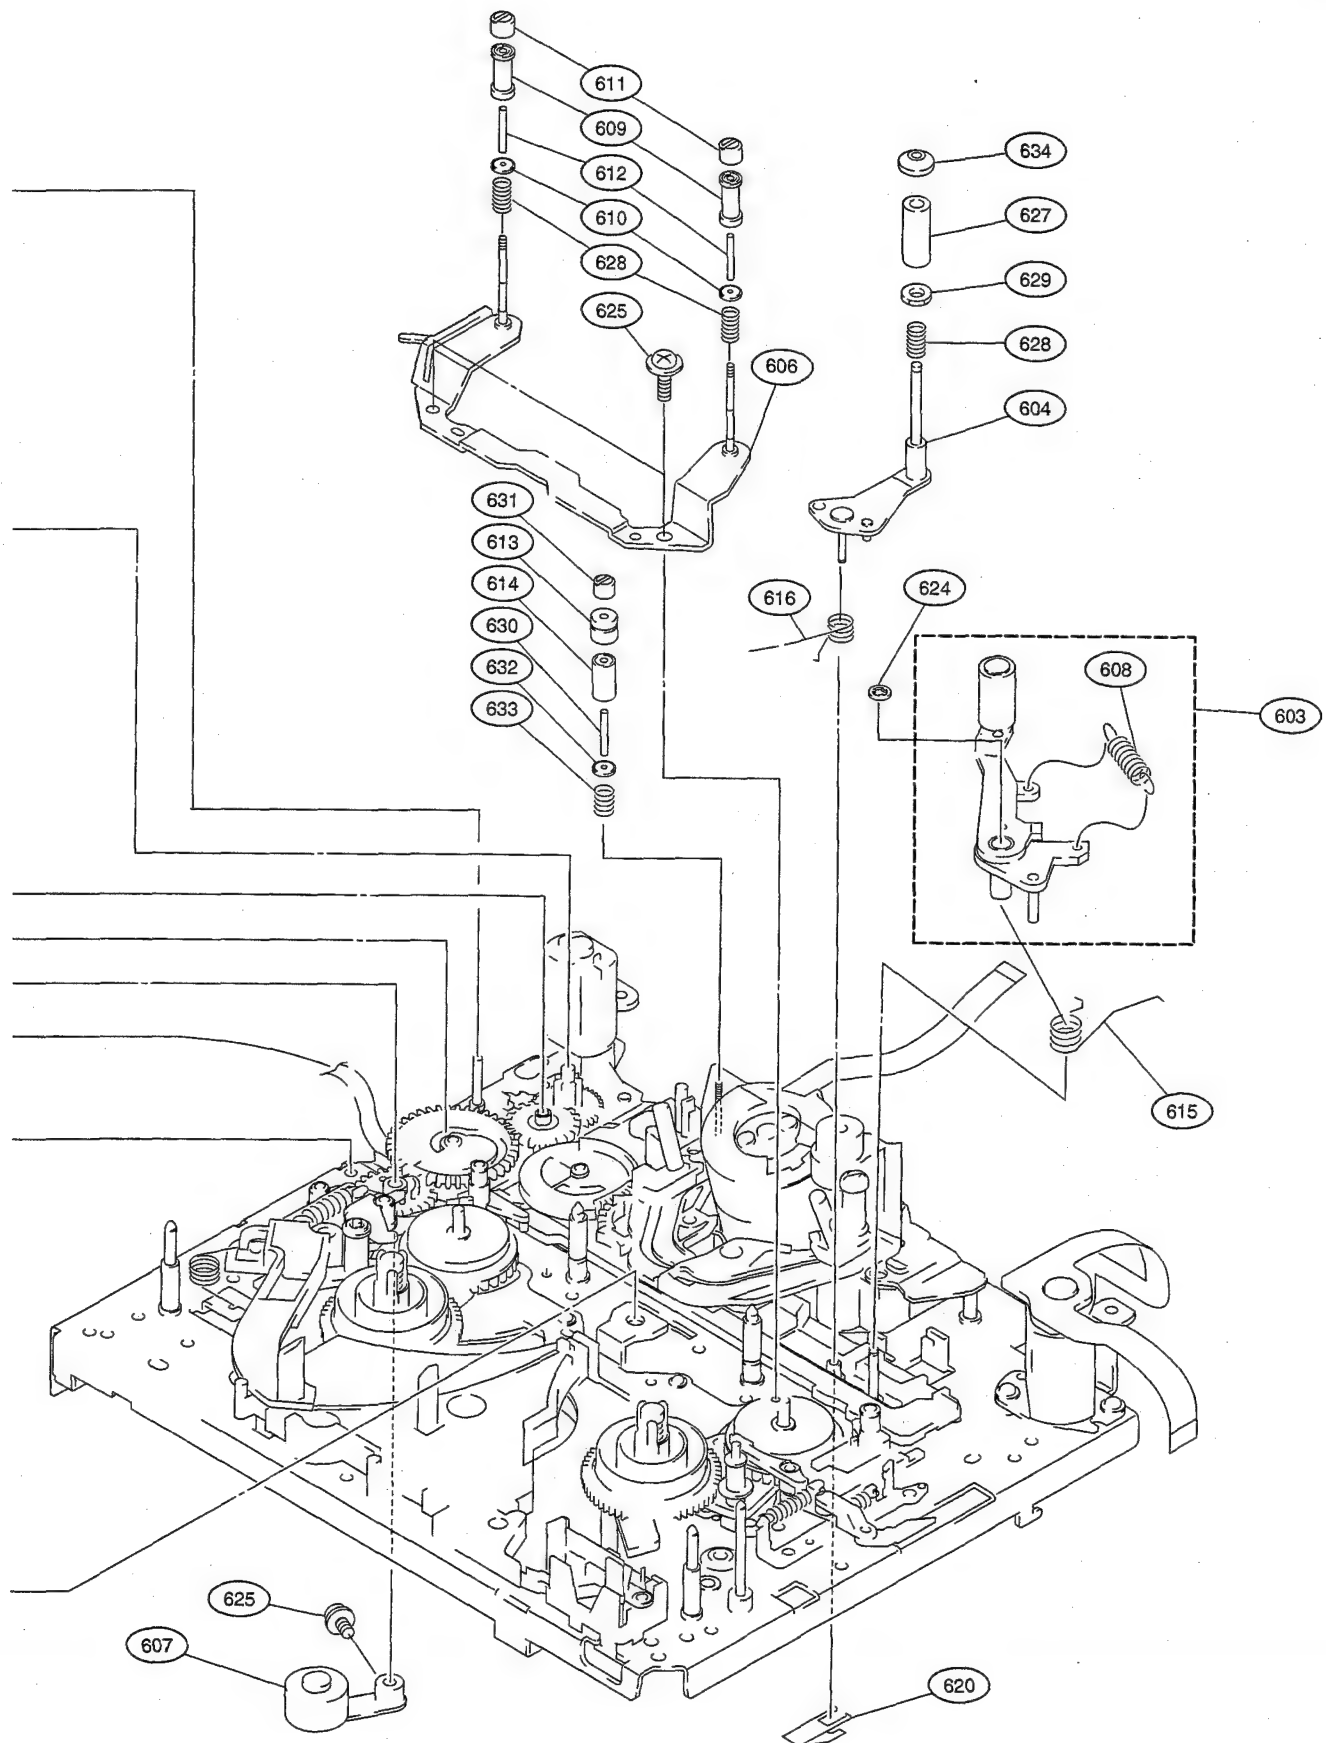



## Reel/Brake

No.	Part No.	SP Description
701	A-8278-432-C	o ARM ASSEMBLY(T),HARD BRAKE
702	A-8278-433-A	o ARM(S)ASSEMBLY,HARD BRAKE
703	A-8311-497-C	o REEL(LARGE)ASSEMBLY
704	X-3678-869-1	s ARM(T)ASSEMBLY,SOFT BRAKE
705	X-3678-870-1	s SOFT BRAKE ASSEMBLY,TL
706	X-3678-881-3	o S PLATE ASSEMBLY,REEL
707	X-3678-882-3	o PLATE ASSEMBLY,T REEL
708	X-3608-225-1	o GEAR ASSEMBLY(T),SUB REEL
709	X-3608-226-1	o GEAR ASSEMBLY(S),SUB REEL
710	3-349-867-01	s SPRING, TENSION

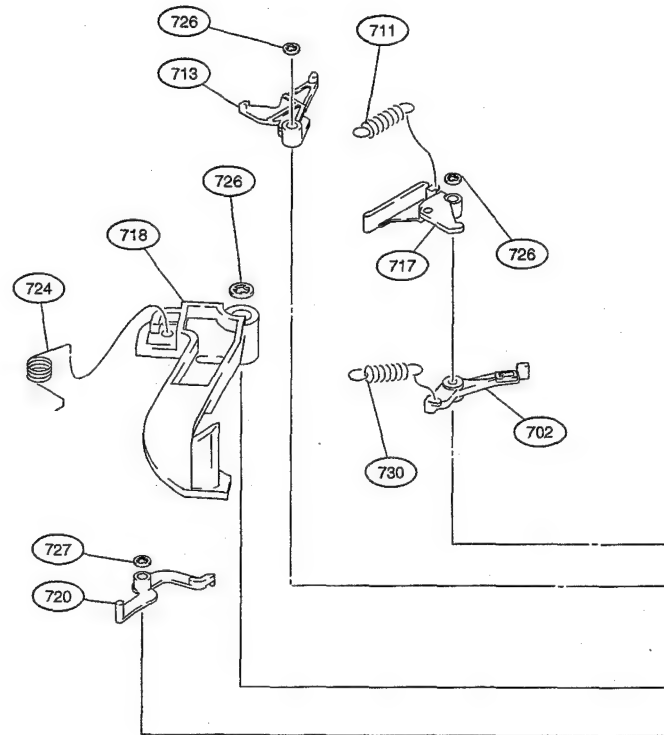



711	3-446-154-99	s SPRING, TENSION
712	3-605-330-01	o HOOK(T),SPRING
713	3-603-966-02	o ARM,LOCK RELEASE
714	3-604-851-01	o ARM,SH RELEASE
715	3-604-855-01	o LEVER,TL,RELEASE
716	3-604-860-02	o RELEASE ARM,T BRAKE
717	3-605-314-01	s ARM(S),SOFT BRAKE
718	3-605-316-02	o ROCK ARM,REEL
719	3-605-317-02	o ROCK DRIVING ARM,REEL
720	3-605-318-01	o ARM,SS RELEASE
721	3-605-320-02	o STOPPER,REEL T
722	3-605-329-02	o HOOK(S),SPRING
723	3-605-332-01	o RETAINER,REEL PLATE
724	3-605-333-01	o PRESS SPRING,REEL LOCK
725	3-606-366-01	o LEVER,BRAKE,SOFT,T
726	3-669-465-01	s WASHER(1.5), STOPPER
727	3-726-829-01	s WASHER, STOPPER
728	3-729-013-21	s SCREW(M1.4X2.5),WASHERHEAD(+P)
729	3-908-649-01	s SPRING(OPEN)
730	3-913-922-01	s SPRING(T RELEASE), TENSION
731	4-930-450-01	s SPRING, TENSION
732	3-331-658-01	s SPRING, TENSION

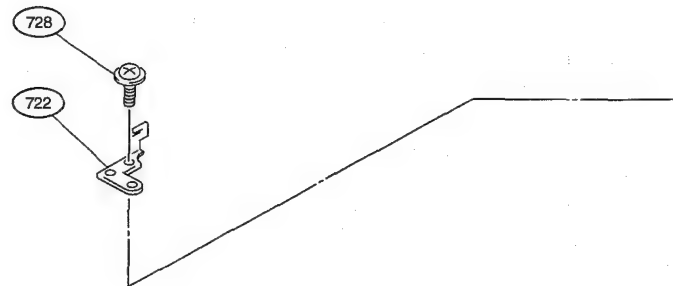

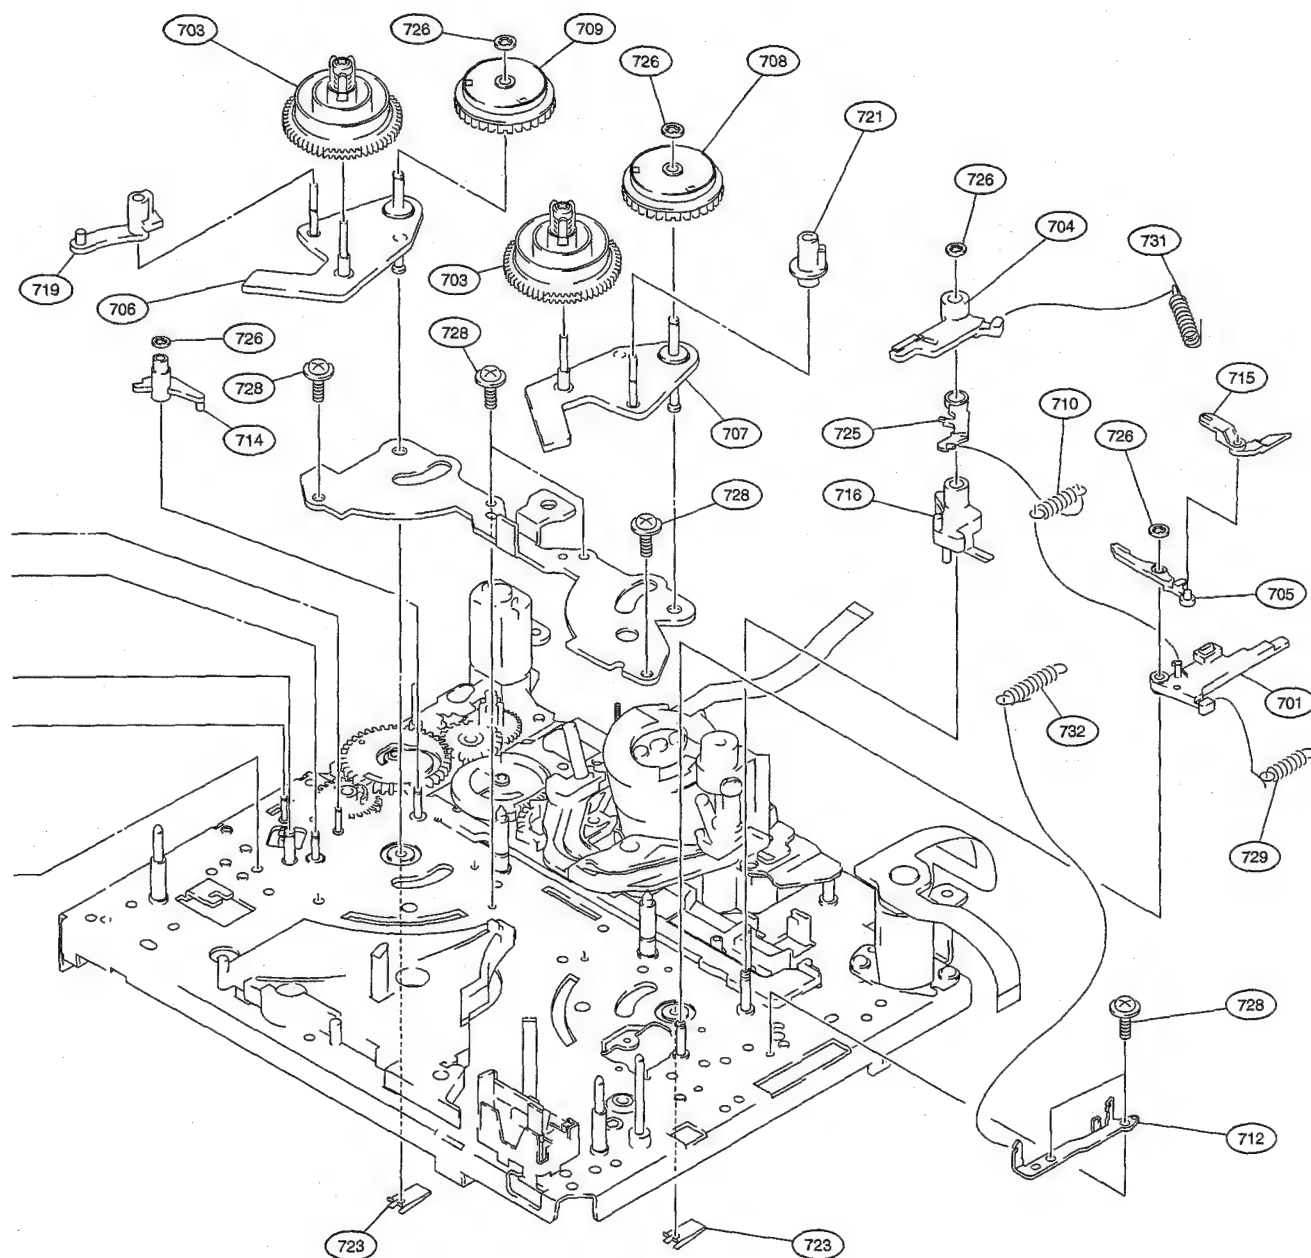


## Motor

No.	Part No.	SP Description
801	A-7026-009-B	s SCREW ASSEMBLY, DRUM FITTING
802	A-4900-064-A	s DRUM ASSY, DEH-03A/J-RP [for DSR-390/390P/370/370P]
	A-7044-005-A	s DRUM ASSEMBLY, DEH-03A-R [for DSR-300A/300AP]
803	A-8311-086-C	s MOTOR BLOCK ASSEMBLY, LD
804	A-8311-088-A	s MOTOR ASSEMBLY, SHIFT
805	A-8311-505-B	s C ASSEMBLY
806	3-604-834-03	o HOLDER, TC
807	X-3678-884-2	s IDLER GEAR ASSEMBLY
808	X-3945-435-1	s SHAFT(12) ASSEMBLY, WORM
809	1-698-870-12	s MOTOR, DC(REEL)
810	3-315-414-31	s WASHER
811	3-604-708-01	o ARM(B), HC
812	3-604-797-01	o SPRING(HC), TORSION
813	3-604-864-02	o COVER, REEL ROCK
814	3-669-465-01	s WASHER(1.5), STOPPER
815	3-703-816-42	s SCREW(M1.4X2.5), SPECIAL HEAD
816	3-729-013-21	s SCREW(M1.4X2.5), WASHERHEAD(+P)
817	8-835-530-01	s MOTOR, DC SCD12A/J-N
818	1-801-756-11	s SENSOR, DEW CONDENSATION

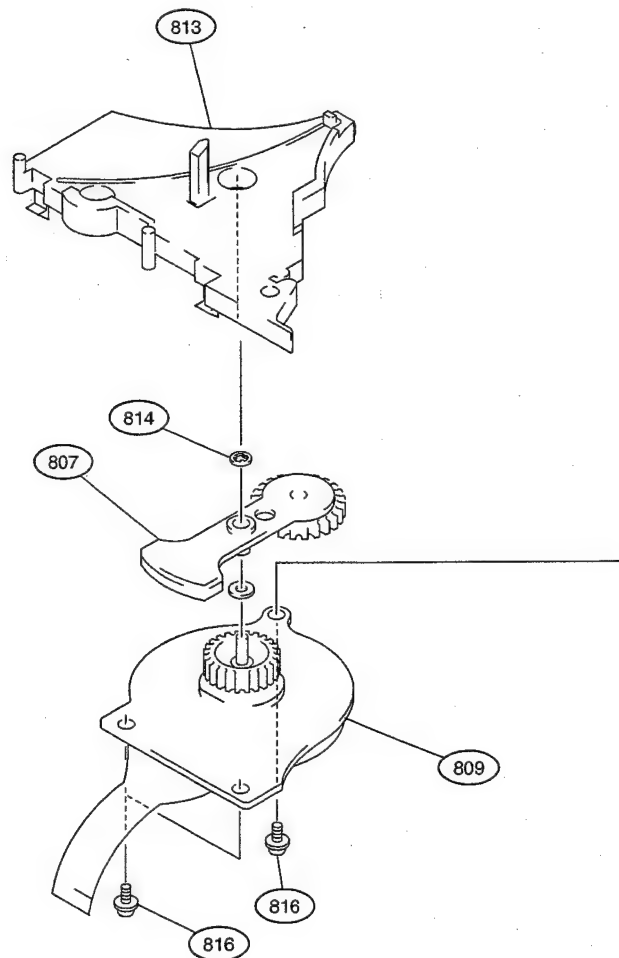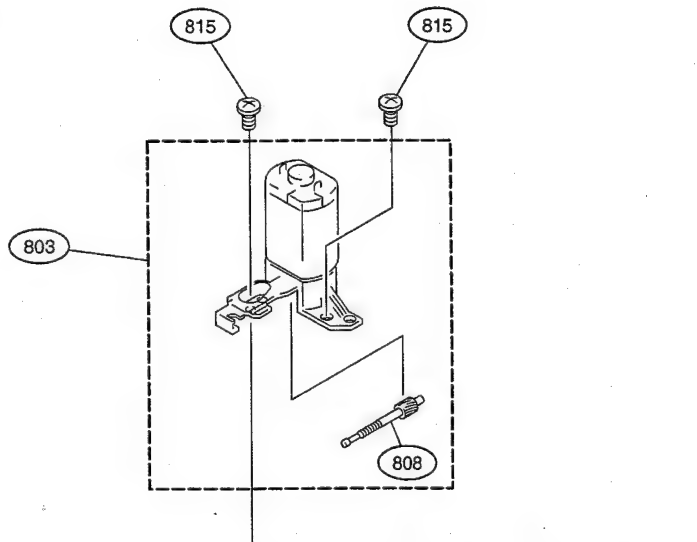




Gear (2)

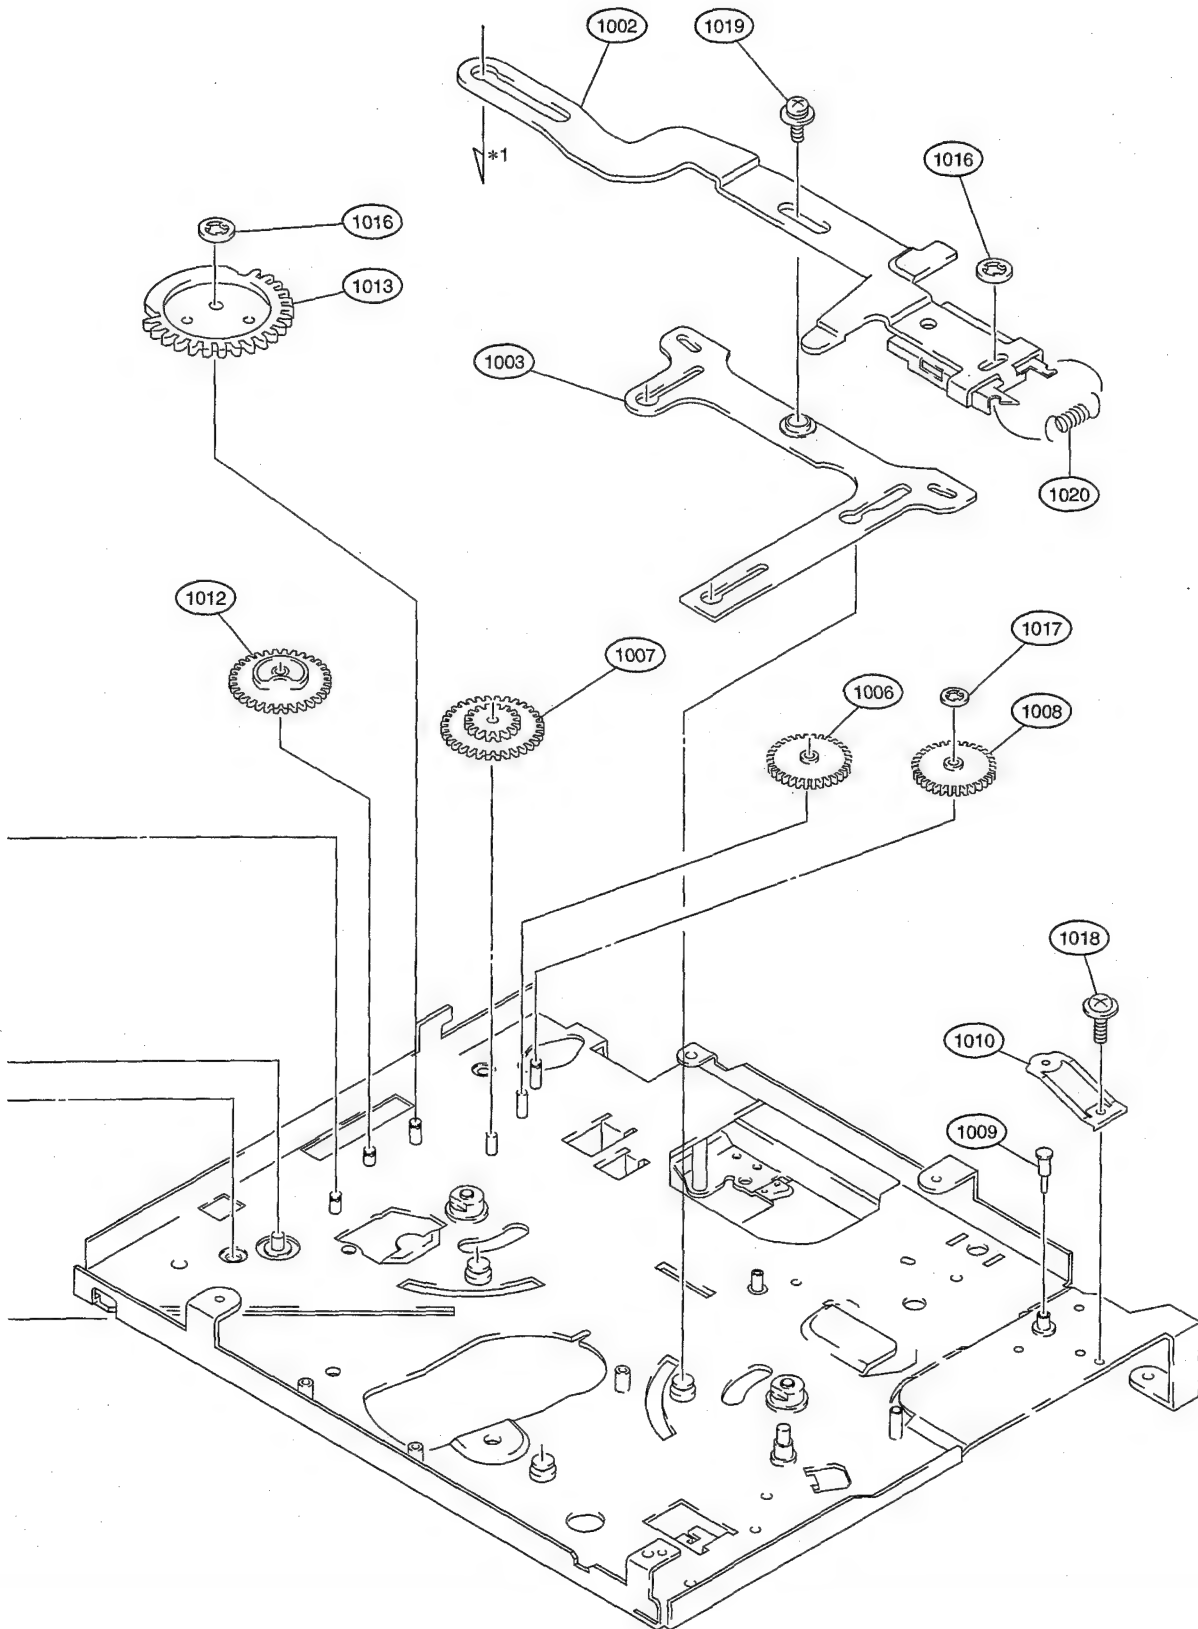

Lens

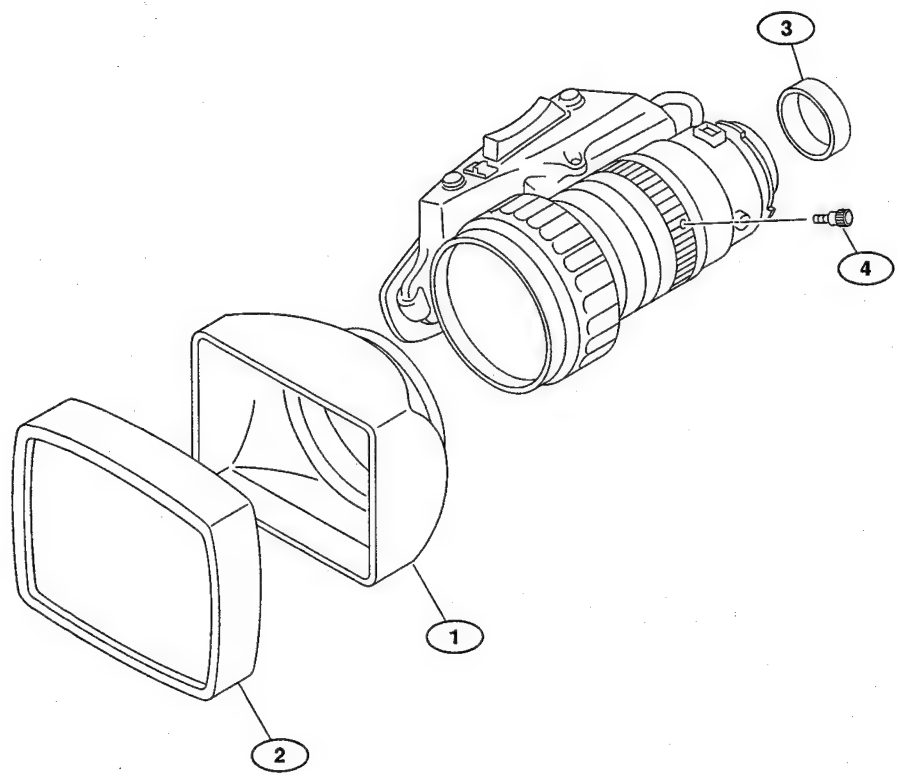

VCL-716BX (For DSR-390K2/370K2)

No.	Part No.	SP Description
1	3-709-661-01	s HOOD
2	3-709-663-01	s CAP, LENS
3	3-709-660-01	s CAP, MOUNT
4	3-709-662-01	s LEVER

VCL-719BX (For DSR-390K1/370K1)

No.	Part No.	SP Description
1	3-709-307-01	o HOOD
2	3-709-308-01	o CAP, HOOD
3	3-707-546-01	o CAP, DUST
4	3-709-310-01	o LEVER, ZOOM

### 1-3. Electrical Parts List

#### Index

Board	Page	Remarks
AA-104	1-26	
AT-142	1-27	DSR-300A/300AP
AT-150	1-30	DSR-390/390P/370/370P
CC-68	1-33	
CN-1519	1-33	DSR-300A/300AP
CN-1524	1-33	
CN-1811	1-34	
CN-1823	1-34	
CN-1864	1-34	
CN-1865	1-34	
CN-1866	1-35	
CN-1867	1-35	
CN-1873	1-35	
CN-1874	1-35	
CN-1981	1-35	
CN-2277	1-35	DSR-390/390P/370/370P
CP-315	1-36	DSR-300A/300AP
CP-373	1-37	DSR-390/390P/370/370P
DPR-141A	1-40	DSR-300A/300AP (suffix 13-)
	1-50	DSR-300A/300AP (suffix 11)
DPR-141C	1-60	DSR-390/390P/370/370P
DU-36	1-69	
DV-21A	1-70	DSR-300A/300AP
DV-21C	1-70	DSR-390/390P/370/370P
ES-31/31P	1-71	
FP-118A	1-82	DSR-390/390P/370/370P
FP-122	1-89	DSR-300A/300AP
FP-99	1-96	
GCN-16	1-97	
HN-227	1-97	
IR-33	1-98	
KY-405	1-98	
LE-221	1-98	
MB-833	1-98	
MT-114	1-98	
PA-205	1-99	
PA-206	1-100	
PA-207	1-101	
PS-570	1-102	
PSW-71	1-102	
RP-91	1-103	
SE-295	1-106	

Board	Page	Remarks
SE-297	1-106	
SE-566	1-106	
SV-213	1-106	
SW-18	1-112	
SW-19	1-112	
SW-929	1-112	
TG-187/187P	1-112	
VA-199	1-114	
FRAME	1-121	

AA-104 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-165-B	o MOUNTED CIRCUIT BOARD, AA-104
C501	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C502	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C503	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C504	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C505	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C506	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C507	1-104-551-11	s CAPACITOR, FILM 0.01MF/16V 2125
C508	1-104-551-11	s CAPACITOR, FILM 0.01MF/16V 2125
C509	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C512	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C516	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C517	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C518	1-107-561-11	s CAPACITOR, CHIP FILM 0.01MF
C519	1-107-561-11	s CAPACITOR, CHIP FILM 0.01MF
C520	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C521	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C522	1-126-219-11	s CAPACITOR, ELECT 3.3MF
C523	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C524	1-126-219-11	s CAPACITOR, ELECT 3.3MF
C525	1-126-219-11	s CAPACITOR, ELECT 3.3MF
C526	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C527	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C528	1-163-243-11	s CAPACITOR, CHIP CERAMIC 47PF/50
C529	1-163-243-11	s CAPACITOR, CHIP CERAMIC 47PF/50
C530	1-104-563-11	s CAPACITOR, CHIP FILM 0.1MF
C531	1-104-563-11	s CAPACITOR, CHIP FILM 0.1MF
C532	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C533	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C534	1-104-563-11	s CAPACITOR, CHIP FILM 0.1MF
C535	1-104-563-11	s CAPACITOR, CHIP FILM 0.1MF
C536	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C537	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C538	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C540	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C543	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C545	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C546	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C547	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C548	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
CN501	1-691-550-11	s PIN, CONNECTOR (3P) (SMD) (1.5MM)
CN502	1-565-249-11	o SOCKET, CONNECTOR 20P
CN503	1-764-394-11	s CONNECTOR (XLR TYPE) 3P
CN504	1-778-652-11	o CONNECTOR, FFC (ZIF) 50P
CN505	1-764-177-11	o PIN, CONNECTOR (7P) (SMD) (1.5MM)
CN506	1-573-806-21	s PIN, CONNECTOR (6P) (SMD) (1.5MM)
D501	8-719-800-76	s DIODE 1SS226
D502	8-719-800-76	s DIODE 1SS226
D504	8-719-027-95	s DIODE HSM88WK
FB501	1-543-775-11	s BEAD, FERRITE
FB502	1-543-775-11	s BEAD, FERRITE
FB503	1-543-775-11	s BEAD, FERRITE
FB504	1-414-445-11	s FERRITE, EMI (SMD)
FB505	1-414-445-11	s FERRITE, EMI (SMD)
FB506	1-414-445-11	s FERRITE, EMI (SMD)
FB507	1-543-775-11	s BEAD, FERRITE
FB508	1-543-775-11	s BEAD, FERRITE
FB509	1-543-775-11	s BEAD, FERRITE

(AA-104 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FB510	1-414-445-11	s FERRITE, EMI (SMD)
FB511	1-543-775-11	s BEAD, FERRITE
FB512	1-543-775-11	s BEAD, FERRITE
FB513	1-543-775-11	s BEAD, FERRITE
FB514	1-543-775-11	s BEAD, FERRITE
FB515	1-543-775-11	s BEAD, FERRITE
FB516	1-543-775-11	s BEAD, FERRITE
FB517	1-543-775-11	s BEAD, FERRITE
FB518	1-543-775-11	s BEAD, FERRITE
FB519	1-543-775-11	s BEAD, FERRITE
FL501	1-239-077-11	s FILTER, EMI
FL502	1-239-896-12	s FILTER, EMI (SMD)
IC501	8-759-082-57	s IC TC7W04FU
IC503	8-759-659-71	s IC SN74HC165APWR
IC505	8-759-268-33	s IC SN74HC595ADB (R)
IC506	8-759-058-58	s IC TC7S04FU-TB85R
IC507	8-759-669-45	s IC TL062CPWR-12
IC508	8-759-111-56	s IC UPC4572G2
IC509	8-759-422-21	s IC NJM4580VTE2
IC510	8-759-530-27	s IC TC4052BFT(EL,N)
IC512	8-759-669-45	s IC TL062CPWR-12
IC513	8-759-082-61	s IC TC4WS3FU
Q503	8-729-905-35	s TRANSISTOR 2SC4081-R
Q504	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q505	8-729-905-35	s TRANSISTOR 2SC4081-R
Q506	8-729-905-35	s TRANSISTOR 2SC4081-R
Q507	8-729-905-35	s TRANSISTOR 2SC4081-R
R501	1-216-097-91	s RESISTOR, CHIP 100K 1/10W(2012)
R502	1-216-097-91	s RESISTOR, CHIP 100K 1/10W(2012)
R503	1-216-097-91	s RESISTOR, CHIP 100K 1/10W(2012)
R512	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R513	1-216-843-11	s RESISTOR, CHIP 68K 1/16W (1608)
R514	1-216-101-00	s RESISTOR, CHIP 150K 1/10W(2012)
R515	1-216-051-00	s RESISTOR, CHIP 1.2K 1/10W(2012)
R516	1-216-105-91	s RESISTOR, CHIP 220K 1/10W(2125)
R517	1-216-655-11	s RESISTOR, CHIP 1.5K 1/10W(2012)
R518	1-216-655-11	s RESISTOR, CHIP 1.5K 1/10W(2012)
R524	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R525	1-216-065-91	s RESISTOR, CHIP 4.7K 1/10W(2012)
R526	1-216-065-91	s RESISTOR, CHIP 4.7K 1/10W(2012)
R527	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R528	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R529	1-216-069-00	s RESISTOR, CHIP 6.8K 1/10W(2012)
R530	1-216-069-00	s RESISTOR, CHIP 6.8K 1/10W(2012)
R531	1-216-081-00	s RESISTOR, CHIP 22K 1/10W(2012)
R533	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R535	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R536	1-208-801-11	s RESISTOR, CHIP 6.2K 1/10W(2012)
R537	1-208-830-11	s RESISTOR, CHIP 100K 1/10W(2012)
R538	1-208-830-11	s RESISTOR, CHIP 100K 1/10W(2012)
R539	1-208-796-11	s RESISTOR, CHIP 3.9K 1/10W(2012)
R541	1-208-807-11	s RESISTOR, CHIP 11K 1/10W (2125)
R542	1-208-796-11	s RESISTOR, CHIP 3.9K 1/10W(2012)
R544	1-208-807-11	s RESISTOR, CHIP 11K 1/10W (2125)
R547	1-216-051-00	s RESISTOR, CHIP 1.2K 1/10W(2012)
R548	1-216-051-00	s RESISTOR, CHIP 1.2K 1/10W(2012)
R549	1-216-001-00	s RESISTOR, CHIP 10 1/10W(2012)
R550	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)

(AA-104 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R551	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R552	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R553	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R554	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R555	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R556	1-216-033-00	s RESISTOR,CHIP 220 1/10W(2012)
R557	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R558	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R559	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R560	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R561	1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
R562	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R563	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R564	1-216-061-00	s RESISTOR,CHIP 3.3K 1/10W(2012)
R565	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R566	1-216-061-00	s RESISTOR,CHIP 3.3K 1/10W(2012)
R572	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R573	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R582	1-216-125-00	s RESISTOR,CHIP 1.5M 1/10W(2012)
R583	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R584	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R585	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R586	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R587	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R589	1-216-125-00	s RESISTOR,CHIP 1.5M 1/10W(2012)
R590	1-216-089-91	s RESISTOR,CHIP 47K 1/10W(2012)
R591	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R592	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R593	1-216-089-91	s RESISTOR,CHIP 47K 1/10W(2012)
RB501	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB502	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB503	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB504	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RV501	1-241-261-41	s RESISTOR, ADJ, CERMET 1K

AT-142 BOARD

\*a: [Lot No. 911-162]  
\*b: [Lot No. 163-]

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-996-A	o MOUNTED CIRCUIT BOARD, AT-142
1pc	3-709-100-01	o COVER, IC SOCKET
C501	1-113-991-11	s CAPACITOR,TANTALUM 33MF/16V
C502	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C503	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C505	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C506	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C507	1-135-149-21	s CAPACITOR,TANTALUM 2.2MF/10V
C508	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C509	1-126-393-11	s CAPACITOR,ELECT 33MF/10V(CHIP)
C510	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C511	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C512	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C513	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C515	1-126-393-11	s CAPACITOR,ELECT 33MF/10V(CHIP)
C516	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C517	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C520	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C521	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C522	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C523	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C525	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C526	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C527	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C528	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C529	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C530	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C531	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C532	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C533	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C534	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C536	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C537	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C538	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C539	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C540	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C541	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C542	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C543	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C544	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C545	1-126-397-11	s CAPACITOR,ELECT 33MF/25V(CHIP)
C546	1-126-397-11	s CAPACITOR,ELECT 33MF/25V(CHIP)
C547	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C548	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C549	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C550	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C551	1-135-177-21	s CAPACITOR,TANTALUM 1MF/25V
C552	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C553	1-162-917-11	s CAPACITOR,CERAMIC 15PF/50V CH
C554	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C555	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C556	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C557	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F

## (AT-142 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C558	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C559	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C701	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C702	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C703	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C704	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C705	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C706	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C707	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C710	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C711	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C712	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C713	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C714	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C715	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C716	*b 1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V CH
	*a 1-162-917-11	s CAPACITOR, CERAMIC 7PF/50V CH
C717	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C719	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C720	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C721	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C729	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C730	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C731	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C732	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C733	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C734	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C735	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C736	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
CN503	1-580-789-21	o PIN, CONNECTOR (SMD) 6P
CNI703	1-251-496-21	o SOCKET, IC
CV502	1-141-368-11	s CAPACITOR, CHIP TRIMMER 30PF
CV701	1-141-422-11	s CAPACITOR TRIMER 10PF (CHIP)
D501	8-719-029-64	s DIODE RD4.7UH-T1
D502	8-719-050-51	s DIODE RD9.1UM-T1B2
D503	8-719-421-69	s DIODE MA133
D504	8-719-421-69	s DIODE MA133
D505	8-719-421-69	s DIODE MA133
D506	8-719-421-69	s DIODE MA133
D507	8-719-421-69	s DIODE MA133
D508	8-719-421-69	s DIODE MA133
D509	8-719-421-69	s DIODE MA133
D510	8-719-421-69	s DIODE MA133
D511	8-719-421-69	s DIODE MA133
D701	8-719-975-40	s DIODE RB411D (RECTI)
D702	8-719-421-69	s DIODE MA133
D703	8-719-421-69	s DIODE MA133
IC501	8-759-185-42	s IC LM4040AIM3-2.5
IC502	8-759-669-45	s IC TL062CPWR-12
IC504	8-759-589-29	s IC X24645S8I-2.7T2
IC506	8-759-049-77	s IC SN74HC244APWR
IC507	8-759-659-71	s IC SN74HC165APWR
IC508	8-752-392-03	s IC CXD1095BR
IC509	8-759-082-58	s IC TC7W08FU
IC511	8-759-660-18	s IC SN74HC74APWR
IC512	8-759-338-95	s IC NJM2903V (TE2)
IC513	8-759-257-96	s IC TC7814FU (TE85R)

## (AT-142 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC514	8-759-659-96	s IC SN74HC08APWR
IC515	8-759-082-59	s IC TC7W32FU
IC516	8-759-058-58	s IC TC7S04FU-TE85R
IC517	8-759-082-55	s IC TC7W00FU
IC518	8-759-669-66	s IC TLC272CPWR
IC519	8-759-009-05	s IC MC14051BF
IC520	8-759-669-45	s IC TL062CPWR-12
IC521	8-759-064-36	s IC MB88346BPFV
IC522	8-759-669-45	s IC TL062CPWR-12
IC524	8-759-082-60	s IC TC7866FU
IC525	8-759-594-35	s IC UPD6453GT-658-E2
IC526	8-759-660-09	s IC SN74HC158APWR
IC528	8-759-064-36	s IC MB88346BPFV
IC529	8-759-669-45	s IC TL062CPWR-12
IC530	8-759-082-60	s IC TC7866FU
IC701	8-759-532-02	s IC CY62256LL-70ZC-T2
IC702	8-759-532-02	s IC CY62256LL-70ZC-T2
IC703	6-800-374-01	o IC 29F800B-DSR300AV1.02
IC704	8-759-058-58	s IC TC7S04FU-TE85R
IC708	8-759-489-89	s IC HD6437034AD49F
IC709	8-759-542-91	s IC S-80840ANUP-ED4-T2
IC711	8-759-182-95	s IC HD151015T
IC712	8-759-196-96	s IC TC7SH08FU (TE85R)
IC717	8-759-252-59	s IC MAX202CSE
L501	1-410-385-11	s INDUCTOR, CHIP 22UH (3225)
L502	1-410-385-11	s INDUCTOR, CHIP 22UH (3225)
L503	1-412-955-11	s INDUCTOR 22UH (2520)
L504	1-412-963-11	s INDUCTOR 100UH (2520)
L505	1-412-955-11	s INDUCTOR 22UH (2520)
L507	1-412-955-11	s INDUCTOR 22UH (2520)
L508	1-410-385-11	s INDUCTOR, CHIP 22UH (3225)
L509	1-412-955-11	s INDUCTOR 22UH (2520)
L510	1-410-385-11	s INDUCTOR, CHIP 22UH (3225)
L511	1-412-282-41	s INDUCTOR INDUCTOR 470UH (3225)
L512	1-412-282-41	s INDUCTOR INDUCTOR 470UH (3225)
L513	1-412-957-11	s INDUCTOR 33UH (2520)
L701	1-412-955-11	s INDUCTOR 22UH (2520)
L702	1-412-943-11	s INDUCTOR 2.2UH (2520)
L703	1-412-955-11	s INDUCTOR 22UH (2520)
L704	1-412-955-11	s INDUCTOR 22UH (2520)
L706	1-412-955-11	s INDUCTOR 22UH (2520)
Q501	8-729-101-07	s TRANSISTOR 2SB798
Q502	8-729-402-19	s TRANSISTOR XN6501
Q503	8-729-402-19	s TRANSISTOR XN6501
Q504	8-729-905-35	s TRANSISTOR 2SC4081-R
Q505	8-729-905-35	s TRANSISTOR 2SC4081-R
Q506	8-729-905-35	s TRANSISTOR 2SC4081-R
Q507	8-729-142-90	s TRANSISTOR 2SK853-K5
Q508	8-729-141-75	s TRANSISTOR 2SD596DV345
Q509	8-729-141-48	s TRANSISTOR 2SB624-BV345
Q510	8-729-905-35	s TRANSISTOR 2SC4081-R
Q511	8-729-905-35	s TRANSISTOR 2SC4081-R
Q512	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q513	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q701	8-729-402-19	s TRANSISTOR XN6501
R501	1-218-881-11	s RESISTOR, CHIP 27K 1/16W (1608)
R502	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R503	1-218-851-11	s RESISTOR, CHIP 1.5K 1/16W (1608)

## (AT-142 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R504	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R505	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R506	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R507	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R508	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R509	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R510	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R511	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R512	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R513	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R514	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R515	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R516	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R517	1-216-819-11	s RESISTOR,CHIP 680 1/16W 1608
R518	1-216-819-11	s RESISTOR,CHIP 680 1/16W 1608
R519	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R520	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R521	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R522	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R523	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R524	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R525	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R526	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R527	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R528	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R529	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R530	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R531	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R532	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R533	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R534	1-218-882-11	s RESISTOR,CHIP 30K 1/16W(1608)
R535	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R536	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R537	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R538	1-216-863-11	s RESISTOR,CHIP 3.3M 1/16W 1608
R539	1-216-863-11	s RESISTOR,CHIP 3.3M 1/16W 1608
R540	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R541	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R542	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R543	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R544	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R545	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R546	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R547	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R548	1-218-893-11	s RESISTOR,CHIP 82K 1/16W(1608)
R549	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R550	1-218-893-11	s RESISTOR,CHIP 82K 1/16W(1608)
R551	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R552	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R553	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R554	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R555	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R557	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R558	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R559	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R560	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R561	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R562	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R563	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)

## (AT-142 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R564	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R565	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R566	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R567	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R568	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R569	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R570	1-218-870-11	s RESISTOR,CHIP 9.1K 1/16W(1608)
R571	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R572	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R573	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R574	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R575	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R576	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R577	1-216-807-11	s RESISTOR,CHIP 68 1/16W 1608
R578	1-216-807-11	s RESISTOR,CHIP 68 1/16W 1608
R579	1-216-807-11	s RESISTOR,CHIP 68 1/16W 1608
R580	1-216-807-11	s RESISTOR,CHIP 68 1/16W 1608
R581	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R582	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R583	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R585	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R586	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R587	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R588	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R589	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R590	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R591	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R592	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R593	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R594	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R595	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R596	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R597	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R598	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R599	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R601	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R602	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R603	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R604	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R605	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R606	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R608	1-218-870-11	s RESISTOR,CHIP 9.1K 1/16W(1608)
R609	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R610	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R611	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R612	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R613	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R615	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R616	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R617	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R618	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R619	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R620	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R621	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R622	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R623	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R624	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R625	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R626	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)



(AT-142 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R627	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R628	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R701	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R704	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R705	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R706	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R707	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R708	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R709	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R711	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R712	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R713	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R714	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R715	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R716	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R717	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R718	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R719	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R722	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R724	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R725	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R726	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R728	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R729	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R730	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R731	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R732	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R733	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R734	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R737	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R738	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R739	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R740	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R741	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R742	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R743	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R749	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R750	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R752	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
RB501	1-239-309-11 s	RESISTOR,ARRAY,CHIP 100K
RB502	1-236-904-11 s	RESISTOR,NETWORK 1K (1608)
RB503	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RB504	1-236-904-11 s	RESISTOR,NETWORK 1K (1608)
RB505	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RB506	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RB507	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RB508	1-236-904-11 s	RESISTOR,NETWORK 1K (1608)
RB509	1-236-904-11 s	RESISTOR,NETWORK 1K (1608)
RB510	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RB701	1-239-309-11 s	RESISTOR,ARRAY,CHIP 100K
RB702	1-239-309-11 s	RESISTOR,ARRAY,CHIP 100K
RB703	1-236-904-11 s	RESISTOR,NETWORK 1K (1608)
RB704	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RB705	1-239-309-11 s	RESISTOR,ARRAY,CHIP 100K
RB706	1-239-426-11 s	NETWORK,RESISTOR 2.2K (1608)
RB707	1-239-412-11 s	NETWORK,RESISTOR 100 (1608)
RB708	1-239-428-11 s	NETWORK,RESISTOR 3.3K (1608)
X702	1-760-273-11 s	VIBRATOR, CRYSTAL

AT-150 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8329-857-A s	MOUNTED CIRCUIT BOARD, AT-150
1pc	3-709-100-01 o	COVER, IC SOCKET
C501	1-104-919-11 s	CAPACITOR,TANTALUM 10MF/25V
C502	1-119-751-11 s	CAPACITOR,TANTALUM 22MF/16V
C503	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C504	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C505	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C506	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C507	1-135-870-91 s	CAPACITOR, TANTALUM 2.2/16V
C508	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C509	1-126-393-11 s	CAPACITOR ELECT 33MF/10V(CHIP)
C510	1-119-751-11 s	CAPACITOR,TANTALUM 22MF/16V
C511	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C512	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C513	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C514	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C515	1-126-393-11 s	CAPACITOR ELECT 33MF/10V(CHIP)
C516	1-119-751-11 s	CAPACITOR,TANTALUM 22MF/16V
C517	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C520	1-119-751-11 s	CAPACITOR,TANTALUM 22MF/16V
C521	1-119-751-11 s	CAPACITOR,TANTALUM 22MF/16V
C522	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C523	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C524	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C525	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C526	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C527	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C528	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C529	1-119-751-11 s	CAPACITOR,TANTALUM 22MF/16V
C530	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C531	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C532	1-162-964-11 s	CAPACITOR,CERAMIC 1000PF/50V B
C533	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C534	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C536	1-162-964-11 s	CAPACITOR,CERAMIC 1000PF/50V B
C537	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C538	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C539	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C540	1-119-751-11 s	CAPACITOR,TANTALUM 22MF/16V
C541	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C542	1-162-964-11 s	CAPACITOR,CERAMIC 1000PF/50V B
C543	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C544	1-162-964-11 s	CAPACITOR,CERAMIC 1000PF/50V B
C545	1-126-397-11 s	CAPACITOR ELECT 33MF/25V(CHIP)
C546	1-126-397-11 s	CAPACITOR ELECT 33MF/25V(CHIP)
C547	1-104-919-11 s	CAPACITOR,TANTALUM 10MF/25V
C548	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C549	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C550	1-104-919-11 s	CAPACITOR,TANTALUM 10MF/25V
C551	1-107-689-21 s	CAPACITOR,TANTALUM 1MF/35V
C552	1-162-923-11 s	CAPACITOR,CERAMIC 47PF/50V CH
C553	1-162-917-11 s	CAPACITOR,CERAMIC 15PF/50V CH
C554	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C555	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C556	1-162-964-11 s	CAPACITOR,CERAMIC 1000PF/50V B
C557	1-164-156-11 s	CAPACITOR,CERAMIC 0.1MF/25V F
C558	1-104-919-11 s	CAPACITOR,TANTALUM 10MF/25V
C559	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B



## (AT-150 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C560	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C576	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C577	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C578	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C579	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C580	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C701	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C702	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C703	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C704	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C705	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C706	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C707	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C710	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C711	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C712	1-162-964-11 s	CAPACITOR, CERAMIC 1000PF/50V B
C713	1-162-964-11 s	CAPACITOR, CERAMIC 1000PF/50V B
C714	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C715	1-107-689-21 s	CAPACITOR, TANTALUM 1MF/35V
C716	1-162-912-11 s	CAPACITOR, CERAMIC 7PF/50V 1608
C717	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH
C720	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C721	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C729	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C730	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C731	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C732	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C733	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C734	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
C735	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C736	1-162-964-11 s	CAPACITOR, CERAMIC 1000PF/50V B
C748	1-119-751-11 s	CAPACITOR, TANTALUM 22MF/16V
CN501	1-774-603-41 s	CONNECTOR, BOARD TO BOARD 100P
CN503	1-580-789-21 o	PIN, CONNECTOR (SMD) 6P
CV502	1-141-368-11 s	CAPACITOR, CHIP TRIMMER 30PF
CV701	1-141-422-11 s	CAPACITOR, TRIMER 10PF (CHIP)
D501	8-719-017-03 s	DIODE 02DZ4.7-TPH3
D502	8-719-050-51 s	DIODE RD9.1UM-T1B2
D503	8-719-421-69 s	DIODE MA133
D504	8-719-421-69 s	DIODE MA133
D505	8-719-421-69 s	DIODE MA133
D506	8-719-421-69 s	DIODE MA133
D507	8-719-421-69 s	DIODE MA133
D508	8-719-421-69 s	DIODE MA133
D509	8-719-421-69 s	DIODE MA133
D511	8-719-421-69 s	DIODE MA133
D512	8-719-421-69 s	DIODE MA133
D702	8-719-421-69 s	DIODE MA133
D703	8-719-421-69 s	DIODE MA133
IC501	8-759-185-42 s	IC LM4040AIM3-2.5
IC502	8-759-327-01 s	IC NJM062V-TE2
IC504	8-759-589-29 s	IC X24645S81-2.7T2
IC506	8-759-673-09 s	IC MM74HC244MTCX
IC507	8-759-659-71 s	IC SN74HC165APWR
IC508	8-752-392-03 s	IC CXD1095BR
IC509	8-759-082-58 s	IC TC7W08FU
IC511	8-759-673-55 s	IC MM74HC74AMTCX

## (AT-150 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC512	8-759-338-95 s	IC NJM2903V (TE2)
IC513	8-759-257-96 s	IC TC7S14FU (TE85R)
IC514	8-759-673-46 s	IC MM74HC08MTCX
IC515	8-759-673-52 s	IC MM74HC32MTCX
IC516	8-759-082-55 s	IC TC7W00FU
IC517	8-759-082-55 s	IC TC7W00FU
IC518	8-759-327-01 s	IC NJM062V-TE2
IC519	8-759-009-05 s	IC MC14051BF
IC520	8-759-327-01 s	IC NJM062V-TE2
IC521	8-759-064-36 s	IC MB88346BPFV
IC522	8-759-327-01 s	IC NJM062V-TE2
IC524	8-759-082-60 s	IC TC7S66FU
IC525	8-759-594-35 s	IC UPD6453GT-658-E2
IC526	8-759-660-09 s	IC SN74HC158APWR
IC528	8-759-064-36 s	IC MB88346BPFV
IC529	8-759-327-01 s	IC NJM062V-TE2
IC530	8-759-082-60 s	IC TC7S66FU
IC531	8-759-058-64 s	IC TC7S32FU-TE85R
IC550	8-759-564-49 s	IC TC7W53FU-TE12R
IC551	8-759-564-49 s	IC TC7W53FU-TE12R
IC701	8-759-532-02 s	IC CY62256LL-70ZC-T2
IC702	8-759-532-02 s	IC CY62256LL-70ZC-T2
IC703	6-803-352-01 o	IC 29F800B-DSR370/570V1.10
IC708	8-759-489-89 s	IC HD6437034AD49F
IC709	8-759-542-91 s	IC S-80840ANUP-ED4-T2
IC711	8-759-549-15 s	IC SN74LV245APWR
IC712	8-759-196-96 s	IC TC7SH08FU (TE85R)
IC723	8-759-252-59 s	IC MAX202CSE
IC724	8-759-399-56 s	IC STK12C68-S45
IS703	1-251-496-21 o	SOCKET, IC
L501	1-412-955-11 s	INDUCTOR 22UH (2520)
L502	1-412-955-11 s	INDUCTOR 22UH (2520)
L503	1-412-955-11 s	INDUCTOR 22UH (2520)
L504	1-412-963-11 s	INDUCTOR 100UH (2520)
L505	1-412-955-11 s	INDUCTOR 22UH (2520)
L507	1-412-955-11 s	INDUCTOR 22UH (2520)
L508	1-412-955-11 s	INDUCTOR 22UH (2520)
L509	1-412-955-11 s	INDUCTOR 22UH (2520)
L510	1-412-955-11 s	INDUCTOR 22UH (2520)
L511	1-412-282-41 s	INDUCTOR, CHIP 470UH (3225)
L512	1-412-282-41 s	INDUCTOR, CHIP 470UH (3225)
L513	1-412-957-11 s	INDUCTOR 33UH (2520)
L701	1-412-955-11 s	INDUCTOR 22UH (2520)
L702	1-412-943-11 s	INDUCTOR 2.2UH (2520)
L704	1-412-955-11 s	INDUCTOR 22UH (2520)
L706	1-412-955-11 s	INDUCTOR 22UH (2520)
Q501	8-729-101-07 s	TRANSISTOR 2SB798
Q502	8-729-402-19 s	TRANSISTOR XN6501
Q503	8-729-402-19 s	TRANSISTOR XN6501
Q504	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q505	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q506	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q508	8-729-141-75 s	TRANSISTOR 2SD596DV345
Q509	8-729-141-48 s	TRANSISTOR 2SB624-BV345
Q510	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q511	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q512	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR

## (AT-150 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q513	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q517	8-729-142-90	s TRANSISTOR 2SK853-K5
Q701	8-729-402-19	s TRANSISTOR XN6501
R501	1-218-881-11	s RESISTOR, CHIP 27K 1/16W (1608)
R502	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R503	1-218-851-11	s RESISTOR, CHIP 1.5K 1/16W (1608)
R504	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W (1608)
R505	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R506	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R507	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R508	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R509	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R510	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R511	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R512	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R513	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R514	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R515	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R516	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R517	1-218-843-11	s RESISTOR, CHIP 680 1/16W (1608)
R518	1-218-843-11	s RESISTOR, CHIP 680 1/16W (1608)
R519	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R520	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R521	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R522	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R523	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R524	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R525	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R526	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R527	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R528	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R529	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R530	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R531	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R532	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R533	1-218-875-11	s RESISTOR, CHIP 15K 1/16W (1608)
R534	1-218-882-11	s RESISTOR, CHIP 30K 1/16W (1608)
R535	1-218-875-11	s RESISTOR, CHIP 15K 1/16W (1608)
R536	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R537	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R538	1-216-863-11	s RESISTOR, CHIP 3.3M 1/16W 1608
R539	1-216-863-11	s RESISTOR, CHIP 3.3M 1/16W 1608
R540	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R541	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R542	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R543	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R544	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R545	1-218-861-11	s RESISTOR, CHIP 3.9K 1/16W (1608)
R546	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R547	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R548	1-218-893-11	s RESISTOR, CHIP 82K 1/16W (1608)
R549	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R550	1-218-893-11	s RESISTOR, CHIP 82K 1/16W (1608)
R551	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R552	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R553	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R554	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R555	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)

## (AT-150 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R557	1-216-864-11	s CONDUCTOR, CHIP (1608)
R558	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R559	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R560	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R561	1-218-869-11	s RESISTOR, CHIP 8.2K 1/16W (1608)
R562	1-218-865-11	s RESISTOR, CHIP 5.6K 1/16W (1608)
R563	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R564	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R565	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R566	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R567	1-218-861-11	s RESISTOR, CHIP 3.9K 1/16W (1608)
R568	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R569	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R570	1-218-870-11	s RESISTOR, CHIP 9.1K 1/16W (1608)
R571	1-218-865-11	s RESISTOR, CHIP 5.6K 1/16W (1608)
R572	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R573	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R574	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R575	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R576	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R577	1-211-989-11	s RESISTOR, CHIP 68 1/16W (1608)
R578	1-211-989-11	s RESISTOR, CHIP 68 1/16W (1608)
R579	1-211-989-11	s RESISTOR, CHIP 68 1/16W (1608)
R580	1-211-989-11	s RESISTOR, CHIP 68 1/16W (1608)
R581	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R582	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R583	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R585	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R586	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R587	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R588	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R589	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R590	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R591	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R592	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R593	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R594	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R595	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R596	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R597	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R598	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R599	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R601	1-218-861-11	s RESISTOR, CHIP 3.9K 1/16W (1608)
R602	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R603	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R604	1-218-861-11	s RESISTOR, CHIP 3.9K 1/16W (1608)
R605	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R606	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R608	1-218-870-11	s RESISTOR, CHIP 9.1K 1/16W (1608)
R609	1-218-865-11	s RESISTOR, CHIP 5.6K 1/16W (1608)
R610	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R611	1-218-895-11	s RESISTOR, CHIP 100K 1/16W (1608)
R612	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R613	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R614	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R615	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R616	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R617	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R618	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)

## (AT-150 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R620	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R621	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R622	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R623	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R624	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R625	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R626	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R627	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R651	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R652	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R653	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R654	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R655	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R656	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R701	1-216-791-11 s	RESISTOR,CHIP 3.3 1/16W 1608
R702	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R703	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R704	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R705	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R706	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R707	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R708	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R711	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R712	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R713	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R714	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R715	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R716	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R717	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R718	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R719	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R722	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R724	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R725	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R726	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R728	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R729	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R732	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R733	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R734	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R737	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R738	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R739	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R740	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R741	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R742	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R743	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R749	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R750	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R752	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R765	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
RB501	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB502	1-236-904-11 s	RESISTOR NETWORK 1K (1608)
RB503	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB504	1-236-904-11 s	RESISTOR NETWORK 1K (1608)
RB505	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB506	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB507	1-236-907-11 s	RESISTOR BLOCK 100K (1608)

## (AT-150 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB508	1-236-904-11 s	RESISTOR NETWORK 1K (1608)
RB509	1-236-904-11 s	RESISTOR NETWORK 1K (1608)
RB510	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB701	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB702	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB703	1-236-904-11 s	RESISTOR NETWORK 1K (1608)
RB704	1-236-907-11 s	RESISTOR BLOCK 100K (1608)
RB705	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB706	1-239-426-11 s	NETWORK RESISTOR 2.2K (1608)
RB707	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB708	1-239-428-11 s	NETWORK RESISTOR 3.3K (1608)
X702	1-760-273-11 s	VIBRATOR, CRYSTAL

-----  
CC-68 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8277-832-C o	MOUNTED CIRCUIT BOARD, CC-68
CN1	1-750-159-21 o	CONNECTOR, FPC (5P)
Q1	8-729-926-31 s	PHOTO TRANSISTOR PT483F1S
S1	1-572-288-11 s	SWITCH, PUSH0 (1-1)
S2	1-572-288-11 s	SWITCH, PUSH0 (1-1)

-----  
CN-1519 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8317-811-A o	MOUNTED CIRCUIT BOARD, CN-1519
CN2	1-766-566-11 o	CONNECTOR, ROUND TYPE (M) (26P)
FB101	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB102	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB103	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB104	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB105	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB106	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB107	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB108	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB109	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FB110	1-414-552-11 s	MICRO INDUCTOR (CHIP TYPE)
FL101	1-239-896-12 s	FILTER, EMI (SMD)
FL102	1-239-896-12 s	FILTER, EMI (SMD)
FL103	1-239-896-12 s	FILTER, EMI (SMD)
FL104	1-239-896-12 s	FILTER, EMI (SMD)
FL105	1-239-896-12 s	FILTER, EMI (SMD)
FL106	1-239-896-12 s	FILTER, EMI (SMD)

-----  
CN-1524 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-669-156-11 o	PRINTED WIRING BOARD, CN-1524

-----  
CN-1866 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-673-947-12	o PRINTED WIRING BOARD, CN-1866
C801	1-163-009-11	s CAPACITOR, CERAMIC 1000PF/50V
C802	1-163-009-11	s CAPACITOR, CERAMIC 1000PF/50V
CN801	1-507-980-41	s JACK
W801	1-958-492-11	o HARNESS, SUB (CN1518)

-----  
CN-1867 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-673-950-11	o PRINTED WIRING BOARD, CN-1867
C701	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C702	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
CN701	1-507-980-41	s JACK
FB701	1-543-775-11	s BEAD, FERRITE
R701	1-216-005-00	s RESISTOR, CHIP 15 1/10W(2012)
R702	1-216-005-00	s RESISTOR, CHIP 15 1/10W(2012)
W701	1-958-491-11	o HARNESS, SUB (CN1549)

-----  
CN-1873 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-673-955-11	o PRINTED WIRING BOARD, CN-1873
CN1	1-563-929-11	s CONNECTOR, ROUND TYPE (RF) 4P
W1	1-958-493-11	o HARNESS, SUB (CN1693)

-----  
CN-1874 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-673-956-11	o PRINTED WIRING BOARD, CN-1874
1pc	3-709-106-01	o TERMINAL, LIGHT
1pc	3-709-108-01	o HOLDER, CONNECTOR
1pc	3-709-107-01	o HOUSING, LIGHT TERMINAL
C1	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C2	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
CN1	1-560-364-00	o CONNECTOR, 2P

-----  
CN-1981 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-677-405-11	o PRINTED WIRING BOARD, CN-1981

-----  
CN-2277 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8329-788-A	s MOUNTED CIRCUIT BOARD, CN-2277
2pcs	1-560-372-00	s TERMINAL, PRESS
1pc	1-561-514-00	o CONNECTOR HOUSING, ILG (2P)
CN2	1-766-566-11	o CONNECTOR, ROUND TYPE (M) (26P)
FB101	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB102	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB103	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB104	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB105	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB106	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB107	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB108	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB109	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FB110	1-414-552-11	s MICRO INDUCTOR (CHIP TYPE)
FL101	1-239-896-12	s FILTER, EMI (SMD)
FL102	1-239-896-12	s FILTER, EMI (SMD)
FL103	1-239-896-12	s FILTER, EMI (SMD)
FL104	1-239-896-12	s FILTER, EMI (SMD)
FL105	1-239-896-12	s FILTER, EMI (SMD)
FL106	1-239-896-12	s FILTER, EMI (SMD)
FL107	1-239-896-12	s FILTER, EMI (SMD)

## CP-315 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8318-040-A	o MOUNTED CIRCUIT BOARD, CP-315
1pc	A-8278-413-E	s PLATE, CP ASSY
1pc	1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
4pcs	1-778-787-13	o CONNECTOR, COAXIAL (BNC TYPE)
1pc	1-778-788-11	o JACK, 2P PIN
1pc	3-604-376-01	o PLATE, CP
3pcs	7-685-546-14	s SCREW +BTP 3X8
C101	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C102	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C103	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C104	1-163-275-11	s CAPACITOR, CERAMIC 1000PF/50V
C105	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C106	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C107	1-124-261-00	s CAPACITOR, ELECT 10M/50V
C108	1-124-261-00	s CAPACITOR, ELECT 10M/50V
C109	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C110	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C111	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C112	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C113	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C114	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C115	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C116	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C117	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C119	1-107-690-11	s CAPACITOR, TANTALUM 6.8MF/35V
C120	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C121	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C122	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C123	1-163-275-11	s CAPACITOR, CERAMIC 1000PF/50V
C124	1-107-690-11	s CAPACITOR, TANTALUM 6.8MF/35V
C125	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C126	1-163-133-00	s CAPACITOR, CHIP CERAMIC 470PF
C127	1-124-261-00	s CAPACITOR, ELECT 10M/50V
C128	1-124-261-00	s CAPACITOR, ELECT 10M/50V
C129	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C130	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C131	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C132	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C133	1-107-690-11	s CAPACITOR, TANTALUM 6.8MF/35V
C134	1-107-690-11	s CAPACITOR, TANTALUM 6.8MF/35V
C301	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C302	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C303	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C304	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C305	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C306	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C406	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C413	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C414	1-128-548-11	s CAPACITOR, ELECT 4700MF/25V
C415	1-115-339-11	s CAPACITOR, CERAMIC 0.1MF/50V
CB401	Δ 1-533-481-11	s BREAKER, CIRCUIT
CN1	1-750-065-11	o CONNECTOR, BOARD TO BOARD 60P
CN2	1-784-720-12	s PIN, CONNECTOR (PC BOARD TYPE)
CN3	1-560-356-00	o CONNECTOR POST HEADER, ILG (2P)
CN5	1-784-626-11	o CONNECTOR, FPC (DIP TYPE) 22P
CN6	1-580-535-11	o PIN, CONNECTOR (PC BOARD) 12P

## (CP-315 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
CN7	1-580-534-11	o PIN, CONNECTOR (PC BOARD) 10P
CN8	1-566-757-11	s PIN, CONNECTOR (PC BOARD) 2P
CN9	1-506-703-11	o CONNECTOR POST HEADER, ILG (4P)
CN101	1-766-386-12	s CONNECTOR, 3P-XLR TYPE (FEMALE)
CN102	1-766-386-12	s CONNECTOR, 3P-XLR TYPE (FEMALE)
D101	8-719-820-41	s DIODE 1SS302
D102	8-719-820-41	s DIODE 1SS302
D103	8-719-820-41	s DIODE 1SS302
D104	8-719-820-41	s DIODE 1SS302
D202	8-719-820-41	s DIODE 1SS302
D203	8-719-820-41	s DIODE 1SS302
D205	8-719-820-41	s DIODE 1SS302
D206	8-719-820-41	s DIODE 1SS302
D207	8-719-820-41	s DIODE 1SS302
D208	8-719-820-41	s DIODE 1SS302
D209	8-719-820-41	s DIODE 1SS302
D210	8-719-820-41	s DIODE 1SS302
D402	8-719-911-55	s DIODE U05G (RECTI)
FL201	1-239-896-12	s FILTER, EMI (SMD)
FL202	1-239-896-12	s FILTER, EMI (SMD)
FL203	1-239-896-12	s FILTER, EMI (SMD)
FL205	1-239-895-11	s FILTER, EMI (SMD)
FL206	1-239-895-11	s FILTER, EMI (SMD)
FL207	1-239-895-11	s FILTER, EMI (SMD)
FL208	1-239-895-11	s FILTER, EMI (SMD)
IC101	8-759-700-84	s IC NJM2041MD
IC201	8-759-700-84	s IC NJM2041MD
IC301	8-759-385-17	s IC NJM4580E (TE2)
L101	1-412-137-11	s INDUCTOR, MICRO 10UH
L102	1-412-137-11	s INDUCTOR, MICRO 10UH
L103	1-412-137-11	s INDUCTOR, MICRO 10UH
L104	1-412-137-11	s INDUCTOR, MICRO 10UH
PS301	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS401	Δ 1-576-410-21	s FUSE, CHIP 2A/63V
Q101	8-729-141-75	s TRANSISTOR 2SD596DV345
Q102	8-729-141-48	s TRANSISTOR 2SB624-BV345
Q103	8-729-271-31	s TRANSISTOR 2SC2713-G
Q104	8-729-271-31	s TRANSISTOR 2SC2713-G
Q407	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q408	8-729-039-35	s TRANSISTOR SI9435DY-T1
Q409	8-729-039-35	s TRANSISTOR SI9435DY-T1
R102	1-216-017-91	s RESISTOR, CHIP 47 1/10W (2012)
R103	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R105	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R106	1-208-790-11	s RESISTOR, CHIP 2.2K 1/10W (2012)
R107	1-208-790-11	s RESISTOR, CHIP 2.2K 1/10W (2012)
R108	1-208-790-11	s RESISTOR, CHIP 2.2K 1/10W (2012)
R109	1-208-790-11	s RESISTOR, CHIP 2.2K 1/10W (2012)
R110	1-208-790-11	s RESISTOR, CHIP 2.2K 1/10W (2012)
R111	1-208-790-11	s RESISTOR, CHIP 2.2K 1/10W (2012)
R112	1-208-768-11	s RESISTOR, CHIP 270 1/10W (2012)
R113	1-208-768-11	s RESISTOR, CHIP 270 1/10W (2012)
R114	1-208-770-11	s RESISTOR, CHIP 330 1/10W (2012)
R115	1-208-770-11	s RESISTOR, CHIP 330 1/10W (2012)
R116	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R117	1-208-793-11	s RESISTOR, CHIP 3K 1/10W (2125)

## (CP-315 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R118	1-208-818-11 s	RESISTOR,CHIP 33K 1/10W (2012)
R119	1-208-818-11 s	RESISTOR,CHIP 33K 1/10W (2012)
R120	1-208-776-11 s	RESISTOR,CHIP 560 1/10W (2012)
R121	1-208-778-11 s	RESISTOR,CHIP 680 1/10W (2012)
R122	1-208-798-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R123	1-208-798-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R124	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R127	1-216-055-00 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R128	1-216-055-00 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R129	1-216-083-00 s	RESISTOR,CHIP 27K 1/10W(2012)
R131	1-216-017-91 s	RESISTOR,CHIP 47 1/10W(2012)
R132	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R134	1-216-083-00 s	RESISTOR,CHIP 27K 1/10W(2012)
R135	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R136	1-208-790-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R137	1-208-790-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R138	1-208-790-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R139	1-208-790-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R140	1-208-790-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R141	1-208-790-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R142	1-208-768-11 s	RESISTOR,CHIP 270 1/10W (2012)
R143	1-208-768-11 s	RESISTOR,CHIP 270 1/10W (2012)
R144	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R145	1-208-770-11 s	RESISTOR,CHIP 330 1/10W (2012)
R146	1-208-770-11 s	RESISTOR,CHIP 330 1/10W (2012)
R147	1-208-793-11 s	RESISTOR,CHIP 3K 1/10W (2125)
R148	1-208-818-11 s	RESISTOR,CHIP 33K 1/10W (2012)
R149	1-208-818-11 s	RESISTOR,CHIP 33K 1/10W (2012)
R150	1-208-776-11 s	RESISTOR,CHIP 560 1/10W (2012)
R151	1-208-778-11 s	RESISTOR,CHIP 680 1/10W (2012)
R152	1-208-798-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R153	1-208-798-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R154	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R201	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R202	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R203	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R204	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R205	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R206	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R207	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R219	1-216-023-00 s	RESISTOR,CHIP 82 1/10W(2012)
R301	1-208-798-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R302	1-208-798-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R303	1-216-025-91 s	RESISTOR,CHIP 100 1/10W(2125)
R304	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R305	1-216-295-91 s	RESISTOR,CHIP 0 (1/10W)
R306	1-208-781-11 s	RESISTOR,CHIP 910 1/10W (2125)
R307	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R308	1-216-660-11 s	RESISTOR,CHIP 2.4K 1/10W(2012)
R309	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R310	1-216-025-91 s	RESISTOR,CHIP 100 1/10W(2125)
R311	1-216-660-11 s	RESISTOR,CHIP 2.4K 1/10W(2012)
R312	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R415	1-216-033-00 s	RESISTOR,CHIP 220 1/10W(2012)
R418	1-216-097-91 s	RESISTOR,CHIP 100K 1/10W(2012)
S101	1-572-042-11 s	SWITCH,SLIDE (2-4-3)
S102	1-572-042-11 s	SWITCH,SLIDE (2-4-3)

## CP-373 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8329-787-A s	MOUNTED CIRCUIT BOARD, CP-373
1pc	1-573-590-13 s	CONNECTOR, (S) TERMINAL 4P
4pcs	1-778-787-13 o	CONNECTOR, COAXIAL (BNC TYPE)
1pc	1-778-788-11 o	JACK, 2P PIN
1pc	3-604-376-01 o	PLATE,CP
3pcs	7-685-546-14 s	SCREW +BTP 3X8
1pc	A-8278-413-E s	PLATE,CP ASSY
C101	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C102	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C103	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C104	1-163-275-11 s	CAPACITOR CERAMIC 1000PF/50V
C105	1-163-133-00 s	CAPACITOR,CHIP CERAMIC 470PF
C106	1-163-133-00 s	CAPACITOR,CHIP CERAMIC 470PF
C107	1-124-261-00 s	CAPACITOR,ELECT 10M/50V
C108	1-124-261-00 s	CAPACITOR,ELECT 10M/50V
C109	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C110	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C111	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C112	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C113	1-128-694-11 s	CAP, CHIP TANTALUM ELECT 22MF
C114	1-128-694-11 s	CAP, CHIP TANTALUM ELECT 22MF
C115	1-135-259-11 s	CAPACITOR,TANTALUM 10MF/6.3V
C116	1-135-259-11 s	CAPACITOR,TANTALUM 10MF/6.3V
C117	1-115-339-11 s	CAPACITOR,CERAMIC 0.1MF/50V
C118	1-115-339-11 s	CAPACITOR,CERAMIC 0.1MF/50V
C119	1-104-920-11 s	CAPACITOR TANTALUM 4.7MF/35V
C120	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C121	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C122	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C123	1-163-275-11 s	CAPACITOR CERAMIC 1000PF/50V
C124	1-104-920-11 s	CAPACITOR TANTALUM 4.7MF/35V
C125	1-163-133-00 s	CAPACITOR,CHIP CERAMIC 470PF
C126	1-163-133-00 s	CAPACITOR,CHIP CERAMIC 470PF
C127	1-124-261-00 s	CAPACITOR,ELECT 10M/50V
C128	1-124-261-00 s	CAPACITOR,ELECT 10M/50V
C129	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C130	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C131	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C132	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C133	1-104-920-11 s	CAPACITOR TANTALUM 4.7MF/35V
C134	1-104-920-11 s	CAPACITOR TANTALUM 4.7MF/35V
C301	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C302	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C303	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C304	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C305	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C306	1-104-851-11 s	CAPACITOR,TANTALUM 10MF/10V
C406	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C413	1-163-021-91 s	CAPACITOR, CERAMIC 0.01MF/50V
C414	1-128-548-11 s	CAPACITOR,ELECT 4700MF/25V
C415	1-115-339-11 s	CAPACITOR,CERAMIC 0.1MF/50V
C416	1-115-339-11 s	CAPACITOR,CERAMIC 0.1MF/50V
C417	1-165-629-11 s	CAPACITOR,CERAMIC1000000PF B
C501	1-119-667-11 s	CAPACITOR CERAMIC 22MF/10V(F)
C502	1-119-667-11 s	CAPACITOR CERAMIC 22MF/10V(F)
C503	1-163-021-91 s	CAPACITOR, CERAMIC 0.01MF/50V
C504	1-127-573-11 s	CAPACITOR,CERAMIC 1MFB(2012)
C505	1-127-573-11 s	CAPACITOR,CERAMIC 1MFB(2012)



## (CP-373 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C506	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
CB401	Δ 1-533-481-11	s BREAKER, CIRCUIT
CN1	1-750-065-11	o CONNECTOR, BOARD TO BOARD 60P
CN2	1-784-720-12	s PIN, CONNECTOR (PC BOARD TYPE)
CN3	1-560-356-00	o CONNECTOR POST HEADER, ILG (2P)
CN5	1-774-114-11	s CONNECTOR, FPC (DIP TYPE) 24P
CN6	1-580-535-11	o PIN, CONNECTOR (PC BOARD) 12P
CN7	1-580-534-11	o PIN, CONNECTOR (PC BOARD) 10P
CN8	1-566-757-11	s PIN, CONNECTOR (PC BOARD) 2P
CN9	1-506-703-11	o CONNECTOR POST HEADER, ILG (4P)
CN10	1-560-356-00	o CONNECTOR POST HEADER, ILG (2P)
CN101	1-766-386-14	s CONNECTOR, 3P-XLR TYPE(FEMALE)
CN102	1-766-386-14	s CONNECTOR, 3P-XLR TYPE(FEMALE)
D101	8-719-820-41	s DIODE 1SS302
D102	8-719-820-41	s DIODE 1SS302
D103	8-719-820-41	s DIODE 1SS302
D104	8-719-820-41	s DIODE 1SS302
D201	8-719-820-41	s DIODE 1SS302
D202	8-719-820-41	s DIODE 1SS302
D203	8-719-820-41	s DIODE 1SS302
D204	8-719-820-41	s DIODE 1SS302
D205	8-719-820-41	s DIODE 1SS302
D206	8-719-820-41	s DIODE 1SS302
D207	8-719-820-41	s DIODE 1SS302
D208	8-719-820-41	s DIODE 1SS302
D401	8-719-801-78	s DIODE 1SS184
D402	8-719-911-55	s DIODE U05G (RECTI)
D403	8-719-105-91	s DIODE RD5.6M-B2
D404	8-719-801-78	s DIODE 1SS184
D501	8-719-820-41	s DIODE 1SS302
D502	8-719-024-81	s DIODE 1SS300-TE85L
D503	8-719-820-41	s DIODE 1SS302
FL201	1-239-896-12	s FILTER, EMI (SMD)
FL202	1-239-896-12	s FILTER, EMI (SMD)
FL203	1-239-896-12	s FILTER, EMI (SMD)
FL204	1-239-895-11	s FILTER, EMI (SMD)
FL205	1-239-895-11	s FILTER, EMI (SMD)
FL206	1-239-895-11	s FILTER, EMI (SMD)
FL207	1-239-895-11	s FILTER, EMI (SMD)
FL208	1-239-895-11	s FILTER, EMI (SMD)
IC101	8-759-700-84	s IC NJM2041MD
IC201	8-759-700-84	s IC NJM2041MD
IC301	8-759-385-17	s IC NJM4580E (TE2)
IC501	8-759-702-02	s IC NJM062M
IC502	8-759-242-64	s IC TC4W53F
IC503	8-759-702-02	s IC NJM062M
IC504	8-759-242-64	s IC TC4W53F
L101	1-412-137-11	s INDUCTOR, MICRO 10UH
L102	1-412-137-11	s INDUCTOR, MICRO 10UH
L103	1-412-137-11	s INDUCTOR, MICRO 10UH
L104	1-412-137-11	s INDUCTOR, MICRO 10UH
PS301	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS401	Δ 1-576-410-21	s FUSE, CHIP 2A/63V
Q101	8-729-159-65	s TRANSISTOR 2SD596-DV5
Q102	8-729-162-45	s TRANSISTOR 2SB624-BV5

## (CP-373 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q103	8-729-271-31	s TRANSISTOR 2SC2713-G
Q104	8-729-271-31	s TRANSISTOR 2SC2713-G
Q401	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q402	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q403	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q404	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q407	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q408	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q409	8-729-905-35	s TRANSISTOR 2SC4081-R
Q410	8-729-905-35	s TRANSISTOR 2SC4081-R
Q411	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q412	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q413	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q414	6-550-062-01	s TRANSISTOR SI4835DY-T1
Q415	8-729-905-35	s TRANSISTOR 2SC4081-R
Q416	8-729-905-35	s TRANSISTOR 2SC4081-R
Q501	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q502	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q503	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q504	8-729-905-35	s TRANSISTOR 2SC4081-R
R102	1-216-295-91	s CONDUCTOR, CHIP (2012)
R103	1-216-295-91	s CONDUCTOR, CHIP (2012)
R105	1-216-295-91	s CONDUCTOR, CHIP (2012)
R106	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R107	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R108	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R109	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R110	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R111	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R112	1-208-768-11	s RESISTOR,CHIP 270 1/10W (2012)
R113	1-208-768-11	s RESISTOR,CHIP 270 1/10W (2012)
R114	1-208-770-11	s RESISTOR,CHIP 330 1/10W (2012)
R115	1-208-770-11	s RESISTOR,CHIP 330 1/10W (2012)
R116	1-216-295-91	s CONDUCTOR, CHIP (2012)
R117	1-208-793-11	s RESISTOR,CHIP 3K 1/10W (2125)
R118	1-208-818-11	s RESISTOR,CHIP 33K 1/10W (2012)
R119	1-208-818-11	s RESISTOR,CHIP 33K 1/10W (2012)
R120	1-208-776-11	s RESISTOR,CHIP 560 1/10W (2012)
R121	1-208-778-11	s RESISTOR,CHIP 680 1/10W (2012)
R122	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R123	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R124	1-216-295-91	s CONDUCTOR, CHIP (2012)
R127	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R128	1-216-055-00	s RESISTOR CHIP 1.8K 1/10W(2012)
R129	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R131	1-216-295-91	s CONDUCTOR, CHIP (2012)
R132	1-216-295-91	s CONDUCTOR, CHIP (2012)
R134	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R135	1-216-295-91	s CONDUCTOR, CHIP (2012)
R136	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R137	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R138	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R139	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R140	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R141	1-208-790-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R142	1-208-768-11	s RESISTOR,CHIP 270 1/10W (2012)
R143	1-208-768-11	s RESISTOR,CHIP 270 1/10W (2012)
R144	1-208-770-11	s RESISTOR,CHIP 330 1/10W (2012)
R145	1-208-770-11	s RESISTOR,CHIP 330 1/10W (2012)

## (CP-373 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R146	1-216-295-91	s CONDUCTOR, CHIP (2012)
R147	1-208-793-11	s RESISTOR,CHIP 3K 1/10W (2125)
R148	1-208-818-11	s RESISTOR,CHIP 33K 1/10W (2012)
R149	1-208-818-11	s RESISTOR,CHIP 33K 1/10W (2012)
R150	1-208-776-11	s RESISTOR,CHIP 560 1/10W (2012)
R151	1-208-778-11	s RESISTOR,CHIP 680 1/10W (2012)
R152	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R153	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R154	1-216-295-91	s CONDUCTOR, CHIP (2012)
R205	1-216-295-91	s CONDUCTOR, CHIP (2012)
R301	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R302	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R303	1-208-758-11	s RESISTOR,CHIP 100 1/10W (2012)
R306	1-208-781-11	s RESISTOR,CHIP 910 1/10W (2125)
R307	1-216-053-00	s RESISTOR CHIP 1.5K 1/10W(2012)
R308	1-216-660-11	s RESISTOR,CHIP 2.4K 1/10W(2012)
R309	1-216-053-00	s RESISTOR CHIP 1.5K 1/10W(2012)
R310	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R311	1-216-660-11	s RESISTOR,CHIP 2.4K 1/10W(2012)
R312	1-216-053-00	s RESISTOR CHIP 1.5K 1/10W(2012)
R313	1-216-049-11	s RESISTOR, CHIP 1K 1/10W(2012)
R401	1-216-105-91	s RESISTOR,CHIP 220K 1/10W(2125)
R402	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R403	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R404	1-216-085-00	s RESISTOR CHIP 33K 1/10W(2012)
R405	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R406	1-216-105-91	s RESISTOR,CHIP 220K 1/10W(2125)
R415	1-216-085-00	s RESISTOR CHIP 33K 1/10W(2012)
R418	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R422	1-216-089-91	s RESISTOR, CHIP 47K 1/10W(2012)
R423	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R424	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R425	1-216-081-00	s RESISTOR,CHIP 22K 1/10W(2012)
R426	1-216-097-00	s RESISTOR CHIP 100K 1/10W(2012)
R427	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R428	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R429	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R502	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R503	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R504	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R505	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R506	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R507	1-216-022-00	s RESISTOR,CHIP 75 1/10W (2125)
R508	1-216-089-91	s RESISTOR, CHIP 47K 1/10W(2012)
R509	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R510	1-216-109-00	s RESISTOR CHIP 330K 1/10W(2012)
R511	1-216-089-91	s RESISTOR, CHIP 47K 1/10W(2012)
R512	1-216-089-91	s RESISTOR, CHIP 47K 1/10W(2012)
R514	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R515	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R516	1-216-025-00	s RESISTOR,CHIP 100 1/10W(2012)
R517	1-216-061-00	s RESISTOR CHIP 3.3K 1/10W(2012)
R518	1-216-089-91	s RESISTOR, CHIP 47K 1/10W(2012)
R519	1-216-109-00	s RESISTOR CHIP 330K 1/10W(2012)
R520	1-216-089-91	s RESISTOR, CHIP 47K 1/10W(2012)
R521	1-216-089-91	s RESISTOR, CHIP 47K 1/10W(2012)
R522	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R523	1-216-022-00	s RESISTOR,CHIP 75 1/10W (2125)

## (CP-373 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S101	1-572-042-11	s SWITCH,SLIDE (2-4-3)
S102	1-572-042-11	s SWITCH,SLIDE (2-4-3)



-----  
DPR-141A BOARD suffix 13 and higher  
-----

\*a: [Lot No. 161-181]

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-988-A	o MOUNTED CIRCUIT BOARD, DPR-141
5pcs	3-729-013-41	s SCREW(M1.4X3.5), WASHERHEAD (+P)
4pcs	7-622-205-05	s NUT M2 TYPE2
4pcs	7-628-253-20	s SCREW +PS 2X6
C101	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C107	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C108	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C109	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C110	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C111	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C112	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C113	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C114	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C115	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C116	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C117	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C118	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C119	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C120	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C121	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C122	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C123	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C124	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C131	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C133	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C134	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C135	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C136	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C137	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C138	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C139	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C140	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C141	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C142	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C143	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C144	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C145	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C146	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C147	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C148	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C149	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C150	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C151	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C152	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C153	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C154	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C155	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C156	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C157	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C158	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
C159	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C160	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C161	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C162	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C163	1-107-686-11	s CAPACITOR, TANTALUM 4.7MF/16V
C164	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C165	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C166	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C167	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C168	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C169	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C201	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C204	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C209	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C210	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C211	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C212	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C214	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C215	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C216	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C220	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C221	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C222	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C223	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C224	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C225	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C226	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C229	*a 1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C231	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C232	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C233	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C234	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C235	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C236	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C237	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C238	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C239	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C240	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C241	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C242	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C243	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C244	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C245	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C246	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C247	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C248	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C249	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C250	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C251	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C252	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C255	1-162-962-11	s CAPACITOR, CERAMIC 470PF/50V(B)
C256	1-162-962-11	s CAPACITOR, CERAMIC 470PF/50V(B)
C257	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C258	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C301	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C302	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C303	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP	Description
C375	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C376	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C377	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C378	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C379	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C380	1-107-685-11	s	CAPACITOR TANTALUM 15MF/6.3V
C381	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C382	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C383	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C384	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C385	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C386	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C387	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C388	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C389	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C390	1-162-923-11	s	CAPACITOR, CERAMIC 47PF/50V CH
C391	1-104-851-11	s	CAPACITOR, TANTALUM 10MF/10V
C392	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C393	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C394	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C395	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C396	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C397	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C398	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C399	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C400	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C401	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C402	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C403	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C404	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C501	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C502	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C503	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C504	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C507	1-164-315-11	s	CAPACITOR, CERAMIC 470PF/50V CH
C508	1-162-964-11	s	CAPACITOR, CERAMIC 1000PF/50V B
C509	1-162-922-11	s	CAPACITOR, CERAMIC 39PF/50V CH
C510	1-162-964-11	s	CAPACITOR, CERAMIC 1000PF/50V B
C511	1-162-964-11	s	CAPACITOR, CERAMIC 1000PF/50V B
C512	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C513	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C514	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C515	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C516	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C517	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C518	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C521	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C522	1-110-569-21	s	CAPACITOR CHIP TANTAL47MF/6.3V
C523	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C524	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C527	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C528	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C529	1-164-315-11	s	CAPACITOR, CERAMIC 470PF/50V CH
C530	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C531	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C532	1-110-569-21	s	CAPACITOR CHIP TANTAL47MF/6.3V
C534	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C535	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C536	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
C537	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C539	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C546	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C547	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C548	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C549	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C601	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C603	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C604	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C605	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C606	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C611	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C612	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C613	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C614	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C615	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C621	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C622	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C623	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C631	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C632	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C633	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C651	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C652	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C653	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C654	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C655	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C656	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C657	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C658	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C701	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C702	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C703	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C704	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C705	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C711	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C712	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C714	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C715	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C716	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C717	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C727	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C728	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C731	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C732	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C733	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C734	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C735	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C736	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C751	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C752	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C753	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C754	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C755	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C756	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C757	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C758	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C759	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C771	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
C772	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C773	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C774	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C775	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C776	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C777	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C778	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C779	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C780	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C781	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C782	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C783	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C784	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C785	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C786	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C801	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C802	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C803	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C804	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C805	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C806	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C807	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C808	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C809	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C810	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C811	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C812	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C813	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C814	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C815	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C816	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C817	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C818	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C819	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C821	1-109-994-11	s CAPACITOR, CHIP CERAMIC 2.2MF B
C822	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C823	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C824	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C825	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C826	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C827	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C828	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C829	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C830	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C831	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C832	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C833	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C834	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C835	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C836	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C837	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C901	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C902	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C903	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C904	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C923	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C924	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C925	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C926	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
C927	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C928	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C929	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C930	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C931	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C932	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C933	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C934	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C935	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C936	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C937	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C938	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C939	1-104-546-11	s CAPACITOR, FILM 0.0039MF/16V
C940	1-104-546-11	s CAPACITOR, FILM 0.0039MF/16V
C941	1-164-392-11	s CAPACITOR, CERAMIC 390PF/50V CH
C942	1-164-392-11	s CAPACITOR, CERAMIC 390PF/50V CH
C943	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C944	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C945	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL
C946	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL
C947	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C948	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C949	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C950	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C951	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C952	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C954	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C955	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C956	1-110-569-21	s CAPACITOR, CHIP TANTALUM 47MF/6.3V
C957	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C958	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C959	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C960	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C961	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C962	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C965	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C966	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C971	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C972	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C973	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C985	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C986	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C987	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C988	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C989	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C990	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C991	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C992	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C993	1-162-965-11	s CAPACITOR, CERAMIC 1500PF/50V B
C994	1-162-965-11	s CAPACITOR, CERAMIC 1500PF/50V B
C995	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C996	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C997	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C998	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C999	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1000	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1001	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C1002	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216
C1003	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216

## (DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
C1004	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216
C1005	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216
C1006	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN3	1-770-452-21	o CONNECTOR, BOARD TO BOARD 30P
CN4	1-774-391-11	o CONNECTOR, BOARD TO BOARD 60P
CN5	1-580-267-11	o CONNECTOR, BOARD TO BOARD 20P
CN6	1-793-091-11	o CONNECTOR, BOARD TO BOARD 60P
CN9	1-785-849-11	o CONNECTOR, BOARD TO BOARD 40P
D101	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D102	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D301	8-719-421-69	s DIODE MA133
D302	8-719-421-69	s DIODE MA133
D303	8-719-421-69	s DIODE MA133
D304	8-719-421-69	s DIODE MA133
D701	8-719-027-95	s DIODE HSM88WK
D702	8-719-041-39	s DIODE KV1470 (5MA)
D713	8-719-041-39	s DIODE KV1470 (5MA)
D714	8-719-027-95	s DIODE HSM88WK
D821	8-719-041-39	s DIODE KV1470 (5MA)
D901	8-719-941-09	s DIODE DAP202U
D902	8-719-941-09	s DIODE DAP202U
FB301	1-414-445-11	s FERRITE, EMI (SMD)
FB302	1-414-445-11	s FERRITE, EMI (SMD)
FB303	1-414-445-11	s FERRITE, EMI (SMD)
FB304	1-414-445-11	s FERRITE, EMI (SMD)
FL301	1-233-740-11	s FILTER, LOW PASS
FL303	1-233-740-11	s FILTER, LOW PASS
FL305	1-233-740-11	s FILTER, LOW PASS
FL307	1-233-740-11	s FILTER, LOW PASS
FL501	1-233-345-21	s FILTER, LOW PASS (5.5MHZ)
FL502	1-233-776-11	s FILTER, LOW PASS
FL503	1-233-776-11	s FILTER, LOW PASS
IC101	8-759-185-42	s IC LM4040AIM3-2.5
IC102	8-759-669-72	s IC TL064CPWR
IC103	8-759-669-45	s IC TL062CPWR-12
IC104	8-759-673-43	s IC MM74HC04MTCX
IC105	8-759-523-95	s IC TC74VHC74FT (EL)
IC106	8-752-376-32	s IC CXD2310AR
IC107	8-752-376-32	s IC CXD2310AR
IC108	8-752-376-32	s IC CXD2310AR
IC201	8-759-674-44	s IC MM74HCT244MTCX
IC202	8-759-669-72	s IC TL064CPWR
IC204	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC205	8-759-058-54	s IC TC7S00FU-TE85R
IC208	8-759-058-54	s IC TC7S00FU-TE85R
IC209	8-759-447-77	s IC TC7WH74FU (TE12R)
IC211	8-752-360-44	s IC CXK1203AR
IC212	8-752-360-44	s IC CXK1203AR
IC213	8-752-360-44	s IC CXK1203AR
IC214	8-752-360-44	s IC CXK1203AR
IC215	8-759-196-96	s IC TC7SH08FU (TE85R)
IC217	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC218	8-759-674-44	s IC MM74HCT244MTCX
IC219	8-759-196-93	s IC TC7SH00FU-TE85R
IC301	8-759-678-06	s IC CAT24WC02JI-TE13
IC302	8-759-064-36	s IC MB88346BPFV
IC303	8-759-523-04	s IC TC74HC4538AFT

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
IC304	8-759-058-58 s	IC TC7S04FU-TE85R
IC305	8-759-485-79 s	IC TC7SET08FU (TE85L)
IC306	8-759-673-37 s	IC MM74HC00MTCX
IC307	8-752-363-60 s	IC CXD2307R-T4
IC308	8-759-523-02 s	IC TC74HC4053AFT(EL)
IC309	8-759-531-92 s	IC TC7WH04FU(Te12R)
IC310	8-752-381-65 o	IC CXD606-101R
IC311	8-759-485-79 s	IC TC7SET08FU (TE85L)
IC312	8-759-184-64 s	IC TC4W66FU
IC313	8-759-669-45 s	IC TL062CPWR-12
IC314	8-759-271-86 s	IC TC7SH04FU
IC315	8-759-491-46 s	IC TC74VHC04AFT (EL)
IC316	8-759-523-95 s	IC TC74VHC74FT(EL)
IC317	8-759-485-79 s	IC TC7SET08FU (TE85L)
IC318	8-759-546-74 s	IC TC7WH157FU(Te12R)
IC319	8-752-334-64 s	IC CXD1171M
IC320	8-759-196-96 s	IC TC7SH08FU (TE85R)
IC321	8-759-196-96 s	IC TC7SH08FU (TE85R)
IC324	8-759-058-54 s	IC TC7S00FU-TE85R
IC501	8-759-464-95 s	IC AK6420AF-E2
IC502	8-759-498-27 s	IC TK16074MTL
IC503	8-759-498-27 s	IC TK16074MTL
IC504	8-759-271-86 s	IC TC7SH04FU
IC505	8-759-457-61 s	IC CXD8628ER
IC506	8-759-485-79 s	IC TC7SET08FU (TE85L)
IC509	8-759-524-50 s	IC TC74VHC541FT(EL)
IC510	8-759-271-86 s	IC TC7SH04FU
IC511	8-759-386-27 s	IC 74LCX04MTCX
IC512	8-759-524-50 s	IC TC74VHC541FT(EL)
IC513	8-759-485-79 s	IC TC7SET08FU (TE85L)
IC514	8-752-363-60 s	IC CXD2307R-T4
IC517	8-759-524-04 s	IC TC74VHC125FT (EL)
IC518	8-759-524-04 s	IC TC74VHC125FT (EL)
IC521	8-759-196-96 s	IC TC7SH08FU (TE85R)
IC601	8-759-327-31 s	IC CXD2183R
IC611	8-752-378-68 s	IC CXD3101R
IC621	8-759-328-28 s	IC ZA4024
IC631	8-759-328-28 s	IC ZA4024
IC651	8-759-426-26 s	IC CXD8608R
IC652	8-759-524-52 s	IC TC74VHC574FT(EL)
IC653	8-759-524-52 s	IC TC74VHC574FT(EL)
IC711	8-752-375-05 s	IC CXD2191R
IC751	8-752-864-20 s	IC CXP911016-015Q
IC752	8-759-464-95 s	IC AK6420AF-E2
IC771	8-759-385-90 s	IC CXD2187AR
IC772	8-759-585-05 s	IC CXD8627BR
IC773	8-759-082-60 s	IC TC7S66FU
IC781	8-759-433-17 s	IC UPD482445LG4-B10-9MH-E2-HDC
IC801	8-759-529-45 s	IC IDT71V256SA15PZ-TL
IC811	8-752-374-96 s	IC CXD2190R
IC821	8-759-271-86 s	IC TC7SH04FU
IC822	8-759-271-86 s	IC TC7SH04FU
IC823	8-759-362-16 s	IC CXD2913AQ
IC824	8-759-327-01 s	IC NJM062V-TE2
IC825	8-759-429-28 s	IC CXD8630R
IC826	8-759-082-60 s	IC TC7S66FU
IC901	8-759-422-21 s	IC NJM4580VTE2
IC905	8-759-173-51 s	IC SM5872AS (ET)
IC906	8-759-422-21 s	IC NJM4580VTE2

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
IC907	8-759-422-21 s	IC NJM4580VTE2
IC908	8-759-422-21 s	IC NJM4580VTE2
IC911	8-752-374-97 s	IC CXD2705AR
IC912	8-759-674-62 s	IC MM74HCT541MTCX
IC913	8-759-523-94 s	IC TC74VHC32FT(EL)
IC917	8-759-833-99 s	IC MC74HC4052ADTR2
IC918	8-759-833-99 s	IC MC74HC4052ADTR2
IC919	8-759-422-21 s	IC NJM4580VTE2
IC921	8-759-422-21 s	IC NJM4580VTE2
IC923	8-759-462-08 s	IC AK5352-VF (E2)
IC924	8-759-447-77 s	IC TC7WH74FU (TE12R)
L101	1-412-951-11 s	INDUCTOR 10UH (2520)
L102	1-412-951-11 s	INDUCTOR 10UH (2520)
L103	1-412-951-11 s	INDUCTOR 10UH (2520)
L104	1-412-951-11 s	INDUCTOR 10UH (2520)
L105	1-412-951-11 s	INDUCTOR 10UH (2520)
L106	1-412-951-11 s	INDUCTOR 10UH (2520)
L107	1-412-951-11 s	INDUCTOR 10UH (2520)
L201	1-424-643-11 s	COIL, CHOKE 10UH
L301	1-412-955-11 s	INDUCTOR 22UH (2520)
L302	1-412-955-11 s	INDUCTOR 22UH (2520)
L303	1-410-737-31 s	INDUCTOR,CHIP 0.47UH (3225)
L305	1-410-385-11 s	INDUCTOR,CHIP 22UH (3225)
L306	1-424-643-11 s	COIL, CHOKE 10UH
L307	1-412-955-11 s	INDUCTOR 22UH (2520)
L308	1-412-955-11 s	INDUCTOR 22UH (2520)
L309	1-412-955-11 s	INDUCTOR 22UH (2520)
L310	1-412-955-11 s	INDUCTOR 22UH (2520)
L501	1-414-398-11 s	INDUCTOR (SMD) 10UH
L502	1-414-398-11 s	INDUCTOR (SMD) 10UH
L503	1-414-398-11 s	INDUCTOR (SMD) 10UH
L601	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L611	1-414-398-11 s	INDUCTOR (SMD) 10UH
L651	1-414-398-11 s	INDUCTOR (SMD) 10UH
L701	1-410-378-11 s	INDUCTOR,CHIP 5.6UH (3225)
L711	1-410-389-31 s	INDUCTOR,CHIP 47UH (3225)
L713	1-410-740-31 s	INDUCTOR,CHIP 0.82UH
L751	1-414-398-11 s	INDUCTOR (SMD) 10UH
L771	1-414-398-11 s	INDUCTOR (SMD) 10UH
L772	1-414-398-11 s	INDUCTOR (SMD) 10UH
L781	1-414-398-11 s	INDUCTOR (SMD) 10UH
L801	1-414-398-11 s	INDUCTOR (SMD) 10UH
L811	1-414-398-11 s	INDUCTOR (SMD) 10UH
L821	1-414-398-11 s	INDUCTOR (SMD) 10UH
L823	1-414-398-11 s	INDUCTOR (SMD) 10UH
L824	1-414-398-11 s	INDUCTOR (SMD) 10UH
L826	1-414-398-11 s	INDUCTOR (SMD) 10UH
L827	1-414-398-11 s	INDUCTOR (SMD) 10UH
L901	1-414-398-11 s	INDUCTOR (SMD) 10UH
L902	1-414-398-11 s	INDUCTOR (SMD) 10UH
L903	1-414-398-11 s	INDUCTOR (SMD) 10UH
L904	1-414-398-11 s	INDUCTOR (SMD) 10UH
L905	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L906	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L907	1-414-398-11 s	INDUCTOR (SMD) 10UH
L908	1-414-398-11 s	INDUCTOR (SMD) 10UH
L909	1-414-398-11 s	INDUCTOR (SMD) 10UH
L980	1-414-392-31 s	INDUCTOR (SMD) 1.0UH



## (DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
L981	1-414-392-31 s	INDUCTOR (SMD) 1.0UH
L982	1-414-392-31 s	INDUCTOR (SMD) 1.0UH
L983	1-414-392-31 s	INDUCTOR (SMD) 1.0UH
L984	1-414-392-31 s	INDUCTOR (SMD) 1.0UH
LV825	1-411-984-11 s	COIL, VARIABLE
Q101	8-729-101-07 s	TRANSISTOR 2SB798
Q102	8-729-101-07 s	TRANSISTOR 2SB798
Q103	8-729-101-07 s	TRANSISTOR 2SB798
Q104	8-729-807-51 s	TRANSISTOR 2SD1623-S
Q105	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q106	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q107	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q108	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q301	8-729-427-83 s	TRANSISTOR XP6501-TXE
Q302	8-729-143-13 s	TRANSISTOR 2SC4176-B34
Q303	8-729-026-32 s	TRANSISTOR XP6534-TX
Q304	8-729-026-34 s	TRANSISTOR XP6435-TX
Q305	8-729-427-83 s	TRANSISTOR XP6501-TXE
Q306	8-729-143-13 s	TRANSISTOR 2SC4176-B34
Q307	8-729-026-32 s	TRANSISTOR XP6534-TX
Q308	8-729-026-34 s	TRANSISTOR XP6435-TX
Q309	8-729-427-83 s	TRANSISTOR XP6501-TXE
Q310	8-729-143-13 s	TRANSISTOR 2SC4176-B34
Q311	8-729-026-32 s	TRANSISTOR XP6534-TX
Q312	8-729-026-34 s	TRANSISTOR XP6435-TX
Q313	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q501	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q502	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q503	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q504	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q505	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q506	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q507	8-729-055-85 s	TRANSISTOR UMT1N-TN
Q508	8-729-055-85 s	TRANSISTOR UMT1N-TN
Q823	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q901	6-550-007-01 s	TRANSISTOR UMC3NTR
Q902	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q903	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q904	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q905	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q906	6-550-007-01 s	TRANSISTOR UMC3NTR
Q907	6-550-007-01 s	TRANSISTOR UMC3NTR
Q908	6-550-007-01 s	TRANSISTOR UMC3NTR
R101	1-218-881-11 s	RESISTOR, CHIP 27K 1/16W(1608)
R102	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R103	1-218-881-11 s	RESISTOR, CHIP 27K 1/16W(1608)
R104	1-218-861-11 s	RESISTOR, CHIP 3.9K 1/16W(1608)
R105	1-218-879-11 s	RESISTOR, CHIP 22K 1/16W (1608)
R106	1-216-823-11 s	RESISTOR, CHIP 1.5K 1/16W
R107	1-218-863-11 s	RESISTOR, CHIP 4.7K 1/16W(1608)
R108	1-218-853-11 s	RESISTOR, CHIP 1.8K 1/16W(1608)
R109	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R110	1-216-823-11 s	RESISTOR, CHIP 1.5K 1/16W
R111	1-218-881-11 s	RESISTOR, CHIP 27K 1/16W(1608)
R112	1-218-863-11 s	RESISTOR, CHIP 4.7K 1/16W(1608)
R113	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R114	1-218-885-11 s	RESISTOR, CHIP 39K 1/16W (1608)
R115	1-218-884-11 s	RESISTOR, CHIP 36K 1/16W (1608)

## (DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
R116	1-218-875-11 s	RESISTOR, CHIP 15K 1/16W (1608)
R117	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R118	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R119	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R120	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R121	1-216-845-11 s	RESISTOR, CHIP 100K 1/16W(1608)
R122	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R123	1-216-857-11 s	RESISTOR, CHIP 1M 1/16W(1608)
R124	1-216-857-11 s	RESISTOR, CHIP 1M 1/16W(1608)
R125	1-218-823-11 s	RESISTOR, CHIP 100 1/16W (1608)
R126	1-218-823-11 s	RESISTOR, CHIP 100 1/16W (1608)
R131	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R132	1-216-797-11 s	RESISTOR, CHIP 10 1/16W 1608
R134	1-216-805-11 s	RESISTOR, CHIP 47 1/16W 1608
R135	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R137	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W(1608)
R138	1-218-835-11 s	RESISTOR, CHIP 330 1/16W (1608)
R139	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W(1608)
R140	1-211-977-11 s	RESISTOR, CHIP 22 1/16W (1608)
R141	1-216-813-11 s	RESISTOR, CHIP 220 1/16W 1608
R142	1-216-797-11 s	RESISTOR, CHIP 10 1/16W 1608
R143	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W(1608)
R144	1-218-835-11 s	RESISTOR, CHIP 330 1/16W (1608)
R145	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W(1608)
R146	1-211-977-11 s	RESISTOR, CHIP 22 1/16W (1608)
R147	1-216-797-11 s	RESISTOR, CHIP 10 1/16W 1608
R148	1-216-813-11 s	RESISTOR, CHIP 220 1/16W 1608
R149	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W(1608)
R150	1-218-835-11 s	RESISTOR, CHIP 330 1/16W (1608)
R151	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W(1608)
R152	1-211-977-11 s	RESISTOR, CHIP 22 1/16W (1608)
R153	1-216-797-11 s	RESISTOR, CHIP 10 1/16W 1608
R154	1-216-813-11 s	RESISTOR, CHIP 220 1/16W 1608
R202	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R203	1-218-843-11 s	RESISTOR, CHIP 680 1/16W (1608)
R204	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R206	1-218-823-11 s	RESISTOR, CHIP 100 1/16W (1608)
R208	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R209	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R210	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R211	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R212	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R213	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R214	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R215	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R216	1-218-867-11 s	RESISTOR, CHIP 6.8K 1/16W(1608)
R217	1-218-867-11 s	RESISTOR, CHIP 6.8K 1/16W(1608)
R218	1-218-867-11 s	RESISTOR, CHIP 6.8K 1/16W(1608)
R219	1-218-867-11 s	RESISTOR, CHIP 6.8K 1/16W(1608)
R220	1-218-867-11 s	RESISTOR, CHIP 6.8K 1/16W(1608)
R221	1-218-867-11 s	RESISTOR, CHIP 6.8K 1/16W(1608)
R222	1-216-797-11 s	RESISTOR, CHIP 10 1/16W 1608
R224	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R225	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R226	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R227	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R229	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R230	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R231	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
R232	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R234	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R238	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R239	1-216-864-11	s CONDUCTOR, CHIP (1608)
R240	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R241	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R242	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R243	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R244	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R245	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R246	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R247	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R248	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R249	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R250	1-216-864-11	s CONDUCTOR, CHIP (1608)
R251	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R252	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R253	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R254	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R255	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R256	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R257	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R258	1-216-864-11	s CONDUCTOR, CHIP (1608)
R259	1-216-864-11	s CONDUCTOR, CHIP (1608)
R301	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R302	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R303	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R304	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R305	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R306	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R308	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R309	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R310	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R312	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R313	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R317	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R318	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R319	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R320	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R321	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R322	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R323	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R324	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R325	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R326	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R327	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R328	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R329	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R330	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R331	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R332	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R334	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R335	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R339	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R340	1-218-874-11	s RESISTOR,CHIP 13K 1/16W (1608)
R343	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R346	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R347	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R348	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
R349	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R350	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R351	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R352	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R353	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R355	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R356	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R360	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R361	1-218-874-11	s RESISTOR,CHIP 13K 1/16W (1608)
R364	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R367	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R368	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R369	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R370	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R371	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R372	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R373	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R375	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R376	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R380	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R381	1-218-874-11	s RESISTOR,CHIP 13K 1/16W (1608)
R384	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R387	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R388	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R389	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R390	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R391	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R392	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R393	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R394	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R395	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R396	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R397	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R398	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R399	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R401	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R402	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R403	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R404	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R405	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R406	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R407	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R408	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R409	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R410	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R411	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R412	1-216-864-11	s CONDUCTOR, CHIP (1608)
R413	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R414	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R415	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R420	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R425	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R426	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R430	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R431	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R432	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R433	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R434	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R435	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
R436	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R437	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R438	1-216-864-11	s CONDUCTOR, CHIP (1608)
R444	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R445	1-216-864-11	s CONDUCTOR, CHIP (1608)
R501	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R502	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R503	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R504	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R505	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R507	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R508	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R509	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R510	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R511	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R512	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R513	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R514	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R515	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R516	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R517	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R518	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R519	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R520	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R521	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R522	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R523	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R524	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R525	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R526	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R527	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R528	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R529	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R532	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R533	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R534	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R535	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R536	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R537	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R538	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R539	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R540	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R541	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R542	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R543	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R544	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R545	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R548	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R551	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R552	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R553	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R559	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R560	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R561	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R563	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R564	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R565	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R568	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R569	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
R571	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R572	1-216-830-11	s RESISTOR,CHIP 5.6K 1/16W 1608
R573	1-216-830-11	s RESISTOR,CHIP 5.6K 1/16W 1608
R602	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R616	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R651	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R658	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R702	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R703	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R704	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R705	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R706	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R707	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R708	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R709	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R711	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R713	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R715	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R720	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R723	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R724	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R725	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R726	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R727	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R728	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R729	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R730	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R731	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R732	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R733	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R734	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R751	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R752	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R753	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R754	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R755	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R758	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R759	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R760	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R761	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R763	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R764	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R765	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R766	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R767	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R771	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R772	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R776	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R777	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R778	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R779	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R801	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R802	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R803	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R804	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R806	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R808	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R812	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R813	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)



(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
R814	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R815	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R816	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R817	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R818	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R819	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R820	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R821	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R822	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R823	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R824	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R825	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R826	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R827	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R828	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R829	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R830	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R901	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R902	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R904	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R906	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R913	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R914	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R916	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R917	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R918	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R919	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R920	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R921	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R922	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R923	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R924	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R925	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R926	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R927	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R928	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R929	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R930	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R931	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R932	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R933	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R934	1-218-860-11	s RESISTOR, CHIP 3.6K 1/16W(1608)
R935	1-218-860-11	s RESISTOR, CHIP 3.6K 1/16W(1608)
R936	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W(1608)
R937	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W(1608)
R939	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R940	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R941	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R942	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R943	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R944	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R945	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R946	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R947	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R958	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R959	1-218-878-11	s RESISTOR, CHIP 20K 1/16W (1608)
R960	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R963	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R964	1-218-878-11	s RESISTOR, CHIP 20K 1/16W (1608)

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
R965	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R967	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R968	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R970	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R971	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R976	1-218-868-11	s RESISTOR, CHIP 7.5K 1/16W(1608)
R977	1-218-875-11	s RESISTOR, CHIP 15K 1/16W (1608)
R978	1-218-877-11	s RESISTOR, CHIP 18K 1/16W (1608)
R980	1-218-868-11	s RESISTOR, CHIP 7.5K 1/16W(1608)
R981	1-218-875-11	s RESISTOR, CHIP 15K 1/16W (1608)
R982	1-218-877-11	s RESISTOR, CHIP 18K 1/16W (1608)
R988	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R989	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R990	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R991	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R992	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R993	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R994	1-218-882-11	s RESISTOR, CHIP 30K 1/16W(1608)
R995	1-218-882-11	s RESISTOR, CHIP 30K 1/16W(1608)
R996	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R997	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R998	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R999	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1000	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1001	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1002	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1003	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1004	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1005	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1006	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R1007	1-218-837-11	s RESISTOR, CHIP 390 1/16W (1608)
R1008	1-218-841-11	s RESISTOR, CHIP 560 1/16W (1608)
R1009	1-218-852-11	s RESISTOR, CHIP 1.6K 1/16W(1608)
R1011	1-218-841-11	s RESISTOR, CHIP 560 1/16W (1608)
R10110	1-218-837-11	s RESISTOR, CHIP 390 1/16W (1608)
R1012	1-218-852-11	s RESISTOR, CHIP 1.6K 1/16W(1608)
R1015	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1016	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1019	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1020	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
RB101	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB102	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB103	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB104	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB105	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB106	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB107	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB108	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB109	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB201	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB202	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB203	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB204	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB205	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB206	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB207	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB208	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB209	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB210	1-236-908-11	s RESISTOR, NETWORK 10K (3216)

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
RB211	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB212	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB213	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB214	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB215	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB216	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB217	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB218	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB219	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB220	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB221	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB222	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB223	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB224	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB225	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB226	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB227	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB228	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB229	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB230	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB231	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB232	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB233	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB234	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB235	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB236	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB237	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB238	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB239	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB240	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB241	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB301	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB302	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB303	1-239-309-11	s RESISTOR ARRAY, CHIP 100K
RB304	1-239-419-11	s NETWORK RESISTOR 470 (1608)
RB305	1-239-419-11	s NETWORK RESISTOR 470 (1608)
RB306	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB307	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB501	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB503	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB504	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB505	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB506	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB507	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB508	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB509	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB510	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB511	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB512	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB513	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB514	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB515	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB516	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB517	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB518	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB519	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB520	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB521	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB522	1-239-409-11	s RESISTOR NETWORK 47 (1608)

(DPR-141A BOARD suffix 13 and higher)

Ref. No. or Q'ty	Part No.	SP Description
RB611	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB711	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB712	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB713	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB753	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB755	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB756	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB771	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB772	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB774	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB775	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB802	1-236-904-11	s RESISTOR NETWORK 1K (1608)
TP201	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP501	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP502	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP503	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP712	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
X401	1-767-695-21	s OSCILLATOR, CRYSTAL
X711	1-760-654-21	s VIBRATOR, CRYSTAL
X751	1-760-655-21	s VIBRATOR, CRYSTAL

-----  
DPR-141A BOARD suffix 11  
-----

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8324-988-A	o	MOUNTED CIRCUIT BOARD, DPR-141A
5pcs	3-729-013-41	s	SCREW, WASHERHEAD (+P) (ST)
1pc	7-622-205-05	s	NUT M2 TYPE2
1pc	7-628-253-20	s	SCREW +PS 2X6
C101	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C102	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C103	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C104	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C105	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C106	1-135-180-21	s	CAPACITOR, TANTALUM 3.3MF/10V
C107	1-107-689-21	s	CAPACITOR, TANTALUM 1MF/35V
C108	1-104-823-11	s	CAPACITOR, TANTALUM 47MF/16V
C109	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C110	1-135-180-21	s	CAPACITOR, TANTALUM 3.3MF/10V
C111	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C112	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C113	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C114	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C115	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C116	1-135-180-21	s	CAPACITOR, TANTALUM 3.3MF/10V
C117	1-135-180-21	s	CAPACITOR, TANTALUM 3.3MF/10V
C118	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C119	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C120	1-135-177-21	s	CAPACITOR, TANTALUM 1MF/25V
C121	1-135-177-21	s	CAPACITOR, TANTALUM 1MF/25V
C122	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C123	1-104-851-11	s	CAPACITOR, TANTALUM 10MF/10V
C124	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C125	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C131	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C133	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C134	1-162-921-11	s	CAPACITOR, CERAMIC 33PF/50V CH
C135	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C136	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C137	1-107-686-11	s	CAPACITOR, TANTALUM 4.7MF/16V
C138	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C139	1-107-686-11	s	CAPACITOR, TANTALUM 4.7MF/16V
C140	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C141	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C142	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C143	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C144	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C145	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C146	1-162-921-11	s	CAPACITOR, CERAMIC 33PF/50V CH
C147	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C148	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C149	1-107-686-11	s	CAPACITOR, TANTALUM 4.7MF/16V
C150	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C151	1-107-686-11	s	CAPACITOR, TANTALUM 4.7MF/16V
C152	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C153	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C154	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C155	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C156	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C157	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C158	1-162-921-11	s	CAPACITOR, CERAMIC 33PF/50V CH
C159	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C160	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C161	1-107-686-11	s	CAPACITOR, TANTALUM 4.7MF/16V

(DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP	Description
C162	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C163	1-107-686-11	s	CAPACITOR, TANTALUM 4.7MF/16V
C164	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C165	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C166	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C167	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C168	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C169	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C201	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C202	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C204	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C209	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C210	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C211	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C212	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C214	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C215	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C216	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C220	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C221	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C222	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C223	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C224	1-104-851-11	s	CAPACITOR, TANTALUM 10MF/10V
C225	1-104-851-11	s	CAPACITOR, TANTALUM 10MF/10V
C226	1-104-851-11	s	CAPACITOR, TANTALUM 10MF/10V
C230	1-216-864-11	s	RESISTOR, CHIP 0 1/16W (1608)
C231	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C232	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C233	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C234	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C235	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C236	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C237	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C238	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C239	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C240	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C241	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C242	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C243	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C244	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C245	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C246	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C247	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C248	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C249	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C250	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C251	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C252	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C255	1-162-962-11	s	CAPACITOR, CERAMIC 470PF/50V(B)
C256	1-162-962-11	s	CAPACITOR, CERAMIC 470PF/50V(B)
C257	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C258	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C301	1-110-569-11	s	CAPACITOR, TANTALUM 47MF/6.3V
C302	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C303	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C304	1-113-682-11	s	CAPACITOR, TANTALUM 33MF/10V
C305	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F
C306	1-164-156-11	s	CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
C307	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C308	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C309	1-162-968-11 s	CAPACITOR, CERAMIC 4700PF/50V B
C310	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C311	1-162-966-11 s	CAPACITOR, CERAMIC 2200PF/50V B
C314	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C315	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C316	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C317	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C318	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C319	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C320	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C321	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C322	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C323	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C324	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C325	1-162-910-11 s	CAPACITOR, CERAMIC 5PF/50V 1608
C326	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C327	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C329	1-162-915-11 s	CAPACITOR, CERAMIC 10PF/50V CH
C330	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C333	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C334	1-162-910-11 s	CAPACITOR, CERAMIC 5PF/50V 1608
C335	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C336	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C338	1-162-915-11 s	CAPACITOR, CERAMIC 10PF/50V CH
C339	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C342	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C343	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C344	1-162-910-11 s	CAPACITOR, CERAMIC 5PF/50V 1608
C345	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C346	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C348	1-162-915-11 s	CAPACITOR, CERAMIC 10PF/50V CH
C349	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C352	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C353	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C354	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C355	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C357	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C358	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C359	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C360	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C361	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C362	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C363	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C364	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C365	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C366	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C367	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C368	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C369	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C370	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C371	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C372	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C373	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C374	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C375	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C376	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C377	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
C378	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C379	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C380	1-107-685-11 s	CAPACITOR, TANTALUM 15MF/6.3V
C381	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C382	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C383	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C384	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C385	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C386	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C387	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C388	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C389	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C390	1-162-923-11 s	CAPACITOR, CERAMIC 47PF/50V CH
C391	1-104-851-11 s	CAPACITOR, TANTALUM 10MF/10V
C392	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C393	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C394	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C395	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C396	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C397	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C398	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C399	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C400	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C401	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C402	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C403	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C404	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C407	1-216-864-11 s	RESISTOR, CHIP 0 1/16W (1608)
C501	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C502	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C503	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C504	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C507	1-164-315-11 s	CAPACITOR, CERAMIC 470PF/50V CH
C508	1-162-964-11 s	CAPACITOR, CERAMIC 1000PF/50V B
C509	1-162-922-11 s	CAPACITOR, CERAMIC 39PF/50V CH
C510	1-162-964-11 s	CAPACITOR, CERAMIC 1000PF/50V B
C511	1-162-964-11 s	CAPACITOR, CERAMIC 1000PF/50V B
C512	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C513	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C514	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C515	1-113-682-11 s	CAPACITOR, TANTALUM 33MF/10V
C516	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C517	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C518	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C521	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C522	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C523	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C524	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C527	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C528	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C529	1-164-315-11 s	CAPACITOR, CERAMIC 470PF/50V CH
C530	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C531	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C532	1-110-569-11 s	CAPACITOR, TANTALUM 47MF/6.3V
C534	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C535	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C536	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C537	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F
C539	1-164-156-11 s	CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
C546	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C547	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C548	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C549	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C601	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C603	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C604	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C605	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C606	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C611	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C612	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C613	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C614	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C615	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C621	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C622	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C623	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C631	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C632	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C633	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C651	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C652	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C653	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C654	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C655	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C656	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C657	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C658	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C701	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C702	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C703	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C704	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C705	1-135-149-21	s CAPACITOR, TANTALUM 2.2MF/10V
C711	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C712	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C714	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C715	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C716	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C717	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C727	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C728	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C731	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C732	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C733	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C734	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C735	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C736	1-135-149-21	s CAPACITOR, TANTALUM 2.2MF/10V
C751	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C752	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C753	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C754	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C755	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C756	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C757	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C758	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C759	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C771	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C772	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C773	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
C774	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C775	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C776	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C777	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C778	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C779	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C780	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C781	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C782	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C783	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C784	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C785	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C786	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C801	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C802	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C803	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C804	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C805	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C806	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C807	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C808	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C809	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C810	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C811	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C812	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C813	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C814	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C815	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C816	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C817	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C818	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C819	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C821	1-109-994-11	s CAPACITOR, CHIP CERAMIC 2.2MF B
C822	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C823	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C824	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C825	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C826	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C827	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C828	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C829	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C830	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C831	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C832	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C833	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C834	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C835	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C836	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C837	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C901	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C902	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C903	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C904	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C905	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C906	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C907	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C908	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C909	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C910	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH



## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
C911	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C912	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C913	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V
C914	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V
C915	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C916	1-104-547-11	s CAPACITOR, FILM 0.0047MF/16V
C917	1-104-547-11	s CAPACITOR, FILM 0.0047MF/16V
C918	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C919	1-104-547-11	s CAPACITOR, FILM 0.0047MF/16V
C920	1-104-547-11	s CAPACITOR, FILM 0.0047MF/16V
C921	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C922	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C923	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C924	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C925	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C926	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C927	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C928	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C929	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C930	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C931	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C932	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C933	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C934	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C935	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C936	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C937	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C938	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C939	1-104-546-11	s CAPACITOR, FILM 0.0039MF/16V
C940	1-104-546-11	s CAPACITOR, FILM 0.0039MF/16V
C941	1-164-392-11	s CAPACITOR, CERAMIC 390PF/50V CH
C942	1-164-392-11	s CAPACITOR, CERAMIC 390PF/50V CH
C943	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C944	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C945	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL
C946	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL
C947	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C948	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C949	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C950	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C951	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C952	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C954	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C955	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C956	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C957	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C958	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C959	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C960	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C961	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C962	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C963	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C964	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN3	1-770-452-21	o CONNECTOR, BOARD TO BOARD 30P
CN4	1-774-391-11	o CONNECTOR, BOARD TO BOARD 60P
CN5	1-580-267-11	o CONNECTOR, BOARD TO BOARD 20P
CN6	1-793-091-11	o CONNECTOR, BOARD TO BOARD 60P
CN9	1-785-849-11	o CONNECTOR, BOARD TO BOARD 40P

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
D101	8-719-029-63	s ZENER DIODE RD4.3UH-T1
D102	8-719-029-63	s ZENER DIODE RD4.3UH-T1
D301	8-719-421-69	s DIODE MA133
D302	8-719-421-69	s DIODE MA133
D303	8-719-421-69	s DIODE MA133
D304	8-719-421-69	s DIODE MA133
D701	8-719-027-95	s DIODE HSM88WK
D702	8-719-041-39	s DIODE KV1470 (5MA)
D713	8-719-041-39	s DIODE KV1470 (5MA)
D714	8-719-027-95	s DIODE HSM88WK
D821	8-719-041-39	s DIODE KV1470 (5MA)
FB301	1-414-445-11	s FERRITE, EMI (SMD)
FB302	1-414-445-11	s FERRITE, EMI (SMD)
FB303	1-414-445-11	s FERRITE, EMI (SMD)
FB304	1-414-445-11	s FERRITE, EMI (SMD)
FL301	1-233-740-11	s FILTER, LOW PASS
FL303	1-233-740-11	s FILTER, LOW PASS
FL305	1-233-740-11	s FILTER, LOW PASS
FL307	1-233-740-11	s FILTER, LOW PASS
FL501	1-233-345-21	s FILTER, LOW PASS (5.5MHZ)
FL502	1-233-776-11	s FILTER, LOW PASS
FL503	1-233-776-11	s FILTER, LOW PASS
IC101	8-759-185-42	s IC LM4040AIM3-2.5
IC102	8-759-669-72	s IC TL064CPWR
IC103	8-759-669-45	s IC TL062CPWR-12
IC104	8-759-659-94	s IC SN74HC04APWR
IC105	8-759-523-95	s IC TC74VHC74FT(EL)
IC106	8-752-376-32	s IC CXD2310AR
IC107	8-752-376-32	s IC CXD2310AR
IC108	8-752-376-32	s IC CXD2310AR
IC201	8-759-049-86	s IC SN74HCT244APW (E05)
IC202	8-759-669-72	s IC TL064CPWR
IC204	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC205	8-759-058-54	s IC TC7S00FU-TE85R
IC208	8-759-058-54	s IC TC7S00FU-TE85R
IC209	8-759-447-77	s IC TC7WH74FU (TR12R)
IC211	8-752-360-44	s IC CXK1203AR
IC212	8-752-360-44	s IC CXK1203AR
IC213	8-752-360-44	s IC CXK1203AR
IC214	8-752-360-44	s IC CXK1203AR
IC215	8-759-196-96	s IC TC7SH08FU (TE85R)
IC217	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC218	8-759-049-86	s IC SN74HCT244APW (E05)
IC219	8-759-196-93	s IC TC7SH00FU-TE85R
IC301	8-759-678-06	s IC CAT24WC02JI-TE13
IC302	8-759-064-36	s IC MB88346BPFV
IC303	8-759-523-04	s IC TC74HC4538AFT
IC304	8-759-058-58	s IC TC7S04FU-TE85R
IC305	8-759-485-79	s IC TC7SET08FU (TE85L)
IC306	8-759-673-37	s IC MM74HC00MTCK
IC307	8-752-363-60	s IC CXD2307R-T4
IC308	8-759-523-02	s IC TC74HC4053AFT(EL)
IC309	8-759-531-92	s IC TC7WH04FU(TE12R)
IC310	8-752-381-65	o IC CXD606-101R
IC311	8-759-485-79	s IC TC7SET08FU (TE85L)
IC312	8-759-184-64	s IC TC4W66FU
IC313	8-759-669-45	s IC TL062CPWR-12

(DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
IC314	8-759-271-86	s IC TC7SH04FU
IC315	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC316	8-759-523-95	s IC TC74VHC74FT (EL)
IC317	8-759-485-79	s IC TC7SET08FU (TE85L)
IC318	8-759-546-74	s IC TC7WH157FU (TE12R)
IC319	8-752-334-64	s IC CXD1171M
IC320	8-759-196-96	s IC TC7SH08FU (TE85R)
IC321	8-759-196-96	s IC TC7SH08FU (TE85R)
IC324	8-759-058-54	s IC TC7S00FU-TE85R
IC501	8-759-464-95	s IC AK6420AF-E2
IC502	8-759-498-27	s IC TK16074MTL
IC503	8-759-498-27	s IC TK16074MTL
IC504	8-759-271-86	s IC TC7SH04FU
IC505	8-759-457-61	s IC CXD8628BR
IC506	8-759-485-79	s IC TC7SET08FU (TE85L)
IC509	8-759-524-50	s IC TC74VHC541FT (EL)
IC510	8-759-271-86	s IC TC7SH04FU
IC511	8-759-386-27	s IC 74LCX04MTCX
IC512	8-759-524-50	s IC TC74VHC541FT (EL)
IC513	8-759-485-79	s IC TC7SET08FU (TE85L)
IC514	8-752-363-60	s IC CXD2307R-T4
IC517	8-759-524-04	s IC TC74VHC125FT (EL)
IC518	8-759-524-04	s IC TC74VHC125FT (EL)
IC521	8-759-196-96	s IC TC7SH08FU (TE85R)
IC601	8-759-327-31	s IC CXD2183R
IC611	8-752-378-68	s IC CXD3101R
IC621	8-759-328-28	s IC ZA4024
IC631	8-759-328-28	s IC ZA4024
IC651	8-759-426-26	s IC CXD8608R
IC652	8-759-524-52	s IC TC74VHC574FT (EL)
IC653	8-759-524-52	s IC TC74VHC574FT (EL)
IC711	8-752-375-05	s IC CXD2191R
IC751	8-752-864-20	s IC CXP911016-015Q
IC752	8-759-464-95	s IC AK6420AF-E2
IC771	8-759-385-90	s IC CXD2187AR
IC772	8-759-585-05	s IC CXD8627BR
IC773	8-759-082-60	s IC TC7S66FU
IC781	8-759-433-17	s IC UPD482445LG4-B10-9MH-E2-HDC
IC801	8-759-529-45	s IC IDT71V256SA15PZ-TL
IC811	8-752-374-96	s IC CXD2190R
IC821	8-759-271-86	s IC TC7SH04FU
IC822	8-759-271-86	s IC TC7SH04FU
IC823	8-759-362-16	s IC CXD2913AQ
IC824	8-759-327-01	s IC NJM062V-TE2
IC825	8-759-429-28	s IC CXD8630R
IC826	8-759-082-60	s IC TC7S66FU
IC901	8-759-422-21	s IC NJM4580VTE2
IC903	8-759-357-73	s IC TL32088CNS (E20)
IC904	8-759-357-74	s IC TLC320AD58CDWR
IC905	8-759-173-51	s IC SM5872AS (ET)
IC906	8-759-422-21	s IC NJM4580VTE2
IC907	8-759-422-21	s IC NJM4580VTE2
IC908	8-759-422-21	s IC NJM4580VTE2
IC909	8-759-184-64	s IC TC4W66FU
IC910	8-759-184-64	s IC TC4W66FU
IC911	8-752-374-97	s IC CXD2705AR
IC912	8-759-051-49	s IC SN74HCT541APW (R)
IC913	8-759-523-94	s IC TC74VHC32FT (EL)
IC915	8-759-184-64	s IC TC4W66FU

(DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
IC916	8-759-184-64	s IC TC4W66FU
L101	1-412-951-11	s INDUCTOR 10UH (2520)
L102	1-412-951-11	s INDUCTOR 10UH (2520)
L103	1-412-951-11	s INDUCTOR 10UH (2520)
L104	1-412-951-11	s INDUCTOR 10UH (2520)
L105	1-412-951-11	s INDUCTOR 10UH (2520)
L106	1-412-951-11	s INDUCTOR 10UH (2520)
L107	1-412-951-11	s INDUCTOR 10UH (2520)
L201	1-424-643-11	s COIL, CHOKE 10UH
L301	1-412-955-11	s INDUCTOR 22UH (2520)
L302	1-412-955-11	s INDUCTOR 22UH (2520)
L303	1-410-737-31	s INDUCTOR, CHIP 0.47UH (3225)
L305	1-410-385-11	s INDUCTOR, CHIP 22UH (3225)
L306	1-424-643-11	s COIL, CHOKE 10UH
L307	1-412-955-11	s INDUCTOR 22UH (2520)
L308	1-412-955-11	s INDUCTOR 22UH (2520)
L309	1-412-955-11	s INDUCTOR 22UH (2520)
L310	1-412-955-11	s INDUCTOR 22UH (2520)
L501	1-414-398-11	s INDUCTOR (SMD) 10UH
L502	1-414-398-11	s INDUCTOR (SMD) 10UH
L503	1-414-398-11	s INDUCTOR (SMD) 10UH
L601	1-410-381-11	s INDUCTOR, CHIP 10UH (3225)
L611	1-414-398-11	s INDUCTOR (SMD) 10UH
L651	1-414-398-11	s INDUCTOR (SMD) 10UH
L701	1-410-378-11	s INDUCTOR, CHIP 5.6UH (3225)
L711	1-414-402-11	s INDUCTOR (SMD) 47UH
L713	1-410-740-31	s INDUCTOR, CHIP 0.82UH
L751	1-414-398-11	s INDUCTOR (SMD) 10UH
L771	1-414-398-11	s INDUCTOR (SMD) 10UH
L772	1-414-398-11	s INDUCTOR (SMD) 10UH
L781	1-414-398-11	s INDUCTOR (SMD) 10UH
L801	1-414-398-11	s INDUCTOR (SMD) 10UH
L811	1-414-398-11	s INDUCTOR (SMD) 10UH
L821	1-414-398-11	s INDUCTOR (SMD) 10UH
L823	1-414-398-11	s INDUCTOR (SMD) 10UH
L824	1-414-398-11	s INDUCTOR (SMD) 10UH
L826	1-414-398-11	s INDUCTOR (SMD) 10UH
L827	1-414-398-11	s INDUCTOR (SMD) 10UH
L901	1-414-398-11	s INDUCTOR (SMD) 10UH
L902	1-414-398-11	s INDUCTOR (SMD) 10UH
L903	1-414-398-11	s INDUCTOR (SMD) 10UH
L904	1-414-398-11	s INDUCTOR (SMD) 10UH
L905	1-410-393-11	s INDUCTOR, CHIP 100UH (3225)
L906	1-410-393-11	s INDUCTOR, CHIP 100UH (3225)
L907	1-414-398-11	s INDUCTOR (SMD) 10UH
L908	1-414-398-11	s INDUCTOR (SMD) 10UH
L909	1-414-398-11	s INDUCTOR (SMD) 10UH
L980	1-414-392-21	s INDUCTOR (SMD) 1.0UH
L981	1-414-392-21	s INDUCTOR (SMD) 1.0UH
L982	1-414-392-21	s INDUCTOR (SMD) 1.0UH
L983	1-414-392-21	s INDUCTOR (SMD) 1.0UH
L984	1-414-392-21	s INDUCTOR (SMD) 1.0UH
LV825	1-411-984-11	s COIL, VARIABLE
Q101	8-729-101-07	s TRANSISTOR 2SB798
Q102	8-729-101-07	s TRANSISTOR 2SB798
Q103	8-729-101-07	s TRANSISTOR 2SB798
Q104	8-729-807-51	s TRANSISTOR 2SD1623-S

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
Q105	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q106	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q107	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q108	8-729-427-74 s	TRANSISTOR XP4601-TXE
Q301	8-729-427-83 s	TRANSISTOR XP6501-TXE
Q302	8-729-143-13 s	TRANSISTOR 2SC4176-B34
Q303	8-729-026-32 s	TRANSISTOR XP6534-TX
Q304	8-729-026-34 s	TRANSISTOR XP6435-TX
Q305	8-729-427-83 s	TRANSISTOR XP6501-TXE
Q306	8-729-143-13 s	TRANSISTOR 2SC4176-B34
Q307	8-729-026-32 s	TRANSISTOR XP6534-TX
Q308	8-729-026-34 s	TRANSISTOR XP6435-TX
Q309	8-729-427-83 s	TRANSISTOR XP6501-TXE
Q310	8-729-143-13 s	TRANSISTOR 2SC4176-B34
Q311	8-729-026-32 s	TRANSISTOR XP6534-TX
Q312	8-729-026-34 s	TRANSISTOR XP6435-TX
Q313	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q501	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q502	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q503	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q504	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q505	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q506	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q507	8-729-055-85 s	TRANSISTOR UMT1N-TN
Q508	8-729-055-85 s	TRANSISTOR UMT1N-TN
Q823	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q901	8-729-015-88 s	TRANSISTOR UMC3TL
Q902	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q903	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q904	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q905	8-729-013-37 s	TRANSISTOR 2SC4213-AB-TE85L
Q906	8-729-015-88 s	TRANSISTOR UMC3TL
R101	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R102	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R103	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R104	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R105	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R106	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R107	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R108	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R109	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R110	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R111	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R112	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R113	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R114	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R115	1-218-884-11 s	RESISTOR,CHIP 36K 1/16W (1608)
R116	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R117	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R118	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R119	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R120	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R121	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R122	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R123	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R124	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R125	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R126	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
R128	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R130	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R131	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R132	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R134	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R135	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R137	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R138	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R139	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R140	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R141	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R142	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R143	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R144	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R145	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R146	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R147	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R148	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R149	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R150	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R151	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R152	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R153	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R154	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R155	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R202	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R203	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R204	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R206	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R208	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R209	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R210	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R211	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R212	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R213	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R214	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R215	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R216	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R217	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R218	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R219	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R220	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R221	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R222	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R224	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R225	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R226	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R227	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R229	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R230	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R231	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R232	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R234	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R238	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R239	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R240	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R241	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R242	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R243	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)



## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
R244	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R245	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R246	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R247	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R248	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R249	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R250	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R251	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R252	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R253	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R254	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R255	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R256	1-218-830-11 s	RESISTOR,CHIP 200 1/16W (1608)
R257	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R258	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R301	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R302	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R303	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R304	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R305	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R306	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R308	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R309	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R310	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R312	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R313	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R316	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R317	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R318	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R319	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R320	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R321	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R322	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R323	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R324	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R325	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R326	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R327	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R328	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R329	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R330	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R331	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R332	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R334	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R335	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R339	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R340	1-218-874-11 s	RESISTOR,CHIP 13K 1/16W (1608)
R343	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R346	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R347	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R348	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R349	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R350	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R351	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R352	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R353	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R355	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R356	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R360	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
R361	1-218-874-11 s	RESISTOR,CHIP 13K 1/16W (1608)
R364	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R367	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R368	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R369	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R370	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R371	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R372	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R373	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R375	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R376	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R380	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R381	1-218-874-11 s	RESISTOR,CHIP 13K 1/16W (1608)
R384	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R387	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R388	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R389	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R390	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R391	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R392	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R393	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R394	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R395	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R396	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R397	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R398	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R399	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R400	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R401	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R402	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R403	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R404	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R405	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R406	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R407	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R408	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R409	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R410	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R411	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R412	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R413	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R414	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R415	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R417	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R420	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R424	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R425	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R426	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R428	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R430	1-218-869-11 s	RESISTOR,CHIP 8.2K 1/16W(1608)
R431	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R432	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R433	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R434	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R435	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R436	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R437	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R438	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R439	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
R444	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R501	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R502	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R503	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R504	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R505	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R506	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R507	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R508	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R509	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R510	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R511	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R512	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R513	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R514	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R515	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R516	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R517	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R518	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R519	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R520	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R521	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R522	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R523	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R524	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R525	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R526	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R527	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R528	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R529	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R532	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R533	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R534	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R535	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R536	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R537	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R538	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R539	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R540	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R541	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R542	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R543	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R544	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R545	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R548	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R550	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R551	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R552	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R553	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R559	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R560	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R561	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R563	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R564	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R565	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R568	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R569	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R571	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R572	1-216-830-11	s RESISTOR,CHIP 5.6K 1/16W 1608

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
R573	1-216-830-11	s RESISTOR,CHIP 5.6K 1/16W 1608
R575	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R602	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R616	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R617	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R651	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R658	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R701	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R702	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R703	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R704	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R705	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R706	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R707	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R708	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R709	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R711	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R712	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R713	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R715	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R720	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R723	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R724	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R725	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R726	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R727	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R728	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R729	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R730	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R731	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R732	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R733	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R734	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R751	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R752	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R753	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R754	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R755	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R758	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R759	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R760	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R761	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R763	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R764	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R765	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R766	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R767	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R771	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R772	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R776	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R777	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R778	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R779	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R801	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R802	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R803	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R804	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R805	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R806	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
R807	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R808	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R809	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R811	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R812	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R813	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R814	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R815	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R816	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R817	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R818	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R819	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R820	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R821	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R822	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R823	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R824	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R825	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R826	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R827	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R828	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R829	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R830	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R901	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R902	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R904	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R906	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R907	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R908	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R909	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R910	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R911	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
R912	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R913	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R914	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R915	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R916	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R917	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R918	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R919	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R920	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R921	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R922	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R923	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R924	1-218-880-11	s RESISTOR,CHIP 24K 1/16W (1608)
R925	1-218-880-11	s RESISTOR,CHIP 24K 1/16W (1608)
R926	1-218-880-11	s RESISTOR,CHIP 24K 1/16W (1608)
R927	1-218-880-11	s RESISTOR,CHIP 24K 1/16W (1608)
R928	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R929	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R930	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R931	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R932	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R933	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R934	1-218-860-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R935	1-218-860-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R936	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R937	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R939	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
R940	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R941	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R942	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R943	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R944	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R945	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R946	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R947	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R948	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R949	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R952	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R953	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
R954	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R955	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
R957	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
R958	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R959	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R960	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R962	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R963	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R964	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R965	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R967	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R968	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R969	1-218-829-11	s RESISTOR,CHIP 180 1/16W (1608)
R970	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R971	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R972	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
R974	1-218-829-11	s RESISTOR,CHIP 180 1/16W (1608)
R975	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
RB101	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB102	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB103	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB104	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB105	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB106	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB107	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB108	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB109	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB201	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB202	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB203	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB204	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB205	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB206	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB207	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB208	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB209	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
RB210	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB211	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB212	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
RB213	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB214	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB215	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB216	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB217	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB218	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB219	1-239-409-11	s RESISTOR,NETWORK 47 (1608)
RB220	1-239-409-11	s RESISTOR,NETWORK 47 (1608)

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
RB221	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB222	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB223	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB224	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB225	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB226	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB227	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB228	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB229	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB230	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB231	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB232	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB233	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB234	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB235	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB236	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB237	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB238	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB239	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB240	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB241	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB301	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB302	1-236-907-11	s RESISTOR, BLOCK 100K (1608)
RB303	1-239-309-11	s RESISTOR, ARRAY, CHIP 100K
RB304	1-239-419-11	s NETWORK, RESISTOR 470 (1608)
RB305	1-239-419-11	s NETWORK, RESISTOR 470 (1608)
RB306	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB307	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB501	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB503	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB504	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB505	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB506	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB507	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB508	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB509	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB510	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB511	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB512	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB513	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB514	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB515	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB516	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB517	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB518	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB519	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB520	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB521	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB522	1-239-409-11	s RESISTOR, NETWORK 47 (1608)
RB611	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB711	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB712	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB713	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB753	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB755	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB756	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB771	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB772	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB774	1-236-904-11	s RESISTOR, NETWORK 1K (1608)

## (DPR-141A BOARD suffix 11)

Ref. No. or Q'ty	Part No.	SP Description
RB775	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
RB802	1-236-904-11	s RESISTOR, NETWORK 1K (1608)
TP201	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP501	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP502	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP503	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP712	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
X401	1-767-695-21	s OSCILLATOR, CRYSTAL
X711	1-760-654-21	s VIBRATOR, CRYSTAL
X751	1-760-655-21	s VIBRATOR, CRYSTAL

-----  
DPR-141C BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8344-130-A	s MOUNTED CIRCUIT BOARD, DPR-141C
5pcs	3-729-013-41	s SCREW(M1.4X3.5),WASHERHEAD(+P)
4pcs	7-622-205-05	s NUT M2 TYPE2
4pcs	7-628-253-20	s SCREW +PS 2X6
C101	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C106	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C107	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C108	1-137-689-11	s CAP, CHIP TANTALUM ELECT 47MF
C109	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C110	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C111	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C112	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C113	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C115	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C116	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C117	1-104-912-11	s CAPACITOR TANTALUM 3.3MF/16V
C118	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C119	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C120	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C121	1-135-177-21	s CAPACITOR TANTALUM 1MF/25V
C122	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C123	1-135-957-11	s CAP, CHIP TANTALUM ELECT 10MF
C124	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C131	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C133	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C134	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C135	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C136	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C137	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C138	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C139	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C140	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C141	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C142	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C143	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C144	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C145	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C146	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C147	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C148	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C149	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C150	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C151	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C152	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C153	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C154	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C155	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C156	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C157	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C158	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C159	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C160	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C161	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V

(DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C162	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C163	1-107-686-11	s CAPACITOR,TANTALUM 4.7MF/16V
C164	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C165	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C166	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C167	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C168	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C169	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C201	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C204	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C209	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C210	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C211	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C212	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C213	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C214	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C215	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C216	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C220	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C221	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C222	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C223	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C224	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C225	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C226	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C231	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C232	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C233	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C234	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C235	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C236	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C237	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C238	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C239	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C240	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C241	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C242	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C243	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C244	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C245	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C246	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C247	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C248	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C249	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C250	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C251	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C252	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C255	1-162-962-11	s CAPACITOR,CERAMIC 470PF/50V(B)
C256	1-162-962-11	s CAPACITOR,CERAMIC 470PF/50V(B)
C257	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C258	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C301	1-137-689-11	s CAP, CHIP TANTALUM ELECT 47MF
C302	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C303	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C304	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C305	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C306	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C307	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F





## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C548	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C549	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C601	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C603	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C604	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C605	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C606	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C611	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C612	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C613	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C614	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C615	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C621	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C622	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C623	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C631	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C632	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C633	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C651	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C652	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C653	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C654	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C655	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C656	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C657	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C658	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C701	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C702	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C703	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C704	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C705	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C711	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C712	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C714	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C715	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C716	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C717	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C727	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C728	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C731	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C732	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C733	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C734	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C735	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C736	1-135-149-21	s CAPACITOR TANTALUM 2.2MF/10V
C751	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C752	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C753	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C754	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C755	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C756	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C757	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C758	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C759	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C771	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C772	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C773	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C774	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C775	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C776	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C777	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C778	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C779	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C780	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C781	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C782	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C783	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C784	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C785	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C786	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C801	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C802	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C803	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C804	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C805	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C806	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C807	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C808	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C809	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C810	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C811	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C812	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C813	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C814	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C815	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C816	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C817	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C818	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C819	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C821	1-109-994-11	s CAPACITOR, CHIP CERAMIC 2.2MF B
C822	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C823	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C824	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C825	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C826	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C827	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C828	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C829	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C830	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C831	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C832	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C833	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C834	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C835	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C836	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C837	1-110-569-21	s CAPACITOR CHIP TANTAL47MF/6.3V
C901	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C902	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C903	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C904	1-113-991-11	s CAPACITOR TANTALUM 33MF/16V
C923	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C924	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C925	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C926	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C927	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C928	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C929	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C930	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C931	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C932	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C933	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C934	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C935	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C936	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C937	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C938	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C939	1-104-546-11	s CAPACITOR, FILM 0.0039MF/16V
C940	1-104-546-11	s CAPACITOR, FILM 0.0039MF/16V
C941	1-164-392-11	s CAPACITOR CERAMIC 390PF/50V CH
C942	1-164-392-11	s CAPACITOR CERAMIC 390PF/50V CH
C943	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C944	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C945	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL
C946	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL
C947	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C948	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C949	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C950	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C951	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C952	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C954	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C955	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C956	1-110-569-21	s CAPACITOR CHIP TANTALUM 47MF/6.3V
C957	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C958	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C959	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C960	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C961	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C962	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C965	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C966	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C971	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C972	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C973	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C985	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C986	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C987	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C988	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C989	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C990	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C991	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C992	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C993	1-162-965-11	s CAPACITOR, CERAMIC 1500PF/50V B
C994	1-162-965-11	s CAPACITOR, CERAMIC 1500PF/50V B
C995	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C996	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C997	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C998	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C999	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1000	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C1001	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C1002	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216
C1003	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216
C1004	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216
C1005	1-127-692-11	s CAP, CHIP CERAMIC 10MF B 3216
C1006	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
CN3	1-770-452-21	o CONNECTOR, BOARD TO BOARD 30P
CN4	1-774-391-11	o CONNECTOR, BOARD TO BOARD 60P
CN5	1-580-267-11	o CONNECTOR, BOARD TO BOARD 20P
CN6	1-793-091-11	o CONNECTOR, BOARD TO BOARD 60P
CN9	1-785-849-11	o CONNECTOR, BOARD TO BOARD 40P
D101	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D102	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D301	8-719-421-69	s DIODE MA133
D302	8-719-421-69	s DIODE MA133
D303	8-719-421-69	s DIODE MA133
D304	8-719-421-69	s DIODE MA133
D701	8-719-027-95	s DIODE HSM88WK
D702	8-719-041-39	s DIODE KV1470 (5MA)
D713	8-719-041-39	s DIODE KV1470 (5MA)
D714	8-719-027-95	s DIODE HSM88WK
D821	8-719-041-39	s DIODE KV1470 (5MA)
D901	8-719-941-09	s DIODE DAP202U
D902	8-719-941-09	s DIODE DAP202U
FB301	1-414-445-11	s FERRITE, EMI (SMD)
FB302	1-414-445-11	s FERRITE, EMI (SMD)
FB303	1-414-445-11	s FERRITE, EMI (SMD)
FB304	1-414-445-11	s FERRITE, EMI (SMD)
FL301	1-233-740-11	s FILTER, LOW PASS
FL303	1-233-740-11	s FILTER, LOW PASS
FL305	1-233-740-11	s FILTER, LOW PASS
FL307	1-233-740-11	s FILTER, LOW PASS
FL501	1-233-345-21	s FILTER, LOW PASS (5.5MHZ)
FL502	1-233-776-11	s FILTER, LOW PASS
FL503	1-233-776-11	s FILTER, LOW PASS
IC101	8-759-185-42	s IC LM4040AIM3-2.5
IC102	8-759-669-72	s IC TL064CPWR
IC103	8-759-669-45	s IC TL062CPWR-12
IC104	8-759-673-43	s IC MM74HC04MTCX
IC105	8-759-523-95	s IC TC74VHC74FT(EL)
IC106	8-752-376-32	s IC CXD2310AR
IC107	8-752-376-32	s IC CXD2310AR
IC108	8-752-376-32	s IC CXD2310AR
IC201	8-759-674-44	s IC MM74HCT244MTCX
IC202	8-759-669-72	s IC TL064CPWR
IC204	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC205	8-759-058-54	s IC TC7S00FU-TE85R
IC208	8-759-058-54	s IC TC7S00FU-TE85R
IC209	8-759-447-77	s IC TC7WH74FU (TE12R)
IC211	8-752-360-44	s IC CXK1203AR
IC212	8-752-360-44	s IC CXK1203AR
IC213	8-752-360-44	s IC CXK1203AR
IC214	8-752-360-44	s IC CXK1203AR
IC215	8-759-196-96	s IC TC7SH08FU (TE85R)
IC217	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC218	8-759-674-44	s IC MM74HCT244MTCX
IC219	8-759-196-93	s IC TC7SH00FU-TE85R
IC301	8-759-678-06	s IC CAT24WC02J1-TE13
IC302	8-759-064-36	s IC MB88346BPFV
IC303	8-759-523-04	s IC TC74HC4538AFT
IC304	8-759-058-58	s IC TC7S04FU-TE85R
IC305	8-759-485-79	s IC TC7SET08FU (TE85L)
IC306	8-759-673-37	s IC MM74HC00MTCX
IC307	8-752-363-60	s IC CXD2307R-T4



## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC308	8-759-523-02	s IC TC74HC4053AFT(EL)
IC309	8-759-531-92	s IC TC7WH04FU(TE12R)
IC310	8-752-381-65	o IC CXD606-101R
IC311	8-759-485-79	s IC TC7SET08FU (TE85L)
IC312	8-759-184-64	s IC TC4W66FU
IC313	8-759-669-45	s IC TL062CPWR-12
IC314	8-759-271-86	s IC TC7SH04FU
IC315	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC316	8-759-523-95	s IC TC74VHC74FT(EL)
IC317	8-759-485-79	s IC TC7SET08FU (TE85L)
IC318	8-759-546-74	s IC TC7WH157FU(TE12R)
IC319	8-752-334-64	s IC CXD1171M
IC320	8-759-196-96	s IC TC7SH08FU (TE85R)
IC321	8-759-196-96	s IC TC7SH08FU (TE85R)
IC324	8-759-058-54	s IC TC7S00FU-TE85R
IC501	8-759-464-95	s IC AK6420AF-E2
IC502	8-759-498-27	s IC TK16074MTL
IC503	8-759-498-27	s IC TK16074MTL
IC504	8-759-271-86	s IC TC7SH04FU
IC505	8-759-457-61	s IC CXD8628BR
IC506	8-759-485-79	s IC TC7SET08FU (TE85L)
IC509	8-759-524-50	s IC TC74VHC541FT(EL)
IC510	8-759-271-86	s IC TC7SH04FU
IC511	8-759-386-27	s IC 74LCX04MTCX
IC512	8-759-524-50	s IC TC74VHC541FT(EL)
IC513	8-759-485-79	s IC TC7SET08FU (TE85L)
IC514	8-752-363-60	s IC CXD2307R-T4
IC517	8-759-524-04	s IC TC74VHC125FT (EL)
IC518	8-759-524-04	s IC TC74VHC125FT (EL)
IC521	8-759-196-96	s IC TC7SH08FU (TE85R)
IC601	8-759-327-31	s IC CXD2183R
IC611	8-752-378-68	s IC CXD3101R
IC621	8-759-328-28	s IC ZA4024
IC631	8-759-328-28	s IC ZA4024
IC651	8-759-426-26	s IC CXD8608R
IC652	8-759-524-52	s IC TC74VHC574FT(EL)
IC653	8-759-524-52	s IC TC74VHC574FT(EL)
IC706	8-759-524-10	s IC TC74VHC157FT (EL)
IC711	8-752-375-05	s IC CXD2191R
IC751	8-752-929-66	s IC CXP911016-016Q
IC752	8-759-464-95	s IC AK6420AF-E2
IC771	8-759-385-90	s IC CXD2187AR
IC772	8-759-585-05	s IC CXD8627BR
IC773	8-759-082-60	s IC TC7S66FU
IC781	8-759-433-17	s IC UPD482445LG4-B10-9MH-E2-HDC
IC801	8-759-529-45	s IC IDT71V256SA15PZ-TL
IC811	8-752-374-96	s IC CXD2190R
IC821	8-759-271-86	s IC TC7SH04FU
IC822	8-759-271-86	s IC TC7SH04FU
IC823	8-759-362-16	s IC CXD2913AQ
IC824	8-759-327-01	s IC NJM062V-TE2
IC825	6-802-914-02	s IC CXD8630AR
IC826	6-759-082-60	s IC TC7S66FU
IC901	8-759-422-21	s IC NJM4580VTE2
IC905	8-759-173-51	s IC SM5872AS (ET)
IC906	8-759-422-21	s IC NJM4580VTE2
IC907	8-759-422-21	s IC NJM4580VTE2
IC908	8-759-422-21	s IC NJM4580VTE2
IC911	8-752-374-97	s IC CXD2705AR

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC912	8-759-674-62	s IC MM74HCT541MTCX
IC913	8-759-523-94	s IC TC74VHC32FT(EL)
IC917	8-759-833-99	s IC MC74HC4052ADTR2
IC918	8-759-833-99	s IC MC74HC4052ADTR2
IC919	8-759-422-21	s IC NJM4580VTE2
IC921	8-759-422-21	s IC NJM4580VTE2
IC923	8-759-462-08	s IC AK5352-VF (E2)
IC924	8-759-447-77	s IC TC7WH74FU (TE12R)
L101	1-412-951-11	s INDUCTOR 10UH (2520)
L102	1-412-951-11	s INDUCTOR 10UH (2520)
L103	1-412-951-11	s INDUCTOR 10UH (2520)
L104	1-412-951-11	s INDUCTOR 10UH (2520)
L105	1-412-951-11	s INDUCTOR 10UH (2520)
L106	1-412-951-11	s INDUCTOR 10UH (2520)
L107	1-412-951-11	s INDUCTOR 10UH (2520)
L201	1-424-643-11	s COIL, CHOKE 10UH
L301	1-412-955-11	s INDUCTOR 22UH (2520)
L302	1-412-955-11	s INDUCTOR 22UH (2520)
L303	1-410-737-31	s INDUCTOR,CHIP 0.47UH (3225)
L305	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L306	1-424-643-11	s COIL, CHOKE 10UH
L307	1-412-955-11	s INDUCTOR 22UH (2520)
L308	1-412-955-11	s INDUCTOR 22UH (2520)
L309	1-412-955-11	s INDUCTOR 22UH (2520)
L310	1-412-955-11	s INDUCTOR 22UH (2520)
L501	1-414-398-11	s INDUCTOR (SMD) 10UH
L502	1-414-398-11	s INDUCTOR (SMD) 10UH
L503	1-414-398-11	s INDUCTOR (SMD) 10UH
L601	1-410-381-11	s INDUCTOR,CHIP 10UH (3225)
L611	1-414-398-11	s INDUCTOR (SMD) 10UH
L651	1-414-398-11	s INDUCTOR (SMD) 10UH
L701	1-410-378-11	s INDUCTOR,CHIP 5.6UH (3225)
L711	1-410-389-31	s INDUCTOR,CHIP 47UH (3225)
L713	1-410-740-31	s INDUCTOR,CHIP 0.82UH
L751	1-414-398-11	s INDUCTOR (SMD) 10UH
L771	1-414-398-11	s INDUCTOR (SMD) 10UH
L772	1-414-398-11	s INDUCTOR (SMD) 10UH
L781	1-414-398-11	s INDUCTOR (SMD) 10UH
L801	1-414-398-11	s INDUCTOR (SMD) 10UH
L811	1-414-398-11	s INDUCTOR (SMD) 10UH
L821	1-414-398-11	s INDUCTOR (SMD) 10UH
L823	1-414-398-11	s INDUCTOR (SMD) 10UH
L824	1-414-398-11	s INDUCTOR (SMD) 10UH
L826	1-414-398-11	s INDUCTOR (SMD) 10UH
L827	1-414-398-11	s INDUCTOR (SMD) 10UH
L901	1-414-398-11	s INDUCTOR (SMD) 10UH
L902	1-414-398-11	s INDUCTOR (SMD) 10UH
L903	1-414-398-11	s INDUCTOR (SMD) 10UH
L904	1-414-398-11	s INDUCTOR (SMD) 10UH
L905	1-410-393-11	s INDUCTOR,CHIP 100UH (3225)
L906	1-410-393-11	s INDUCTOR,CHIP 100UH (3225)
L907	1-414-398-11	s INDUCTOR (SMD) 10UH
L908	1-414-398-11	s INDUCTOR (SMD) 10UH
L909	1-414-398-11	s INDUCTOR (SMD) 10UH
L980	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L981	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L982	1-414-392-31	s INDUCTOR (SMD) 1.0UH
L983	1-414-392-31	s INDUCTOR (SMD) 1.0UH

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L984	1-414-392-31	s INDUCTOR (SMD) 1.0UH
LV825	1-411-984-11	s COIL, VARIABLE
Q101	8-729-101-07	s TRANSISTOR 2SB798
Q102	8-729-101-07	s TRANSISTOR 2SB798
Q103	8-729-101-07	s TRANSISTOR 2SB798
Q104	8-729-807-51	s TRANSISTOR 2SD1623-S
Q105	8-729-427-74	s TRANSISTOR XP4601-TXE
Q106	8-729-427-74	s TRANSISTOR XP4601-TXE
Q107	8-729-427-74	s TRANSISTOR XP4601-TXE
Q108	8-729-427-74	s TRANSISTOR XP4601-TXE
Q301	8-729-427-83	s TRANSISTOR XP6501-TXE
Q302	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q303	8-729-026-32	s TRANSISTOR XP6534-TX
Q304	8-729-026-34	s TRANSISTOR XP6435-TX
Q305	8-729-427-83	s TRANSISTOR XP6501-TXE
Q306	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q307	8-729-026-32	s TRANSISTOR XP6534-TX
Q308	8-729-026-34	s TRANSISTOR XP6435-TX
Q309	8-729-427-83	s TRANSISTOR XP6501-TXE
Q310	8-729-143-13	s TRANSISTOR 2SC4176-B34
Q311	8-729-026-32	s TRANSISTOR XP6534-TX
Q312	8-729-026-34	s TRANSISTOR XP6435-TX
Q313	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q501	8-729-905-35	s TRANSISTOR 2SC4081-R
Q502	8-729-905-35	s TRANSISTOR 2SC4081-R
Q503	8-729-905-35	s TRANSISTOR 2SC4081-R
Q504	8-729-905-35	s TRANSISTOR 2SC4081-R
Q505	8-729-905-35	s TRANSISTOR 2SC4081-R
Q506	8-729-026-53	s TRANSISTOR 2SA1576A-T106-QR
Q507	8-729-055-85	s TRANSISTOR UMT1N-TN
Q508	8-729-055-85	s TRANSISTOR UMT1N-TN
Q823	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q901	6-550-007-01	s TRANSISTOR UMC3NTR
Q902	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
Q903	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
Q904	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
Q905	8-729-013-37	s TRANSISTOR 2SC4213-AB-TE85L
Q906	6-550-007-01	s TRANSISTOR UMC3NTR
Q907	6-550-007-01	s TRANSISTOR UMC3NTR
Q908	6-550-007-01	s TRANSISTOR UMC3NTR
R101	1-218-881-11	s RESISTOR, CHIP 27K 1/16W (1608)
R102	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R103	1-218-881-11	s RESISTOR, CHIP 27K 1/16W (1608)
R104	1-218-861-11	s RESISTOR, CHIP 3.9K 1/16W (1608)
R105	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R106	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R107	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R108	1-218-853-11	s RESISTOR, CHIP 1.8K 1/16W (1608)
R109	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R110	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R111	1-218-881-11	s RESISTOR, CHIP 27K 1/16W (1608)
R112	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R113	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R114	1-218-885-11	s RESISTOR, CHIP 39K 1/16W (1608)
R115	1-218-884-11	s RESISTOR, CHIP 36K 1/16W (1608)
R116	1-218-875-11	s RESISTOR, CHIP 15K 1/16W (1608)
R117	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R118	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R119	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R120	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R121	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R122	1-216-864-11	s CONDUCTOR, CHIP (1608)
R123	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R124	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R125	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R126	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R128	1-216-864-11	s CONDUCTOR, CHIP (1608)
R130	1-216-864-11	s CONDUCTOR, CHIP (1608)
R131	1-216-864-11	s CONDUCTOR, CHIP (1608)
R132	1-211-969-11	s RESISTOR, CHIP 10 1/16W (1608)
R134	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R135	1-216-864-11	s CONDUCTOR, CHIP (1608)
R137	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R138	1-218-835-11	s RESISTOR, CHIP 330 1/16W (1608)
R139	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R140	1-211-977-11	s RESISTOR, CHIP 22 1/16W (1608)
R141	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R142	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R143	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R144	1-218-835-11	s RESISTOR, CHIP 330 1/16W (1608)
R145	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R146	1-211-977-11	s RESISTOR, CHIP 22 1/16W (1608)
R147	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R148	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R149	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R150	1-218-835-11	s RESISTOR, CHIP 330 1/16W (1608)
R151	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R152	1-211-977-11	s RESISTOR, CHIP 22 1/16W (1608)
R153	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R154	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R202	1-216-864-11	s CONDUCTOR, CHIP (1608)
R203	1-218-843-11	s RESISTOR, CHIP 680 1/16W (1608)
R204	1-216-864-11	s CONDUCTOR, CHIP (1608)
R206	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R208	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R209	1-216-864-11	s CONDUCTOR, CHIP (1608)
R210	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R211	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R212	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R213	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R214	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R215	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R216	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R217	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R218	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R219	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R220	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R221	1-218-867-11	s RESISTOR, CHIP 6.8K 1/16W (1608)
R222	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R224	1-216-864-11	s CONDUCTOR, CHIP (1608)
R225	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R226	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R227	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R229	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R230	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R231	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R232	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R234	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R238	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R239	1-216-864-11	s CONDUCTOR, CHIP (1608)
R240	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R241	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R242	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R243	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R244	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R245	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R246	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R247	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R248	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R249	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R250	1-216-864-11	s CONDUCTOR, CHIP (1608)
R251	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R252	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R253	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R254	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R255	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R256	1-218-830-11	s RESISTOR,CHIP 200 1/16W (1608)
R257	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R258	1-216-864-11	s CONDUCTOR, CHIP (1608)
R259	1-216-864-11	s CONDUCTOR, CHIP (1608)
R301	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R302	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R303	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R304	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R305	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R306	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R308	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R309	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R310	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R312	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R313	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R317	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R318	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R319	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R320	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R321	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R322	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R323	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R324	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R325	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R326	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R327	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R328	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R329	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R330	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R331	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R332	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R334	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R335	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R339	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R340	1-218-874-11	s RESISTOR,CHIP 13K 1/16W (1608)
R343	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R346	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R347	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R348	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R349	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R350	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R351	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R352	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R353	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R355	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R356	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R360	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R361	1-218-874-11	s RESISTOR,CHIP 13K 1/16W (1608)
R364	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R367	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R368	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R369	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R370	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R371	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R372	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R373	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R375	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R376	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R380	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R381	1-218-874-11	s RESISTOR,CHIP 13K 1/16W (1608)
R384	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R387	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R388	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R389	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R390	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R391	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R392	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R393	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R394	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R395	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R396	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R397	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R398	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R399	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R401	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R402	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R403	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R404	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R405	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R406	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R407	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R408	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R409	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R410	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R411	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R412	1-216-864-11	s CONDUCTOR, CHIP (1608)
R413	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R414	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R415	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R417	1-216-864-11	s CONDUCTOR, CHIP (1608)
R420	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R424	1-216-864-11	s CONDUCTOR, CHIP (1608)
R425	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R426	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R430	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R431	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R432	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R433	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R434	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R435	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R436	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R437	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R438	1-216-864-11	s CONDUCTOR, CHIP (1608)
R439	1-216-864-11	s CONDUCTOR, CHIP (1608)
R444	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R445	1-216-864-11	s CONDUCTOR, CHIP (1608)
R501	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R502	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R503	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R504	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R505	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R507	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R508	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R509	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R510	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R511	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R512	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R513	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R514	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R515	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R516	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R517	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R518	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R519	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R520	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R521	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R522	1-216-825-11	s RESISTOR, CHIP 2.2K 1/16W 1608
R523	1-216-825-11	s RESISTOR, CHIP 2.2K 1/16W 1608
R524	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R525	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R526	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R527	1-216-823-11	s RESISTOR, CHIP 1.5K 1/16W
R528	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R529	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R532	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R533	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R534	1-216-825-11	s RESISTOR, CHIP 2.2K 1/16W 1608
R535	1-216-825-11	s RESISTOR, CHIP 2.2K 1/16W 1608
R536	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R537	1-218-830-11	s RESISTOR, CHIP 200 1/16W (1608)
R538	1-218-830-11	s RESISTOR, CHIP 200 1/16W (1608)
R539	1-218-830-11	s RESISTOR, CHIP 200 1/16W (1608)
R540	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R541	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R542	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R543	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R544	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R545	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R548	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R551	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R552	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R553	1-216-825-11	s RESISTOR, CHIP 2.2K 1/16W 1608
R559	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R560	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R561	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R563	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R564	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R565	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R568	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R569	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R571	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R572	1-216-830-11	s RESISTOR, CHIP 5.6K 1/16W 1608
R573	1-216-830-11	s RESISTOR, CHIP 5.6K 1/16W 1608
R602	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R616	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R651	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R658	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R702	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R703	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R704	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R705	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R706	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R707	1-218-835-11	s RESISTOR, CHIP 330 1/16W (1608)
R708	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R709	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R711	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R713	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R715	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R720	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R723	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R724	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R725	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R726	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R727	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R728	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R729	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R730	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R731	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R732	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R733	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R734	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R751	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R752	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R753	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R754	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R755	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R758	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R759	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R760	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R761	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R763	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R764	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R765	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R766	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R767	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R771	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R772	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R776	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R777	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R778	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R779	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R801	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R802	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R803	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R804	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R806	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R808	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R812	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R813	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R814	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R815	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R816	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R817	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R818	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R819	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R820	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R821	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R822	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R823	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R824	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R825	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R826	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R827	1-218-883-11	s RESISTOR, CHIP 33K 1/16W (1608)
R828	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R829	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R830	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R901	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R902	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R904	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R906	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R913	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R914	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R916	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R917	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R918	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R919	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R920	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R921	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R922	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R923	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R924	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R925	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R926	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R927	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R928	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W (1608)
R929	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W (1608)
R930	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W (1608)
R931	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W (1608)
R932	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W (1608)
R933	1-218-857-11	s RESISTOR, CHIP 2.7K 1/16W (1608)
R934	1-218-860-11	s RESISTOR, CHIP 3.6K 1/16W (1608)
R935	1-218-860-11	s RESISTOR, CHIP 3.6K 1/16W (1608)
R936	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R937	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W (1608)
R939	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R940	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R941	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R942	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R943	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R944	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R945	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R946	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R947	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R958	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R959	1-218-878-11	s RESISTOR, CHIP 20K 1/16W (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R960	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R963	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R964	1-218-878-11	s RESISTOR, CHIP 20K 1/16W (1608)
R965	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R967	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R968	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R970	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R971	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R976	1-218-868-11	s RESISTOR, CHIP 7.5K 1/16W (1608)
R977	1-218-875-11	s RESISTOR, CHIP 15K 1/16W (1608)
R978	1-218-877-11	s RESISTOR, CHIP 18K 1/16W (1608)
R980	1-218-868-11	s RESISTOR, CHIP 7.5K 1/16W (1608)
R981	1-218-875-11	s RESISTOR, CHIP 15K 1/16W (1608)
R982	1-218-877-11	s RESISTOR, CHIP 18K 1/16W (1608)
R988	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R989	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R990	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R991	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R992	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R993	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R994	1-218-882-11	s RESISTOR, CHIP 30K 1/16W (1608)
R995	1-218-882-11	s RESISTOR, CHIP 30K 1/16W (1608)
R996	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R997	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R998	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R999	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1000	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1001	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1002	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1003	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1004	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1005	1-218-823-11	s RESISTOR, CHIP 100 1/16W (1608)
R1006	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R1007	1-218-837-11	s RESISTOR, CHIP 390 1/16W (1608)
R1008	1-218-841-11	s RESISTOR, CHIP 560 1/16W (1608)
R1009	1-218-852-11	s RESISTOR, CHIP 1.6K 1/16W (1608)
R1010	1-218-837-11	s RESISTOR, CHIP 390 1/16W (1608)
R1011	1-218-841-11	s RESISTOR, CHIP 560 1/16W (1608)
R1012	1-218-852-11	s RESISTOR, CHIP 1.6K 1/16W (1608)
R1015	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1016	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1019	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R1020	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
RB101	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB102	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB103	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB104	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB105	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB106	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB107	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB108	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB109	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB201	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB202	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB203	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB204	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB205	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB206	1-236-908-11	s RESISTOR, NETWORK 10K (3216)



## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB207	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB208	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB209	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB210	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB211	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB212	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB213	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB214	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB215	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB216	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB217	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB218	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB219	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB220	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB221	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB222	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB223	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB224	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB225	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB226	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB227	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB228	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB229	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB230	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB231	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB232	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB233	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB234	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB235	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB236	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB237	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB238	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB239	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB240	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB241	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB301	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB302	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB303	1-239-309-11	s RESISTOR ARRAY, CHIP 100K
RB304	1-239-419-11	s NETWORK RESISTOR 470 (1608)
RB305	1-239-419-11	s NETWORK RESISTOR 470 (1608)
RB306	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB307	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB501	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB503	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB504	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB505	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB506	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB507	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB508	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB509	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB510	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB511	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB512	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB513	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB514	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB515	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB516	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB517	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB518	1-239-409-11	s RESISTOR NETWORK 47 (1608)

## (DPR-141C BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB519	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB520	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB521	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB522	1-239-409-11	s RESISTOR NETWORK 47 (1608)
RB611	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB711	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB712	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB713	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB753	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB755	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB756	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB771	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB772	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB774	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB775	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB802	1-236-904-11	s RESISTOR NETWORK 1K (1608)
TP201	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP501	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP502	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP503	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP712	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
X401	1-767-695-21	s OSCILLATOR, CRYSTAL
X711	1-760-654-21	s VIBRATOR, CRYSTAL
X751	1-760-655-21	s VIBRATOR, CRYSTAL

## DU-36 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-673-954-11	o PRINTED WIRING BOARD, DU-36
C1	1-128-339-11	s CAPACITOR, ELECT 2200MF/16V
C2	1-128-339-11	s CAPACITOR, ELECT 2200MF/16V
C3	1-128-339-11	s CAPACITOR, ELECT 2200MF/16V
CN1	1-566-757-11	s PIN, CONNECTOR (PC BOARD) 2P

-----  
DV-21C/21A BOARD  
-----

\*a: [Lot No. 911-274, 2A1-]  
\*b: [Lot No. 281-294]

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-104-A	o MOUNTED CIRCUIT BOARD, DV-21A [for DSR-300A/300AP]
	A-8344-127-A	s MOUNTED CIRCUIT BOARD, DV-21C [for DSR-390/390P/370/370P]
C106	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C107	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C108	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C109	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C110	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C111	1-135-177-21	s CAPACITOR, TANTALUM 1MF/25V
C112	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C113	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V
C114	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C115	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C116	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C117	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C118	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C119	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C120	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C121	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C122	*b 1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
	*a 1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C123	*b 1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
	*a 1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C124	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C125	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C126	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C127	1-164-346-11	s CAPACITOR, CHIP CERAMIC 1MF/16V
C128	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V
C129	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN101	1-764-095-11	o PIN, CONNECTOR (PC BOARD) 10P
CN102	1-580-789-21	o PIN, CONNECTOR (SMD) 6P
CN103	1-785-846-91	o CONNECTOR, BOARD TO BOARD 40P
D101	8-719-938-72	s DIODE SB01-05CP (RECTI)
D102	8-719-941-86	s DIODE DAN202U
IC101	8-759-430-56	s IC CXD2194AR-TEB
IC102	8-759-432-00	s IC TSB11LV01PT-TEB
IC104	8-759-524-27	s IC TC74VHC244FT(EL)
IC105	8-759-524-04	s IC TC74VHC125FT(EL)
IC106	8-759-196-96	s IC TC74SH08FU (TE85R)
IC107	8-759-445-93	s IC AK6440AM (E2)
L106	1-414-398-11	s INDUCTOR (SMD) 10UH
L107	1-414-398-11	s INDUCTOR (SMD) 10UH
L108	1-414-398-11	s INDUCTOR (SMD) 10UH
L109	1-414-392-21	s INDUCTOR (SMD) 1.0UH
R101	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R102	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R103	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R104	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R105	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R106	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R107	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R108	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R109	1-218-840-11	s RESISTOR, CHIP 510 1/16W (1608)
R110	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608

(DV-21C/21A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R111	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R112	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R113	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R114	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R115	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R116	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R117	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R118	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R119	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R120	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R121	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R122	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R123	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R124	1-216-834-11	s RESISTOR, CHIP 12K 1/16W 1608
R125	1-216-834-11	s RESISTOR, CHIP 12K 1/16W 1608
R126	1-216-834-11	s RESISTOR, CHIP 12K 1/16W 1608
R127	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W (1608)
R128	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W (1608)
R129	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W (1608)
R130	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R131	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R132	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R133	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R134	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W (1608)
R135	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R136	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R137	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R138	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R139	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R140	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R141	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R142	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R143	1-216-845-11	s RESISTOR, CHIP 100K 1/16W (1608)
R144	1-216-857-11	s RESISTOR, CHIP 1M 1/16W (1608)
R145	1-218-873-11	s RESISTOR, CHIP 12K 1/16W (1608)
R146	1-218-873-11	s RESISTOR, CHIP 12K 1/16W (1608)
R147	1-211-987-11	s RESISTOR, CHIP 56 1/16W (1608)
R148	1-211-987-11	s RESISTOR, CHIP 56 1/16W (1608)
R149	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R150	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R151	1-211-987-11	s RESISTOR, CHIP 56 1/16W (1608)
R152	1-211-987-11	s RESISTOR, CHIP 56 1/16W (1608)
RB101	1-239-310-11	s RESISTOR, ARRAY, CHIP 220K
TP1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
X101	1-760-735-11	s VIBRATOR, CRYSTAL
X102	1-579-922-11	s VIBRATOR, CERAMIC (CHIP TYPE)

-----  
 ES-31/31P BOARD  
 -----

\*a: [Lot No. 911-135]  
 \*b: [Lot No. 141-]

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-990-A	o MOUNTED CIRCUIT BOARD, ES-31 [for UC,J]
	A-8324-992-A	o MOUNTED CIRCUIT BOARD, ES-31(P) [for CE,SY,CN]
2pcs	3-614-239-01	o PUSH RIVETS(D=2.1)
1pc	7-628-253-20	s SCREW +PS 2X6
1pc	7-622-205-05	s NUT M2 TYPE2
C101	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C102	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C103	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C104	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C106	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C107	1-104-823-11	s CAPACITOR,TANTALUM 47MF/16V
C108	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C109	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C110	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C111	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C112	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C113	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C114	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C115	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C116	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C117	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C118	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C119	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C120	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C121	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C122	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C123	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C124	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C126	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C127	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C128	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C129	1-104-608-11	s CAPACITOR,ELECT 33MF/6.3V
C130	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C131	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C132	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C133	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C134	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C135	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C136	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C137	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C138	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C139	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C140	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C141	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C143	1-135-145-11	s CAPACITOR,TANTALUM 0.47MF/35V
C144	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C145	1-126-393-11	s CAPACITOR,ELECT 33MF/10V(CHIP)
C146	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C147	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C148	1-126-391-11	s CAPACITOR,ELECT 47MF/6.3V(105)
C149	1-104-913-11	s CAPACITOR,TANTALUM 10MF/16V [for CE,SY,CN]

(ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C150	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C151	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C152	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C153	1-126-393-11	s CAPACITOR,ELECT 33MF/10V(CHIP)
C155	1-104-913-11	s CAPACITOR,TANTALUM 10MF/16V
C156	1-162-909-11	s CAPACITOR,CERAMIC 4PF/50V CH
C157	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C158	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C159	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C160	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C161	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C162	1-104-608-11	s CAPACITOR,ELECT 33MF/6.3V
C163	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C164	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C165	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C166	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C167	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C168	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C169	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C170	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C171	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C172	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C173	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C174	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C176	1-135-145-11	s CAPACITOR,TANTALUM 0.47MF/35V
C177	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C178	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C179	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C180	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C181	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C182	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C183	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C184	1-126-412-11	s CAPACITOR,ELECT 220MF/4V(CHIP)
C185	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C186	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C187	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C188	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C189	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C190	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C191	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C192	1-162-922-11	s CAPACITOR,CERAMIC 39PF/50V CH [for UC,J]
	1-162-926-11	s CAPACITOR,CERAMIC 82PF/50V CH [for CE,SY,CN]
C193	1-162-911-11	s CAPACITOR,CERAMIC 6PF/50V 1608 [for UC,J]
	1-162-917-11	s CAPACITOR,CERAMIC 15PF/50V CH [for CE,SY,CN]
C195	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C196	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C197	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C198	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C199	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C200	1-162-913-11	s CAPACITOR,CHIP CERAMIC 8PF/50V
C201	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C202	1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C203	1-162-910-11	s CAPACITOR,CERAMIC 5PF/50V 1608
C204	1-104-913-11	s CAPACITOR,TANTALUM 10MF/16V
C205	1-126-391-11	s CAPACITOR,ELECT 47MF/6.3V(105)
C206	1-126-393-11	s CAPACITOR,ELECT 33MF/10V(CHIP)



## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C207	1-162-906-11	s CAPACITOR, CERAMIC 1.5PFCK
C208	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C209	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C210	1-162-909-11	s CAPACITOR, CERAMIC 4PF/50V CH
C211	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608 [for UC, J]
C218	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C219	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C220	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C221	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C401	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C402	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C403	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C404	1-115-154-11	s CAPACITOR, ELECT 10MF/16V (BP)
C405	1-115-154-11	s CAPACITOR, ELECT 10MF/16V (BP)
C406	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C407	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C408	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C410	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C411	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C412	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C413	1-117-139-11	s CAPACITOR, ELECT 2.2MF/35V (BP)
C414	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C415	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C416	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C417	1-117-139-11	s CAPACITOR, ELECT 2.2MF/35V (BP)
C418	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C419	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C420	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C421	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C422	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C423	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C424	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C425	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C426	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C427	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C428	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C429	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C430	1-126-395-11	s CAPACITOR, ELECT 22MF/16V (CHIP)
C431	1-162-911-11	s CAPACITOR, CERAMIC 6PF/50V 1608
C601	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C602	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C603	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C604	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C605	1-164-346-11	s CAPACITOR, CHIP CERAMIC 1MF/16V
C606	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C607	1-164-346-11	s CAPACITOR, CHIP CERAMIC 1MF/16V
C609	1-164-346-11	s CAPACITOR, CHIP CERAMIC 1MF/16V
C610	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C611	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C612	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C613	1-164-346-11	s CAPACITOR, CHIP CERAMIC 1MF/16V
C614	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C615	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C616	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C617	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C618	1-164-346-11	s CAPACITOR, CHIP CERAMIC 1MF/16V
C619	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C620	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C621	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C622	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C623	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C624	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C625	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C626	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C627	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C628	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C650	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C651	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C652	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C653	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH [for UC, J]
C654	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH [for CE, SY, CN]
C654	1-162-928-11	s CAPACITOR, CERAMIC 120PF/50V CH [for UC, J]
C654	1-164-816-11	s CAPACITOR, CERAMIC 220PF/50V CH [for CE, SY, CN]
C655	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C656	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C657	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C658	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C659	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C660	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C661	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C662	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C663	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C665	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C680	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C681	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C682	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C683	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C684	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C685	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C686	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C687	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C688	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C689	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C690	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C691	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C692	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C693	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C695	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C696	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C697	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C698	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C701	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C702	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C703	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C704	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C705	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C706	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C707	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C708	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C709	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C710	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C801	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C802	1-113-985-11	s CAPACITOR, TANTALUM 10MF/20V
C803	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C804	1-115-154-11	s CAPACITOR, ELECT 10MF/16V (BP)
C805	1-126-393-11	s CAPACITOR, ELECT 33MF/10V (CHIP)
C806	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C807	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C808	1-104-914-11	s CAPACITOR, TANTALUM 22MF/16V
C809	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C810	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C811	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C812	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH [for UC, J]
	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH [for CE, SY, CN]
C813	1-135-145-11	s CAPACITOR, TANTALUM 0.47MF/35V
C814	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C815	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C816	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C817	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C818	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C819	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C820	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C821	1-126-395-11	s CAPACITOR, ELECT 22MF/16V (CHIP)
C822	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C823	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C824	1-126-391-11	s CAPACITOR, ELECT 47MF/6.3V (105)
C825	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C826	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C827	1-107-689-21	s CAPACITOR, TANTALUM 1MF/35V
C828	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C829	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C832	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C833	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C834	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C835	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C836	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C837	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C840	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C841	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH [for UC, J]
	1-162-926-11	s CAPACITOR, CERAMIC 82PF/50V CH [for CE, SY, CN]
C842	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C843	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C844	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C845	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C846	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C847	1-113-985-11	s CAPACITOR, TANTALUM 10MF/20V
C848	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C849	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C850	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C851	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C852	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C853	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C854	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C855	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C856	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C857	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C858	1-164-739-11	s CAPACITOR, CERAMIC 560PF (1608)
C859	1-104-913-11	s CAPACITOR, TANTALUM 10MF/16V
C860	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C861	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C862	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C863	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C864	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH [for UC, J]
	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH [for CE, SY, CN]
C865	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C871	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CP801	1-760-267-11	s OSCILLATOR, CRYSTAL (VCO TYPE) [for UC, J]
	1-760-269-11	s OSCILLATOR, CRYSTAL (VCO TYPE) [for CE, SY, CN]
D101	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D102	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D103	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D104	8-719-421-67	s DIODE MA132WK
D105	8-719-059-52	s DIODE MA3J14300LSO
D401	8-719-059-52	s DIODE MA3J14300LSO
D402	8-719-057-01	s DIODE RD2.0UM-T1B
D405	8-719-800-76	s DIODE 1SS226
D406	8-719-157-36	s DIODE RD6.8M-B
D407	8-719-057-01	s DIODE RD2.0UM-T1B
D702	8-719-941-04	s DIODE SB007-03CP
D703	8-719-059-52	s DIODE MA3J14300LSO
D801	8-719-059-51	s DIODE MA3J142E0LSO
D802	8-719-059-51	s DIODE MA3J142E0LSO
D803	8-719-059-51	s DIODE MA3J142E0LSO
D804	8-719-059-52	s DIODE MA3J14300LSO
DL101	1-411-271-21	s DELAY LINE
DL102	1-411-272-21	s DELAY LINE
DL401	1-415-761-21	s DELAY LINE, LC
DL402	1-415-760-21	s DELAY LINE, LC
E601	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E801	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
FL101	1-402-647-11	s DELAY LINE (90C) (NTSC) [for UC, J]
	1-402-646-21	s DELAY LINE (90C) (PAL) [for CE, SY, CN]
FL102	1-233-737-11	s FILTER, BAND PASS [for UC, J]
	1-233-738-11	s FILTER, BAND PASS [for CE, SY, CN]
FL401	1-233-342-11	s FILTER, TRAP
FL402	1-239-896-12	s FILTER, EMI (SMD)
FL403	1-239-896-12	s FILTER, EMI (SMD)
FL404	1-239-896-12	s FILTER, EMI (SMD)
FL405	1-239-896-12	s FILTER, EMI (SMD)
FL406	1-239-896-12	s FILTER, EMI (SMD)
FL407	1-239-896-12	s FILTER, EMI (SMD)
FL408	1-239-896-12	s FILTER, EMI (SMD)
FL601	1-233-346-21	s FILTER, BAND PASS (3.58MHZ) [for UC, J]
	1-233-390-21	s FILTER, BAND PASS [for CE, SY, CN]
IC101	8-759-185-42	s IC LM4040AIM3-2.5
IC102	8-759-669-72	s IC TL064CPWR
IC103	8-759-678-06	s IC CAT24WC02JI-TE13
IC104	8-759-064-36	s IC MB88346BPFV
IC105	8-759-669-45	s IC TL062CPWR-12
IC106	8-759-064-36	s IC MB88346BPFV
IC107	8-759-523-02	s IC TC74HC4053AFT (EL)
IC108	8-759-523-02	s IC TC74HC4053AFT (EL)
IC109	8-759-530-27	s IC TC4052BFT (EL, N)

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC110	8-759-082-61 s	IC TC4W53FU
IC111	8-752-090-56 s	IC CXA3178M-T4
IC112	8-759-082-61 s	IC TC4W53FU
IC113	8-759-530-05 s	IC TC4053BFT (EL.N)
IC114	8-759-082-61 s	IC TC4W53FU
IC115	8-759-058-62 s	IC TC7S08FU-TE85R
IC116	8-759-058-58 s	IC TC7S04FU-TE85R
IC117	8-759-523-02 s	IC TC74HC4053AFT(EL)
IC401	8-759-082-60 s	IC TC7S66FU
IC402	8-759-082-60 s	IC TC7S66FU
IC403	8-759-523-02 s	IC TC74HC4053AFT(EL)
IC404	8-759-058-58 s	IC TC7S04FU-TE85R
IC405	8-759-523-02 s	IC TC74HC4053AFT(EL)
IC406	8-759-488-48 s	IC NJM2249V(Te2)
IC407	8-759-488-48 s	IC NJM2249V(Te2)
IC408	8-759-523-02 s	IC TC74HC4053AFT(EL)
IC409	8-759-258-43 s	IC LT1253CS8 (E2)
IC410	8-759-260-44 s	IC LT1254CS (E2)
IC411	8-759-082-61 s	IC TC4W53FU
IC412	8-759-258-43 s	IC LT1253CS8 (E2)
IC413	8-759-082-61 s	IC TC4W53FU
IC414	8-759-058-58 s	IC TC7S04FU-TE85R
IC601	8-752-056-59 s	IC CXA1592R
IC602	8-759-082-61 s	IC TC4W53FU [for UC,J]
IC603	8-759-082-61 s	IC TC4W53FU [for UC,J]
IC604	8-759-660-23 s	IC SN74HCT08APWR
IC605	8-759-064-36 s	IC MB88346BPFV
IC606	8-759-498-26 s	IC NJM2534V(Te2)
IC607	8-759-392-64 s	IC AD828AR
IC608	8-752-053-21 s	IC CXA1211M
IC609	8-759-498-26 s	IC NJM2534V(Te2)
IC610	8-759-392-64 s	IC AD828AR
IC701	8-752-054-80 s	IC CXA1521M
IC702	8-759-082-61 s	IC TC4W53FU
IC801	8-759-058-58 s	IC TC7S04FU-TE85R
IC802	8-759-101-12 s	IC UPC311G2
IC803	8-759-064-36 s	IC MB88346BPFV
IC804	8-752-335-47 s	IC CXD1216M
IC805	8-759-082-61 s	IC TC4W53FU
IC806	8-759-510-71 s	IC BA10358F-E2
IC807	8-759-082-61 s	IC TC4W53FU
IC808	8-752-341-58 s	IC CXD1217Q
IC809	8-759-058-64 s	IC TC7S32FU-TE85R
IC810	8-759-058-58 s	IC TC7S04FU-TE85R
IC811	8-759-058-58 s	IC TC7S04FU-TE85R [for CE,SY,CN]
IC812	8-759-058-58 s	IC TC7S04FU-TE85R
IC813	8-759-195-81 s	IC TC7S86FU
IC814	8-759-510-71 s	IC BA10358F-E2
IC815	8-759-902-88 s	IC SN74LS123NS
IC816	8-759-082-61 s	IC TC4W53FU
IC817	8-759-523-04 s	IC TC74HC4538AFT
IC818	8-759-112-66 s	IC UPC812G2
IC819	8-759-673-37 s	IC MM74HC00MTCX
IC825	8-759-058-62 s	IC TC7S08FU-TE85R
IC826	8-759-447-77 s	IC TC7WH74FU (TR12R)
IC827	8-759-209-57 s	IC TC4S69F
L101	1-412-280-31 s	INDUCTOR,CHIP 330UH (3225)
L102	1-412-959-11 s	INDUCTOR 47UH (2520)

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L103	1-412-959-11 s	INDUCTOR 47UH (2520)
L104	1-412-959-11 s	INDUCTOR 47UH (2520)
L105	1-412-280-31 s	INDUCTOR,CHIP 330UH (3225)
L106	1-410-392-11 s	INDUCTOR,CHIP 82UH (3225)
	1-410-656-11 s	INDUCTOR,CHIP 150UH (3225) [for UC,J]
		[for CE,SY,CN]
L107	1-412-955-11 s	INDUCTOR 22UH (2520)
L108	1-412-955-11 s	INDUCTOR 22UH (2520)
L109	1-412-955-11 s	INDUCTOR 22UH (2520)
L601	1-414-402-11 s	INDUCTOR (SMD) 47UH
L602	1-414-398-11 s	INDUCTOR (SMD) 10UH
L603	1-414-402-11 s	INDUCTOR (SMD) 47UH
L650	1-414-402-11 s	INDUCTOR (SMD) 47UH
L651	1-412-960-21 s	INDUCTOR (SMALL TYPE)56UH [for UC,J]
	1-412-963-11 s	INDUCTOR 100UH (2520) [for CE,SY,CN]
L652	1-414-404-11 s	INDUCTOR (SMD) 100UH
L653	1-414-404-11 s	INDUCTOR (SMD) 100UH
L680	1-414-404-11 s	INDUCTOR (SMD) 100UH
L681	1-414-404-11 s	INDUCTOR (SMD) 100UH
L701	1-414-402-11 s	INDUCTOR (SMD) 47UH
L702	1-414-402-11 s	INDUCTOR (SMD) 47UH
L801	1-412-955-11 s	INDUCTOR 22UH (2520)
L802	1-412-955-11 s	INDUCTOR 22UH (2520)
L803	1-410-656-11 s	INDUCTOR,CHIP 150UH (3225) [for UC,J]
	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225) [for CE,SY,CN]
L804	1-412-957-11 s	INDUCTOR 33UH (2520)
L805	1-412-959-11 s	INDUCTOR 47UH (2520)
L806	1-412-959-11 s	INDUCTOR 47UH (2520)
L807	1-412-959-11 s	INDUCTOR 47UH (2520)
L808	1-412-959-11 s	INDUCTOR 47UH (2520)
L809	1-412-955-11 s	INDUCTOR 22UH (2520)
L810	1-412-955-11 s	INDUCTOR 22UH (2520)
L811	1-412-959-11 s	INDUCTOR 47UH (2520)
Q101	8-729-101-07 s	TRANSISTOR 2SB798
Q102	8-729-101-07 s	TRANSISTOR 2SB798
Q103	8-729-807-51 s	TRANSISTOR 2SD1623-S
Q104	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q105	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q106	8-729-402-84 s	TRANSISTOR XN4601
Q107	8-729-402-78 s	TRANSISTOR XN6401
Q109	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q110	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q111	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q112	8-729-402-78 s	TRANSISTOR XN6401
Q113	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q114	8-729-402-84 s	TRANSISTOR XN4601
Q115	8-729-402-84 s	TRANSISTOR XN4601
Q116	8-729-402-19 s	TRANSISTOR XN6501
Q117	8-729-402-19 s	TRANSISTOR XN6501
Q118	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q119	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q120	8-729-402-84 s	TRANSISTOR XN4601
Q121	8-729-402-78 s	TRANSISTOR XN6401
Q122	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q123	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q124	8-729-905-35 s	TRANSISTOR 2SC4081-R

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q125	8-729-402-78 s	TRANSISTOR XN6401
Q126	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q127	8-729-402-19 s	TRANSISTOR XN6501
Q128	8-729-402-84 s	TRANSISTOR XN4601
Q129	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q130	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q131	8-729-402-78 s	TRANSISTOR XN6401
Q132	8-729-402-78 s	TRANSISTOR XN6401
Q133	8-729-403-32 s	TRANSISTOR XN6534
Q134	8-729-402-84 s	TRANSISTOR XN4601
Q135	8-729-402-84 s	TRANSISTOR XN4601
Q136	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q137	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q138	8-729-402-84 s	TRANSISTOR XN4601
Q140	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q141	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q142	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q143	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q144	8-729-403-29 s	TRANSISTOR XN6435
Q145	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q146	8-729-402-84 s	TRANSISTOR XN4601
Q147	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q148	8-729-402-19 s	TRANSISTOR XN6501
Q149	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q150	8-729-403-32 s	TRANSISTOR XN6534
Q151	8-729-122-63 s	TRANSISTOR 2SA1226-E4
Q152	8-729-402-19 s	TRANSISTOR XN6501
Q153	8-729-402-78 s	TRANSISTOR XN6401
Q155	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q156	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q401	8-729-117-32 s	TRANSISTOR 2SC4177
Q402	8-729-403-29 s	TRANSISTOR XN6435
Q403	8-729-117-32 s	TRANSISTOR 2SC4177
Q404	8-729-402-19 s	TRANSISTOR XN6501
Q405	8-729-117-32 s	TRANSISTOR 2SC4177
Q406	8-729-403-32 s	TRANSISTOR XN6534
Q407	8-729-403-29 s	TRANSISTOR XN6435
Q408	8-729-402-84 s	TRANSISTOR XN4601
Q410	8-729-402-78 s	TRANSISTOR XN6401
Q411	8-729-402-84 s	TRANSISTOR XN4601
Q412	8-729-403-29 s	TRANSISTOR XN6435
Q413	8-729-403-32 s	TRANSISTOR XN6534
Q414	8-729-117-32 s	TRANSISTOR 2SC4177
Q415	8-729-403-29 s	TRANSISTOR XN6435
Q416	8-729-402-84 s	TRANSISTOR XN4601
Q417	8-729-402-84 s	TRANSISTOR XN4601
Q418	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q419	8-729-101-07 s	TRANSISTOR 2SB798
Q420	8-729-807-51 s	TRANSISTOR 2SD1623-S
Q421	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q422	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q423	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q424	8-729-402-19 s	TRANSISTOR XN6501
Q426	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q427	8-729-402-19 s	TRANSISTOR XN6501
Q428	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q429	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q601	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q602	8-729-905-35 s	TRANSISTOR 2SC4081-R

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q603	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q604	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q650	8-729-402-78 s	TRANSISTOR XN6401
Q651	8-729-402-19 s	TRANSISTOR XN6501
Q652	8-729-402-84 s	TRANSISTOR XN4601
Q653	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q680	6-550-007-01 s	TRANSISTOR UMC3NTR
Q701	8-729-402-78 s	TRANSISTOR XN6401
Q702	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q703	8-729-402-84 s	TRANSISTOR XN4601
Q801	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q802	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q803	8-729-402-19 s	TRANSISTOR XN6501
Q804	8-729-403-29 s	TRANSISTOR XN6435
Q805	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q806	8-729-402-19 s	TRANSISTOR XN6501
Q807	8-729-403-29 s	TRANSISTOR XN6435
Q808	8-729-402-84 s	TRANSISTOR XN4601
Q809	8-729-141-53 s	TRANSISTOR 2SK94-X2X3X4
Q810	8-729-402-84 s	TRANSISTOR XN4601 [for UC,J]
Q811	8-729-402-84 s	TRANSISTOR XN4601
R101	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R102	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R103	1-218-889-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R104	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R105	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R106	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R107	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R108	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R109	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R110	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R111	1-218-884-11 s	RESISTOR,CHIP 36K 1/16W (1608)
R112	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R113	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R114	1-218-865-11 s	RESISTOR,CHIP 5.6K 1/16W(1608)
R115	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R116	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R117	1-218-886-11 s	RESISTOR,CHIP 43K 1/16W (1608)
R118	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R119	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R120	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R121	1-218-893-11 s	RESISTOR,CHIP 82K 1/16W(1608)
R122	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R123	1-218-893-11 s	RESISTOR,CHIP 82K 1/16W(1608)
R124	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R125	1-218-893-11 s	RESISTOR,CHIP 82K 1/16W(1608)
R126	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R127	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R128	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R129	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R130	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R131	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R132	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R133	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R134	1-218-846-11 s	RESISTOR,CHIP 910 1/16W (1608)
R135	1-211-973-11 s	RESISTOR,CHIP 15 1/16W (1608)
R136	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R137	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R138	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R139	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R140	1-211-987-11	s RESISTOR,CHIP 56 1/16W (1608)
R141	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R142	1-218-828-11	s RESISTOR,CHIP 160 1/16W (1608)
R143	1-211-973-11	s RESISTOR,CHIP 15 1/16W (1608)
R144	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R145	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R146	1-211-973-11	s RESISTOR,CHIP 15 1/16W (1608)
R147	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R148	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R149	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R150	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R151	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R152	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R153	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R154	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R155	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R156	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R157	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R158	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R159	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R160	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R161	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R162	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608) [for UC,J]
R163	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608 [for CE,SY,CN]
R164	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R165	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R166	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R167	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R168	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R169	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R170	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R171	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608) [for UC,J] [for CE,SY,CN]
R172	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W [for UC,J] 1-216-829-11 s RESISTOR,CHIP 4.7K 1/16W(1608) [for CE,SY,CN]
R173	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R174	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R175	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R176	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608) [for UC,J] 1-218-853-11 s RESISTOR,CHIP 1.8K 1/16W(1608) [for CE,SY,CN]
R177	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R178	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R179	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R180	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R181	1-216-835-11	s RESISTOR,CHIP 15K 1/16W
R182	1-216-828-11	s RESISTOR,CHIP 3.9K 1/16W 1608
R183	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R184	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R185	1-216-812-11	s RESISTOR,CHIP 180 1/16W 1608
R186	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R187	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R188	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R189	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R192	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R193	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R194	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R195	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R196	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R197	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R198	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R199	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R200	1-218-846-11	s RESISTOR,CHIP 910 1/16W (1608)
R201	1-211-973-11	s RESISTOR,CHIP 15 1/16W (1608)
R202	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R203	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R204	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R205	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R206	1-211-987-11	s RESISTOR,CHIP 56 1/16W (1608)
R207	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R208	1-218-828-11	s RESISTOR,CHIP 160 1/16W (1608)
R209	1-211-973-11	s RESISTOR,CHIP 15 1/16W (1608)
R210	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R211	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R212	1-211-973-11	s RESISTOR,CHIP 15 1/16W (1608)
R213	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R214	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R215	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R216	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R217	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R218	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R219	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R220	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R221	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608) [for UC,J] 1-218-867-11 s RESISTOR,CHIP 6.8K 1/16W(1608) [for CE,SY,CN]
R222	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R223	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R224	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R225	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R226	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R227	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R228	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R229	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R230	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R231	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R232	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R233	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R234	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R235	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R236	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R237	1-216-807-11	s RESISTOR,CHIP 68 1/16W 1608
R238	1-216-807-11	s RESISTOR,CHIP 68 1/16W 1608
R239	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R240	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R241	1-216-836-11	s RESISTOR,CHIP 18K 1/16W 1608
R242	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R243	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R244	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R245	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608



## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R246	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R247	1-218-917-11 s	RESISTOR,CHIP 820K 1/16W(1608)
R248	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R249	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R250	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R251	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R252	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R253	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R254	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R255	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R256	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R257	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R258	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R259	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R260	1-216-826-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R261	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R262	1-218-844-11 s	RESISTOR,CHIP 750 1/16W (1608)
R263	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R264	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R265	1-216-824-11 s	RESISTOR,CHIP 1.8K 1/16W 1608
R266	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R267	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R268	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R269	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R270	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R271	1-211-987-11 s	RESISTOR,CHIP 56 1/16W (1608)
R272	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R273	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R274	1-218-846-11 s	RESISTOR,CHIP 910 1/16W (1608)
R275	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R276	1-216-824-11 s	RESISTOR,CHIP 1.8K 1/16W 1608
R277	1-216-826-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R278	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R279	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R280	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R281	1-218-833-11 s	RESISTOR,CHIP 270 1/16W (1608) [for UC,J]
	1-218-834-11 s	RESISTOR,CHIP 300 1/16W (1608) [for CE,SY,CN]
R282	1-211-974-11 s	RESISTOR,CHIP 16 1/16W (1608) [for UC,J]
	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R283	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R284	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608) [for UC,J]
	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608) [for CE,SY,CN]
R286	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R287	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R288	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R289	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R290	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R291	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R292	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R293	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R294	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R295	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R296	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R297	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R298	1-216-819-11 s	RESISTOR,CHIP 680 1/16W 1608
R299	1-218-854-11 s	RESISTOR,CHIP 2K 1/16W (1608)
R300	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R301	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R302	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R303	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R304	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R305	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R306	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R307	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R308	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R309	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R310	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R311	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R312	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R313	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R314	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R315	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R316	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R317	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R318	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R319	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R320	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R321	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R323	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R324	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R325	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R326	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R327	1-216-794-11 s	RESISTOR,CHIP 5.6 1/16W 1608
R328	1-216-794-11 s	RESISTOR,CHIP 5.6 1/16W 1608
R329	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R330	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R331	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R332	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R333	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R334	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R335	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R336	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R337	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R338	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R339	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R340	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R341	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R342	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R343	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R344	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R345	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R350	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R354	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R355	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R356	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R357	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R358	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R359	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R362	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R401	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R402	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R403	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R404	1-216-840-11 s	RESISTOR,CHIP 39K 1/16W 1608
R405	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R406	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R407	1-216-822-11 s	RESISTOR,CHIP 1.2K 1/16W 1608
R408	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R409	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R410	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R411	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R412	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R413	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R414	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R415	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R416	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R417	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R418	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R419	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R421	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R422	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R423	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R424	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R425	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R426	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R427	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R428	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R429	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R430	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R431	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R432	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R433	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R435	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R436	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R437	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R438	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R439	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R440	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R441	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R442	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R443	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R444	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R445	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R446	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R447	1-216-822-11 s	RESISTOR,CHIP 1.2K 1/16W 1608
R448	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R449	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R450	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R451	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R452	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R453	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R454	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R455	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R456	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R457	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R458	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R459	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R460	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R461	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R462	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R463	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R464	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R465	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R466	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R467	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R468	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R471	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R472	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R473	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R474	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R475	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R476	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R477	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R478	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R479	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R480	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R481	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R482	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R483	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R484	1-218-838-11 s	RESISTOR,CHIP 430 1/16W (1608)
R485	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R486	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R487	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R488	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R489	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R490	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R491	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R492	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R493	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R494	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R495	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R496	1-216-840-11 s	RESISTOR,CHIP 39K 1/16W 1608
R497	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R498	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R499	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R500	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R501	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R502	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R503	1-216-815-11 s	RESISTOR,CHIP 330 1/16W 1608
R504	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R505	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R506	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R507	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R508	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R509	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R510	1-216-815-11 s	RESISTOR,CHIP 330 1/16W 1608
R511	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R512	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R513	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R514	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R515	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R516	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R517	1-216-815-11 s	RESISTOR,CHIP 330 1/16W 1608
R518	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R519	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R520	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R521	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R522	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R523	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R524	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608



## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R525	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R526	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R527	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R528	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R529	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R530	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R531	1-218-846-11 s	RESISTOR,CHIP 910 1/16W (1608)
R532	1-218-846-11 s	RESISTOR,CHIP 910 1/16W (1608)
R533	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R534	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R535	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R536	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R537	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R539	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R540	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R541	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R542	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R543	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R544	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R545	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R546	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R547	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R548	1-211-987-11 s	RESISTOR,CHIP 56 1/16W (1608)
R549	1-162-916-11 s	CAPACITOR,CERAMIC 12PF/50V CH
R601	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R602	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R603	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R605	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R606	1-211-987-11 s	RESISTOR,CHIP 56 1/16W (1608)
R607	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R608	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R609	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R611	1-211-991-11 s	RESISTOR,CHIP 82 1/16W (1608)
R612	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R613	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R614	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R615	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R616	1-216-840-11 s	RESISTOR,CHIP 39K 1/16W 1608
R617	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R620	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R621	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R622	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R623	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R624	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R625	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R626	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R627	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R628	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R629	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R630	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R631	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R632	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R633	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R634	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R635	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R636	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R637	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R638	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R639	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R640	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R641	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R642	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R643	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R644	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R645	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R650	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R651	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R652	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R653	1-216-838-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R654	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R655	1-216-836-11 s	RESISTOR,CHIP 18K 1/16W 1608
R656	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R657	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R658	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R659	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R660	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R661	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R662	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R663	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R664	1-216-813-11 s	RESISTOR,CHIP 220 1/16W 1608
R665	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R666	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R667	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R668	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R669	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R670	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R671	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R672	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R673	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R674	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R678	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R680	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R681	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R682	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R683	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R684	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R685	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R686	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R687	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608) [for UC,J]
	1-218-846-11 s	RESISTOR,CHIP 910 1/16W (1608) [for CE,SY,CN]
R688	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R689	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R690	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R691	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R692	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R701	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R702	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R703	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R704	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R705	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R706	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R707	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R708	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R709	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R710	1-216-835-11	s RESISTOR,CHIP 15K 1/16W
R711	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R712	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R713	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R714	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R715	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R716	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R717	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R718	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R719	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R720	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R721	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R722	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R723	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R724	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R726	1-218-874-11	s RESISTOR,CHIP 13K 1/16W (1608)
R727	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R801	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R802	1-216-822-11	s RESISTOR,CHIP 1.2K 1/16W 1608
R803	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R804	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R805	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R806	1-218-848-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
R807	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R808	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R809	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R810	1-216-836-11	s RESISTOR,CHIP 18K 1/16W 1608
R811	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R812	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R813	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R814	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R815	1-216-848-11	s RESISTOR,CHIP 180K 1/16 (1608)
R816	1-216-822-11	s RESISTOR,CHIP 1.2K 1/16W 1608
R817	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W [for UC,J]
	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608 [for CE,SY,CN]
R818	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R819	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R820	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R821	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R822	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R823	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R824	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R825	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R826	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R827	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R828	1-218-866-11	s RESISTOR,CHIP 6.2K 1/16W(1608)
R829	1-216-848-11	s RESISTOR,CHIP 180K 1/16 (1608)
R830	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R831	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R832	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R833	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R834	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R835	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R836	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R837	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R838	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R839	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R840	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R841	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R842	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R843	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R844	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R845	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R846	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R847	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R848	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R849	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R850	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608) [for UC,J]
R851	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608) [for UC,J]
R852	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608) [for UC,J]
R853	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R854	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608) [for CE,SY,CN]
R855	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R856	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608) [for CE,SY,CN]
R857	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608 [for UC,J]
R858	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608) [for UC,J]
R859	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R860	1-216-834-11	s RESISTOR,CHIP 12K 1/16W 1608 [for UC,J]
R861	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R862	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R863	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R864	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R865	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R866	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R867	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R868	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R869	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R870	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R871	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R872	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R873	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608) [for UC,J]
	1-216-820-11	s RESISTOR,CHIP 820 1/16W(1608) [for CE,SY,CN]
R874	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R875	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R876	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R877	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R878	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R879	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R880	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R881	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R882	1-218-882-11 s	RESISTOR,CHIP 30K 1/16W(1608)
R883	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R884	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R885	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R886	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R887	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R888	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R889	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R890	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R891	1-218-866-11 s	RESISTOR,CHIP 6.2K 1/16W(1608)
R892	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R893	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R894	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R895	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R896	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R897	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R898	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R899	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R900	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R902	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R903	1-216-835-11 s	RESISTOR,CHIP 15K 1/16W
R904	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R905	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R906	1-218-872-11 s	RESISTOR,CHIP 11K 1/16W (1608)
R907	1-218-874-11 s	RESISTOR,CHIP 13K 1/16W (1608)
R908	1-216-835-11 s	RESISTOR,CHIP 15K 1/16W
R909	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R910	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R911	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R912	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R913	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R915	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608 [for CE,SY,CN]
R916	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R917	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R918	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608 [for UC,J]
R922	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R924	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R925	1-216-805-11 s	RESISTOR,CHIP 47 1/16W (1608)
R926	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R927	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R928	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608 [for UC,J]
R929	1-216-805-11 s	RESISTOR,CHIP 47 1/16W 1608
R931	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R932	1-216-828-11 s	RESISTOR,CHIP 3.9K 1/16W 1608
R933	1-216-828-11 s	RESISTOR,CHIP 3.9K 1/16W 1608
R934	1-216-828-11 s	RESISTOR,CHIP 3.9K 1/16W 1608
R935	1-216-828-11 s	RESISTOR,CHIP 3.9K 1/16W 1608
R936	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
RB101	1-236-904-11 s	RESISTOR,NETWORK 1K (1608)
RB102	1-236-904-11 s	RESISTOR,NETWORK 1K (1608)
RB103	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)

## (ES-31/31P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB104	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RB601	1-236-907-11 s	RESISTOR,BLOCK 100K (1608)
RV101	1-241-261-41 s	RESISTOR,ADJ, CERMET 1K
RV103	1-241-261-41 s	RESISTOR,ADJ, CERMET 1K
RV104	*b 1-214-261-11 s	RESISTOR,ADJ 1K (CERMET)
	*a 1-241-260-11 s	RESISTOR,ADJ 500 (CERMET)
S401	1-571-275-11 s	SWITCH, SLIDE (1-1-2)
TP801	1-535-757-11 s	CHIP, CHECKER (CONNECTOR)

FP-118A BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8329-963-A	s MOUNTED CIRCUIT BOARD, FP-118A
1pc	3-604-372-01	o SPACER LCD (ABS)
C1	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C2	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C7	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C8	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C9	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C10	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C11	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C12	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C13	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C14	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C15	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C16	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C17	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C18	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C19	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C20	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C21	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C200	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C203	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C204	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C205	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C206	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C207	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C208	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C209	1-126-397-11	s CAPACITOR, ELECT 33MF/25V(CHIP)
C210	1-126-397-11	s CAPACITOR, ELECT 33MF/25V(CHIP)
C211	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C212	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-164-739-11	s CAPACITOR, CERAMIC 560PF (1608)
C214	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C215	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C216	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C217	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C218	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C219	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C220	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C221	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C222	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C223	1-165-112-11	s CAPACITOR, CERAMIC 0.33MF/16V F
C224	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C225	1-164-730-11	s CAPACITOR, CERAMIC 1200RF (M-)
C226	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C227	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C228	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C229	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C300	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C301	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C302	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C303	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C304	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C305	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V

(FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C306	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C307	1-126-402-11	s CAPACITOR, ELECT 2.2MF/50V
C308	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C309	1-126-402-11	s CAPACITOR, ELECT 2.2MF/50V
C310	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C311	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C312	1-126-395-11	s CAPACITOR, ELECT 22MF/16V(CHIP)
C313	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C314	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C315	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C316	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C317	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C318	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C401	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C402	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C403	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C404	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C405	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C406	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C407	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C408	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C409	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C410	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C411	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C412	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C413	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C414	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C415	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C416	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C417	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C418	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C419	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C420	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C421	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C422	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C423	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C424	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C425	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C426	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C427	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C428	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C429	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C430	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C431	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C434	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C435	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C436	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C437	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C438	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C439	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C440	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C441	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C442	1-126-393-11	s CAPACITOR, ELECT 33MF/10V(CHIP)
C443	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C444	1-115-581-11	s CAPACITOR, CHIP ELECT 100MF/16V
C445	1-115-154-11	s CAPACITOR, ELECT 10MF/16V(BP)
C446	1-115-154-11	s CAPACITOR, ELECT 10MF/16V(BP)
C447	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C448	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C449	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C451	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C453	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C454	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C455	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C456	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C457	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C601	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C602	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C603	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C604	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C605	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C606	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C607	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C608	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C609	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C610	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C611	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C613	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C614	1-126-393-11	s CAPACITOR ELECT 33MF/10V(CHIP)
C615	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C616	1-126-393-11	s CAPACITOR ELECT 33MF/10V(CHIP)
C617	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C618	1-126-395-11	s CAPACITOR, ELECT 22MF/16V(CHIP)
C619	1-126-412-11	s CAPACITOR, ELECT 220MF/4V(CHIP)
C620	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C621	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C622	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C623	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C624	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C625	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C706	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C707	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C718	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C719	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C801	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C802	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C804	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C806	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
C807	1-115-581-11	s CAPACITOR CHIP ELECT 100MF/16V
CN1	1-778-652-11	o CONNECTOR, FFC (ZIF) 50P
CN2	1-778-652-11	o CONNECTOR, FFC (ZIF) 50P
CN3	1-778-651-11	o CONNECTOR, FFC (ZIF) 40P
CN4	1-695-931-11	o CONNECTOR, FPC (10P)
CN5	1-580-056-21	o PIN, CONNECTOR 3P
CN6	1-580-056-21	o PIN, CONNECTOR 3P
CN8	1-695-931-11	o CONNECTOR, FPC (10P)
CV200	1-141-345-11	s CAPACITOR, TRIMMER(CHIP) 40PF
D1	8-719-059-49	s LED EBR3368S
D200	8-719-938-72	s DIODE SB01-05CP (RECTI)
D201	8-719-106-31	s DIODE RD8.2M-B1
D202	8-719-105-90	s DIODE RD5.6M-B1
D203	8-719-106-61	s DIODE RD11M-B1
D204	8-719-105-90	s DIODE RD5.6M-B1
D205	8-719-059-52	s DIODE MA3J14300LSO
D206	8-719-059-52	s DIODE MA3J14300LSO
D207	8-719-105-28	s DIODE RD2.4M-B
D208	8-719-105-28	s DIODE RD2.4M-B

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D209	8-719-987-41	s LED CL-150Y-CD
D210	8-719-987-41	s LED CL-150Y-CD
D211	8-719-987-41	s LED CL-150Y-CD
D212	8-719-987-41	s LED CL-150Y-CD
D213	8-719-987-41	s LED CL-150Y-CD
D214	8-719-987-41	s LED CL-150Y-CD
D215	8-719-987-41	s LED CL-150Y-CD
D216	8-719-987-41	s LED CL-150Y-CD
D217	8-719-820-41	s DIODE 1SS302
D300	8-719-938-72	s DIODE SB01-05CP (RECTI)
D301	8-719-938-72	s DIODE SB01-05CP (RECTI)
D302	8-719-938-72	s DIODE SB01-05CP (RECTI)
D303	8-719-059-51	s DIODE MA3J142E0LSO
D401	8-719-059-52	s DIODE MA3J14300LSO
D402	8-719-059-52	s DIODE MA3J14300LSO
D403	8-719-059-52	s DIODE MA3J14300LSO
D501	8-719-059-52	s DIODE MA3J14300LSO
D502	8-719-801-78	s DIODE 1SS184
D503	8-719-801-78	s DIODE 1SS184
D504	8-719-801-78	s DIODE 1SS184
D605	8-719-820-41	s DIODE 1SS302
D703	8-719-820-41	s DIODE 1SS302
D704	8-719-820-41	s DIODE 1SS302
D801	8-719-941-86	s DIODE DAN202U
E1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E401	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E501	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
F801	1-576-122-21	s CIRCUIT PROTECTOR 0.4A(IC LINK)
FB801	1-414-135-11	s MICRO INDUCTOR (CHIP) 21A10
IC2	8-759-327-65	s IC CXD8525N (E2)
IC4	8-759-674-43	s IC MM74HCT244SXX
IC6	8-759-524-04	s IC TC74VHC125FT (EL)
IC200	6-801-427-01	s IC UPD78064GF-201-3BA
IC201	8-759-175-77	s IC CXD8384Q
IC202	8-759-289-80	s IC LC75821W-DS
IC203	8-759-442-54	s IC RH5RL50AA-T1
IC204	8-759-464-95	s IC AK6420AF-E2
IC205	8-759-035-93	s IC SC7832F
IC206	8-759-209-57	s IC TC4869F
IC207	8-759-669-45	s IC TL062CPWR-12
IC208	8-759-745-64	s IC NJM4560M
IC209	8-759-082-60	s IC TC7S66FU
IC210	8-759-058-64	s IC TC7S32FU-TE85R
IC300	8-759-087-73	s IC S-80745AN-D9-S
IC301	8-759-504-40	s IC S80741AL-A5
IC302	8-759-442-54	s IC RH5RL50AA-T1
IC303	8-759-442-54	s IC RH5RL50AA-T1
IC401	8-759-422-21	s IC NJM4580VTE2
IC403	8-759-422-21	s IC NJM4580VTE2
IC404	8-759-422-21	s IC NJM4580VTE2
IC405	8-759-422-21	s IC NJM4580VTE2
IC406	8-759-082-61	s IC TC4W53FU
IC407	8-759-082-61	s IC TC4W53FU
IC408	8-759-701-01	s IC NJM2904M
IC409	8-759-111-56	s IC UPC4572G2
IC410	8-759-111-56	s IC UPC4572G2



## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC411	8-759-422-21 s	IC NJM4580VTE2
IC412	8-759-422-21 s	IC NJM4580VTE2
IC413	8-759-422-21 s	IC NJM4580VTE2
IC414	8-759-422-21 s	IC NJM4580VTE2
IC415	8-759-431-95 s	IC S-81230SGUP-DQB-T1
IC416	8-759-422-21 s	IC NJM4580VTE2
IC601	8-759-745-64 s	IC NJM4560M
IC602	8-759-745-64 s	IC NJM4560M
IC605	8-759-530-28 s	IC TC4066BFT
IC606	8-759-745-64 s	IC NJM4560M
IC607	8-759-431-97 s	IC NJM386M(TE2)
IC701	8-759-194-97 s	IC NJM4560M-D(TE2)
IC705	8-759-530-05 s	IC TC4053BFT (EL.N)
IC801	8-759-058-62 s	IC TC7S08FU-TE85R
IC802	8-759-058-58 s	IC TC7S04FU-TE85R
IC803	8-759-236-51 s	IC TC74HC165AF (EL)
IC804	8-759-236-51 s	IC TC74HC165AF (EL)
L1	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L2	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L3	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L200	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L300	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L301	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L501	1-412-282-41 s	INDUCTOR,CHIP 470UH (3225)
L601	1-414-402-11 s	INDUCTOR (SMD) 47UH
L701	1-412-955-11 s	INDUCTOR 22UH (2520)
LI300	1-550-414-31 s	HOLDER, BATTERY
ND200	1-801-621-21 o	DISPLAY, LCD
PH401	1-808-252-11 s	PHOTO COUPLER M30
Q1	8-729-106-60 s	TRANSISTOR 2SB1115A
Q2	8-729-042-52 s	TRANSISTOR IMT1AT108
Q3	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q4	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q5	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q6	8-729-929-73 s	TRANSISTOR UMG8-TL
Q7	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q8	8-729-929-73 s	TRANSISTOR UMG8-TL
Q9	8-729-929-52 s	TRANSISTOR UMA9-TR
Q10	8-729-927-74 s	TRANSISTOR UMG2
Q11	8-729-028-73 s	TRANSISTOR DTA114EUA-T106
Q12	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q13	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q201	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q202	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q203	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q204	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q205	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q300	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q301	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q302	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q303	8-729-142-90 s	TRANSISTOR 2SK853-K5
Q304	8-729-042-52 s	TRANSISTOR IMT1AT108
Q305	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q306	8-729-907-26 s	TRANSISTOR IMX1
Q307	8-729-042-52 s	TRANSISTOR IMT1AT108
Q308	8-729-029-14 s	TRANSISTOR DTC144EUA-T106

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q401	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q402	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q403	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q404	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q405	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q406	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q407	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q408	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q409	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q410	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q411	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q412	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q413	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q414	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q415	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q501	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q502	6-550-002-01 s	TRANSISTOR IMB2AT110
Q504	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q505	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q506	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q507	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q508	8-729-141-75 s	TRANSISTOR 2SD596DV345
Q509	8-729-026-53 s	TRANSISTOR 2SA1576A-T106-QR
Q510	8-729-141-48 s	TRANSISTOR 2SB624-BV345
Q511	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q512	8-729-141-75 s	TRANSISTOR 2SD596DV345
Q513	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q514	8-729-141-75 s	TRANSISTOR 2SD596DV345
Q515	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q516	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q701	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q702	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q801	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q802	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q803	8-729-101-07 s	TRANSISTOR 2SB798
Q804	8-729-140-63 s	TRANSISTOR 2SA1611-MSM6
R1	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R2	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R3	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R4	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R5	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R6	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R7	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R8	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R9	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R10	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R11	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R12	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R13	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R14	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R15	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R16	1-216-830-11 s	RESISTOR,CHIP 5.6K 1/16W 1608
R17	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R18	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R19	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R20	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R21	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R22	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R23	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R24	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R25	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R26	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R27	1-216-827-11 s	RESISTOR, CHIP 3.3K 1/16W 1608
R28	1-216-827-11 s	RESISTOR, CHIP 3.3K 1/16W 1608
R29	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R30	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R31	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R32	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R33	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R34	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R35	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R36	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R37	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R38	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R39	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R40	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R41	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R42	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R43	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R44	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R45	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R47	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R48	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R49	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R50	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R51	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R52	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R53	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R54	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R55	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R56	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R57	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R58	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R59	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R60	1-216-816-11 s	RESISTOR, CHIP 390 1/16W 1608
R61	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R62	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R63	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R64	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R65	1-216-841-11 s	RESISTOR, CHIP 47K 1/16W 1608
R66	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R67	1-216-815-11 s	RESISTOR,CHIP 330 1/16W 1608
R68	1-216-815-11 s	RESISTOR,CHIP 330 1/16W 1608
R69	1-216-815-11 s	RESISTOR,CHIP 330 1/16W 1608
R70	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R71	1-216-815-11 s	RESISTOR,CHIP 330 1/16W 1608
R72	1-216-820-11 s	RESISTOR, CHIP 820 1/16W 1608
R73	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R74	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R75	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R76	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R77	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R78	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R79	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R80	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R81	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R82	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R83	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R84	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R85	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R86	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R87	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R88	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R89	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R90	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R91	1-216-841-11 s	RESISTOR, CHIP 47K 1/16W 1608
R92	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R93	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R94	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R95	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R200	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R201	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R202	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R203	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R204	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R205	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R206	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R207	1-216-851-11 s	RESISTOR,CHIP 330K 1/16W 1608
R208	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R209	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R210	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R211	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R212	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R213	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R214	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R215	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R216	1-216-861-11 s	RESISTOR,CHIP 2.2M 1/16W 1608
R217	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R218	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R219	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R220	1-216-827-11 s	RESISTOR, CHIP 3.3K 1/16W 1608
R221	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R222	1-216-838-11 s	RESISTOR CHIP 27K 1/16W(1608)
R223	1-216-827-11 s	RESISTOR, CHIP 3.3K 1/16W 1608
R224	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R225	1-216-838-11 s	RESISTOR CHIP 27K 1/16W(1608)
R226	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R227	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R228	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R229	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R230	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R231	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R232	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R233	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R234	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R235	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R236	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R237	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R238	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R239	1-218-890-11 s	RESISTOR,CHIP 62K 1/16W(1608)
R240	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R241	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R242	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R243	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R244	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R245	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608



## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R246	1-216-864-11	s CONDUCTOR, CHIP (1608)
R247	1-216-857-11	s RESISTOR, CHIP 1M 1/16W(1608)
R248	1-216-815-11	s RESISTOR, CHIP 330 1/16W 1608
R249	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R250	1-216-857-11	s RESISTOR, CHIP 1M 1/16W(1608)
R251	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R252	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R253	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R254	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R255	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R256	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R257	1-218-882-11	s RESISTOR, CHIP 30K 1/16W(1608)
R258	1-218-858-11	s RESISTOR, CHIP 3K 1/16W (1608)
R259	1-218-851-11	s RESISTOR, CHIP 1.5K 1/16W(1608)
R260	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R261	1-211-990-11	s RESISTOR, CHIP 75 1/16W (1608)
R262	1-216-826-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R263	1-216-826-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R264	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R265	1-216-826-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R266	1-216-826-11	s RESISTOR, CHIP 2.7K 1/16W(1608)
R267	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R268	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R269	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R270	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R271	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R272	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R273	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R274	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R275	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R276	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R277	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R278	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R279	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R280	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R281	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R282	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R283	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R300	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R301	1-216-843-11	s RESISTOR, CHIP 68K 1/16W (1608)
R302	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R303	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R304	1-216-861-11	s RESISTOR, CHIP 2.2M 1/16W 1608
R305	1-216-861-11	s RESISTOR, CHIP 2.2M 1/16W 1608
R306	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R307	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R308	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R309	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R310	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R311	1-216-851-11	s RESISTOR, CHIP 330K 1/16W 1608
R312	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R313	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R314	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R315	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R316	1-216-852-11	s RESISTOR, CHIP 390K 1/16W 1608
R317	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R318	1-216-838-11	s RESISTOR, CHIP 27K 1/16W(1608)
R319	1-216-857-11	s RESISTOR, CHIP 1M 1/16W(1608)
R320	1-216-857-11	s RESISTOR, CHIP 1M 1/16W(1608)

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R321	1-216-855-11	s RESISTOR, CHIP 680K 1/16W 1608
R322	1-216-855-11	s RESISTOR, CHIP 680K 1/16W 1608
R323	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R324	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R325	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R326	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R327	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R328	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R329	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R330	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R331	1-216-864-11	s CONDUCTOR, CHIP (1608)
R332	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R333	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R401	1-218-848-11	s RESISTOR, CHIP 1.1K 1/16W(1608)
R402	1-218-848-11	s RESISTOR, CHIP 1.1K 1/16W(1608)
R404	1-218-848-11	s RESISTOR, CHIP 1.1K 1/16W(1608)
R405	1-218-848-11	s RESISTOR, CHIP 1.1K 1/16W(1608)
R406	1-216-864-11	s CONDUCTOR, CHIP (1608)
R407	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R408	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R412	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R413	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R414	1-216-829-11	s RESISTOR, CHIP 4.7K 1/16W(1608)
R415	1-216-829-11	s RESISTOR, CHIP 4.7K 1/16W(1608)
R416	1-216-864-11	s CONDUCTOR, CHIP (1608)
R417	1-216-864-11	s CONDUCTOR, CHIP (1608)
R420	1-218-872-11	s RESISTOR, CHIP 11K 1/16W (1608)
R421	1-218-872-11	s RESISTOR, CHIP 11K 1/16W (1608)
R423	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R425	1-218-866-11	s RESISTOR, CHIP 6.2K 1/16W(1608)
R426	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R427	1-218-866-11	s RESISTOR, CHIP 6.2K 1/16W(1608)
R428	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R429	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R430	1-218-863-11	s RESISTOR, CHIP 4.7K 1/16W(1608)
R431	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R432	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R433	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R434	1-218-887-11	s RESISTOR, CHIP 47K 1/16W (1608)
R435	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R436	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R437	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R438	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R439	1-216-837-11	s RESISTOR, CHIP 22K 1/16W 1608
R440	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R441	1-218-839-11	s RESISTOR, CHIP 470 1/16W (1608)
R442	1-211-990-11	s RESISTOR, CHIP 75 1/16W (1608)
R443	1-218-845-11	s RESISTOR, CHIP 820 1/16W (1608)
R444	1-216-829-11	s RESISTOR, CHIP 4.7K 1/16W(1608)
R445	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R446	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R447	1-216-864-11	s CONDUCTOR, CHIP (1608)
R448	1-216-864-11	s CONDUCTOR, CHIP (1608)
R451	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R452	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R453	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R454	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R455	1-216-829-11	s RESISTOR, CHIP 4.7K 1/16W(1608)
R456	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R457	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R458	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R459	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R460	1-216-801-11 s	RESISTOR,CHIP 22 1/16W (1608)
R461	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R462	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R463	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R464	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R467	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R468	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R469	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R470	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R471	1-216-846-11 s	RESISTOR,CHIP 120K 1/16W (1608)
R472	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R474	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R475	1-216-841-11 s	RESISTOR, CHIP 47K 1/16W 1608
R476	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R477	1-216-841-11 s	RESISTOR, CHIP 47K 1/16W 1608
R478	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R479	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R480	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R481	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R482	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R483	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R484	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R485	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R486	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R487	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R488	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R489	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R490	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R491	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R492	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R493	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R494	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R497	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R498	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R499	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R500	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R501	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R502	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R503	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R504	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R505	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R506	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R507	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R508	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R510	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R512	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R513	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R514	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R515	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R516	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R517	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R518	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R522	1-218-872-11 s	RESISTOR,CHIP 11K 1/16W (1608)
R523	1-218-872-11 s	RESISTOR,CHIP 11K 1/16W (1608)
R524	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R601	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R602	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R603	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R604	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R605	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R608	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R609	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R610	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R611	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R612	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R613	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R614	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R615	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R616	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R617	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R618	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R619	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R620	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R621	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R622	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R623	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R624	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R625	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R626	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R627	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R628	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R629	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R630	1-218-877-11 s	RESISTOR,CHIP 18K 1/16W (1608)
R631	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R632	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R633	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R635	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R636	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R637	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R638	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R639	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R640	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R641	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R642	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R643	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R644	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R645	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R646	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R647	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R649	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R650	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R651	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R652	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R653	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R654	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R656	1-216-864-11 s	CONDUCTOR, CHIP (1608)
R657	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R658	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R659	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R660	1-218-476-11 s	RESISTOR,CHIP 180 1/4W (3225)
R661	1-218-866-11 s	RESISTOR,CHIP 6.2K 1/16W(1608)
R702	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R703	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R705	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R707	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R708	1-216-864-11	s CONDUCTOR, CHIP (1608)
R715	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R717	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R718	1-218-849-11	s RESISTOR, CHIP 1.2K 1/16W (1608)
R719	1-218-849-11	s RESISTOR, CHIP 1.2K 1/16W (1608)
R720	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W (1608)
R721	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R722	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R728	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R729	1-216-829-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R730	1-216-829-11	s RESISTOR, CHIP 4.7K 1/16W (1608)
R731	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R733	1-211-969-11	s RESISTOR, CHIP 10 1/16W (1608)
R736	1-211-969-11	s RESISTOR, CHIP 10 1/16W (1608)
R738	1-211-969-11	s RESISTOR, CHIP 10 1/16W (1608)
R801	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R802	1-216-805-11	s RESISTOR, CHIP 47 1/16W 1608
R803	1-216-849-11	s RESISTOR, CHIP 220K 1/16W 1608
R804	1-218-740-11	s RESISTOR, CHIP 100K 1/16W (1608)
R805	1-219-365-11	s RESISTOR, CHIP
R806	1-218-740-11	s RESISTOR, CHIP 100K 1/16W (1608)
R807	1-218-692-11	s RESISTOR, CHIP 1.0K 1/16W (1608)
R808	1-218-740-11	s RESISTOR, CHIP 100K 1/16W (1608)
R809	1-218-740-11	s RESISTOR, CHIP 100K 1/16W (1608)
R812	1-216-864-11	s CONDUCTOR, CHIP (1608)
RB1	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB2	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB3	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB4	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB5	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB6	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB7	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB8	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB9	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB10	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB11	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB12	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB202	1-239-711-11	s NETWORK, RESISTOR 0 (1608)
RB203	1-239-310-11	s RESISTOR ARRAY, CHIP 220K
RB204	1-239-310-11	s RESISTOR ARRAY, CHIP 220K
RB207	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB208	1-239-426-11	s NETWORK RESISTOR 2.2K (1608)
RB209	1-239-426-11	s NETWORK RESISTOR 2.2K (1608)
RB210	1-239-426-11	s NETWORK RESISTOR 2.2K (1608)
RB211	1-239-426-11	s NETWORK RESISTOR 2.2K (1608)
RB212	1-239-426-11	s NETWORK RESISTOR 2.2K (1608)
RB801	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB802	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB803	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB804	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB805	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB806	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RB807	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB808	1-236-908-11	s RESISTOR, NETWORK 10K (3216)
RB809	1-239-444-11	s NETWORK, RESISTOR 220K (1608)
RV401	1-230-337-11	s RESISTOR, VAR, CARBON 10K
RV402	1-230-337-11	s RESISTOR, VAR, CARBON 10K
RV403	1-225-907-11	s RESISTOR ADJ, CERMET (3TYPE) 100K
RV601	1-225-903-11	s RESISTOR ADJ, CERMET 22K

## (FP-118A BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RV602	1-225-903-11	s RESISTOR ADJ, CERMET 22K
RV603	1-230-337-11	s RESISTOR, VAR, CARBON 10K
RV604	1-230-337-11	s RESISTOR, VAR, CARBON 10K
S1	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S2	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S3	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S4	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S5	1-771-141-11	s SWITCH, SLIDE
S6	1-771-141-11	s SWITCH, SLIDE
S200	1-570-832-11	s SWITCH, SLIDE (2-2-3)
S201	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S203	1-570-838-11	s SWITCH, SLIDE (2-2-2)
S401	1-771-323-11	s SWITCH, SLIDE
S402	1-771-323-11	s SWITCH, SLIDE
S403	1-771-140-11	s SWITCH, SLIDE
S404	1-771-140-11	s SWITCH, SLIDE
S501	1-771-323-11	s SWITCH, SLIDE
S801	1-771-141-11	s SWITCH, SLIDE
S802	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S803	1-771-140-11	s SWITCH, SLIDE
S804	1-771-140-11	s SWITCH, SLIDE
S805	1-771-140-11	s SWITCH, SLIDE
S806	1-771-140-11	s SWITCH, SLIDE
S807	1-771-140-11	s SWITCH, SLIDE
S808	1-771-141-11	s SWITCH, SLIDE
S809	1-771-140-11	s SWITCH, SLIDE
S810	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S811	1-570-711-11	s SWITCH, SLIDE
TP1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP200	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP201	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP401	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP402	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP601	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP602	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP603	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
X1	1-760-655-21	s VIBRATOR, CRYSTAL
X2	1-760-655-21	s VIBRATOR, CRYSTAL
X200	1-579-843-11	s OSCILLATOR, CRYSTAL
X201	1-760-458-21	s VIBRATOR, CRYSTAL
X202	1-760-272-22	s VIBRATOR, CRYSTAL

FP-122 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-994-A	o MOUNTED CIRCUIT BOARD, FP-122
1pc	3-604-372-01	o SPACER LCD (ABS)
1pc	3-679-501-01	o COVER, RUBBER KEY BOARD
2pcs	7-685-102-19	s SCREW +PTP2X4
C1	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C2	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C3	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C4	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C5	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C7	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C8	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C9	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C10	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C11	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C12	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C13	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C14	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C15	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C16	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C17	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C18	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C19	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C20	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C21	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C200	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C203	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C204	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C205	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C206	1-162-918-11	s CAPACITOR, CERAMIC 18PF/50V CH
C207	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C208	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C209	1-126-397-11	s CAPACITOR, ELECT 33MF/25V(CHIP)
C210	1-126-397-11	s CAPACITOR, ELECT 33MF/25V(CHIP)
C211	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C212	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-164-739-11	s CAPACITOR, CERAMIC 560PF (1608)
C214	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C215	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C216	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C217	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C218	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C219	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C220	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C221	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C222	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C223	1-165-112-11	s CAPACITOR, CERAMIC 0.33MF/16V F
C224	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C225	1-164-730-11	s CAPACITOR, CERAMIC 1200RF (M-)
C226	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C227	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C228	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C229	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C300	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C301	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C302	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C303	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C304	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)

(FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C305	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C306	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C307	1-126-402-11	s CAPACITOR, ELECT 2.2MF/50V
C308	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C309	1-126-402-11	s CAPACITOR, ELECT 2.2MF/50V
C310	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C311	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C312	1-126-395-11	s CAPACITOR, ELECT 22MF/16V(CHIP)
C313	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C314	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C315	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C316	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C317	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C318	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C401	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C402	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C403	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C404	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C405	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C406	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C407	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C408	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C409	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C410	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C411	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C412	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C413	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C414	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C415	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C416	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C417	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C418	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C419	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C420	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C421	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C422	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C423	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C424	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C425	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C426	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C427	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C428	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C429	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C430	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C431	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C434	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C435	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C436	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C437	1-135-210-11	s CAPACITOR, TANTALUM 4.7MF/10V
C438	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C439	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C440	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C441	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C442	1-126-393-11	s CAPACITOR, ELECT 33MF/10V(CHIP)
C443	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C444	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C445	1-115-154-11	s CAPACITOR, ELECT 10MF/16V(BP)
C446	1-115-154-11	s CAPACITOR, ELECT 10MF/16V(BP)
C447	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C448	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C449	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C451	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C453	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C454	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C455	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C456	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C457	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C601	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C602	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C603	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C604	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C605	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C606	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C607	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C608	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C609	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C610	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C611	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C613	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C614	1-126-393-11	s CAPACITOR, ELECT 33MF/10V (CHIP)
C615	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C616	1-126-393-11	s CAPACITOR, ELECT 33MF/10V (CHIP)
C617	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C618	1-126-395-11	s CAPACITOR, ELECT 22MF/16V (CHIP)
C619	1-126-412-11	s CAPACITOR, ELECT 220MF/4V (CHIP)
C620	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C621	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C622	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C623	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C624	1-164-346-11	s CAPACITOR, CHIP CERAMIC 1MF/16V
C625	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C706	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C707	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C718	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C719	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C801	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C802	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C804	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
CN1	1-778-652-11	o CONNECTOR, FFC (ZIF) 50P
CN2	1-778-652-11	o CONNECTOR, FFC (ZIF) 50P
CN3	1-778-651-11	o CONNECTOR, FFC (ZIF) 40P
CN4	1-695-931-11	o CONNECTOR, FPC (10P)
CN5	1-580-056-21	o PIN, CONNECTOR 3P
CN8	1-695-931-11	o CONNECTOR, FPC (10P)
CV200	1-141-345-11	s CAPACITOR, TRIMMER (CHIP) 40PF
D1	8-719-059-49	s LED EBR3368S
D200	8-719-938-72	s DIODE SB01-05CP (RECTI)
D201	8-719-106-31	s DIODE RD8.2M-B1
D202	8-719-105-90	s DIODE RD5.6M-B1
D203	8-719-106-61	s DIODE RD11M-B1
D204	8-719-105-90	s DIODE RD5.6M-B1
D205	8-719-059-52	s DIODE MA3J14300LSO
D206	8-719-059-52	s DIODE MA3J14300LSO
D207	8-719-105-28	s DIODE RD2.4M-B
D208	8-719-105-28	s DIODE RD2.4M-B
D209	8-719-987-41	s LED CL-150Y-CD

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D210	8-719-987-41	s LED CL-150Y-CD
D211	8-719-987-41	s LED CL-150Y-CD
D212	8-719-987-41	s LED CL-150Y-CD
D213	8-719-987-41	s LED CL-150Y-CD
D214	8-719-987-41	s LED CL-150Y-CD
D215	8-719-987-41	s LED CL-150Y-CD
D216	8-719-987-41	s LED CL-150Y-CD
D217	8-719-820-41	s DIODE 1SS302
D300	8-719-938-72	s DIODE SB01-05CP (RECTI)
D301	8-719-938-72	s DIODE SB01-05CP (RECTI)
D302	8-719-938-72	s DIODE SB01-05CP (RECTI)
D303	8-719-059-51	s DIODE MA3J142E0LSO
D401	8-719-059-52	s DIODE MA3J14300LSO
D402	8-719-059-52	s DIODE MA3J14300LSO
D501	8-719-059-52	s DIODE MA3J14300LSO
D502	8-719-404-35	s DIODE MA141WK
D503	8-719-404-35	s DIODE MA141WK
D504	8-719-404-35	s DIODE MA141WK
D605	8-719-820-41	s DIODE 1SS302
D703	8-719-820-41	s DIODE 1SS302
D704	8-719-820-41	s DIODE 1SS302
E1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E401	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E501	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
FB801	1-414-135-11	s MICRO INDUCTOR (CHIP) 21A10
IC2	8-759-327-65	s IC CXD8525N (E2)
IC3	8-752-913-33	s IC CXE901016-605Q
IC4	8-759-927-12	s IC SN74HCT244NS
IC6	8-759-524-04	s IC TC74VHC125FT (BL)
IC200	8-759-643-27	s IC UPD78064GF-146-3BA
IC201	8-759-175-77	s IC CXD8384Q
IC202	8-759-289-80	s IC LC75821W-DS
IC203	8-759-442-54	s IC RH5RL50AA-T1
IC204	8-759-464-95	s IC AK6420AP-E2
IC205	8-759-035-93	s IC SC7S32F
IC206	8-759-209-57	s IC TC4S69F
IC207	8-759-669-45	s IC TL062CPWR-12
IC208	8-759-745-64	s IC NJM4560M
IC209	8-759-082-60	s IC TC7S66FU
IC210	8-759-058-64	s IC TC7S32FU-TE85R
IC300	8-759-087-73	s IC S-80745AN-D9-S
IC301	8-759-504-40	s IC S80741AL-A5
IC302	8-759-442-54	s IC RH5RL50AA-T1
IC303	8-759-442-54	s IC RH5RL50AA-T1
IC401	8-759-422-21	s IC NJM4580VTE2
IC403	8-759-422-21	s IC NJM4580VTE2
IC404	8-759-422-21	s IC NJM4580VTE2
IC405	8-759-422-21	s IC NJM4580VTE2
IC406	8-759-082-61	s IC TC4W53FU
IC407	8-759-082-61	s IC TC4W53FU
IC408	8-759-701-01	s IC NJM2904M
IC409	8-759-111-56	s IC UPC4572G2
IC410	8-759-111-56	s IC UPC4572G2
IC411	8-759-422-21	s IC NJM4580VTE2
IC412	8-759-422-21	s IC NJM4580VTE2
IC413	8-759-422-21	s IC NJM4580VTE2



## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC414	8-759-422-21 s	IC NJM4580VTE2
IC415	8-759-431-95 s	IC S-81230SGUP-DQB-T1
IC416	8-759-422-21 s	IC NJM4580VTE2
IC601	8-759-745-64 s	IC NJM4560M
IC602	8-759-745-64 s	IC NJM4560M
IC605	8-759-530-28 s	IC TC4066BFT
IC606	8-759-745-64 s	IC NJM4560M
IC607	8-759-431-97 s	IC NJM386M(Te2)
IC701	8-759-710-77 s	IC NJM4560MD
IC705	8-759-530-05 s	IC TC4053BFT (EL.N)
IC801	8-759-058-62 s	IC TC7S08FU-TE85R
IC802	8-759-058-58 s	IC TC7S04FU-TE85R
IC803	8-759-236-51 s	IC TC74HC165AF (EL)
IC804	8-759-236-51 s	IC TC74HC165AF (EL)
L1	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L2	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L3	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L200	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L300	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L301	1-410-381-11 s	INDUCTOR,CHIP 10UH (3225)
L501	1-412-282-41 s	INDUCTOR INDUCTOR 470UH (3225)
L601	1-414-402-11 s	INDUCTOR (SMD) 47UH
L701	1-412-955-11 s	INDUCTOR 22UH (2520)
LI300	1-550-414-31 s	HOLDER, BATTERY
ND200	1-801-621-21 o	DISPLAY, LCD
PH401	1-808-252-11 s	PHOTO COUPLER M30
Q1	8-729-106-60 s	TRANSISTOR 2SB1115A
Q2	8-729-042-52 s	TRANSISTOR IMT1AT108
Q3	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q4	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q5	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q6	8-729-929-73 s	TRANSISTOR UMG8-TL
Q7	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q8	8-729-929-73 s	TRANSISTOR UMG8-TL
Q9	8-729-929-52 s	TRANSISTOR UMA9-TR
Q10	8-729-927-74 s	TRANSISTOR UMG2
Q11	8-729-028-73 s	TRANSISTOR DTA114EUA-T106
Q12	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q13	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q201	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q202	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q203	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q204	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q205	8-729-028-91 s	TRANSISTOR DTA144EUA-T106
Q300	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q301	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q302	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q303	8-729-142-90 s	TRANSISTOR 2SK853-K5
Q304	8-729-042-52 s	TRANSISTOR IMT1AT108
Q305	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q306	8-729-907-26 s	TRANSISTOR IMX1
Q307	8-729-042-52 s	TRANSISTOR IMT1AT108
Q308	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q401	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q402	8-729-014-86 s	TRANSISTOR 2SC4207-YGR-TE85L
Q403	8-729-905-35 s	TRANSISTOR 2SC4081-R

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q404	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q405	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q406	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q407	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q408	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q409	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q410	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q411	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q412	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q413	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q414	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q415	8-729-905-35 s	TRANSISTOR 2SC4081-R
Q501	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q502	8-729-925-47 s	TRANSISTOR IMB2
Q504	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q505	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q506	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q507	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q508	8-729-141-75 s	TRANSISTOR 2SD596DV345
Q509	8-729-026-52 s	TRANSISTOR 2SA1576A-T106-R
Q510	8-729-141-48 s	TRANSISTOR 2SB624-BV345
Q511	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q512	8-729-141-75 s	TRANSISTOR 2SD596DV345
Q513	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q514	8-729-141-75 s	TRANSISTOR 2SD596DV345
Q515	8-729-029-14 s	TRANSISTOR DTC144EUA-T106
Q516	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q701	8-729-209-07 s	TRANSISTOR 2SC4213-B
Q702	8-729-209-07 s	TRANSISTOR 2SC4213-B
R1	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R2	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R3	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R4	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R5	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R6	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R7	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R8	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R9	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R10	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R11	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R12	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R13	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R14	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R15	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R16	1-216-830-11 s	RESISTOR,CHIP 5.6K 1/16W 1608
R17	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R18	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R19	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R20	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R21	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R22	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R23	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R24	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R25	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R26	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R27	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R28	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R29	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R30	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R31	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R32	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R33	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R34	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R35	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R36	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R37	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R38	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R39	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R40	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R41	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R42	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R43	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R44	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R45	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R47	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R48	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R49	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R50	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R51	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R52	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R53	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R54	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R55	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R56	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R57	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R58	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R59	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R60	1-216-816-11	s RESISTOR,CHIP 390 1/16W 1608
R61	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R62	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R63	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R64	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R65	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R66	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R67	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R68	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R69	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R70	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R71	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R72	1-216-820-11	s RESISTOR,CHIP 820 1/16W 1608
R73	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R74	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R75	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R76	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R77	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R78	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R79	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R80	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R81	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R82	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R83	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R84	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R85	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R86	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R87	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R88	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R89	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R90	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R91	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R92	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R93	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R94	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R95	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R200	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R201	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R202	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R203	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R204	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R205	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R206	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R207	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R208	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R209	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R210	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R211	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R212	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R213	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R214	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R215	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R216	1-216-861-11	s RESISTOR,CHIP 2.2M 1/16W 1608
R217	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R218	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R219	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R220	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R221	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R222	1-216-838-11	s RESISTOR,CHIP 27K 1/16W(1608)
R223	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R224	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R225	1-216-838-11	s RESISTOR,CHIP 27K 1/16W(1608)
R226	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R227	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R228	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R229	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R230	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R231	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R232	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R233	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R234	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R235	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R236	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R237	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R238	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R239	1-218-890-11	s RESISTOR,CHIP 62K 1/16W(1608)
R240	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R241	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R242	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R243	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R244	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R245	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R246	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R247	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R248	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R249	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R250	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R251	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R252	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R253	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)



## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R254	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R255	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R256	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R257	1-218-882-11	s RESISTOR,CHIP 30K 1/16W(1608)
R258	1-218-858-11	s RESISTOR,CHIP 3K 1/16W (1608)
R259	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R260	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R261	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R262	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R263	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R264	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R265	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R266	1-216-826-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R267	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R268	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R269	1-218-880-11	s RESISTOR,CHIP 24K 1/16W (1608)
R270	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R271	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R272	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R273	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R274	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R275	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R276	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R277	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R278	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R279	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R280	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R281	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R282	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R283	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R300	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R301	1-216-843-11	s RESISTOR,CHIP 68K 1/16W (1608)
R302	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R303	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R304	1-216-861-11	s RESISTOR,CHIP 2.2M 1/16W 1608
R305	1-216-861-11	s RESISTOR,CHIP 2.2M 1/16W 1608
R306	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R307	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R308	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R309	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R310	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R311	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R312	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R313	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R314	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R315	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R316	1-216-852-11	s RESISTOR,CHIP 390K 1/16W 1608
R317	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R318	1-216-838-11	s RESISTOR,CHIP 27K 1/16W(1608)
R319	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R320	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R321	1-216-855-11	s RESISTOR,CHIP 680K 1/16W 1608
R322	1-216-855-11	s RESISTOR,CHIP 680K 1/16W 1608
R323	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R324	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R325	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R326	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R327	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R328	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R329	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R330	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R331	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R332	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R333	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R401	1-218-848-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
R402	1-218-848-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
R404	1-218-848-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
R405	1-218-848-11	s RESISTOR,CHIP 1.1K 1/16W(1608)
R406	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R407	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R408	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R412	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R413	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R414	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R415	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R416	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R417	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R420	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
R421	1-218-872-11	s RESISTOR,CHIP 11K 1/16W (1608)
R423	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R425	1-218-866-11	s RESISTOR,CHIP 6.2K 1/16W(1608)
R426	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R427	1-218-866-11	s RESISTOR,CHIP 6.2K 1/16W(1608)
R428	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R429	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R430	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R431	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R432	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R433	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R434	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R435	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R436	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R437	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R438	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R439	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R440	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R441	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R442	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R443	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R444	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R445	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R446	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R447	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R448	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R451	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R452	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R453	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R454	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R455	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R456	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R457	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R458	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R459	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R460	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R461	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R462	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R463	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R464	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R467	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R468	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R469	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R470	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R471	1-216-846-11 s	RESISTOR,CHIP 120K 1/16W (1608)
R472	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R474	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R475	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R476	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R477	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R478	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R479	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R480	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R481	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R482	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R483	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R484	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R485	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R486	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R487	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R488	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R489	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R490	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R491	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R492	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R493	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R494	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R497	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R498	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R499	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R500	1-216-849-11 s	RESISTOR,CHIP 220K 1/16W 1608
R501	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R502	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R503	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R504	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R505	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R506	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R507	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R508	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R510	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R512	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R513	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R514	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R515	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R516	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R517	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R518	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R522	1-218-872-11 s	RESISTOR,CHIP 11K 1/16W (1608)
R523	1-218-872-11 s	RESISTOR,CHIP 11K 1/16W (1608)
R524	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R601	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R602	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R603	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R604	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R605	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R608	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R609	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R610	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R611	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R612	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R613	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R614	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R615	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R616	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R617	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R618	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R619	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R620	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R621	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R622	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R623	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R624	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R625	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R626	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R627	1-216-817-11 s	RESISTOR,CHIP 470 1/16W 1608
R628	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R629	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R630	1-218-877-11 s	RESISTOR,CHIP 18K 1/16W (1608)
R631	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R632	1-218-881-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R633	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R635	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R636	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R637	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R638	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R639	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R640	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R641	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R642	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R643	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R644	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R645	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R646	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R647	1-216-797-11 s	RESISTOR,CHIP 10 1/16W 1608
R649	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R650	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R651	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R652	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R653	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R654	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R656	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R657	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R658	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R659	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R660	1-218-476-11 s	RESISTOR,CHIP 180 1/4W (3225)
R661	1-218-866-11 s	RESISTOR,CHIP 6.2K 1/16W(1608)
R702	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R703	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R705	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R707	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R708	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R715	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R717	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608
R718	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R719	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R720	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R721	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R722	1-216-841-11 s	RESISTOR,CHIP 47K 1/16W 1608

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R728	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R729	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R730	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R731	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R733	1-211-969-11	s RESISTOR,CHIP 10 1/16W (1608)
R736	1-211-969-11	s RESISTOR,CHIP 10 1/16W (1608)
R738	1-211-969-11	s RESISTOR,CHIP 10 1/16W (1608)
R801	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R802	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R803	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
RB1	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
RB2	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB3	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB4	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB5	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB6	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB7	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB8	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB9	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB10	1-239-412-11	s NETWORK,RESISTOR 100 (1608)
RB11	1-239-412-11	s NETWORK,RESISTOR 100 (1608)
RB12	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB202	1-239-711-11	s NETWORK,RESISTOR 0 (1608)
RB203	1-239-310-11	s RESISTOR,ARRAY, CHIP 220K
RB204	1-239-310-11	s RESISTOR,ARRAY, CHIP 220K
RB207	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB208	1-239-426-11	s NETWORK,RESISTOR 2.2K (1608)
RB209	1-239-426-11	s NETWORK,RESISTOR 2.2K (1608)
RB210	1-239-426-11	s NETWORK,RESISTOR 2.2K (1608)
RB211	1-239-426-11	s NETWORK,RESISTOR 2.2K (1608)
RB212	1-239-426-11	s NETWORK,RESISTOR 2.2K (1608)
RB801	1-239-621-11	s NETWORK,RESISTOR 22 (1608)
RB802	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB803	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB804	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB805	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB806	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB807	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB808	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB809	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RV401	1-230-337-11	s RESISTOR,VAR,CARBON 10K
RV402	1-230-337-11	s RESISTOR,VAR,CARBON 10K
RV403	1-223-278-11	s RESISTOR,ADJ,100K
RV601	1-223-276-11	s RESISTOR,ADJ, 22K
RV602	1-223-276-11	s RESISTOR,ADJ, 22K
RV603	1-230-337-11	s RESISTOR,VAR,CARBON 10K
RV604	1-230-337-11	s RESISTOR,VAR,CARBON 10K
S1	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S2	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S3	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S4	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S5	1-771-141-11	s SWITCH, SLIDE
S6	1-771-141-11	s SWITCH, SLIDE
S200	1-570-832-11	s SWITCH,SLIDE (2-2-3)
S201	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S203	1-570-838-11	s SWITCH,SLIDE (2-2-2)
S401	1-771-323-11	s SWITCH, SLIDE
S402	1-771-323-11	s SWITCH, SLIDE

## (FP-122 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S403	1-771-140-11	s SWITCH, SLIDE
S404	1-771-140-11	s SWITCH, SLIDE
S501	1-771-323-11	s SWITCH, SLIDE
S801	1-771-141-11	s SWITCH, SLIDE
S802	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S803	1-771-140-11	s SWITCH, SLIDE
S804	1-771-141-11	s SWITCH, SLIDE
S805	1-771-140-11	s SWITCH, SLIDE
S806	1-771-140-11	s SWITCH, SLIDE
S807	1-771-140-11	s SWITCH, SLIDE
S808	1-771-141-11	s SWITCH, SLIDE
S809	1-771-140-11	s SWITCH, SLIDE
S810	1-570-909-11	s SWITCH, TACTIL (REFLOW TYPE)
S811	1-570-711-11	s SWITCH,SLIDE
TP1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP200	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP201	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP401	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP402	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP601	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP602	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP603	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
X1	1-760-655-21	s VIBRATOR, CRYSTAL
X2	1-760-655-21	s VIBRATOR, CRYSTAL
X200	1-579-843-11	s OSCILLATOR, CRYSTAL
X201	1-760-458-21	s VIBRATOR, CRYSTAL
X202	1-760-272-22	s VIBRATOR, CRYSTAL

-----  
FP-99 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8318-233-A	o MOUNTED CIRCUIT BOARD, FP-99
C801	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C802	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C803	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C805	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C808	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C809	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C810	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C811	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C812	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C813	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C814	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C815	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C816	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C817	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C818	1-162-962-11	s CAPACITOR,CERAMIC 470PF/50V(B)
C819	1-162-962-11	s CAPACITOR,CERAMIC 470PF/50V(B)
C820	1-162-962-11	s CAPACITOR,CERAMIC 470PF/50V(B)
C821	1-162-962-11	s CAPACITOR,CERAMIC 470PF/50V(B)
C822	1-162-962-11	s CAPACITOR,CERAMIC 470PF/50V(B)
CN801	1-695-931-11	o CONNECTOR, FPC (10P)
CN802	1-573-768-21	o PIN, CONNECTOR (5P) (SMD) (1.5MM)
CN803	1-573-290-21	s PIN,CONNECTOR (4P) (SMD) (1.5MM)
CN804	1-573-290-21	s PIN,CONNECTOR (4P) (SMD) (1.5MM)
D801	8-719-989-97	s LED CL-150SD-CD
D802	8-719-989-97	s LED CL-150SD-CD
D803	8-719-047-59	s LED CL-150G-CD
D804	8-719-989-97	s LED CL-150SD-CD
D805	8-719-989-97	s LED CL-150SD-CD
D806	8-719-989-97	s LED CL-150SD-CD
FB801	1-414-135-11	s MICRO INDUCTOR (CHIP) 21A10
IC801	8-759-268-33	s IC SN74HC595ADB (R)
IC802	8-759-659-71	s IC SN74HC165APWR
IC803	8-759-659-71	s IC SN74HC165APWR
IC804	8-759-926-37	s IC SN74HC193ANS
IC805	8-759-082-59	s IC TC7W32FU
IC806	8-759-523-04	s IC TC74HC4538AFT
IC807	8-759-523-04	s IC TC74HC4538AFT
IC808	8-759-058-64	s IC TC7S32FU-TE85R
IC809	8-759-277-63	s IC TC7W14FU (TE12R)
L801	1-412-955-11	s INDUCTOR 22UH (2520)
Q801	8-729-907-26	s TRANSISTOR IMX1
Q802	8-729-907-26	s TRANSISTOR IMX1
Q803	8-729-907-26	s TRANSISTOR IMX1
R801	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R802	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R803	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R804	1-216-813-11	s RESISTOR,CHIP 220 1/16W 1608
R805	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R806	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R807	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R808	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R809	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R810	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R811	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)

(FP-99 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R812	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R813	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R814	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R815	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R816	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R821	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R822	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R823	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R824	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R825	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R826	1-218-912-11	s RESISTOR,CHIP 510K 1/16W(1608)
R827	1-216-803-11	s RESISTOR,CHIP 33 1/16W (1608)
R828	1-218-912-11	s RESISTOR,CHIP 510K 1/16W(1608)
R829	1-216-803-11	s RESISTOR,CHIP 33 1/16W (1608)
R830	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R831	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R834	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
RB801	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB802	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB803	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB804	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB805	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB806	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB807	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB808	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB809	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
S803	1-692-111-11	s SWITCH, KEY BOARD
S804	1-692-111-11	s SWITCH, KEY BOARD
S805	1-692-111-11	s SWITCH, KEY BOARD
S806	1-692-111-11	s SWITCH, KEY BOARD
S807	1-692-111-11	s SWITCH, KEY BOARD

-----  
GCN-16 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-170-A	o MOUNTED CIRCUIT BOARD, GCN-16
R101	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R102	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R103	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R104	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R105	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R106	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R107	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R108	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
S101	1-762-123-11	s SWITCH, TOGGLE
S102	1-762-123-11	s SWITCH, TOGGLE
S103	1-762-123-11	s SWITCH, TOGGLE
S104	1-762-531-11	s SWITCH, TOGGLE
W101	1-958-494-11	o HARNESS, SUB (GCN15-1)
W102	1-958-495-11	o HARNESS, SUB (GCN15-2)

-----  
HN-227 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8277-853-A	o MOUNTED CIRCUIT BOARD, HN-227
C1	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C2	1-110-569-11	s CAPACITOR,TANTALUM 47MF/6.3V
C3	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
CN511	1-778-647-11	o CONNECTOR, FFC (ZIF) 15P
CN512	1-778-647-11	o CONNECTOR, FFC (ZIF) 15P
CN513	1-766-654-21	s CONNECTOR, FFC/FPC 18P
CN514	1-778-646-11	o CONNECTOR, FFC (ZIF) 10P
CN515	1-764-520-11	s CONNECTOR, FFC/FPC (ZIF) 11P
CN516	1-695-320-21	o PIN, CONNECTOR(1.5MM)SMD 2P
CN517	1-695-320-21	o PIN, CONNECTOR(1.5MM)SMD 2P
IC1	8-759-469-26	s IC AK6480AF (E2)
R1	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R2	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
RB1	1-239-444-11	s NETWORK,RESISTOR 220K (1608)

-----  
IR-33 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
C204	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C205	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C206	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C208	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C209	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C210	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C212	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C213	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C214	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
CN203	1-764-087-21 s	PIN, CONNECTOR (PC BOARD) 14P
FB201	1-414-445-11 s	FERRITE, EMI (SMD)
FB202	1-414-445-11 s	FERRITE, EMI (SMD)
FB203	1-414-445-11 s	FERRITE, EMI (SMD)
FB204	1-414-445-11 s	FERRITE, EMI (SMD)
FB205	1-414-445-11 s	FERRITE, EMI (SMD)
FB206	1-414-445-11 s	FERRITE, EMI (SMD)
FB207	1-414-445-11 s	FERRITE, EMI (SMD)
FB208	1-414-445-11 s	FERRITE, EMI (SMD)
FB209	1-414-445-11 s	FERRITE, EMI (SMD)
FB210	1-414-445-11 s	FERRITE, EMI (SMD)
FB211	1-414-445-11 s	FERRITE, EMI (SMD)
FB212	1-414-445-11 s	FERRITE, EMI (SMD)
FB213	1-414-445-11 s	FERRITE, EMI (SMD)
FB214	1-414-445-11 s	FERRITE, EMI (SMD)

-----  
KY-405 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8318-188-A o	MOUNTED CIRCUIT BOARD, KY-405
CN1	1-695-931-11 o	CONNECTOR, FPC (10P)
D1	8-719-989-97 s	LED CL-150SD-CD
D2	8-719-989-97 s	LED CL-150SD-CD
D3	8-719-989-97 s	LED CL-150SD-CD
R1	1-216-819-11 s	RESISTOR,CHIP 680 1/16W 1608
R2	1-216-819-11 s	RESISTOR,CHIP 680 1/16W 1608
R3	1-216-819-11 s	RESISTOR,CHIP 680 1/16W 1608
S1	1-570-909-11 s	SWITCH, TACTIL (REFLOW TYPE)
S2	1-570-909-11 s	SWITCH, TACTIL (REFLOW TYPE)
S3	1-570-909-11 s	SWITCH, TACTIL (REFLOW TYPE)
S4	1-570-909-11 s	SWITCH, TACTIL (REFLOW TYPE)
S5	1-570-909-11 s	SWITCH, TACTIL (REFLOW TYPE)

-----  
LE-221 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-171-A o	MOUNTED CIRCUIT BOARD, LE-221
C701	1-163-021-91 s	CAPACITOR, CERAMIC 0.01MF/50V
C702	1-163-021-91 s	CAPACITOR, CERAMIC 0.01MF/50V
CN701	1-566-761-11 o	PIN,CONNECTOR (PC BOARD) 6P
CN702	1-566-758-11 o	PIN,CONNECTOR 3P
D701	8-719-032-78 s	LED GL3UR8
D702	8-719-032-78 s	LED GL3UR8
S701	1-570-608-11 s	SWITCH,TOGGLE

-----  
MB-833 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-150-B o	MOUNTED CIRCUIT BOARD, MB-833
CN1	1-778-652-11 o	CONNECTOR, FFC (ZIF) 50P
CN2	1-778-652-11 o	CONNECTOR, FFC (ZIF) 50P
CN3	1-778-651-11 o	CONNECTOR, FFC (ZIF) 40P
CN5	1-778-650-11 o	CONNECTOR, FFC (ZIF) 30P
CN9	1-764-177-11 o	PIN,CONNECTOR (7P) (SMD) (1.5MM)
CN10	1-778-652-11 o	CONNECTOR, FFC (ZIF) 50P
CN11	1-778-534-11 o	CONNECTOR, FFC (ZIF) 45P
CN13	1-784-629-11 o	CONNECTOR, BOARD TO BOARD 30P
CN14	1-778-652-11 o	CONNECTOR, FFC (ZIF) 50P
CN15	1-778-534-11 o	CONNECTOR, FFC (ZIF) 45P
CN16	1-778-652-11 o	CONNECTOR, FFC (ZIF) 50P
CN19	1-784-627-11 o	CONNECTOR, BOARD TO BOARD 60P
CN22	1-770-469-21 o	PIN, CONNECTOR (PC BOARD) 2P
CN23	1-695-320-21 o	PIN, CONNECTOR (1.5MM) SMD 2P

-----  
MT-114 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
S1	1-572-288-11 s	SWITCH, PUSH0 (1-1)

-----  
PA-205 BOARD  
-----

\*a: [Lot No. 911-335]  
\*b: [Lot No. 341-]

Ref. No. or Q'ty	Part No.	SP Description
C1	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C2	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C3	1-113-992-11	s CAPACITOR, TANTALUM 3.3MF/35V
C4	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C5	1-135-177-21	s CAPACITOR, TANTALUM 1MF/25V
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C9	1-135-070-00	s CAPACITOR, TANTALUM 0.1MF/35V
C10	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C12	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C13	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C14	1-162-911-11	s CAPACITOR, CERAMIC 6PF/50V 1608
C16	1-162-909-11	s CAPACITOR, CERAMIC 4PF/50V CH
C17	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C18	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C20	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C21	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
CN1	1-784-625-11	o CONNECTOR, FFC (ZIP) 30P
CN2	1-695-320-31	o PIN, CONNECTOR (1.5MM) (SMD) 2P
FB1	1-414-445-11	s FERRITE, EMI (SMD)
IC1	8-759-523-07	s IC TC74AC04FT (EL)
IC4	8-759-082-58	s IC TC7W08FU
IC5	8-752-052-72	s IC CXA1439M
L1	1-410-381-11	s INDUCTOR, CHIP 10UH (3225)
Q1	8-729-101-25	s TRANSISTOR 2SC1009A
Q3	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q4	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q7	8-729-117-72	s TRANSISTOR 2SC4178
Q8	8-729-905-35	s TRANSISTOR 2SC4081-R
Q9	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q10	8-729-117-72	s TRANSISTOR 2SC4178
R1	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R2	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R3	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R4	1-218-901-11	s RESISTOR, CHIP 180K 1/16W(1608)
R5	1-218-837-11	s RESISTOR, CHIP 390 1/16W (1608)
R6	1-218-881-11	s RESISTOR, CHIP 27K 1/16W(1608)
R7	*b 1-216-864-11	s CONDUCTOR, CHIP (1608)
	*a 1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R8	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R9	1-216-828-11	s RESISTOR, CHIP 3.9K 1/16W 1608
R10	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R11	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R12	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R13	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R16	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R19	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R20	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R21	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R22	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R23	1-218-853-11	s RESISTOR, CHIP 1.8K 1/16W(1608)
R24	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)

(PA-205 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R30	1-216-827-11	s RESISTOR, CHIP 3.3K 1/16W 1608
R31	1-216-827-11	s RESISTOR, CHIP 3.3K 1/16W 1608
R32	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R33	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R35	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R36	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R37	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R38	1-218-869-11	s RESISTOR, CHIP 8.2K 1/16W(1608)
R39	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R40	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R42	1-216-817-11	s RESISTOR, CHIP 470 1/16W 1608
RV1	1-241-263-11	s RESISTOR, ADJ 5K (CERMET)



-----  
PA-206 BOARD  
-----

\*a: [Lot No. 911-335]  
\*b: [Lot No. 341-]

Ref. No. or Q'ty	Part No.	SP Description
C1	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C2	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C3	1-113-992-11	s CAPACITOR, TANTALUM 3.3MF/35V
C4	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C5	1-135-177-21	s CAPACITOR, TANTALUM 1MF/25V
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C9	1-135-070-00	s CAPACITOR, TANTALUM 0.1MF/35V
C10	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C12	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C13	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C14	1-162-911-11	s CAPACITOR, CERAMIC 6PF/50V 1608
C16	1-162-909-11	s CAPACITOR, CERAMIC 4PF/50V CH
C17	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C18	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C20	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C21	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
CN1	1-784-625-11	o CONNECTOR, FFC (ZIF) 30P
CN2	1-695-320-71	o PIN, CONNECTOR (1.5MM) (SMD) 2P
FB1	1-414-445-11	s FERRITE, EMI (SMD)
IC1	8-759-523-07	s IC TC74AC04FT (EL)
IC3	8-759-075-53	s IC LM35DM
IC4	8-759-082-58	s IC TC7W08FU
IC5	8-752-052-72	s IC CXA1439M
L1	1-410-381-11	s INDUCTOR, CHIP 10UH (3225)
Q1	8-729-101-25	s TRANSISTOR 2SC1009A
Q3	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q4	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q7	8-729-117-72	s TRANSISTOR 2SC4178
Q8	8-729-905-35	s TRANSISTOR 2SC4081-R
Q9	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q10	8-729-117-72	s TRANSISTOR 2SC4178
R1	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R2	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R3	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R4	1-218-901-11	s RESISTOR, CHIP 180K 1/16W(1608)
R5	1-218-837-11	s RESISTOR, CHIP 390 1/16W (1608)
R6	1-218-881-11	s RESISTOR, CHIP 27K 1/16W(1608)
R7	*b 1-216-864-11	s CONDUCTOR, CHIP (1608)
	*a 1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R8	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R9	1-216-828-11	s RESISTOR, CHIP 3.9K 1/16W 1608
R10	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R11	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R12	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R13	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R16	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R19	1-218-846-11	s RESISTOR, CHIP 910 1/16W (1608)
R20	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R21	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R22	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)

(PA-206 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R23	1-218-853-11	s RESISTOR, CHIP 1.8K 1/16W(1608)
R24	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R30	1-216-827-11	s RESISTOR, CHIP 3.3K 1/16W 1608
R31	1-216-827-11	s RESISTOR, CHIP 3.3K 1/16W 1608
R32	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R33	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R35	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R36	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R37	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R38	1-218-869-11	s RESISTOR, CHIP 8.2K 1/16W(1608)
R39	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R40	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R41	1-218-854-11	s RESISTOR, CHIP 2K 1/16W (1608)

-----  
PA-207 BOARD  
-----

\*a: [Lot No. 911-335]  
\*b: [Lot No. 341-]

Ref. No. or Q'ty	Part No.	SP Description
C1	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C2	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C3	1-113-992-11	s CAPACITOR, TANTALUM 3.3MF/35V
C4	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C5	1-135-177-21	s CAPACITOR, TANTALUM 1MF/25V
C6	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C9	1-135-070-00	s CAPACITOR, TANTALUM 0.1MF/35V
C10	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C12	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C13	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C14	1-162-909-11	s CAPACITOR, CERAMIC 4PF/50V CH
C16	1-162-909-11	s CAPACITOR, CERAMIC 4PF/50V CH
C17	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C18	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C20	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C21	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
CN1	1-784-625-11	o CONNECTOR, FFC (ZIF) 30P
CN2	1-695-320-51	o PIN, CONNECTOR (1.5MM) (SMD) 2P
FB1	1-414-445-11	s FERRITE, EMI (SMD)
IC1	8-759-523-07	s IC TC74AC04FT (EL)
IC4	8-759-082-58	s IC TC7W08FU
IC5	8-752-052-72	s IC CXA1439M
L1	1-410-381-11	s INDUCTOR, CHIP 10UH (3225)
Q1	8-729-101-25	s TRANSISTOR 2SC1009A
Q3	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q4	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q7	8-729-117-72	s TRANSISTOR 2SC4178
Q8	8-729-905-35	s TRANSISTOR 2SC4081-R
Q9	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q10	8-729-117-72	s TRANSISTOR 2SC4178
R1	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R2	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R3	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R4	1-218-901-11	s RESISTOR, CHIP 180K 1/16W(1608)
R5	1-218-837-11	s RESISTOR, CHIP 390 1/16W (1608)
R6	1-218-881-11	s RESISTOR, CHIP 27K 1/16W(1608)
R7	*b 1-216-864-11	s CONDUCTOR, CHIP (1608)
	*a 1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R8	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R9	1-216-828-11	s RESISTOR, CHIP 3.9K 1/16W 1608
R10	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R11	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R12	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R13	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R16	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R19	1-218-851-11	s RESISTOR, CHIP 1.5K 1/16W(1608)
R20	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R21	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R22	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R23	1-218-853-11	s RESISTOR, CHIP 1.8K 1/16W(1608)
R24	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)

(PA-207 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R30	1-216-827-11	s RESISTOR, CHIP 3.3K 1/16W 1608
R31	1-216-827-11	s RESISTOR, CHIP 3.3K 1/16W 1608
R32	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R33	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R35	1-216-789-11	s RESISTOR, CHIP 2.2 1/16W(1608)
R36	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R37	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R38	1-218-869-11	s RESISTOR, CHIP 8.2K 1/16W(1608)
R39	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R40	1-218-855-11	s RESISTOR, CHIP 2.2K 1/16W(1608)
R42	1-216-822-11	s RESISTOR, CHIP 1.2K 1/16W 1608
RV1	1-241-263-11	s RESISTOR, ADJ 5K (CERMET)

-----  
PS-570 BOARD  
-----

\*a: [Lot No. 245-264]  
\*b: [Lot No. 265-]

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-176-A	o MOUNTED CIRCUIT BOARD, PS-570
1pc	*b 9-911-863-01	s FIBER SHEET, INSULATING(OTHER)
1pc	*a 2-389-320-01	s CUSION(SILICONE RBR)
1pc	3-846-067-21	o SPACER(C)
C901	1-111-059-11	s CAPACITOR,ELECT 220MF/25V
C902	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
C903	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
C904	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
C905	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
C906	1-127-520-11	s CAPACITOR,ELECT (SOLID) 68MF
C907	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C908	1-163-275-11	s CAPACITOR,CERAMIC 1000PF/50V
C909	1-107-690-11	s CAPACITOR,TANTALUM 6.8MF/35V
C910	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C911	1-104-760-11	s CAPACITOR,CERAMIC 0.047MF/50V
C912	1-135-145-11	s CAPACITOR,TANTALUM 0.47MF/35V
C913	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
C914	1-163-237-11	s CAPACITOR,CERAMIC 27PF/50V
C915	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
CN901	1-506-703-11	o CONNECTOR,POST HEADER,ILG (4P)
CN902	1-560-356-00	o CONNECTOR,POST HEADER,ILG (2P)
D901	8-719-023-54	s DIODE EA60QC06-F
D902	8-719-941-86	s DIODE DAN202U
FL901	1-117-193-11	s CAPACITOR,3 TERMINAL 1.5MF/50V
IC901	8-759-701-36	s IC NJM3403AM
IC902	8-759-521-35	s IC TL5001CD
L901	1-421-459-21	s COIL,CHOKE
L902	1-411-968-11	s COIL, CHOK 33UH
Q901	8-729-029-14	s TRANSISTOR DTC144EUA-T106
Q903	8-729-028-91	s TRANSISTOR DTA144EUA-T106
Q904	8-729-117-32	s TRANSISTOR 2SC4177
Q905	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q906	8-729-043-74	s TRANSISTOR SI4435DY-T1-REVA
Q907	8-729-117-32	s TRANSISTOR 2SC4177
Q908	8-729-045-16	s TRANSISTOR SI4410DY-T1-REVA
R901	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)
R902	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R903	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R904	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R905	1-216-013-00	s RESISTOR,CHIP 33 1/10W(2012)
R906	1-219-989-11	s RESISTOR,SQUARE CHIP 0.02 1W
R907	1-216-029-00	s RESISTOR,CHIP 150 1/10W(2012)
R908	1-208-807-11	s RESISTOR,CHIP 11K 1/10W (2125)
R909	1-208-798-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R910	1-208-830-11	s RESISTOR,CHIP 100K 1/10W(2012)
R911	1-208-782-11	s RESISTOR,CHIP 1K 1/10W (2012)
R912	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R913	1-216-105-91	s RESISTOR,CHIP 220K 1/10W(2125)
R914	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)
R915	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R916	1-216-105-91	s RESISTOR,CHIP 220K 1/10W(2125)
R917	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R918	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R919	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R920	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)

-----  
PSW-71 BOARD  
-----

Ref. No.  
or Q'ty Part No. SP Description

1pc	A-8322-174-A	o MOUNTED CIRCUIT BOARD, PSW-71
C301	1-163-021-91	s CAPACITOR,CERAMIC 0.01MF/50V
C303	1-163-021-91	s CAPACITOR,CERAMIC 0.01MF/50V
C305	1-163-021-91	s CAPACITOR,CERAMIC 0.01MF/50V
C306	1-163-021-91	s CAPACITOR,CERAMIC 0.01MF/50V
C307	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
C308	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
C309	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C310	1-163-038-00	s CAPACITOR,CERAMIC 0.1MF/25V
CN301	1-695-890-11	o PIN, CONNECTOR (PC BOARD) 12P
CN302	1-764-087-21	s PIN, CONNECTOR (PC BOARD) 14P
CN304	1-506-485-11	s PIN,CONNECTOR 6P
CN305	1-506-491-11	s PIN,CONNECTOR 12P
CN306	1-778-652-11	o CONNECTOR, FFC (ZIF) 50P
D301	8-719-938-78	s DIODE SB10-05PCP (RECTI)
D302	8-719-800-76	s DIODE 1SS226
D303	8-719-938-78	s DIODE SB10-05PCP (RECTI)
D304	8-719-938-78	s DIODE SB10-05PCP (RECTI)
D305	8-719-938-78	s DIODE SB10-05PCP (RECTI)
IC301	8-759-530-05	s IC TC4053BFT (EL.N)
IC302	8-759-659-71	s IC SN74HC165APWR
IC303	8-759-268-33	s IC SN74HC595ADB (R)
IC304	8-759-530-05	s IC TC4053BFT (EL.N)
Q301	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q302	8-729-905-35	s TRANSISTOR 2SC4081-R
Q303	8-729-905-35	s TRANSISTOR 2SC4081-R
Q304	8-729-905-35	s TRANSISTOR 2SC4081-R
Q308	8-729-905-35	s TRANSISTOR 2SC4081-R
Q309	8-729-905-35	s TRANSISTOR 2SC4081-R
Q310	8-729-905-35	s TRANSISTOR 2SC4081-R
R301	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)
R302	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R303	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R304	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R305	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R306	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R307	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R308	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)
R309	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R310	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R311	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R312	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R313	1-220-250-11	s RESISTOR,CHIP 10 1/2W (4532)
R314	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R315	1-216-089-91	s RESISTOR,CHIP 47K 1/10W(2012)
R316	1-220-250-11	s RESISTOR,CHIP 10 1/2W (4532)
R318	1-216-001-00	s RESISTOR,CHIP 10 1/10W(2012)
R319	1-216-051-00	s RESISTOR,CHIP 1.2K 1/10W(2012)
R320	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R321	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R322	1-208-793-11	s RESISTOR,CHIP 3K 1/10W (2125)
R323	1-216-061-00	s RESISTOR,CHIP 3.3K 1/10W(2012)
R324	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)
R325	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R326	1-216-057-00	s RESISTOR,CHIP 2.2K 1/10W(2012)
R327	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R328	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)

## (PSW-71 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R329	1-216-097-91	s RESISTOR,CHIP 100K 1/10W(2012)
R330	1-208-782-11	s RESISTOR,CHIP 1K 1/10W (2012)
R331	1-208-782-11	s RESISTOR,CHIP 1K 1/10W (2012)
R333	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R334	1-216-105-91	s RESISTOR,CHIP 220K 1/10W(2125)
R335	1-216-105-91	s RESISTOR,CHIP 220K 1/10W(2125)
R336	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R337	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R338	1-216-061-00	s RESISTOR,CHIP 3.3K 1/10W(2012)
R339	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R340	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R341	1-216-099-00	s RESISTOR,CHIP 120K 1/10W(2012)
R342	1-216-109-00	s RESISTOR,CHIP 330K 1/10W(2012)
R343	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
RB301	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB302	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB304	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB305	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB306	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
S301	1-771-356-11	s SWITCH, TOGGLE
S304	1-692-827-11	s SWITCH, TACT
S306	1-571-642-11	s SWITCH, TOGGLE

## RP-91 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8277-852-A	o MOUNTED CIRCUIT BOARD, RP-91
C770	1-135-259-11	s CAPACITOR,TANTALUM 10MF/6.3V
C771	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C772	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C773	1-162-969-11	s CAPACITOR,CERAMIC 6800PF/25V B
C774	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C775	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C776	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C777	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C778	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C779	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C780	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C781	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C782	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C783	1-135-259-11	s CAPACITOR,TANTALUM 10MF/6.3V
C784	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C785	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C786	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C787	1-135-259-11	s CAPACITOR,TANTALUM 10MF/6.3V
C788	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C789	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C791	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C792	1-110-569-11	s CAPACITOR,TANTALUM 47MF/6.3V
C793	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C794	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C795	1-135-259-11	s CAPACITOR,TANTALUM 10MF/6.3V
C796	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C797	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C798	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C799	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C800	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C801	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C802	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C803	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C804	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C806	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C809	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C810	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C811	1-135-145-11	s CAPACITOR,TANTALUM 0.47MF/35V
C814	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C815	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C816	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C818	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C819	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C821	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C822	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C823	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C824	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C825	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C826	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C827	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C828	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C829	1-135-259-11	s CAPACITOR,TANTALUM 10MF/6.3V
C830	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C831	1-135-259-11	s CAPACITOR,TANTALUM 10MF/6.3V
C832	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C833	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C834	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B

## (RP-91 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C835	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C836	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C837	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C839	1-162-913-11	s CAPACITOR, CHIP CERAMIC 8PF/50V
C841	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C842	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C843	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C844	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C845	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C847	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C848	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C849	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C850	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C853	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C854	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C855	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C857	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C859	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C860	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C861	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C862	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C863	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C865	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C869	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C870	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C871	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C872	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C873	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C874	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C875	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C876	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C878	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C900	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C901	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C902	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C903	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C904	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C905	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C906	1-164-227-11	s CAPACITOR, CERAMIC 0.022MF/25V
C907	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C908	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C909	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C910	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C911	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C912	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C913	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C914	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN771	1-566-542-31	s CONNECTOR, FPC (NON ZIF) 10P
CN772	1-774-260-11	o CONNECTOR, FFC (ZIF) 20P
CN773	1-778-535-11	o CONNECTOR, FFC (ZIF) 45P
CN774	1-778-645-11	o CONNECTOR, FFC (ZIF) 10P
CN775	1-573-371-21	s CONNECTOR, BOARD TO BOARD 14P
D771	8-719-059-51	s DIODE MA3J142E0LSO
D772	8-719-059-51	s DIODE MA3J142E0LSO
D773	8-719-041-39	s DIODE KV1470 (5MA)
D774	8-719-052-27	s DIODE 1S8351-TB
D775	8-719-052-27	s DIODE 1S8351-TB
D776	8-719-027-95	s DIODE HSM88WK

## (RP-91 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FL770	1-411-274-21	s DELAY LINE, LC (23NS)
FL771	1-233-343-21	s FILTER, LOW PASS
FL772	1-233-344-21	s FILTER, LOW PASS
FL900	1-233-351-21	s FILTER, BAND PASS
FL901	1-233-350-21	s FILTER, BAND PASS
IC770	8-759-469-25	s IC AK6440AF (E2)
IC771	8-759-064-36	s IC MB88346BPFV
IC772	8-752-371-18	s IC CXD2302Q
IC773	8-752-070-12	s IC CXA1762Q
IC774	8-752-379-36	s IC CXD2189AR
IC775	8-752-070-11	s IC CXA1761R
IC777	8-752-072-49	s IC CXA1760Q-T6
IC778	8-759-058-62	s IC TC7S08FU-TE85R
IC900	8-759-327-00	s IC CXA8044Q (T4)
IC901	8-759-082-60	s IC TC7S66FU
L770	1-414-398-11	s INDUCTOR (SMD) 10UH
L772	1-414-398-11	s INDUCTOR (SMD) 10UH
L773	1-414-398-11	s INDUCTOR (SMD) 10UH
L774	1-414-398-11	s INDUCTOR (SMD) 10UH
L776	1-414-398-11	s INDUCTOR (SMD) 10UH
L777	1-414-398-11	s INDUCTOR (SMD) 10UH
L779	1-410-738-41	s INDUCTOR, CHIP 0.56UH
L780	1-414-398-11	s INDUCTOR (SMD) 10UH
L782	1-412-963-11	s INDUCTOR 100UH (2520)
L783	1-414-398-11	s INDUCTOR (SMD) 10UH
L787	1-410-381-11	s INDUCTOR, CHIP 10UH (3225)
L788	1-410-380-31	s INDUCTOR, CHIP 8.2UH (3225)
L789	1-414-398-11	s INDUCTOR (SMD) 10UH
L791	1-414-398-11	s INDUCTOR (SMD) 10UH
L900	1-414-398-11	s INDUCTOR (SMD) 10UH
L901	1-412-282-41	s INDUCTOR INDUCTOR 470UH (3225)
Q772	8-729-907-00	s TRANSISTOR DTC114EU
Q773	8-729-141-48	s TRANSISTOR 2SB624-BV345
Q774	8-729-141-48	s TRANSISTOR 2SB624-BV345
Q775	8-729-907-00	s TRANSISTOR DTC114EU
Q776	8-729-905-35	s TRANSISTOR 2SC4081-R
Q777	8-729-905-35	s TRANSISTOR 2SC4081-R
Q778	8-729-905-35	s TRANSISTOR 2SC4081-R
Q779	8-729-905-35	s TRANSISTOR 2SC4081-R
Q780	8-729-907-00	s TRANSISTOR DTC114EU
Q781	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q782	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q784	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q900	8-729-907-00	s TRANSISTOR DTC114EU
Q901	8-729-037-92	s TRANSISTOR 2SD2216J-R(TX).SO
R770	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R771	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R774	1-216-841-11	s RESISTOR, CHIP 47K 1/16W 1608
R776	1-216-818-11	s RESISTOR, CHIP 560 1/16W 1608
R777	1-218-674-11	s RESISTOR CHIP 180 1/16W (1608)
R778	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608)
R779	1-218-744-11	s RESISTOR, CHIP 150K 1/16W
R780	1-218-724-11	s RESISTOR, CHIP 22K 1/16W(1608)
R781	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R782	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R783	1-218-716-11	s RESISTOR, CHIP 10K 1/16W(1608)
R784	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)
R785	1-216-833-11	s RESISTOR, CHIP 10K 1/16W (1608)

## (RP-91 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R786	1-218-684-11	s RESISTOR,CHIP 470 1/16W (1608)
R787	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R788	1-218-677-11	s RESISTOR,CHIP 240 1/16W (1608)
R789	1-216-824-11	s RESISTOR,CHIP 1.8K 1/16W 1608
R790	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R791	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R792	1-216-814-11	s RESISTOR,CHIP 270 1/16W 1608
R793	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R794	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R795	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R796	1-218-668-11	s RESISTOR,CHIP 100 1/16W (1608)
R797	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R798	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R799	1-218-700-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R800	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R801	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R802	1-218-732-11	s RESISTOR,CHIP 47K 1/16W(1608)
R803	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R804	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R805	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R808	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R809	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R810	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R811	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R812	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R813	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R814	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R815	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R816	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R817	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R818	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R819	1-216-831-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R820	1-216-803-11	s RESISTOR,CHIP 33 1/16W (1608)
R821	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R822	1-216-834-11	s RESISTOR,CHIP 12K 1/16W 1608
R823	1-216-834-11	s RESISTOR,CHIP 12K 1/16W 1608
R824	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R825	1-216-835-11	s RESISTOR,CHIP 15K 1/16W
R826	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R827	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R828	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R829	1-218-720-11	s RESISTOR,CHIP 15K 1/16W(1608)
R830	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R831	1-218-710-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R832	1-216-807-11	s RESISTOR,CHIP 68 1/16W 1608
R833	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R834	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R835	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R836	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R837	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R838	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R839	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R841	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R843	1-218-688-11	s RESISTOR,CHIP 680 1/16W(1608)
R844	1-218-688-11	s RESISTOR,CHIP 680 1/16W(1608)
R845	1-218-678-11	s RESISTOR,CHIP 270 1/16W (1608)
R846	1-218-676-11	s RESISTOR,CHIP 220 1/16W(1608)
R847	1-216-805-11	s RESISTOR,CHIP 47 1/16W 1608
R848	1-218-686-11	s RESISTOR,CHIP 560 1/16W (1608)

## (RP-91 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R849	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R850	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R851	1-218-680-11	s RESISTOR,CHIP 330 1/16W(1608)
R852	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R855	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R856	1-218-718-11	s RESISTOR,CHIP 12K 1/16W (1608)
R858	1-218-682-11	s RESISTOR,CHIP 390 1/16W (1608)
R859	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R861	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R862	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R900	1-216-843-11	s RESISTOR,CHIP 68K 1/16W (1608)
R901	1-216-831-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R902	1-216-831-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R903	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R904	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R905	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R906	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R907	1-216-835-11	s RESISTOR,CHIP 15K 1/16W
R908	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R909	1-216-834-11	s RESISTOR,CHIP 12K 1/16W 1608
R910	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R911	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R912	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R913	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R914	1-218-716-11	s RESISTOR,CHIP 10K 1/16W(1608)
R915	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R916	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R917	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R918	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R919	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R920	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)



## SE-295 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8344-460-A	s MOUNTED CIRCUIT BOARD, SE-295A
PH1	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
PH2	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
PH3	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
PH4	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
Q1	8-729-926-31	s PHOTO TRANSISTOR PT483F1S

## SE-297 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8344-461-A	s MOUNTED CIRCUIT BOARD, SE-297A
D1	8-719-989-52	s LED GL4600S
PH1	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
PH2	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
PH3	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
PH4	8-749-012-20	s PHOTO INTERRUPTER GP2S27B
S1	1-692-366-31	s SWITCH, PUSH
TH1	1-808-656-11	s THERMISTOR

## SE-566 BOARD

Ref. No. or Q'ty	Part No.	SP Description
CN301	1-573-806-21	s PIN, CONNECTOR (6P) (SMD) (1.5MM)
PH301	8-749-925-05	s PHOTO REFLEC.NJL5183KA-F20-TE1
PH302	8-749-925-05	s PHOTO REFLEC.NJL5183KA-F20-TE1

## SV-213 BOARD

\*a: [Lot No. 911-215]  
\*b: [Lot No. 221-]

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-140-B	o MOUNTED CIRCUIT BOARD, SV-213
C1	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C2	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C3	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C4	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C5	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C6	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C7	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C8	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C9	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C10	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C11	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C13	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C17	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C18	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C200	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C201	1-135-177-21	s CAPACITOR, TANTALUM 1MF/25V
C202	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C203	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C204	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C205	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C206	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C207	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C208	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C209	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C210	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C211	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C212	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C300	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C301	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C302	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C303	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C304	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C305	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C306	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C309	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C310	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C311	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C312	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C313	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C314	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C315	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C317	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C318	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C319	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C320	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C321	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C322	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C323	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C324	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C325	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C326	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C327	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C328	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C329	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C331	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C332	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C333	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C334	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C400	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C401	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C402	1-164-677-11	s CAPACITOR, CERAMIC 0.033MF/16V
C403	1-135-259-11	s CAPACITOR, TANTALUM 10MF/6.3V
C404	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C405	1-104-852-11	s CAPACITOR, TANTALUM 22MF/10V
C406	1-135-177-21	s CAPACITOR, TANTALUM 1MF/25V
C407	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C408	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C409	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C410	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C411	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C412	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C413	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C414	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C415	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C416	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C417	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C418	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C419	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C420	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C421	1-164-174-11	s CAPACITOR, CERAMIC 8200PF/25V B
C422	1-164-174-11	s CAPACITOR, CERAMIC 8200PF/25V B
C423	1-164-174-11	s CAPACITOR, CERAMIC 8200PF/25V B
C424	1-162-920-11	s CAPACITOR, CERAMIC 27PF/50V CH
C425	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C426	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C427	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C428	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C429	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C500	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C501	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C502	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C503	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C504	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C505	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C506	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C507	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C508	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C509	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C510	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C512	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C516	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C517	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C518	1-113-642-11	s CAPACITOR, TANTALUM 47MF/10V
C520	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C522	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C524	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C525	1-135-072-21	s CAPACITOR, TANTALUM 0.22MF/35V
C526	1-165-128-11	s CAPACITOR, CERAMIC 0.22MF/16V F
C527	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C528	1-110-569-11	s CAPACITOR, TANTALUM 47MF/6.3V
C529	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C530	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C531	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C533	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C534	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C535	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C537	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C538	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C539	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C700	1-162-965-11	s CAPACITOR, CERAMIC 1500PF/50V B
C701	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C702	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C705	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C706	1-104-914-11	s CAPACITOR, TANTALUM 22MF/16V
C707	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C740	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C741	1-162-965-11	s CAPACITOR, CERAMIC 1500PF/50V B
C742	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C746	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C747	1-104-914-11	s CAPACITOR, TANTALUM 22MF/16V
C748	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C749	1-162-965-11	s CAPACITOR, CERAMIC 1500PF/50V B
C750	1-162-969-11	s CAPACITOR, CERAMIC 6800PF/25V B
C754	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C755	1-104-914-11	s CAPACITOR, TANTALUM 22MF/16V
C756	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C757	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C758	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C759	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C760	1-113-500-11	s CAPACITOR, TANTALUM 100MF/10V
C761	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C801	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C802	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C901	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C902	1-162-964-11	s CAPACITOR, CERAMIC 1000PF/50V B
C903	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C904	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C905	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C906	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C907	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C908	1-162-922-11	s CAPACITOR, CERAMIC 39PF/50V CH
C909	1-165-176-11	s CAPACITOR, CERAMIC 47000PF/16V
C910	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C911	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C912	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
CN500	1-750-905-11	o CONNECTOR, BOARD TO BOARD 80P
CN501	1-778-648-11	o CONNECTOR, FFC (ZIF) 20P
CN502	1-778-652-11	o CONNECTOR, FFC (ZIF) 50P
CN504	1-764-526-11	s CONNECTOR, FFC/FPC (ZIF) 18P
CN505	1-778-646-11	o CONNECTOR, FFC (ZIF) 10P
D1	8-719-989-03	s DIODE DAN222
D2	8-719-991-00	s DIODE DAP222
D300	8-719-991-00	s DIODE DAP222
D302	8-719-989-03	s DIODE DAN222
D303	8-719-991-00	s DIODE DAP222
D400	8-719-991-00	s DIODE DAP222
D401	8-719-989-03	s DIODE DAN222
D402	8-719-991-00	s DIODE DAP222
D500	8-719-989-03	s DIODE DAN222
D501	8-719-991-00	s DIODE DAP222
D502	8-719-989-03	s DIODE DAN222

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D503	8-719-991-00	s DIODE DAP222
D507	8-719-991-00	s DIODE DAP222
D508	8-719-105-91	s DIODE RD5.6M-B2
D701	8-719-981-56	s DIODE SB05W05CP (RECTI)
D702	8-719-989-03	s DIODE DAN222
D801	8-719-989-03	s DIODE DAN222
D802	8-719-991-00	s DIODE DAP222
D803	8-719-989-03	s DIODE DAN222
D804	8-719-991-00	s DIODE DAP222
D805	8-719-989-03	s DIODE DAN222
D806	8-719-991-00	s DIODE DAP222
D807	8-719-989-03	s DIODE DAN222
D808	8-719-991-00	s DIODE DAP222
D809	8-719-989-03	s DIODE DAN222
D810	8-719-991-00	s DIODE DAP222
D811	8-719-989-03	s DIODE DAN222
D812	8-719-991-00	s DIODE DAP222
D813	8-719-989-03	s DIODE DAN222
D814	8-719-991-00	s DIODE DAP222
D815	8-719-989-03	s DIODE DAN222
D816	8-719-991-00	s DIODE DAP222
D901	8-719-048-43	s DIODE MA795
E1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E3	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
IC1	8-759-326-99	s IC MCD005AM-TLM
IC2	8-759-510-71	s IC BA10358F-E2
IC3	8-759-981-61	s IC LM2901M
IC5	8-759-523-02	s IC TC74HC4053AFT(EL)
IC6	8-759-700-07	s IC NJM2903M
IC200	8-759-276-89	s IC BA6285FP (E2)
IC201	8-759-276-89	s IC BA6285FP (E2)
IC204	8-759-510-71	s IC BA10358F-E2
IC300	8-759-326-99	s IC MCD005AM-TLM
IC301	8-759-278-58	s IC NJM4558V (TE2)
IC302	8-759-981-61	s IC LM2901M
IC303	8-759-523-02	s IC TC74HC4053AFT(EL)
IC304	8-759-523-95	s IC TC74VHC74FT (EL)
IC305	8-759-510-71	s IC BA10358F-E2
IC306	8-759-444-93	s IC RH5RL33AA-T1
IC307	8-759-523-02	s IC TC74HC4053AFT(EL)
IC309	8-759-526-89	s IC MB88347LPFV-ER
IC400	8-759-335-42	s IC CXA1793N (E2)
IC401	8-759-100-95	s IC UPC324G2
IC402	8-759-700-07	s IC NJM2903M
IC403	8-759-100-95	s IC UPC324G2
IC500	8-752-921-61	s IC CXP913040-011R
IC501	8-759-524-10	s IC TC74VHC157FT (EL)
IC502	8-759-524-10	s IC TC74VHC157FT (EL)
IC505	8-759-431-26	s IC MB3793-30PNF-ER
IC507	8-759-524-41	s IC TC74VHC374FT (EL)
IC508	8-759-524-41	s IC TC74VHC374FT (EL)
IC509	8-759-524-41	s IC TC74VHC374FT (EL)
IC510	8-759-524-41	s IC TC74VHC374FT (EL)
IC512	8-759-524-50	s IC TC74VHC541FT(EL)
IC702	8-759-444-93	s IC RH5RL33AA-T1
IC740	8-759-273-87	s IC NJM2901V (TE2)
IC741	8-759-444-87	s IC NJM324V (TE2)

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC801	8-759-523-01	s IC TC74HC4052AFT(EL)
IC802	8-759-523-01	s IC TC74HC4052AFT(EL)
IC901	8-759-466-53	s IC NJM2060V(TE2)
IC902	8-759-338-95	s IC NJM2903V (TE2)
IC903	8-759-523-02	s IC TC74HC4053AFT(EL)
IC904	8-759-392-01	s IC TC7SH86FU (TE85R)
L500	1-414-398-11	s INDUCTOR (SMD) 10UH
L501	*b 1-414-406-11	s INDUCTOR (SMD) 220UH
	*a 1-414-398-11	s INDUCTOR (SMD) 10UH
L502	1-414-398-11	s INDUCTOR (SMD) 10UH
L700	1-409-678-11	s COIL, CHOKE 68UH
L740	1-409-678-11	s COIL, CHOKE 68UH
L741	1-409-678-11	s COIL, CHOKE 68UH
Q700	8-729-030-78	s TRANSISTOR FP102T-TL
Q701	6-550-367-01	s TRANSISTOR UMB11N-TN
Q740	8-729-030-78	s TRANSISTOR FP102T-TL
Q745	8-729-030-78	s TRANSISTOR FP102T-TL
Q748	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q749	8-729-807-51	s TRANSISTOR 2SD1623-S
Q802	8-729-930-32	s TRANSISTOR UMH11
Q803	6-550-273-01	s TRANSISTOR UMH4NTN
Q804	6-550-273-01	s TRANSISTOR UMH4NTN
Q805	6-550-273-01	s TRANSISTOR UMH4NTN
Q806	8-729-930-32	s TRANSISTOR UMH11
Q901	8-729-029-14	s TRANSISTOR DTC144EUA-T106
R1	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R3	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R4	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R5	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R7	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R8	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R10	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R11	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R12	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R13	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R14	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R16	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R17	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R18	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R19	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R20	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R21	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R27	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R28	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R29	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R30	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R31	1-216-849-11	s RESISTOR,CHIP 220K 1/16W(1608)
R32	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R33	1-216-849-11	s RESISTOR,CHIP 220K 1/16W(1608)
R34	1-216-849-11	s RESISTOR,CHIP 220K 1/16W(1608)
R35	1-216-833-11	s RESISTOR,CHIP 10K 1/16W(1608)
R36	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R37	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R38	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R39	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R40	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R41	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R42	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R43	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R44	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R45	1-216-842-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R47	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R48	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R49	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R203	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R204	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R205	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R206	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R207	1-218-682-11 s	RESISTOR,CHIP 390 1/16W (1608)
R208	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R209	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R210	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R211	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R219	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R220	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R222	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R223	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R225	1-216-852-11 s	RESISTOR,CHIP 390K 1/16W 1608
R226	1-216-852-11 s	RESISTOR,CHIP 390K 1/16W 1608
R227	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R228	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R229	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R230	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R231	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R232	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R233	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R234	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R235	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R236	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R238	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R239	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R241	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R242	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R244	1-216-852-11 s	RESISTOR,CHIP 390K 1/16W 1608
R245	1-216-852-11 s	RESISTOR,CHIP 390K 1/16W 1608
R246	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R247	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R248	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R249	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R250	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R251	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R252	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R253	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R254	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R255	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R300	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R301	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R302	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R303	1-216-842-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R304	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R305	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R306	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R307	1-216-853-11 s	RESISTOR,CHIP 470K 1/16W(1608)
R308	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R309	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R310	1-216-843-11 s	RESISTOR,CHIP 68K 1/16W (1608)

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R311	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R312	1-216-853-11 s	RESISTOR,CHIP 470K 1/16W(1608)
R313	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R314	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R315	1-218-708-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R316	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R317	1-216-842-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R318	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R323	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R324	1-216-843-11 s	RESISTOR,CHIP 68K 1/16W (1608)
R325	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R326	1-216-853-11 s	RESISTOR,CHIP 470K 1/16W(1608)
R327	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R328	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R329	1-218-740-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R330	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R331	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R332	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R333	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R337	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R339	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R340	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R341	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R342	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R343	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R344	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R345	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R346	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R347	1-217-671-11 s	RESISTOR,CHIP 1 1/10W(2125)
R348	1-216-842-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R400	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R401	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R402	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R403	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R404	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R405	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R406	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R407	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R408	1-216-853-11 s	RESISTOR,CHIP 470K 1/16W(1608)
R409	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R410	1-216-843-11 s	RESISTOR,CHIP 68K 1/16W (1608)
R411	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R412	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R413	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R414	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R415	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R416	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R417	1-216-838-11 s	RESISTOR,CHIP 27K 1/16W(1608)
R418	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R419	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R420	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R421	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R422	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R423	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R424	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R425	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R426	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R427	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R428	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R429	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R430	1-216-846-11	s RESISTOR,CHIP 120K 1/16W (1608)
R431	1-216-835-11	s RESISTOR,CHIP 15K 1/16W
R432	1-216-843-11	s RESISTOR,CHIP 68K 1/16W (1608)
R434	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R436	1-216-836-11	s RESISTOR,CHIP 18K 1/16W 1608
R437	1-216-834-11	s RESISTOR,CHIP 12K 1/16W 1608
R438	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R439	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R440	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R441	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R442	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R443	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R444	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R445	1-217-671-11	s RESISTOR,CHIP 1 1/10W(2125)
R501	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R502	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R503	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R504	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R505	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R513	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R514	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R515	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R516	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R517	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R518	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R519	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R520	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R521	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R522	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R523	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R524	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R525	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R526	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R529	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R533	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R534	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R535	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R536	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R537	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R540	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R541	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R542	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R543	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R544	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R545	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R546	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R547	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R548	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R549	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R550	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R551	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R552	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R553	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R555	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R556	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R557	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R558	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R559	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R700	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R701	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R702	1-216-836-11	s RESISTOR,CHIP 18K 1/16W 1608
R703	1-216-843-11	s RESISTOR,CHIP 68K 1/16W (1608)
R704	1-216-840-11	s RESISTOR,CHIP 39K 1/16W 1608
R705	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R706	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R707	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R708	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R709	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R710	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R711	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R714	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R715	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R716	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R740	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R741	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R742	1-216-854-11	s RESISTOR,CHIP 560K 1/16W 1608
R743	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R744	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R745	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R746	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R747	1-216-836-11	s RESISTOR,CHIP 18K 1/16W 1608
R748	1-216-843-11	s RESISTOR,CHIP 68K 1/16W (1608)
R749	1-216-840-11	s RESISTOR,CHIP 39K 1/16W 1608
R750	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R751	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R752	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R753	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R754	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R759	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R760	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R761	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R762	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R763	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R764	1-216-836-11	s RESISTOR,CHIP 18K 1/16W 1608
R765	1-216-843-11	s RESISTOR,CHIP 68K 1/16W (1608)
R766	1-216-840-11	s RESISTOR,CHIP 39K 1/16W 1608
R767	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R768	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R769	1-216-817-11	s RESISTOR,CHIP 470 1/16W 1608
R770	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R771	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R772	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R773	1-216-830-11	s RESISTOR,CHIP 5.6K 1/16W 1608
R774	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R775	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R776	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R777	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R778	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R801	1-216-849-11	s RESISTOR,CHIP 220K 1/16W 1608
R802	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R805	1-218-704-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R806	1-218-692-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R810	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R811	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R812	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R813	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608
R814	1-216-815-11	s RESISTOR,CHIP 330 1/16W 1608



## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R818	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R820	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R822	1-216-851-11	s RESISTOR,CHIP 330K 1/16W 1608
R824	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R901	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R902	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R903	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R904	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R905	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R906	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R907	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R908	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R909	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R910	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R911	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R912	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R913	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R914	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R915	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R916	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R917	1-216-841-11	s RESISTOR,CHIP 47K 1/16W 1608
R918	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R919	1-216-853-11	s RESISTOR,CHIP 470K 1/16W(1608)
R921	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R922	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R923	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
RB500	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB501	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB502	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB503	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB504	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB506	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB507	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB508	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB510	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB511	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB512	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
RB513	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
RB514	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
RB515	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB516	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
RB801	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB802	1-239-407-11	s NETWORK RESISTOR(CHIP) 330
RB803	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB804	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB805	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB806	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB808	1-239-444-11	s NETWORK,RESISTOR 220K (1608)
RB810	1-239-446-11	s NETWORK,RESISTOR 330K (1608)
RB811	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
S500	1-692-535-11	s SWITCH DIP (4P)
TP1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP3	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP300	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP301	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP302	1-535-757-11	s CHIP, CHECKER (CONNECTOR)

## (SV-213 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
TP304	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP400	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP401	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP501	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP502	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP503	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP504	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP505	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP506	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP507	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP508	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP509	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP510	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP701	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP704	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
X500	1-760-655-21	s VIBRATOR, CRYSTAL



-----  
SW-18 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-166-A	o MOUNTED CIRCUIT BOARD, SW-18
R561	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
S561	1-554-592-21	s SWITCH, KEY BOARD
S562	1-554-592-21	s SWITCH, KEY BOARD
S563	1-554-088-00	s SWITCH, KEY BOARD
S564	1-571-642-11	s SWITCH, TOGGLE
W561	1-958-489-11	o HARNESS, SUB (SW923)

-----  
SW-19 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8322-177-A	o MOUNTED CIRCUIT BOARD, SW-19
1pc	3-612-604-01	s KNOB,VR(AUDIO)
C201	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C202	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
CN201	1-573-537-11	s CONNECTOR, BOARD TO BOARD 6P
R201	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R202	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R203	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R204	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
RV201	1-223-686-11	s RESISTOR, VAR, CARBON 5K/5K
S201	1-572-471-11	s SWITCH,PUSH
S202	1-572-471-11	s SWITCH,PUSH
S203	1-570-984-11	s SWITCH, TOGGLE

-----  
SW-929 BOARD  
-----

Ref. No. or Q'ty	Part No.	SP Description
CN101	1-573-290-21	s PIN,CONNECTOR (4P) (SMD) (1.5MM)
RV101	1-473-406-11	s ENCODER, ED JOG(DIAL SHUTTLE)

-----  
TG-187/187P BOARD  
-----

\*a: [Lot No. 911-161]  
\*b: [Lot No. 162-]  
\*c: [Lot No. 911-335]  
\*d: [Lot No. 341-]

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8318-219-A	s MOUNTED CIRCUIT BOARD, TG-187 [for UC,J]
	A-8318-242-A	s MOUNTED CIRCUIT BOARD, TG-187P [for CE,SY,CN]
C1	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C2	1-126-397-11	s CAPACITOR,ELECT 33MF/25V(CHIP)
C3	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C4	1-113-985-11	s CAPACITOR,TANTALUM 10MF/20V
C5	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C6	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C7	1-104-913-11	s CAPACITOR,TANTALUM 10MF/16V
C8	1-104-913-11	s CAPACITOR,TANTALUM 10MF/16V
C9	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C10	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C11	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C12	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C13	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C15	1-135-181-21	s CAPACITOR,TANTALUM 4.7MF/6.3V
C16	1-107-688-11	s CAPACITOR,TANTALUM 1.5MF/25V
C17	1-113-500-11	s CAPACITOR,TANTALUM 100MF/10V
C18	1-126-393-11	s CAPACITOR,ELECT 33MF/10V(CHIP)
C19	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C21	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C22	1-126-397-11	s CAPACITOR,ELECT 33MF/25V(CHIP)
C23	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C24	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C25	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C26	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C29	1-137-910-11	s CAPACITOR,TANTALUM ELECT 10MF
C30	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C31	1-162-964-11	s CAPACITOR,CERAMIC 1000PF/50V B
C33	1-113-500-11	s CAPACITOR,TANTALUM 100MF/10V
C34	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C37	*d 1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C39	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C40	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C41	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C42	1-162-970-11	s CAPACITOR,CERAMIC 0.01MF/25V B
C43	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C44	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C45	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C46	1-113-992-11	s CAPACITOR,TANTALUM 3.3MF/35V
C47	1-113-992-11	s CAPACITOR,TANTALUM 3.3MF/35V
C48	1-113-992-11	s CAPACITOR,TANTALUM 3.3MF/35V
C49	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C50	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C51	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C52	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C53	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C54	1-107-689-21	s CAPACITOR,TANTALUM 1MF/35V
C55	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C56	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C57	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C58	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C59	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C60	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C61	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C62	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F

## (TG-187/187P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C63	1-104-652-11	s CAPACITOR, ELECT 470MF/16V(105)
C64	1-104-652-11	s CAPACITOR, ELECT 470MF/16V(105)
C65	1-128-528-11	s CAPACITOR, ELECT 470MF/25V
C66	1-104-823-11	s CAPACITOR, TANTALUM 47MF/16V
C67	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C68	1-113-986-11	s CAPACITOR, TANTALUM 2.2MF/25V
C69	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C70	1-113-986-11	s CAPACITOR, TANTALUM 2.2MF/25V
C71	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C72	1-113-986-11	s CAPACITOR, TANTALUM 2.2MF/25V
C73	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C74	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C75	1-137-910-11	s CAPACITOR, TANTALUM ELECT 10MF
C76	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C77	1-113-986-11	s CAPACITOR, TANTALUM 2.2MF/25V
C78	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C79	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
CN1	1-778-651-11	o CONNECTOR, FFC (ZIF) 40P
CP1	1-760-278-11	s OSCILLATOR, CRYSTAL (VCO TYPE) [for UC,J]
	1-767-206-11	s OSCILLATOR, CRYSTAL [for CE,SY,CN]
D1	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D2	8-719-404-40	s DIODE MA121
D3	8-719-404-40	s DIODE MA121
D4	8-719-404-40	s DIODE MA121
D5	8-719-421-67	s DIODE MA132WK
D6	8-719-421-67	s DIODE MA132WK
D7	8-719-421-67	s DIODE MA132WK
D8	8-719-938-78	s DIODE SB10-05PCP (RECTI)
D9	8-719-938-78	s DIODE SB10-05PCP (RECTI)
D10	8-719-059-51	s DIODE MA3J142EOLSO
D11	8-719-938-78	s DIODE SB10-05PCP (RECTI)
D12	8-719-421-67	s DIODE MA132WK
E1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
FB6	1-543-775-11	s BEAD, FERRITE
IC1	8-759-185-42	s IC LM4040AIM3-2.5
IC2	8-759-669-72	s IC TL064CPWR
IC3	8-759-562-42	s IC CAT24WC08J-TE13
IC4	8-759-064-36	s IC MB88346BPFV
IC6	8-759-082-57	s IC TC7W04FU
IC7	8-759-058-56	s IC TC7S02FU (TE85R)
IC8	8-759-082-58	s IC TC7W08FU
IC9	8-752-353-25	s IC CXD1265R
IC10	8-759-082-58	s IC TC7W08FU
IC11	8-759-082-58	s IC TC7W08FU
IC12	8-759-523-81	s IC TC74VHC08FT (EL)
IC13	8-752-372-14	s IC CXD1267AN
IC14	8-752-372-14	s IC CXD1267AN
IC15	8-752-372-14	s IC CXD1267AN
IC16	8-759-058-58	s IC TC7S04FU-TE85R
IC17	8-759-659-96	s IC SN74HC08APWR
IC18	8-759-659-70	s IC SN74HC164APWR
R52	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R53	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R54	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608

## (TG-187/187P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R55	1-216-813-11	s RESISTOR, CHIP 220 1/16W 1608
R56	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
IC19	8-759-195-81	s IC TC7S86FU
IC20	8-759-058-54	s IC TC7S00FU-TE85R
IC21	8-759-196-97	s IC TC7SH32FU (TE85R)
L2	1-410-389-31	s INDUCTOR, CHIP 47UH (3225)
L5	1-410-389-31	s INDUCTOR, CHIP 47UH (3225)
L6	1-410-369-11	s INDUCTOR, CHIP 1UH (3225)
L7	1-414-398-11	s INDUCTOR (SMD) 10UH
L8	1-414-398-11	s INDUCTOR (SMD) 10UH
L9	1-414-398-11	s INDUCTOR (SMD) 10UH
L10	1-414-398-11	s INDUCTOR (SMD) 10UH
L11	1-414-398-11	s INDUCTOR (SMD) 10UH
Q1	8-729-807-51	s TRANSISTOR 2SD1623-S
Q2	8-729-101-07	s TRANSISTOR 2SB798
Q3	8-729-101-07	s TRANSISTOR 2SB798
Q4	8-729-905-35	s TRANSISTOR 2SC4081-R
R1	1-218-881-11	s RESISTOR, CHIP 27K 1/16W(1608)
R2	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R3	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R4	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R5	*b 1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
	*a 1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R7	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R8	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R9	1-218-871-11	s RESISTOR, CHIP 10K 1/16W (1608)
R10	1-218-880-11	s RESISTOR, CHIP 24K 1/16W (1608)
R11	1-218-891-11	s RESISTOR, CHIP 68K 1/16W (1608)
R12	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R13	1-218-859-11	s RESISTOR, CHIP 3.3K 1/16W(1608)
R15	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R16	1-218-896-11	s RESISTOR, CHIP 110K 1/16W(1608)
R17	1-218-879-11	s RESISTOR, CHIP 22K 1/16W (1608)
R18	1-216-827-11	s RESISTOR, CHIP 3.3K 1/16W 1608
R20	1-216-839-11	s RESISTOR, CHIP 33K 1/16W 1608
R28	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R29	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R30	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R31	1-216-857-11	s RESISTOR, CHIP 1M 1/16W(1608)
R32	1-216-857-11	s RESISTOR, CHIP 1M 1/16W(1608)
R33	1-216-803-11	s RESISTOR, CHIP 33 1/16W (1608)
R34	1-216-818-11	s RESISTOR, CHIP 560 1/16W 1608
R35	1-216-797-11	s RESISTOR, CHIP 10 1/16W (1608)
R36	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R37	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R38	1-216-797-11	s RESISTOR, CHIP 10 1/16W 1608
R39	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R40	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R41	1-216-809-11	s RESISTOR, CHIP 100 1/16W 1608
R42	1-216-821-11	s RESISTOR, CHIP 1.0K 1/16W(1608)
R43	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608) [for CE,SY,CN]
R44	1-216-864-11	s RESISTOR, CHIP 0 1/16W (1608) [for UC,J]
R45	1-216-801-11	s RESISTOR, CHIP 22 1/16W (1608)
R46	1-216-801-11	s RESISTOR, CHIP 22 1/16W (1608)
R47	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)
R48	1-216-845-11	s RESISTOR, CHIP 100K 1/16W(1608)

## (TG-187/187P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R49	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R50	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R51	*d 1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
	*c 1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R57	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R58	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R59	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R60	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R61	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R62	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R63	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R64	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R65	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R66	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for UC,J]
R67	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608) [for CE,SY,CN]
R69	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R71	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R72	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R73	1-216-801-11	s RESISTOR,CHIP 22 1/16W (1608)
R74	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
RB1	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB2	1-236-907-11	s RESISTOR,BLOCK 100K (1608)

## VA-199 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-984-A	o MOUNTED CIRCUIT BOARD, VA-199
C1	1-104-823-11	s CAPACITOR,TANTALUM 47MF/16V
C2	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C3	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C4	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C5	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C7	1-135-181-21	s CAPACITOR,TANTALUM 4.7MF/6.3V
C8	1-110-569-11	s CAPACITOR,TANTALUM 47MF/6.3V
C9	1-104-563-11	s CAPACITOR,CHIP FILM 0.1MF
C10	1-104-563-11	s CAPACITOR,CHIP FILM 0.1MF
C11	1-104-563-11	s CAPACITOR,CHIP FILM 0.1MF
C12	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V
C13	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C14	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C15	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C16	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C17	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C18	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C19	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C33	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C34	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C35	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C36	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C37	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C38	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C39	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C40	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C44	1-104-823-11	s CAPACITOR,TANTALUM 47MF/16V
C45	1-104-852-11	s CAPACITOR,TANTALUM 22MF/10V
C46	1-135-208-11	s CAPACITOR,TANTALUM 1MF/10V
C47	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C48	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C50	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C51	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C52	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C53	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C54	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C55	1-162-923-11	s CAPACITOR,CERAMIC 47PF/50V CH
C56	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C57	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C58	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C59	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C60	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C101	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C102	1-113-682-11	s CAPACITOR,TANTALUM 33MF/10V
C103	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C107	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C108	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C109	1-104-851-11	s CAPACITOR,TANTALUM 10MF/10V
C110	1-162-917-11	s CAPACITOR,CERAMIC 15PF/50V CH
C111	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C113	1-162-907-11	s CAPACITOR,CERAMIC 2PF/50V(CK)
C114	1-162-912-11	s CAPACITOR,CERAMIC 7PF/50V 1608
C115	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C116	1-164-156-11	s CAPACITOR,CERAMIC 0.1MF/25V F
C117	1-162-911-11	s CAPACITOR,CERAMIC 6PF/50V 1608
C118	1-135-181-21	s CAPACITOR,TANTALUM 4.7MF/6.3V

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C119	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C120	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C121	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C122	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C123	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C124	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C125	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C126	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C127	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C128	1-135-208-11	s CAPACITOR, TANTALUM 1MF/10V
C129	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C130	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C131	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C132	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C133	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C134	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C135	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C137	1-117-136-11	s CAPACITOR, ELECT 10MF/6.3V(BP)
C138	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C139	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C140	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C141	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C144	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C145	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C146	1-113-991-11	s CAPACITOR, TANTALUM 33MF/16V
C147	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C148	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C149	1-117-139-11	s CAPACITOR, ELECT 2.2MF/35V(BP)
C150	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C151	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C152	1-117-136-11	s CAPACITOR, ELECT 10MF/6.3V(BP)
C168	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C169	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C170	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C172	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C173	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C174	1-162-916-11	s CAPACITOR, CERAMIC 12PF/50V CH
C175	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C176	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C177	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C178	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C179	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C180	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C181	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C201	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C202	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C203	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C207	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C208	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C209	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C210	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C211	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C213	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C214	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C215	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C216	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C217	1-162-911-11	s CAPACITOR, CERAMIC 6PF/50V 1608
C218	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C219	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C220	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C221	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C222	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C223	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C224	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C225	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C226	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C227	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C228	1-135-208-11	s CAPACITOR, TANTALUM 1MF/10V
C229	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C230	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C231	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C232	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C233	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C234	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C235	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C237	1-117-136-11	s CAPACITOR, ELECT 10MF/6.3V(BP)
C238	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C239	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C240	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C241	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C244	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C245	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C246	1-113-991-11	s CAPACITOR, TANTALUM 33MF/16V
C247	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C248	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C249	1-117-139-11	s CAPACITOR, ELECT 2.2MF/35V(BP)
C250	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C251	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C252	1-117-136-11	s CAPACITOR, ELECT 10MF/6.3V(BP)
C268	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C269	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C270	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C272	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C273	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C274	1-162-916-11	s CAPACITOR, CERAMIC 12PF/50V CH
C275	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C276	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C277	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C278	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C279	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C280	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C281	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C301	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C302	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C303	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C307	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C308	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C309	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C310	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C311	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C313	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V(CK)
C314	1-162-912-11	s CAPACITOR, CERAMIC 7PF/50V 1608
C315	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C316	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C317	1-162-911-11	s CAPACITOR, CERAMIC 6PF/50V 1608
C318	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C319	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C320	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C321	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C322	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C323	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C324	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C325	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C326	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C327	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C328	1-135-208-11	s CAPACITOR, TANTALUM 1MF/10V
C329	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C330	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C331	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C332	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C333	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C334	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C335	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C337	1-117-136-11	s CAPACITOR, ELECT 10MF/6.3V (BP)
C338	1-164-156-11	s CAPACITOR, CERAMIC 0.1MF/25V F
C339	1-162-970-11	s CAPACITOR, CERAMIC 0.01MF/25V B
C340	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C341	1-162-907-11	s CAPACITOR, CERAMIC 2PF/50V (CK)
C344	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C345	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C346	1-113-991-11	s CAPACITOR, TANTALUM 33MF/16V
C347	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C348	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C349	1-117-139-11	s CAPACITOR, ELECT 2.2MF/35V (BP)
C350	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C351	1-135-181-21	s CAPACITOR, TANTALUM 4.7MF/6.3V
C352	1-117-136-11	s CAPACITOR, ELECT 10MF/6.3V (BP)
C368	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C369	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C370	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C372	1-104-851-11	s CAPACITOR, TANTALUM 10MF/10V
C373	1-162-910-11	s CAPACITOR, CERAMIC 5PF/50V 1608
C374	1-162-916-11	s CAPACITOR, CERAMIC 12PF/50V CH
C375	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C376	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C377	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C378	1-113-682-11	s CAPACITOR, TANTALUM 33MF/10V
C379	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C380	1-162-923-11	s CAPACITOR, CERAMIC 47PF/50V CH
C381	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
CN1	1-695-320-31	o PIN, CONNECTOR (1.5MM) (SMD) 2P
CN2	1-695-320-71	o PIN, CONNECTOR (1.5MM) (SMD) 2P
CN3	1-695-320-21	o PIN, CONNECTOR (1.5MM) SMD 2P
CN4	1-778-650-11	o CONNECTOR, FFC (ZIF) 30P
D1	8-719-421-69	s DIODE MA133
D4	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D5	8-719-033-73	s DIODE RD4.3UM-T1B1B2
D103	8-719-421-71	s DIODE MA132WA
D104	8-719-421-71	s DIODE MA132WA
D203	8-719-421-71	s DIODE MA132WA
D204	8-719-421-71	s DIODE MA132WA
D303	8-719-421-71	s DIODE MA132WA
D304	8-719-421-71	s DIODE MA132WA
E2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
E3	1-535-757-11	s CHIP, CHECKER (CONNECTOR)

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
FL101	1-233-342-11	s FILTER, TRAP
FL201	1-233-342-11	s FILTER, TRAP
FL301	1-233-342-11	s FILTER, TRAP
IC1	8-759-064-36	s IC MB88346BPFV
IC2	8-759-064-36	s IC MB88346BPFV
IC3	8-759-530-05	s IC TC4053BFT (EL.N)
IC4	8-759-669-72	s IC TL064CPWR
IC5	8-759-530-05	s IC TC4053BFT (EL.N)
IC7	8-759-659-74	s IC SN74HC175APWR
IC9	8-759-058-58	s IC TC7504FU-TE85R
IC10	8-759-659-96	s IC SN74HC08APWR
IC11	8-759-659-85	s IC SN74HC32APWR
IC12	8-759-669-45	s IC TL062CPWR-12
IC15	8-759-669-67	s IC TL074CPWR-12
IC16	8-759-530-05	s IC TC4053BFT (EL.N)
IC101	8-759-530-05	s IC TC4053BFT (EL.N)
IC102	8-759-271-18	s IC NJM1496V
IC103	8-759-530-05	s IC TC4053BFT (EL.N)
IC105	8-759-271-18	s IC NJM1496V
IC106	8-759-530-05	s IC TC4053BFT (EL.N)
IC107	8-759-669-72	s IC TL064CPWR
IC201	8-759-530-05	s IC TC4053BFT (EL.N)
IC202	8-759-271-18	s IC NJM1496V
IC203	8-759-530-05	s IC TC4053BFT (EL.N)
IC205	8-759-271-18	s IC NJM1496V
IC206	8-759-530-05	s IC TC4053BFT (EL.N)
IC207	8-759-669-72	s IC TL064CPWR
IC301	8-759-530-05	s IC TC4053BFT (EL.N)
IC302	8-759-271-18	s IC NJM1496V
IC303	8-759-530-05	s IC TC4053BFT (EL.N)
IC305	8-759-271-18	s IC NJM1496V
IC306	8-759-530-05	s IC TC4053BFT (EL.N)
IC307	8-759-669-72	s IC TL064CPWR
IC309	8-759-185-42	s IC LM4040AIM3-2.5
L101	1-412-957-11	s INDUCTOR 33UH (2520)
L102	1-412-961-11	s INDUCTOR (SMALL TYPE) 68UH
L201	1-412-957-11	s INDUCTOR 33UH (2520)
L202	1-412-961-11	s INDUCTOR (SMALL TYPE) 68UH
L301	1-412-957-11	s INDUCTOR 33UH (2520)
L302	1-412-961-11	s INDUCTOR (SMALL TYPE) 68UH
Q1	8-729-402-84	s TRANSISTOR XN4601
Q2	8-729-420-20	s TRANSISTOR XN4312
Q3	8-729-402-19	s TRANSISTOR XN6501
Q6	8-729-101-07	s TRANSISTOR 2SB798
Q7	8-729-807-51	s TRANSISTOR 2SD1623-S
Q9	8-729-101-07	s TRANSISTOR 2SB798
Q101	8-729-402-78	s TRANSISTOR XN6401
Q102	8-729-402-19	s TRANSISTOR XN6501
Q103	8-729-117-72	s TRANSISTOR 2SC4178
Q104	8-729-142-90	s TRANSISTOR 2SK853-K5
Q105	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q106	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q107	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q108	8-729-117-72	s TRANSISTOR 2SC4178
Q109	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q110	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q111	8-729-143-07	s TRANSISTOR 2SA1610-Y33



## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q112	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q113	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q114	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q115	8-729-117-72	s TRANSISTOR 2SC4178
Q116	8-729-905-35	s TRANSISTOR 2SC4081-R
Q117	8-729-403-29	s TRANSISTOR XN6435
Q118	8-729-403-32	s TRANSISTOR XN6534
Q119	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q120	8-729-402-19	s TRANSISTOR XN6501
Q121	8-729-402-78	s TRANSISTOR XN6401
Q122	8-729-905-35	s TRANSISTOR 2SC4081-R
Q123	8-729-905-35	s TRANSISTOR 2SC4081-R
Q124	8-729-905-35	s TRANSISTOR 2SC4081-R
Q201	8-729-402-78	s TRANSISTOR XN6401
Q202	8-729-402-19	s TRANSISTOR XN6501
Q203	8-729-117-72	s TRANSISTOR 2SC4178
Q204	8-729-142-90	s TRANSISTOR 2SK853-K5
Q205	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q206	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q207	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q208	8-729-117-72	s TRANSISTOR 2SC4178
Q209	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q210	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q211	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q212	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q213	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q214	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q215	8-729-117-72	s TRANSISTOR 2SC4178
Q216	8-729-905-35	s TRANSISTOR 2SC4081-R
Q217	8-729-403-29	s TRANSISTOR XN6435
Q218	8-729-403-32	s TRANSISTOR XN6534
Q219	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q220	8-729-402-19	s TRANSISTOR XN6501
Q221	8-729-402-78	s TRANSISTOR XN6401
Q222	8-729-905-35	s TRANSISTOR 2SC4081-R
Q223	8-729-905-35	s TRANSISTOR 2SC4081-R
Q224	8-729-905-35	s TRANSISTOR 2SC4081-R
Q301	8-729-402-78	s TRANSISTOR XN6401
Q302	8-729-402-19	s TRANSISTOR XN6501
Q303	8-729-117-72	s TRANSISTOR 2SC4178
Q304	8-729-142-90	s TRANSISTOR 2SK853-K5
Q305	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q306	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q307	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q308	8-729-117-72	s TRANSISTOR 2SC4178
Q309	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q310	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q311	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q312	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q313	8-729-026-52	s TRANSISTOR 2SA1576A-T106-R
Q314	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q315	8-729-117-72	s TRANSISTOR 2SC4178
Q316	8-729-905-35	s TRANSISTOR 2SC4081-R
Q317	8-729-403-29	s TRANSISTOR XN6435
Q318	8-729-403-32	s TRANSISTOR XN6534
Q319	8-729-143-07	s TRANSISTOR 2SA1610-Y33
Q320	8-729-402-19	s TRANSISTOR XN6501
Q321	8-729-402-78	s TRANSISTOR XN6401
Q322	8-729-905-35	s TRANSISTOR 2SC4081-R

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q323	8-729-905-35	s TRANSISTOR 2SC4081-R
Q324	8-729-905-35	s TRANSISTOR 2SC4081-R
R2	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R3	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R4	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R5	1-218-894-11	s RESISTOR,CHIP 91K 1/16W (1608)
R6	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R7	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R8	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R9	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R10	1-218-894-11	s RESISTOR,CHIP 91K 1/16W (1608)
R11	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R12	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R13	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R14	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R15	1-218-894-11	s RESISTOR,CHIP 91K 1/16W (1608)
R16	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R17	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R18	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R19	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R21	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R22	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R23	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R24	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R25	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R26	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R27	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R28	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R29	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R30	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R32	1-218-862-11	s RESISTOR,CHIP 4.3K 1/16W(1608)
R33	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R34	1-218-877-11	s RESISTOR,CHIP 18K 1/16W (1608)
R35	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R36	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R37	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R38	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R40	1-216-828-11	s RESISTOR,CHIP 3.9K 1/16W 1608
R41	1-216-828-11	s RESISTOR,CHIP 3.9K 1/16W 1608
R42	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R43	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R58	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R59	1-218-884-11	s RESISTOR,CHIP 36K 1/16W (1608)
R60	1-218-881-11	s RESISTOR,CHIP 27K 1/16W(1608)
R61	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R62	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R63	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R68	1-218-886-11	s RESISTOR,CHIP 43K 1/16W (1608)
R69	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R70	1-218-877-11	s RESISTOR,CHIP 18K 1/16W (1608)
R71	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R72	1-216-845-11	s RESISTOR,CHIP 100K 1/16W(1608)
R73	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R75	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R76	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R77	1-216-797-11	s RESISTOR,CHIP 10 1/16W 1608
R78	1-216-838-11	s RESISTOR CHIP 27K 1/16W(1608)
R79	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)



## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R81	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R82	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R83	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R84	1-218-852-11 s	RESISTOR,CHIP 1.6K 1/16W(1608)
R85	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R86	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R87	1-218-852-11 s	RESISTOR,CHIP 1.6K 1/16W(1608)
R88	1-218-848-11 s	RESISTOR,CHIP 1.1K 1/16W(1608)
R90	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R91	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R92	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R93	1-216-845-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R101	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R102	1-216-824-11 s	RESISTOR,CHIP 1.8K 1/16W 1608
R103	1-216-842-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R104	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R105	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R106	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R107	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R109	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R110	1-218-852-11 s	RESISTOR,CHIP 1.6K 1/16W(1608)
R111	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R112	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R113	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R114	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R115	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R116	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R117	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R118	1-218-877-11 s	RESISTOR,CHIP 18K 1/16W (1608)
R119	1-218-829-11 s	RESISTOR,CHIP 180 1/16W (1608)
R120	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R121	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R122	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R123	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R125	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R126	1-216-837-11 s	RESISTOR,CHIP 22K 1/16W 1608
R127	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R128	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R129	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R130	1-218-837-11 s	RESISTOR,CHIP 390 1/16W (1608)
R131	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R132	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R133	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R134	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R135	1-218-837-11 s	RESISTOR,CHIP 390 1/16W (1608)
R136	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R137	1-218-870-11 s	RESISTOR,CHIP 9.1K 1/16W(1608)
R138	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R139	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R140	1-216-825-11 s	RESISTOR,CHIP 2.2K 1/16W 1608
R141	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R142	1-211-984-11 s	RESISTOR,CHIP 43 1/16W (1608)
R143	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R144	1-218-838-11 s	RESISTOR,CHIP 430 1/16W (1608)
R145	1-218-838-11 s	RESISTOR,CHIP 430 1/16W (1608)
R146	1-218-837-11 s	RESISTOR,CHIP 390 1/16W (1608)
R147	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R148	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R149	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R150	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R154	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R155	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R156	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R157	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R158	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R159	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R160	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R161	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R162	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R163	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R164	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R165	1-218-837-11 s	RESISTOR,CHIP 390 1/16W (1608)
R166	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R167	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R168	1-216-824-11 s	RESISTOR,CHIP 1.8K 1/16W 1608
R169	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R170	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R171	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R172	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R173	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R174	1-216-809-11 s	RESISTOR,CHIP 100 1/16W 1608
R175	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R176	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R177	1-218-869-11 s	RESISTOR,CHIP 8.2K 1/16W(1608)
R178	1-218-876-11 s	RESISTOR,CHIP 16K 1/16W (1608)
R180	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R181	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R182	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R183	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R191	1-216-861-11 s	RESISTOR,CHIP 2.2M 1/16W 1608
R192	1-216-860-11 s	RESISTOR,CHIP 1.8M 1/16W 1698
R194	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R195	1-218-901-11 s	RESISTOR,CHIP 180K 1/16W(1608)
R197	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R198	1-218-865-11 s	RESISTOR,CHIP 5.6K 1/16W(1608)
R199	1-216-863-11 s	RESISTOR,CHIP 3.3M 1/16W 1608
R201	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R202	1-216-824-11 s	RESISTOR,CHIP 1.8K 1/16W 1608
R203	1-216-842-11 s	RESISTOR,CHIP 56K 1/16W(1608)
R204	1-216-839-11 s	RESISTOR,CHIP 33K 1/16W 1608
R205	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R206	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R207	1-216-829-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R209	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608
R210	1-218-852-11 s	RESISTOR,CHIP 1.6K 1/16W(1608)
R211	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R212	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R213	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R214	1-216-833-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R215	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R216	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R217	1-218-856-11 s	RESISTOR,CHIP 2.4K 1/16W(1608)
R218	1-218-877-11 s	RESISTOR,CHIP 18K 1/16W (1608)
R219	1-218-829-11 s	RESISTOR,CHIP 180 1/16W (1608)
R220	1-216-821-11 s	RESISTOR,CHIP 1.0K 1/16W(1608)
R221	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R222	1-216-823-11 s	RESISTOR,CHIP 1.5K 1/16W
R223	1-216-827-11 s	RESISTOR,CHIP 3.3K 1/16W 1608

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R225	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R226	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R227	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R228	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R229	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R230	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R231	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R232	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R233	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R234	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R235	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R236	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R237	1-218-870-11	s RESISTOR,CHIP 9.1K 1/16W(1608)
R238	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R239	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R240	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R241	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R242	1-211-984-11	s RESISTOR,CHIP 43 1/16W (1608)
R243	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R244	1-218-838-11	s RESISTOR,CHIP 430 1/16W (1608)
R245	1-218-838-11	s RESISTOR,CHIP 430 1/16W (1608)
R246	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R247	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R248	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R249	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R250	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R254	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R255	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R256	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R257	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R258	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R259	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R260	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R261	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R262	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R263	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R264	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R265	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R266	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R267	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R268	1-216-824-11	s RESISTOR,CHIP 1.8K 1/16W 1608
R269	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R270	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R271	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R272	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R273	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R274	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R275	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R276	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R277	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R278	1-218-876-11	s RESISTOR,CHIP 16K 1/16W (1608)
R280	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R281	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R282	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R283	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R291	1-216-861-11	s RESISTOR,CHIP 2.2M 1/16W 1608
R292	1-216-860-11	s RESISTOR,CHIP 1.8M 1/16W 1698
R294	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R295	1-218-901-11	s RESISTOR,CHIP 180K 1/16W(1608)

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R297	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R298	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R299	1-216-863-11	s RESISTOR,CHIP 3.3M 1/16W 1608
R301	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R302	1-216-824-11	s RESISTOR,CHIP 1.8K 1/16W 1608
R303	1-216-842-11	s RESISTOR,CHIP 56K 1/16W(1608)
R304	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R305	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R306	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R307	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R309	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R310	1-218-852-11	s RESISTOR,CHIP 1.6K 1/16W(1608)
R311	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R312	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R313	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R314	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R315	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R316	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R317	1-218-856-11	s RESISTOR,CHIP 2.4K 1/16W(1608)
R318	1-218-877-11	s RESISTOR,CHIP 18K 1/16W (1608)
R319	1-218-829-11	s RESISTOR,CHIP 180 1/16W (1608)
R320	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R321	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R322	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R323	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R325	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R326	1-216-837-11	s RESISTOR,CHIP 22K 1/16W 1608
R327	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R328	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R329	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R330	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R331	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R332	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R333	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R334	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R335	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R336	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R337	1-218-870-11	s RESISTOR,CHIP 9.1K 1/16W(1608)
R338	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R339	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R340	1-216-825-11	s RESISTOR,CHIP 2.2K 1/16W 1608
R341	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R342	1-211-984-11	s RESISTOR,CHIP 43 1/16W (1608)
R343	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R344	1-218-838-11	s RESISTOR,CHIP 430 1/16W (1608)
R345	1-218-838-11	s RESISTOR,CHIP 430 1/16W (1608)
R346	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R347	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R348	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R349	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R350	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R354	1-216-839-11	s RESISTOR,CHIP 33K 1/16W 1608
R355	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R356	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R357	1-216-827-11	s RESISTOR,CHIP 3.3K 1/16W 1608
R358	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R359	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R360	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R361	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R362	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R363	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R364	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R365	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R366	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R367	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R368	1-216-824-11	s RESISTOR,CHIP 1.8K 1/16W 1608
R369	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R370	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R371	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R372	1-216-823-11	s RESISTOR,CHIP 1.5K 1/16W
R373	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R374	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R375	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R376	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R377	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R378	1-218-876-11	s RESISTOR,CHIP 16K 1/16W (1608)
R380	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R381	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R382	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R383	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R391	1-216-861-11	s RESISTOR,CHIP 2.2M 1/16W 1608
R392	1-216-860-11	s RESISTOR,CHIP 1.8M 1/16W 1698
R394	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R395	1-218-901-11	s RESISTOR,CHIP 180K 1/16W(1608)
R397	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R398	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R399	1-216-863-11	s RESISTOR,CHIP 3.3M 1/16W 1608
R400	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R401	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R402	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R403	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R404	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R405	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R406	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R407	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R500	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R501	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R502	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R503	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R504	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R505	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R506	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R507	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R600	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R601	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R602	1-216-829-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R603	1-216-821-11	s RESISTOR,CHIP 1.0K 1/16W(1608)
R604	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R605	1-216-809-11	s RESISTOR,CHIP 100 1/16W 1608
R606	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R607	1-216-833-11	s RESISTOR,CHIP 10K 1/16W (1608)
R700	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R701	1-218-833-11	s RESISTOR,CHIP 270 1/16W (1608)
R702	1-218-833-11	s RESISTOR,CHIP 270 1/16W (1608)
R703	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R704	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R707	1-218-917-11	s RESISTOR,CHIP 820K 1/16W(1608)
R800	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)

## (VA-199 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R801	1-218-833-11	s RESISTOR,CHIP 270 1/16W (1608)
R802	1-218-833-11	s RESISTOR,CHIP 270 1/16W (1608)
R803	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R804	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R807	1-218-917-11	s RESISTOR,CHIP 820K 1/16W(1608)
R900	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R901	1-218-833-11	s RESISTOR,CHIP 270 1/16W (1608)
R902	1-218-833-11	s RESISTOR,CHIP 270 1/16W (1608)
R903	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R904	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R907	1-218-917-11	s RESISTOR,CHIP 820K 1/16W(1608)
RB1	1-236-904-11	s RESISTOR,NETWORK 1K (1608)
RB2	1-236-907-11	s RESISTOR,BLOCK 100K (1608)
TP1	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP2	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP102	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP202	1-535-757-11	s CHIP, CHECKER (CONNECTOR)
TP302	1-535-757-11	s CHIP, CHECKER (CONNECTOR)

-----  
FRAME  
-----

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-528-174-31	s BATTERY, LITHIUM CR2032
HN101	1-783-283-13	s CABLE, FLEXIBLE FLAT (50-CORE) [CN14/MB board to CN504/AA board]
HN102		(CN506/AA board)
1pc	1-565-978-11	o HOUSING, CONNNECTOR 6P
6pcs	1-565-977-11	s TERMINAL, SOLDERLESS
		(CN701/LE board)
1pc	1-565-978-11	o HOUSING, CONNNECTOR 6P
6pcs	1-565-977-11	s TERMINAL, SOLDERLESS
HN103		(CN503/AT board)
1pc	1-565-978-11	o HOUSING, CONNNECTOR 6P
6pcs	1-565-977-11	s TERMINAL, SOLDERLESS
		(CN1/SE-566 board)
1pc	1-565-978-11	o HOUSING, CONNNECTOR 6P
6pcs	1-565-977-11	s TERMINAL, SOLDERLESS
HN104	1-677-405-11	s PRINTED WIRING BOARD, CN-1981 [CN15/MB board to CN1/TG board]
HN105	1-783-288-13	s CABLE, FLEXIBLE FLAT (30-CORE) [CN5/MB board to CN4/VA board]
HN106	1-783-285-13	s CABLE, FLEXIBLE FLAT (50-CORE) [CN16/MB board to CN306/PSW board]
HN107		(CN305/PSW board)
1pc	1-695-892-11	o HOUSING, CONNECTOR 12P
12pcs	1-695-215-11	o TERMINAL, SOLDERLESS
		(W401/CN-1864 board)
1pc	1-695-892-11	o HOUSING, CONNECTOR 12P
12pcs	1-695-215-11	o TERMINAL, SOLDERLESS
HN108	1-783-282-14	s CABLE, FLEXIBLE FLAT (50-CORE) [CN3/MB board to CN3/FP-118A/122 board]
HN109	1-783-282-14	s CABLE, FLEXIBLE FLAT (50-CORE) [CN2/MB board to CN2/FP-118A/122 board]
HN110	1-777-865-13	s CABLE, FLEXIBLE FLAT (40-CORE) [CN1/MB board to CN1/FP-118A/122 board]
HN111		(CN5/FP-122 board)
1pc	1-569-618-11	o HOUSING, CONNECTOR 3P
3pcs	1-565-977-11	s TERMINAL, SOLDERLESS
HN112	1-777-902-11	o WIRE, FLAT TYPE (10-CORE) [CN4/FP-118A/122 board to CN1/KY board]
HN113	1-783-363-11	s WIRE, FLAT TYPE (10-CORE) [CN8/FP-118A/122 board to CN801/FP-99 board]
HN114	1-958-485-11	o HARNESS, SUB SW929) [CN803/FP-99 board to CN101/SW-929 board]
HN115	1-958-499-12	s HARNESS, SUB (MB-CPS) (CN3/CP board)
1pc	1-561-514-00	o CONNECTOR HOUSING, ILG (2P)
2pcs	1-560-372-00	o TERMINAL, PRESS
		(CN22/MB board)
1pc	1-562-644-11	s SOCKET, CONNECTOR 2P
2pcs	1-562-643-11	o TERMINAL, SOLDERLESS
HN116	1-958-496-11	s HARNESS, SUB (POWER LINE)
1pc	1-500-111-11	s CORE
1pc	1-564-603-31	s CONNECTOR (WITH DC SW) 4P
1pc	1-553-442-21	s SWITCH, MICRO (TO CN6/CP board)
1pc	1-580-582-11	o HOUSING, CONNECTOR 12P
9pcs	1-573-176-11	o TERMINAL, SOLDERLESS
1pc	1-580-599-11	o TERMINAL, SOLDERLESS

(FRAME)

Ref. No. or Q'ty	Part No.	SP Description
HN117	1-958-497-12	s HARNESS, SUB (BATTERY)
1pc	1-766-377-13	s CONNECTOR, BATTERY (TO CN7/CP board)
1pc	1-580-581-11	o HOUSING, CONNECTOR 10P
6pcs	1-573-176-11	o TERMINAL, SOLDERLESS
3pcs	1-580-599-11	o TERMINAL, SOLDERLESS
HN118	1-958-498-11	o HARNESS, SUB (CP-LIGHT) (CN9/CP board)
1pc	1-561-516-00	o CONNECTOR HOUSING, ILG (4P)
4pcs	1-560-372-00	o TERMINAL, PRESS
		(CN901/PS board)
1pc	1-561-516-00	o CONNECTOR HOUSING, ILG (4P)
4pcs	1-560-372-00	o TERMINAL, PRESS
HN119		(CN2/CN-1823 board)
1pc	1-569-519-11	o HOUSING, CONNECTOR 7P
6pcs	1-565-977-11	s TERMINAL, SOLDERLESS
		(CN102/DV board)
1pc	1-565-978-11	o HOUSING, CONNNECTOR 6P
6pcs	1-565-977-11	s TERMINAL, SOLDERLESS
HN120	1-777-866-12	s CABLE, FLEXIBLE FLAT (45-CORE) [CN11/MB board to CN773/RP board]
HN121	1-777-864-11	s CABLE, FLEXIBLE FLAT (20-CORE) [CN772/RP board to CN501/SV board]
HN122	1-777-867-12	s CABLE, FLEXIBLE FLAT (50-CORE) [CN10/MB board to CN502/SV board]
HN123	1-958-486-11	o HARNESS, SUB (DU27) [CN23/MB board to CN1/DU board]
HN124		(CN2/CN-1874 board)
1pc	1-561-514-00	o CONNECTOR HOUSING, ILG (2P)
2pcs	1-560-372-00	o TERMINAL, PRESS
		(VIDEO LIGHT CONNECTOR)
1pc	1-561-514-00	o CONNECTOR HOUSING, ILG (2P)
2pcs	1-560-372-00	o TERMINAL, PRESS
HN201	A-8322-163-A	s MOUNTED CIRCUIT BOARD, CN-1811 [CN20/MB board to CN501/AT board]

## 1-4. Supplied Accessories List

### DSR-390/390P

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-528-174-31 s	BATTERY,LITHIUM CR2032
1pc	3-613-311-01 s	CAP,CN
1pc	3-764-889-01 o	CHART,ADJUSTMENT
1pc	3-776-645-01 s	OPERATING INSTRUCTIONS [for J]
1pc	3-776-645-11 s	OPERATING INSTRUCTIONS [for SY,CN,UC]
1pc	3-776-663-01 s	PACK,CD-ROM [for SY,CN,UC]
1pc	A-6772-374-C s	BELT ASSY, SHOULDER

### DSR-370/370P

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-528-174-31 s	BATTERY,LITHIUM CR2032
1pc	3-206-359-02 o	MANUAL, INSTRUCTION [for J]
1pc	3-206-359-12 o	MANUAL, INSTRUCTION [for SY,CN,UC]
1pc	3-613-311-01 s	CAP,CN
1pc	3-764-889-01 o	CHART,ADJUSTMENT
1pc	3-691-094-02 s	PACK,CD-ROM [for SY,CN,UC]
1pc	A-6772-374-C s	BELT ASSY, SHOULDER

### DSR-300A/300AP

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-6772-374-C s	BELT ASSY, SHOULDER
1pc	1-528-174-31 s	BATTERY,LITHIUM CR2032
1pc	1-542-296-23 o	MICROPHONE
1pc	3-179-882-01 o	SPACER, MICROPHONE
1pc	3-203-818-02 s	MANUAL, INSTRUCTION [JAPANESE]
1pc	3-203-818-12 s	MANUAL, INSTRUCTION [ENGLISH]
1pc	3-203-818-22 s	MANUAL, INSTRUCTION [FRENCH]
1pc	3-203-818-32 s	MANUAL, INSTRUCTION [GERMAN]
1pc	3-203-818-42 s	MANUAL, INSTRUCTION [ITALIAN]
1pc	3-613-311-01 s	CAP,CN
1pc	3-764-889-01 o	CHART,ADJUSTMENT

## 1-5. Optional Fixtures List

Ref. No. or Q'ty	Part No.	SP Description
	J-6080-029-A o	SMALL ADJUSTMENT MIRROR
	J-6082-231-A o	WASHER ATTACHING TOOL (for 1.5)
	J-6082-232-A o	WASHER ATTACHING TOOL (for 1.2)
	J-6082-233-A o	WASHER ATTACHING TOOL (for 0.8)
	J-6082-234-A o	WASHER REMOVING TOOL A
	J-6082-236-A o	WASHER ATTACHING/DETACHING KIT
	J-6082-362-A o	TAPE GUIDE ADJUSTING SCREWDRIVER
	J-6082-373-A o	TORQUE CASSETTE
	J-6276-320-A o	EXTENSION BOARD, EX-622
	J-6325-110-A o	TORQUE SCREWDRIVER BIT (for 1.4)
	J-6325-380-A o	TORQUE SCREWDRIVER BIT (for M2)
	J-6325-400-A o	TORQUE SCREWDRIVER (3 kg)
	J-6441-740-A o	EXTENSION BOARD, DJ-174
	J-6442-350-A o	RF EXTENSION BOARD
	J-6442-410-A o	CASSETTE REFERENCE BOARD
	J-6442-420-A o	GUIDE GAUGE
	J-6442-430-A o	REEL TABLE HEIGHT CHECK GAUGE
	J-6442-510-A o	TORQUE GAUGE 90ATG
	J-6442-520-A o	REWINDING TORQUE MEASURING ATTACHMENT
	3-184-527-01 o	CLEANING CLOTH
	7-432-114-11 o	THREE BOND 1401B
	7-651-000-10 o	GREASE SGL-601 (50g)
	8-967-999-02 o	ALIGNMENT TAPE, XH2-1AST
	8-967-999-21 o	ALIGNMENT TAPE, XH5-1A (for NTSC)
	8-967-999-25 o	ALIGNMENT TAPE, XH5-1AP (for PAL)
	9-910-573-01 o	CLEANING LIQUID

## Section 2

### Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.

For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.

In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled "Semiconductor Pin Assignments" (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.

The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.

Pin assignments and block diagrams are based on the IC manufacturer's data book.

本機に使用されている半導体型名の一覧を下記に示します。索引中、ページが記載されている半導体は、本章の該当ページを参照してください。ただし、互換性のない型名を併記している場合がありますので、部品を交換するときは、Spare Partsの章を参照してください。

また、ID番号が記載されている半導体は、別途発行の "Semiconductor Pin Assignments" CD-ROM版 (ソニー部品番号: 9-968-546-xx) を参照してください。半導体型名またはID番号から検索ができます。

マニュアルまたはCD-ROMに掲載されている半導体は、それぞれの機能を等価的に表わしたものです。

外観やインデックスマークの表示方法が実物と異なる場合があります。

ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE	Page or ID No.	DIODE	Page or ID No.
1SS123-T1 .....	DC001-01	MA132WK-TX .....	DC001-03
1SS184 .....	DC001-03	MA133 .....	DC001-01
1SS226 .....	DC001-01	MA133-TX .....	DC001-01
1SS300-TE85L .....	DC001-02	MA141WK .....	DC001-03
1SS301-TE85L .....	DC001-03	MA3J142E0LSO .....	DC001-03
1SS302 .....	DC001-01	MA3J14300LSO .....	DC001-01
1SS302-TE85L .....	DC001-01	MA795-TX .....	DC001-06
1SS351-TB .....	DC001-01		
1SS355TE-17 .....	DC008-02	RB051L-40 .....	DC007-01
1SS376TE-17 .....	DC008-02	RB051L-40TE25 .....	DC007-01
		RB411D .....	DC001-06
DAN202U .....	DC001-03	RB411D(RECTI) .....	DC001-06
DAN202UT106 .....	DC001-03	RB411D-T146 .....	DC001-06
DAN222 .....	DC001-03	RD11M-B1 .....	DC001-04
DAN222-TL .....	DC001-03	RD11M-T1B1 .....	DC001-04
DAP202U .....	DC001-02	RD2.0UH-T1 .....	DC008-04
DAP202UT106 .....	DC001-02	RD2.4M-B .....	DC001-04
DAP222 .....	DC001-02	RD2.4M-T1B .....	DC001-04
DAP222-TL .....	DC001-02	RD4.3UH-T1 .....	DC008-04
		RD4.7UH-T1 .....	DC008-04
EA60QC06-F .....	DC002-03	RD5.6M-B1 .....	DC001-04
EA60QC06-TE16F2 .....	DC002-03	RD5.6M-B2 .....	DC001-04
ERC04-06SU2 .....	DA004-01	RD5.6M-T1B .....	DC001-04
		RD5.6M-T1B1 .....	DC001-04
HSM88WK .....	DC001-03	RD6.8M-T1B .....	DC001-04
HSM88WK-TL .....	DC001-03	RD6.8M-T1B(5MA) .....	DC001-04
		RD8.2M-B1 .....	DC001-05
KV1470 .....	DC001-13	RD8.2M-T1B1 .....	DC001-05
KV1470(5MA) .....	DC001-13	RD9.1UM-T1B2 .....	DC008-04
KV1470TL00 .....	DC001-13		
		SB007-03CP .....	DC001-06
MA121 .....	DC005-01	SB007-03CP-TB .....	DC001-06
MA121-TW .....	DC005-01	SB01-05CP .....	DC001-06
MA132WA .....	DC001-02	SB01-05CP(RECTI) .....	DC001-06
MA132WA-TX .....	DC001-02	SB01-05CP-TB .....	DC001-06
MA132WK .....	DC001-03	SB05-05CP(RECTI) .....	DC001-06



# Index

DIODE	Page or ID No.
SB05-05CP-TB .....	DC001-06
SB05W05C .....	DC001-03
SB05W05C-TB .....	DC001-03
SB10-05PCP .....	DC002-04
SB10-05PCP-TD .....	DC002-04
U05G .....	DA004-01
UDZS-TE17-5.6B .....	DC008-04
UDZSTE-175.6B .....	DC008-04

LED	Page or ID No.
CL-150G-CD .....	LC001-01
CL-150G-CD-T .....	LC001-01
CL-150SD-CD .....	LC001-01
CL-150SD-CD-T .....	LC001-01
CL-150Y-CD .....	LC001-01
CL-150Y-CD-T .....	LC001-01
EBR3368S .....	LR010-02
GL3UR8 .....	LR002-01
GL4600S .....	LA002-02

TRANSISTOR	Page or ID No.
2SA1036K-R .....	TC001-01
2SA1036K-T-146-R .....	TC001-01
2SA1037AK-T146-QR .....	TC001-01
2SA1037AK-T146-R .....	TC001-01
2SA1213Y-TE12L .....	TC002-01
2SA1226-E4 .....	TC001-01
2SA1226-T1E3E4 .....	TC001-01
2SA1576A-T106-QR .....	TC001-01
2SA1576A-T106-R .....	TC001-01
2SA1610-T1Y34 .....	TC001-01
2SA1610-Y33 .....	TC001-01
2SA1611-M5M6 .....	TC001-01
2SA1611T1-M5M6 .....	TC001-01
2SB1115A .....	TC002-01
2SB1115A-YQ .....	TC002-01
2SB1132-T101-QR .....	TC002-01
2SB1203S-FA .....	TR031-02
2SB1203S-TL .....	TR031-02
2SB624-BV345 .....	TC001-01
2SB624-BV5 .....	TC001-01
2SB624-T1BV4 .....	TC001-01
2SB624-T1BV5 .....	TC001-01
2SB798 .....	TC002-01
2SB798-DL .....	TC002-01
2SC1009A-FA4 .....	TC001-02
2SC1009A-T1FA4 .....	TC001-02
2SC1623 .....	TC001-02

TRANSISTOR	Page or ID No.
2SC2412K-T-146-QR .....	TC001-02
2SC2713-G .....	TC001-02
2SC2713G-TE85L .....	TC001-02
2SC2873Y-TE12L .....	TC002-02
2SC2873Y-TE12R .....	TC002-02
2SC4081T106R .....	TC001-02
2SC4176-B34 .....	TC001-02
2SC4176-T1B34 .....	TC001-02
2SC4177 .....	TC001-02
2SC4177-L6 .....	TC001-02
2SC4177-T1L5L6 .....	TC001-02
2SC4178 .....	TC001-02
2SC4178-F13 .....	TC001-02
2SC4178-T1F13 .....	TC001-02
2SC4207-YGRTE85L .....	TC008-11
2SC4213-AB-TE85L .....	TC001-02
2SC4213-B .....	TC001-02
2SC4213B-TE85L .....	TC001-02
2SD1623-S .....	TC002-02
2SD2216J-R(TX).SO .....	TC001-02
2SD596-DV5 .....	TC001-02
2SD596-T1DV4 .....	TC001-02
2SD596-T1DV5 .....	TC001-02
2SD596DV345 .....	TC001-02
2SJ187 .....	TC002-06
2SJ187-TD .....	TC002-06
2SK711-BL .....	TC001-05
2SK711-BL(TE85L) .....	TC001-05
2SK853-K5 .....	TC001-05
2SK853-T1K5 .....	TC001-05
2SK94-T1X2X3X4 .....	TC001-05
2SK94-X2X3X4 .....	TC001-05
DTA114EUA .....	TC001-04
DTA114EUA-T106 .....	TC001-04
DTA144EUA-T106 .....	TC001-04
DTC114EUA-T106 .....	TC001-03
DTC144EKA .....	TC001-03
DTC144EKA-T146 .....	TC001-03
DTC144EUA-T106 .....	TC001-03
FMY1A-T148 .....	TC008-01
FP102T-TL .....	TC014-01
IMB2 .....	TC005-07
IMB2-T110 .....	TC005-07
IMT1AT108 .....	TC006-10
IMT1US .....	TC006-09
IMT1US-T110 .....	TC006-09
IMX1 .....	TC005-01
IMX1T110 .....	TC005-01
PT483F1 .....	TR037-01
PT483F1S .....	TR037-01
SI4410DY-T1-REVA .....	TC012-06
SI4435DY-T1-REVA .....	TC012-04
SI9435DY-T1 .....	TC012-04

DSR-390/390P/370/370P/300A/300AP V2

# Index

IC	Page or ID No.
ICX038DLA-1 .....	ICX038DLA-1
ICX039DLA-1 .....	ICX038DLA-1
IDT71V256SA15PZ-TL .....	IDT71256L-35TP
LC75821W-DS .....	LC75821W
LM2901M .....	NJM2901N
LM35DM .....	LM35DM
LM35DMX .....	LM35DM
LM4040AIM3-2.5 .....	LM4040BIM3
LT1253CS8(E2) .....	LT1253CS8
LT1253CS8-E2 .....	LT1253CS8
LT1254CS-E2 .....	LT1254CS
MAX202CSE .....	MAX202CSE
MAX202CSE-T .....	MAX202CSE
MB3793-30PNF-ER .....	MB3793-42PNF
MB88346BPFV .....	MB88346APF
MB88346BPFV-EF .....	MB88346APF
MB88347LPFV-ER .....	MB88347PFV-G-BND
MBM29F800BA-90PF .....	MBM29F800BA-90PFTN
MC14051BF .....	MC74HC4051N
MCD005AM-TLM .....	MCD005AM
MM74HC00MTCX .....	TC74HC00P
MM74HCT244SJX .....	TC74HC244P
NJM062M .....	RC4558
NJM062M-TE2 .....	RC4558
NJM062V(TE2) .....	RC4558
NJM062V-TE2 .....	RC4558
NJM1496V(TE2) .....	MC1496P
NJM1496V-TE2 .....	MC1496P
NJM2041M-D .....	RC4558
NJM2041M-D(TE2) .....	RC4558
NJM2060V(TE2) .....	XRA10324AF
NJM2249V(TE2) .....	NJM2249V
NJM2534V(TE2) .....	NJM2234M
NJM2901M-TE2 .....	NJM2901N
NJM2901V(TE2) .....	NJM2901N
NJM2903M .....	UA393DC
NJM2903M-TE2 .....	UA393DC
NJM2903V(TE2) .....	UA393DC
NJM2904M .....	RC4558
NJM2904M(TE2) .....	RC4558
NJM324V(TE2) .....	XRA10324AF
NJM3403AM .....	XRA10324AF
NJM3403AM(TE2) .....	XRA10324AF
NJM386M(TE2) .....	NJM386D-E
NJM4558V(TE2) .....	RC4558
NJM4558V-TE2 .....	RC4558
NJM4560M .....	RC4558
NJM4560M-D(TE2) .....	RC4558
NJM4560M-TE2 .....	RC4558
NJM4560MD-TE2 .....	RC4558
NJM4580E(TE2) .....	RC4558
NJM4580V(TE2) .....	RC4558
NJM4580V-TE2 .....	RC4558
NJM4580VTE2 .....	RC4558

IC	Page or ID No.
REF-03GSR .....	REF-03GS
RH5RL33AA-T1 .....	NJU7201U50
RH5RL50AA-T1 .....	NJU7201U50
S-80741AL-A5-S .....	S-8051ANB
S-80741AL-A5-T1 .....	S-8051ANB
S-80745AN-D9-S .....	S-8054HN-CB
S-80750AN-JE-T1 .....	S-8054HN-CB
S-80840ANUP-ED4-T2 .....	S-8054HN-CB
S-81230SGUP-DQB-T1 .....	S-81225AG-RH
SC7S32F .....	TC7S32F
SM5872AS-ET .....	SM5872AS-ET
SN74HC00APW-E20 .....	TC74HC00P
SN74HC00APWR .....	TC74HC00P
SN74HC04APW-E20 .....	TC74HC04P
SN74HC04APWR .....	TC74HC04P
SN74HC08APW-E05 .....	TC74HC08P
SN74HC08APW-E20 .....	TC74HC08P
SN74HC08APWR .....	TC74HC08P
SN74HC158APW-E05 .....	TC74HC158P
SN74HC164APWR .....	TC74HC164P
SN74HC165ANSR .....	TC74HC165P
SN74HC165APW-E20 .....	TC74HC165P
SN74HC165APWR .....	TC74HC165P
SN74HC175APW-E20 .....	TC74HC175P
SN74HC193ANS .....	TC74HC193P
SN74HC193ANSR .....	TC74HC193P
SN74HC244APW-E05 .....	TC74HC244P
SN74HC244APWR .....	TC74HC244P
SN74HC32APW-E05 .....	TC74HC32P
SN74HC32APW-E20 .....	TC74HC32P
SN74HC32APWR .....	TC74HC32P
SN74HC595ADBR .....	TC74HC595P
SN74HC74APW-E05 .....	TC74HC74P
SN74HC74APW-E20 .....	TC74HC74P
SN74HC74APWR .....	TC74HC74P
SN74HCT08APW-E20 .....	TC74HC08P
SN74HCT08APWR .....	TC74HC08P
SN74HCT244ANS .....	TC74HC244P
SN74HCT244ANSR .....	TC74HC244P
SN74HCT244APW-E05 .....	TC74HC244P
SN74HCT244APWR .....	TC74HC244P
SN74HCT541APW(R) .....	MC74HC541N
SN74HCT541APWR .....	MC74HC541N
SN74LS123NS .....	SN74123N
SN74LS123NSR .....	SN74123N
SN74LV245APWR .....	TC74HC245P
STK12C68-S45 .....	STK12C68-S45
TC4051BFT(EL,N) .....	MC74HC4051N
TC4052BFT(EL,N) .....	MC74HC4052N
TC4053BFT(EL,N) .....	MC74HC4053F
TC4066BFT(EL,N) .....	CD4066AE
TC4S69F .....	TC7S04F
TC4S69F(TE85R) .....	TC7S04F
TC4W53F .....	TC4W53FU
TC4W53F(TE12R) .....	TC4W53FU
TC4W53FU .....	TC4W53FU

IC	Page or ID No.	IC	Page or ID No.
TC4W53FU(TE12R) .....	TC4W53FU	TL062CPW .....	RC4558
TC4W66FU(TE12R) .....	TC4W66F	TL062CPW-E05 .....	RC4558
TC74AC04FT(EL) .....	TC74HC04P	TL062CPWR-12 .....	RC4558
TC74HC165AF(EL) .....	TC74HC165P	TL064CPW .....	XRA10324AF
TC74HC4052AFT(EL) .....	MC74HC4052N	TL064CPW-E05 .....	XRA10324AF
TC74HC4053AFT(EL) .....	MC74HC4053F	TL064CPWR .....	XRA10324AF
TC74HC4538AFT(EL) .....	MC74HC4538N	TL074CPW .....	XRA10324AF
TC74VHC00FT(EL) .....	TC74HC00P	TL074CPW-E05 .....	XRA10324AF
TC74VHC04FT(EL) .....	TC74HC04P	TL074CPWR-12 .....	XRA10324AF
TC74VHC08FS(EL) .....	TC74HC08P	TL1451ACPWR-12 .....	TL1451CNS
TC74VHC08FT(EL) .....	TC74HC08P	TL32088CNS-E20 .....	TL32088CNS
TC74VHC125FT(EL) .....	MC74HC125N	TL32088CNSR .....	TL32088CNS
TC74VHC157FT(EL) .....	TC74HC157P	TL5001CD .....	TL5001
TC74VHC244FT(EL) .....	TC74HC244P	TL5001CDR .....	TL5001
TC74VHC32FT(EL) .....	TC74HC32P	TLC272CPWR .....	RC4558
TC74VHC374FT(EL) .....	TC74HC374P	TLC272CPWR-12 .....	RC4558
TC74VHC541FT(EL) .....	MC74HC541N	TLC320AD58CDWR .....	TLC320AD58CDWR
TC74VHC574FT(EL) .....	TC74HC574P	TSB11LV01PT-TEB .....	TSB11LV01PT-TEB
TC74VHC74FT(EL) .....	TC74HC74P		
TC7S00FU(TE85R) .....	TC7S00F	UPC1093T .....	UPC1093T
TC7S00FU-TE85R .....	TC7S00F	UPC1093T-E1 .....	UPC1093T
TC7S02FU(TE85R) .....	TC4S01F	UPC311G2 .....	UPC311C
TC7S04FU(TE85R) .....	TC7S04F	UPC311G2-E2 .....	UPC311C
TC7S04FU-TE85R .....	TC7S04F	UPC324G2 .....	XRA10324AF
TC7S08FU(TE85R) .....	TC7S08F	UPC324G2-E2 .....	XRA10324AF
TC7S08FU-TE85R .....	TC7S08F	UPC358G2-E2 .....	RC4558
TC7S14FU(TE85R) .....	TC7S14FU	UPC4572G2 .....	RC4558
TC7S32F(TE85R) .....	TC7S32F	UPC4572G2-E2 .....	RC4558
TC7S32FU(TE85R) .....	TC7S32F	UPC812G2 .....	RC4558
TC7S32FU-TE85R .....	TC7S32F	UPC812G2-E2 .....	RC4558
TC7S66FU .....	SC14S66F	UPD482445LG4-B10-9MH-E2-HDC .....	UPD482445G5-60
TC7S66FU(TE85R) .....	SC14S66F	UPD6453GT-658-E2 .....	UPD6453GT
TC7S86FU .....	TC7S86FU	UPD78064GF-146-3BA .....	UPD78064GF-3BA
TC7S86FU(TE85R) .....	TC7S86FU		
TC7SET08FU(TE85R) .....	TC7S08F		
TC7SH00FU-TE85R .....	TC7S00F	X20C05J-55 .....	X20C05J-55
TC7SH04FU .....	TC7S04F	X24645S8I-2.7T2 .....	X24645S8C7000
TC7SH04FU-TE85R .....	TC7S04F	X24645S8T2 .....	X24645S8C7000
TC7SH08FU(TE85R) .....	TC7S08F	X24C08SC7000 .....	2-6
TC7SH08FU-TE85R .....	TC7S08F		
TC7SH32FU(TE85R) .....	TC7S32F	ZA4024 .....	ZA4024
TC7SH32FU-TE85R .....	TC7S32F		
TC7SH86FU(TE85R) .....	TC7S86FU		
TC7SH86FU-TE85R .....	TC7S86FU		
TC7W00FU .....	TC7W00F		
TC7W00FU(TE12R) .....	TC7W00F		
TC7W04FU .....	TC7W04F		
TC7W04FU(TE12R) .....	TC7W04F		
TC7W08FU .....	TC7W08F		
TC7W08FU(TE12R) .....	TC7W08F		
TC7W14FU(TE12R) .....	TC7W14FU		
TC7W32FU .....	TC7W32FU		
TC7W32FU(TE12R) .....	TC7W32FU		
TC7W53FU(TE12R) .....	TC4W53FU		
TC7WH04FU(TE12R) .....	TC7W04F		
TC7WH157FU(TE12R) .....	2-6		
TC7WH74FU(TE12R) .....	TC7W74FU		
TC7WH74FU(TR12R) .....	TC7W74FU		
TK16074MTL .....	TK16074MTL		

## OTHER

## Page or ID No.

GP2S07B .....	MA013-01
M-30 .....	MA007-02
NJL5183KA-F20-TE1 .....	MA014-03


TRANSISTOR, IC

TRANSISTOR

—TOP VIEW—




UMC3NTR (R1=10K,R2=10K,R3=10K,R4=10K)  
UMC3TL (R1=47K,R2=47K,R3=4.7K,R4=10K)



IC

CAT24WC02JI-TE13 (CATALYST)  
CAT24WC02J-TE13 (CATALYST)  
CAT24WC08J-TE13 (CATALYST)  
X24C08SC7000 (XICOR)

SERIAL EEPROM  
—TOP VIEW—



INPUTS  
A0 - A2 : ADDRESS  
SCL : SERIAL CLOCK  
WC : WRITE CONTROL  
WP : WRITE PROTECT

INPUT/OUTPUT  
SDA : SERIAL DATA


OTHERS  
NC : NO CONNECTION  
TEST : TEST PIN

\*NOTE:

TYPE	MEMORY	PIN 7
BR24C02F	2 K	TEST
X24C02	2 K	WC
S-24C02	2 K	WP
CAT24WC02	2 K	WP
X24C04	4 K	TEST
X24C08	8 K	TEST
CAT24WC08	8 K	WP
CAT24WC16	16 K	WP
BR24E16FV	16 K	WP
NM24C16	16 K	NC
CAT24WC64	64 K	WP
24LC128T	128 K	WP

TC7WH157FU(TE12R) (TOSHIBA)

2-CHANNEL MULTIPLEXER  
—TOP VIEW—



INPUTS				OUTPUTS	
EN	G1	A	B	Y	Y
1	x	x	x	0	1
0	0	0	x	0	1
0	0	1	x	1	0
0	1	x	0	0	1
0	1	x	1	1	0

0 : LOW LEVEL  
1 : HIGH LEVEL  
x : DONT CARE


## Section 3 Block Diagrams

### Index


System/Board	Page	Remarks
Audio	3-16	
Camera Overall	3-2	
Servo	3-21	
System Control	3-18	
VTR Overall	3-4	
AA-104	3-17	
AT-142	3-15	DSR-300A/300AP
AT-150	3-14	DSR-390/390P/370/370P
CC-68	3-21	
CN-1867	3-17	
CN-2277/1519	3-13	
CP-373/315	3-8	
DPR-141C/141A	3-8	
DU-36	3-23	
DV-21C/21A	3-24	
ES-31	3-8	
FP-118A/122	3-16	
FP-99	3-19	
HN-227	3-21	
KY-405	3-18	
LE-221	3-17	
MB-833	3-23	
MT-114	3-21	
RP-91	3-20	
SE-295	3-21	
SE-297	3-21	
SE-566	3-14	
SV-213	3-21	
SW-19	3-16	
SW-929	3-19	
VA-199	3-6	




Camera Overall Camera Overall

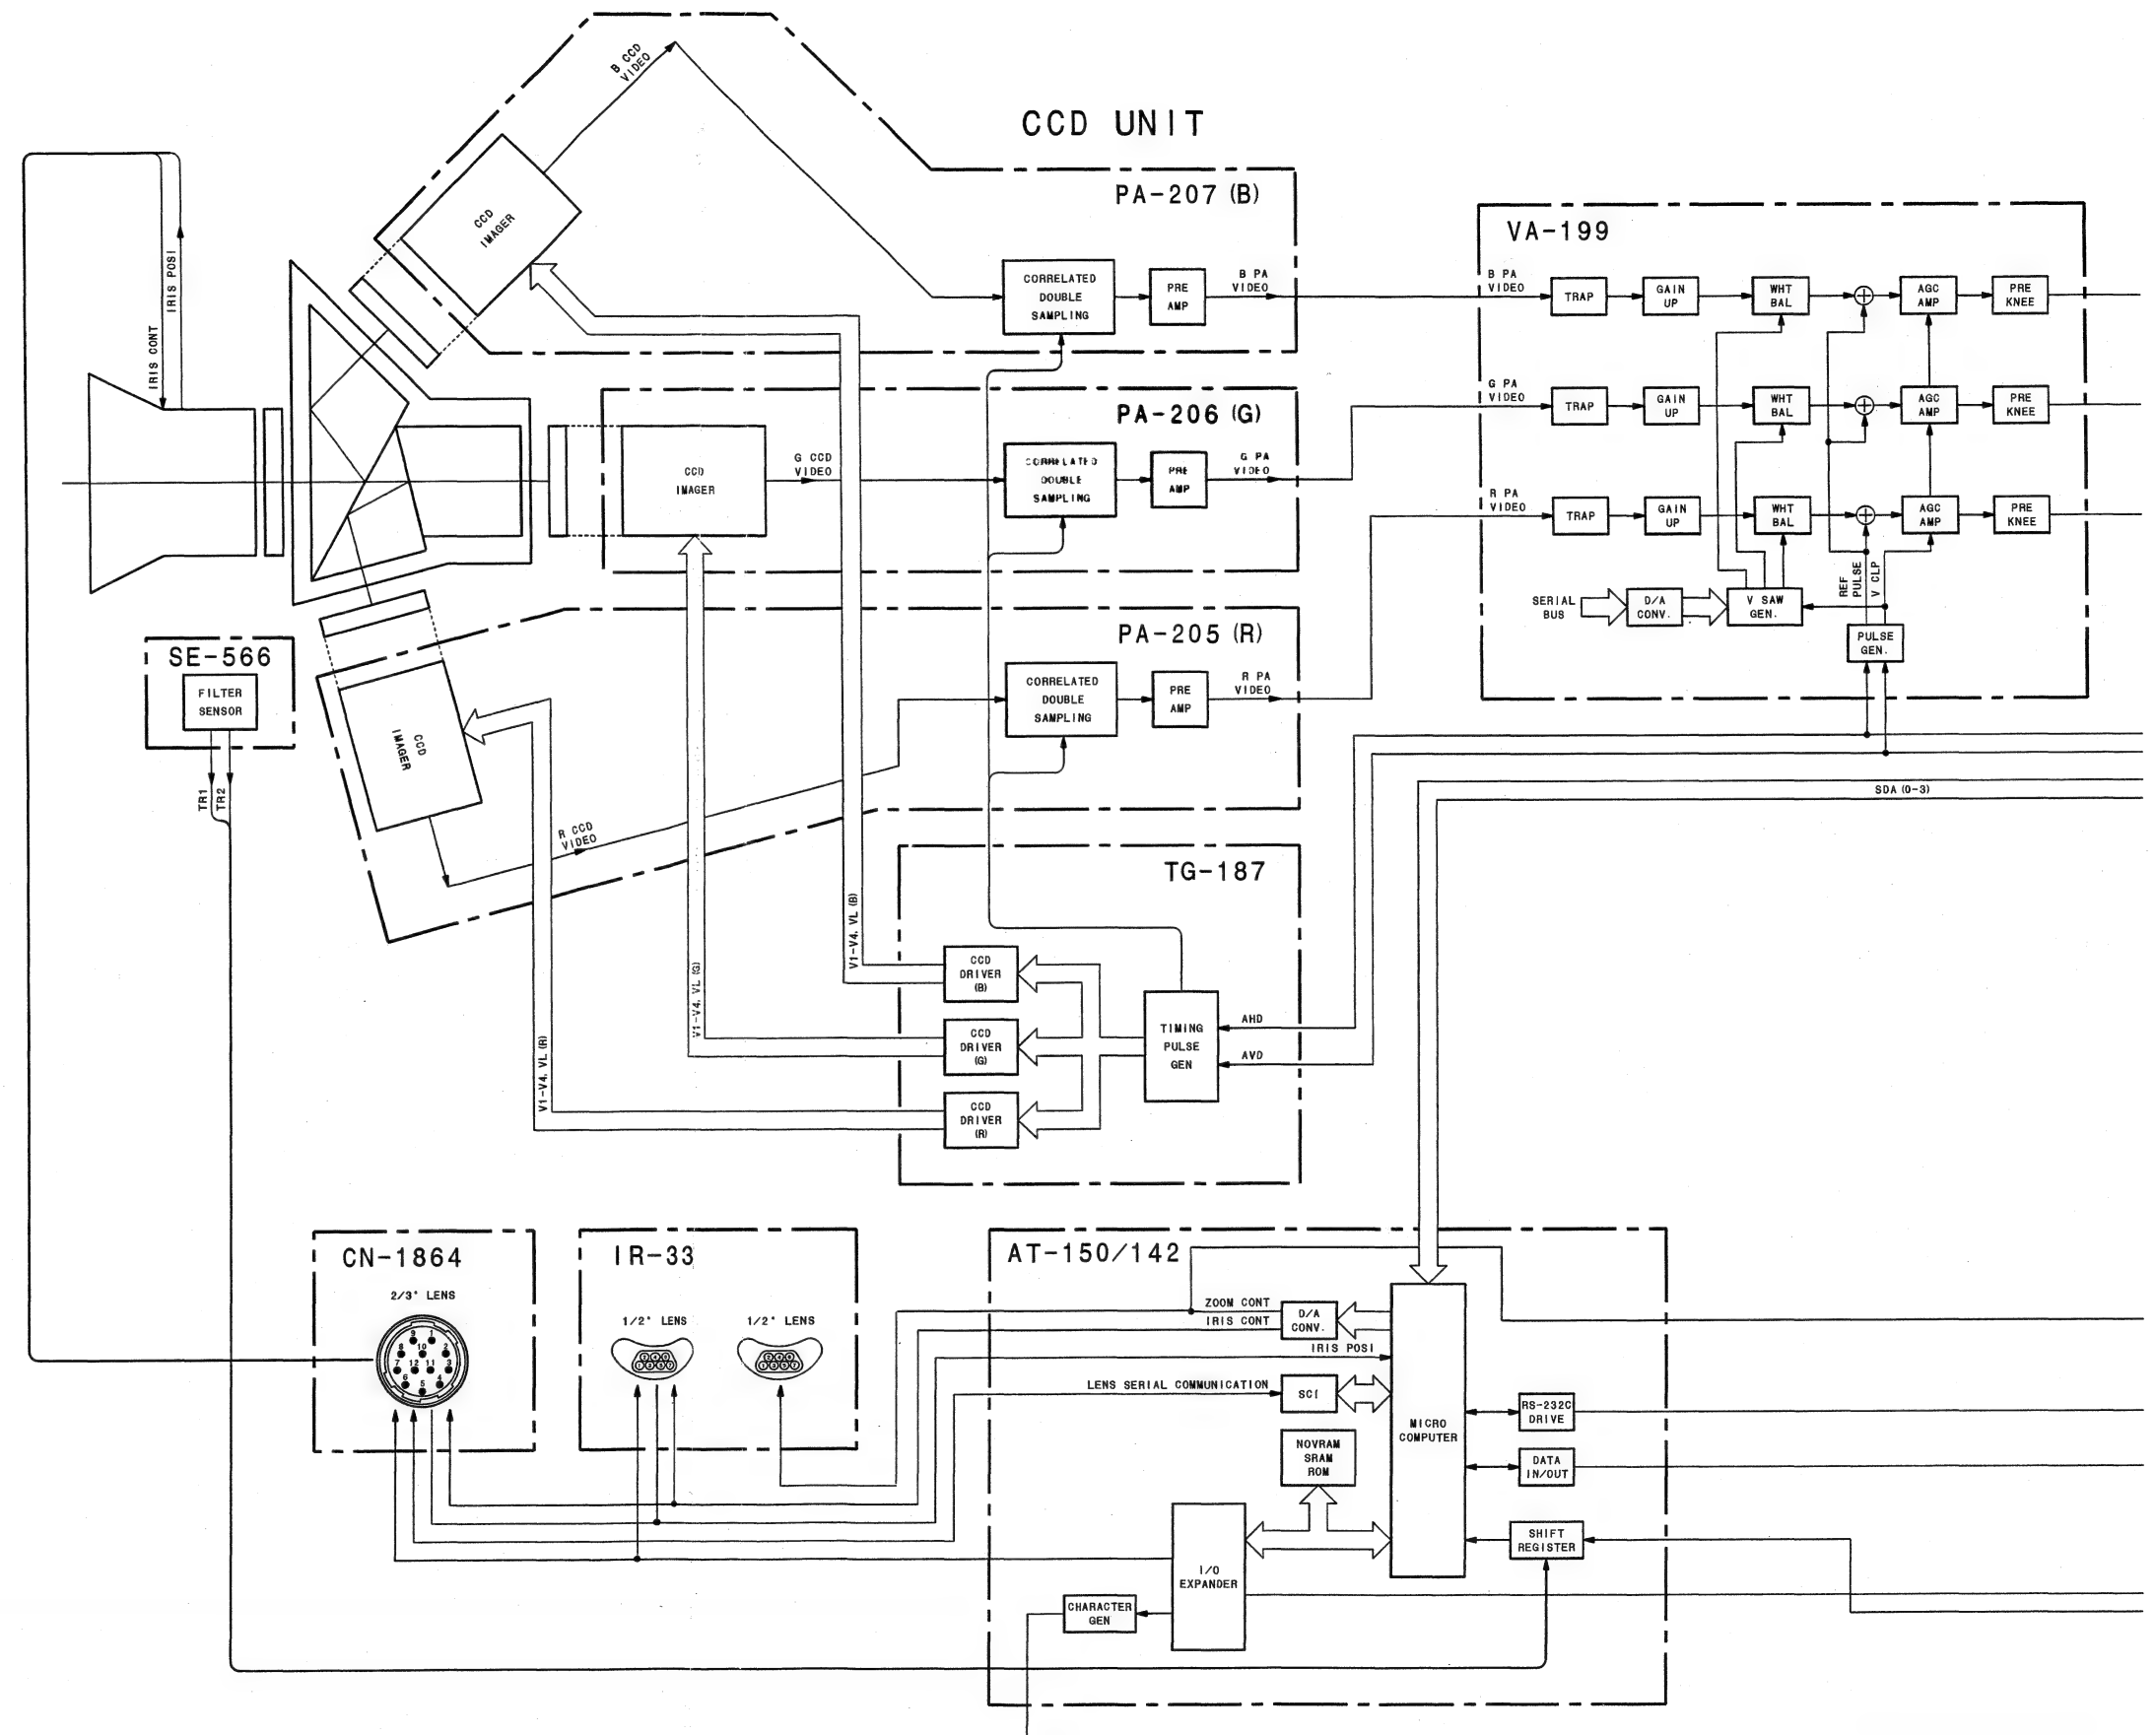




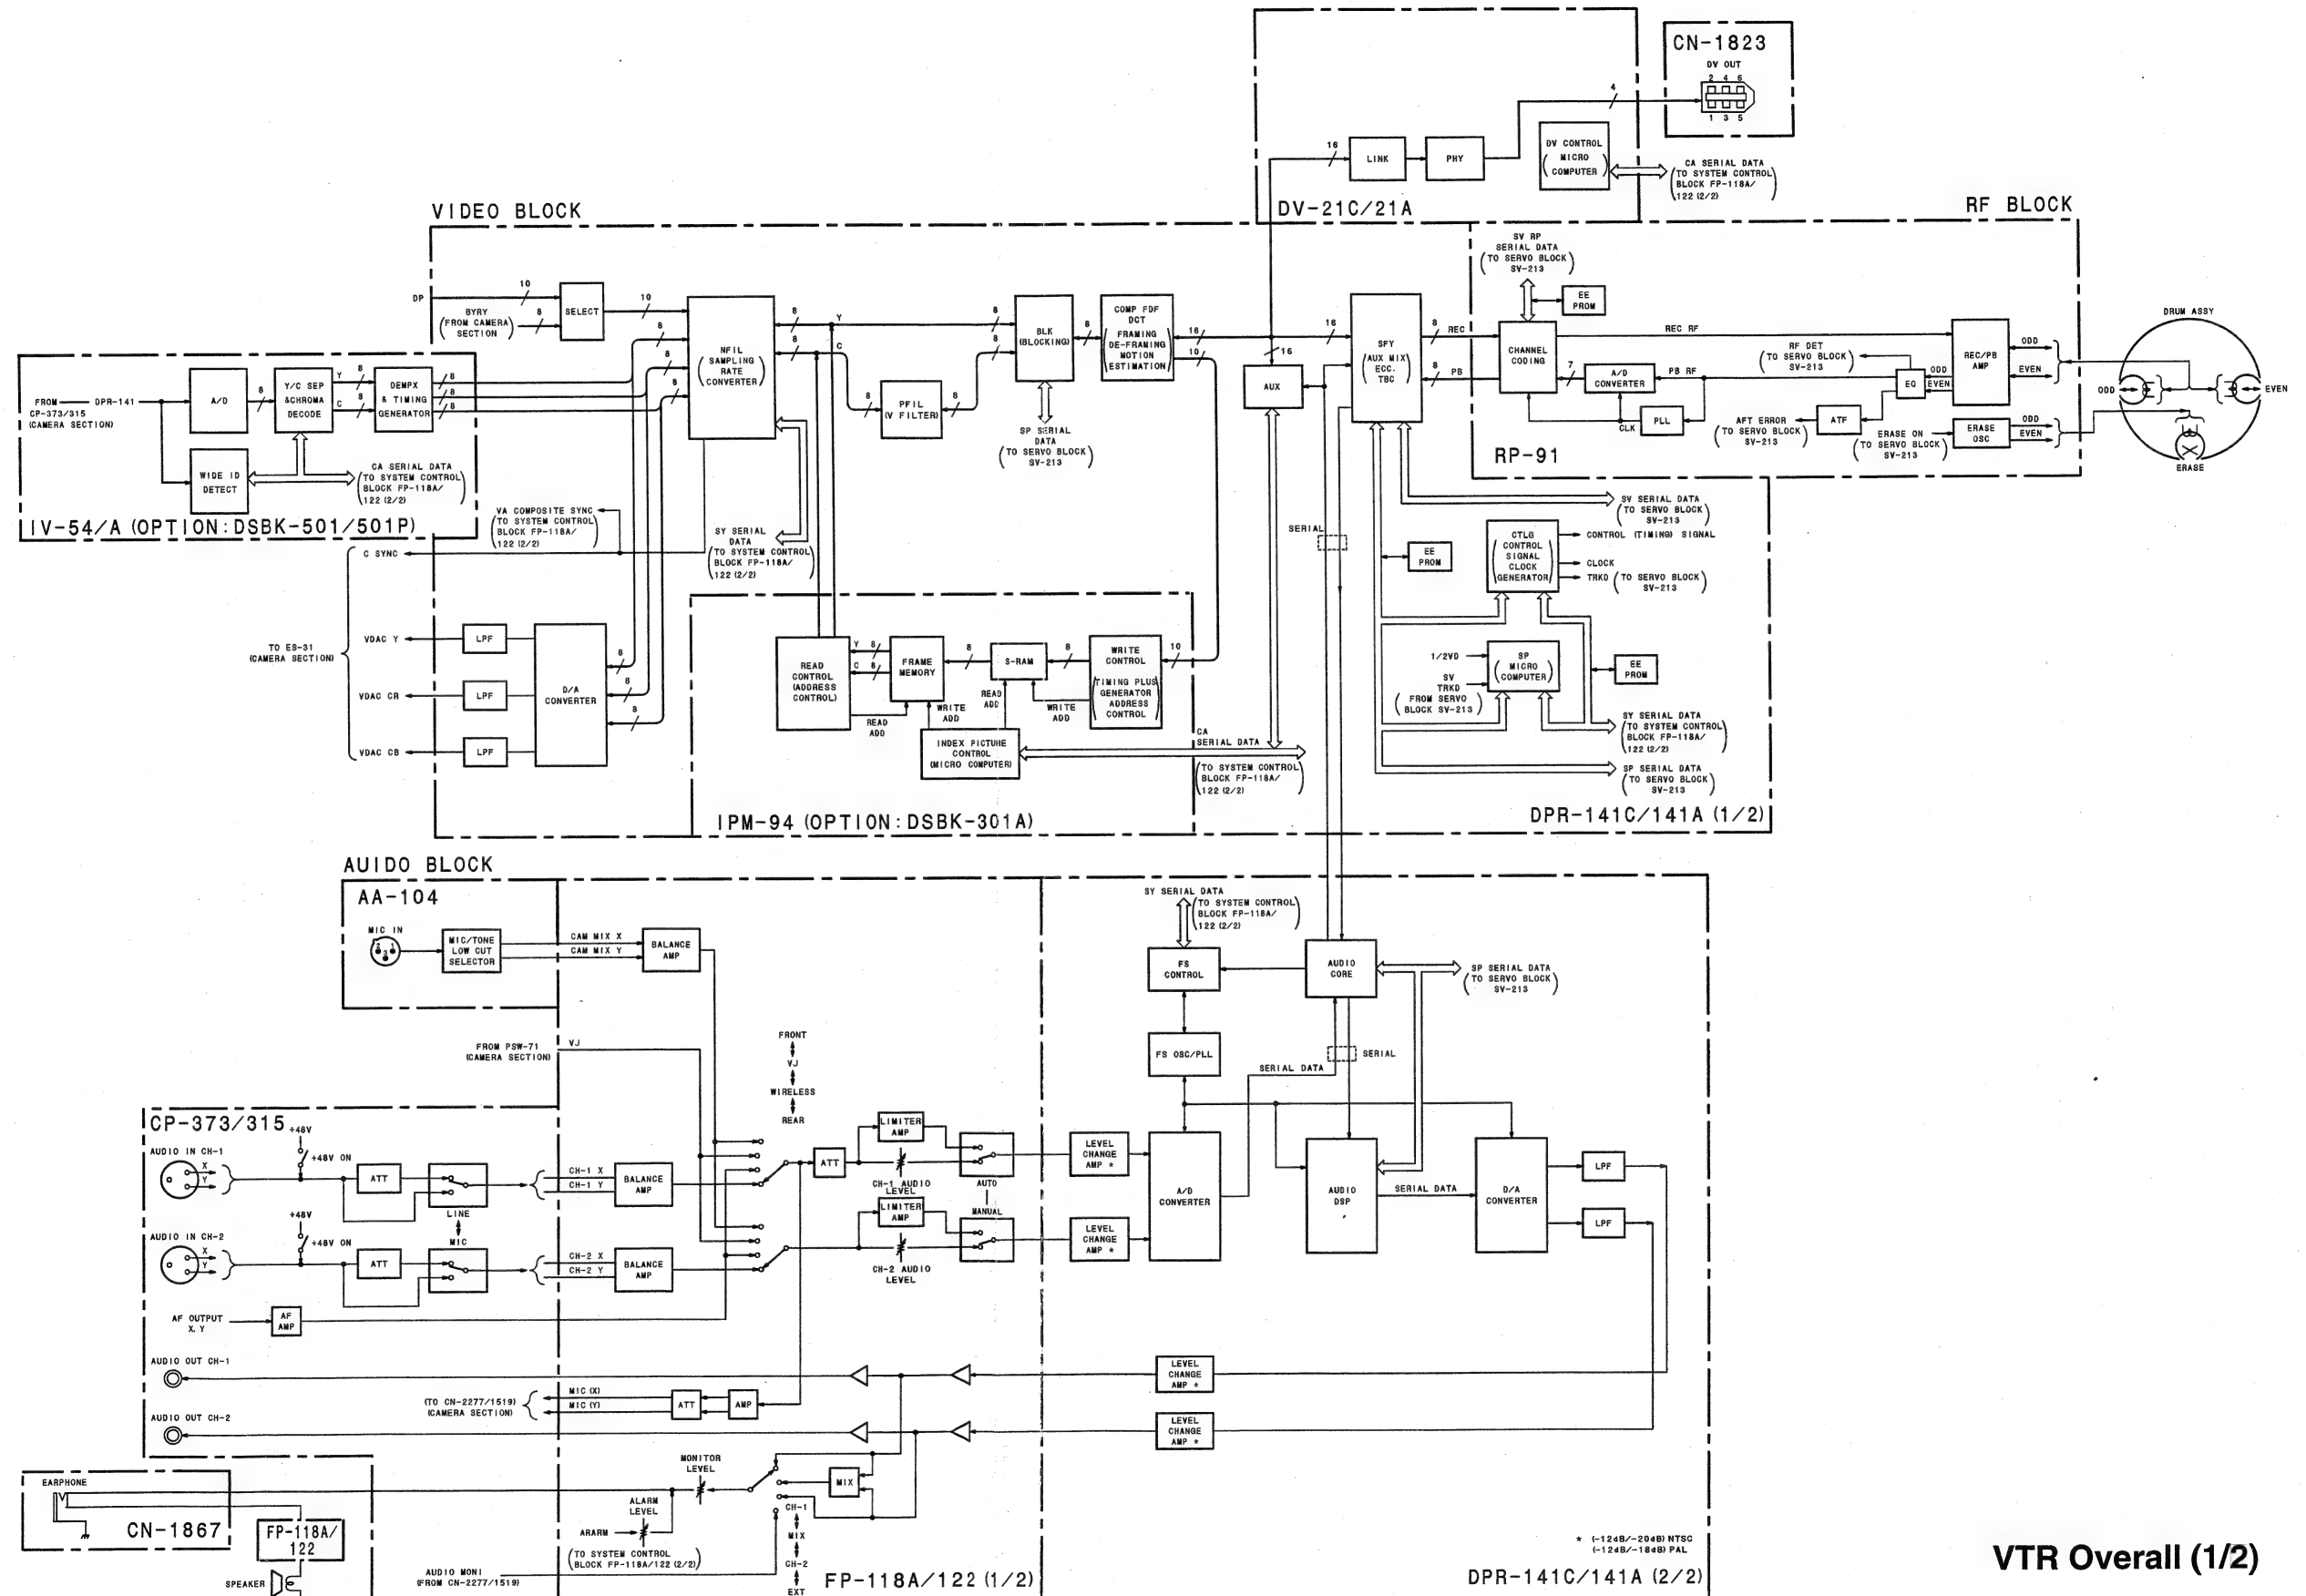



SERVO BLOCK

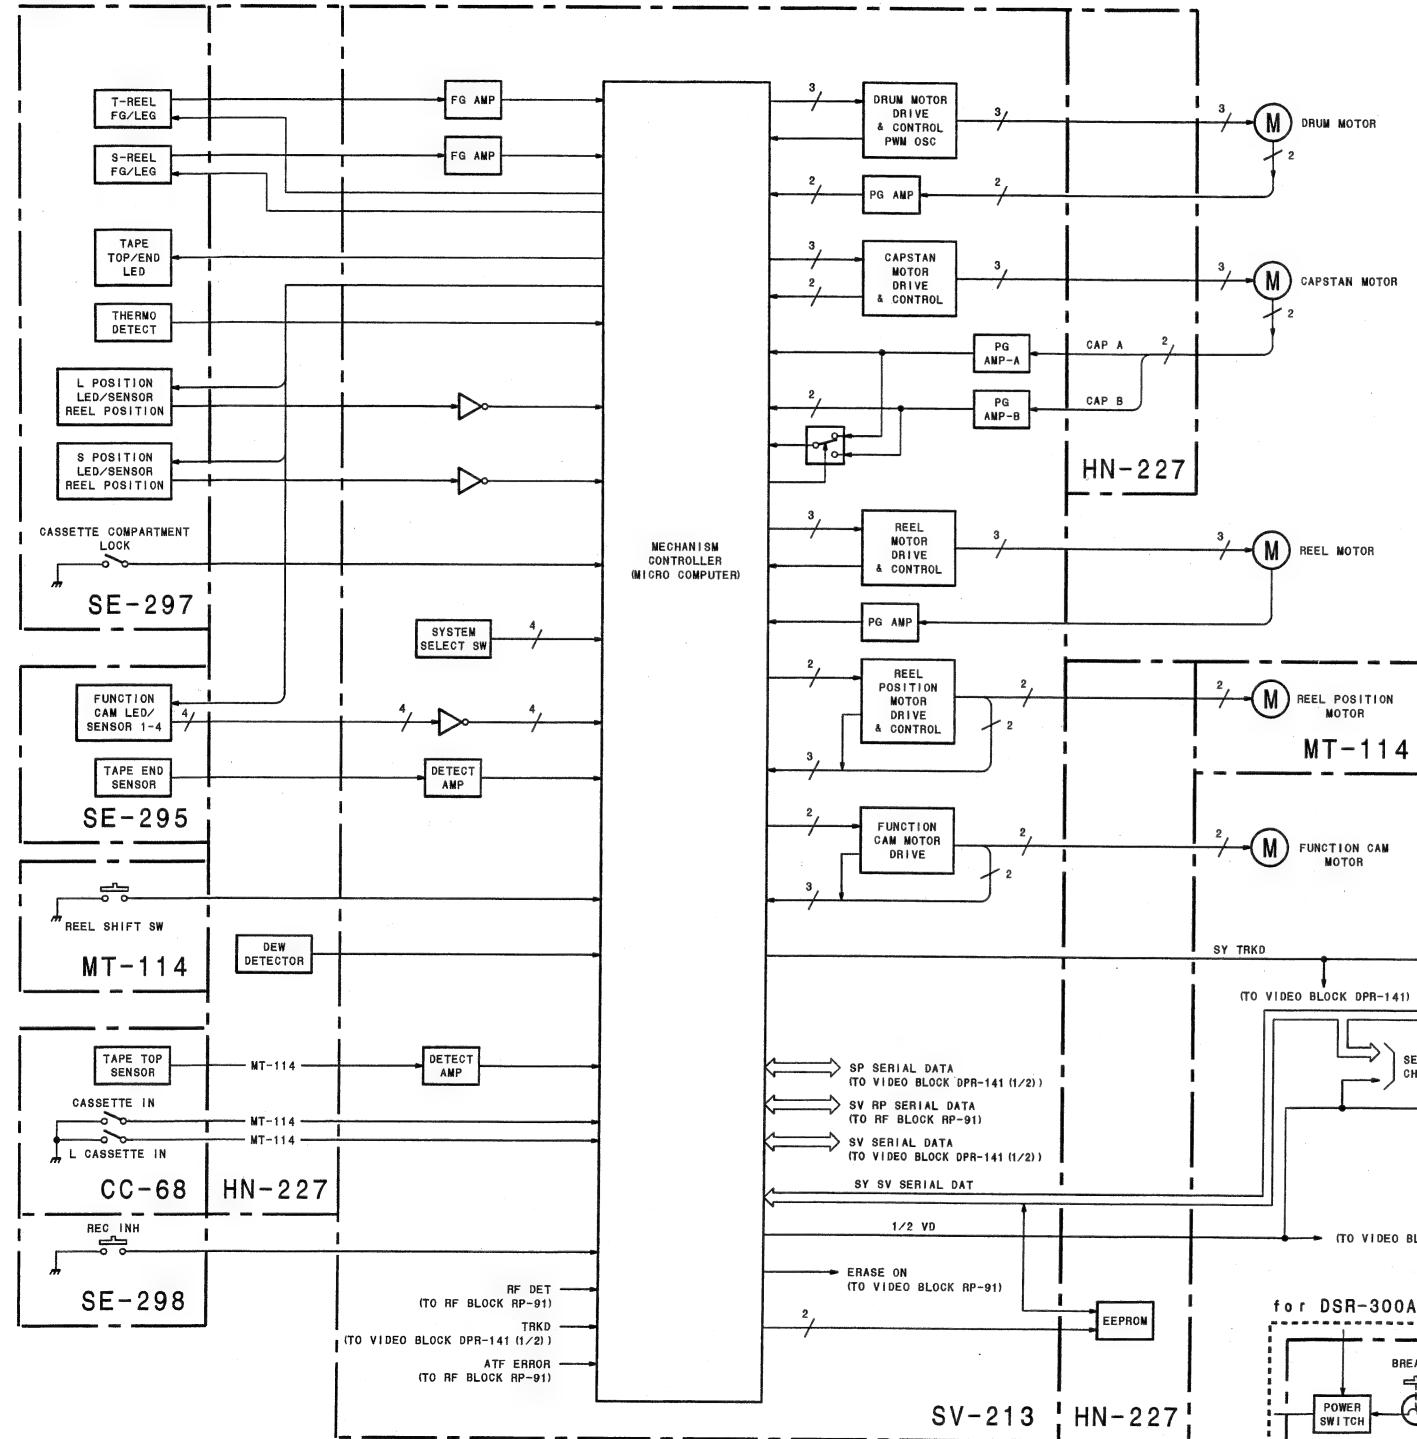


SYSTEM CONTROL & POWER BLOCK

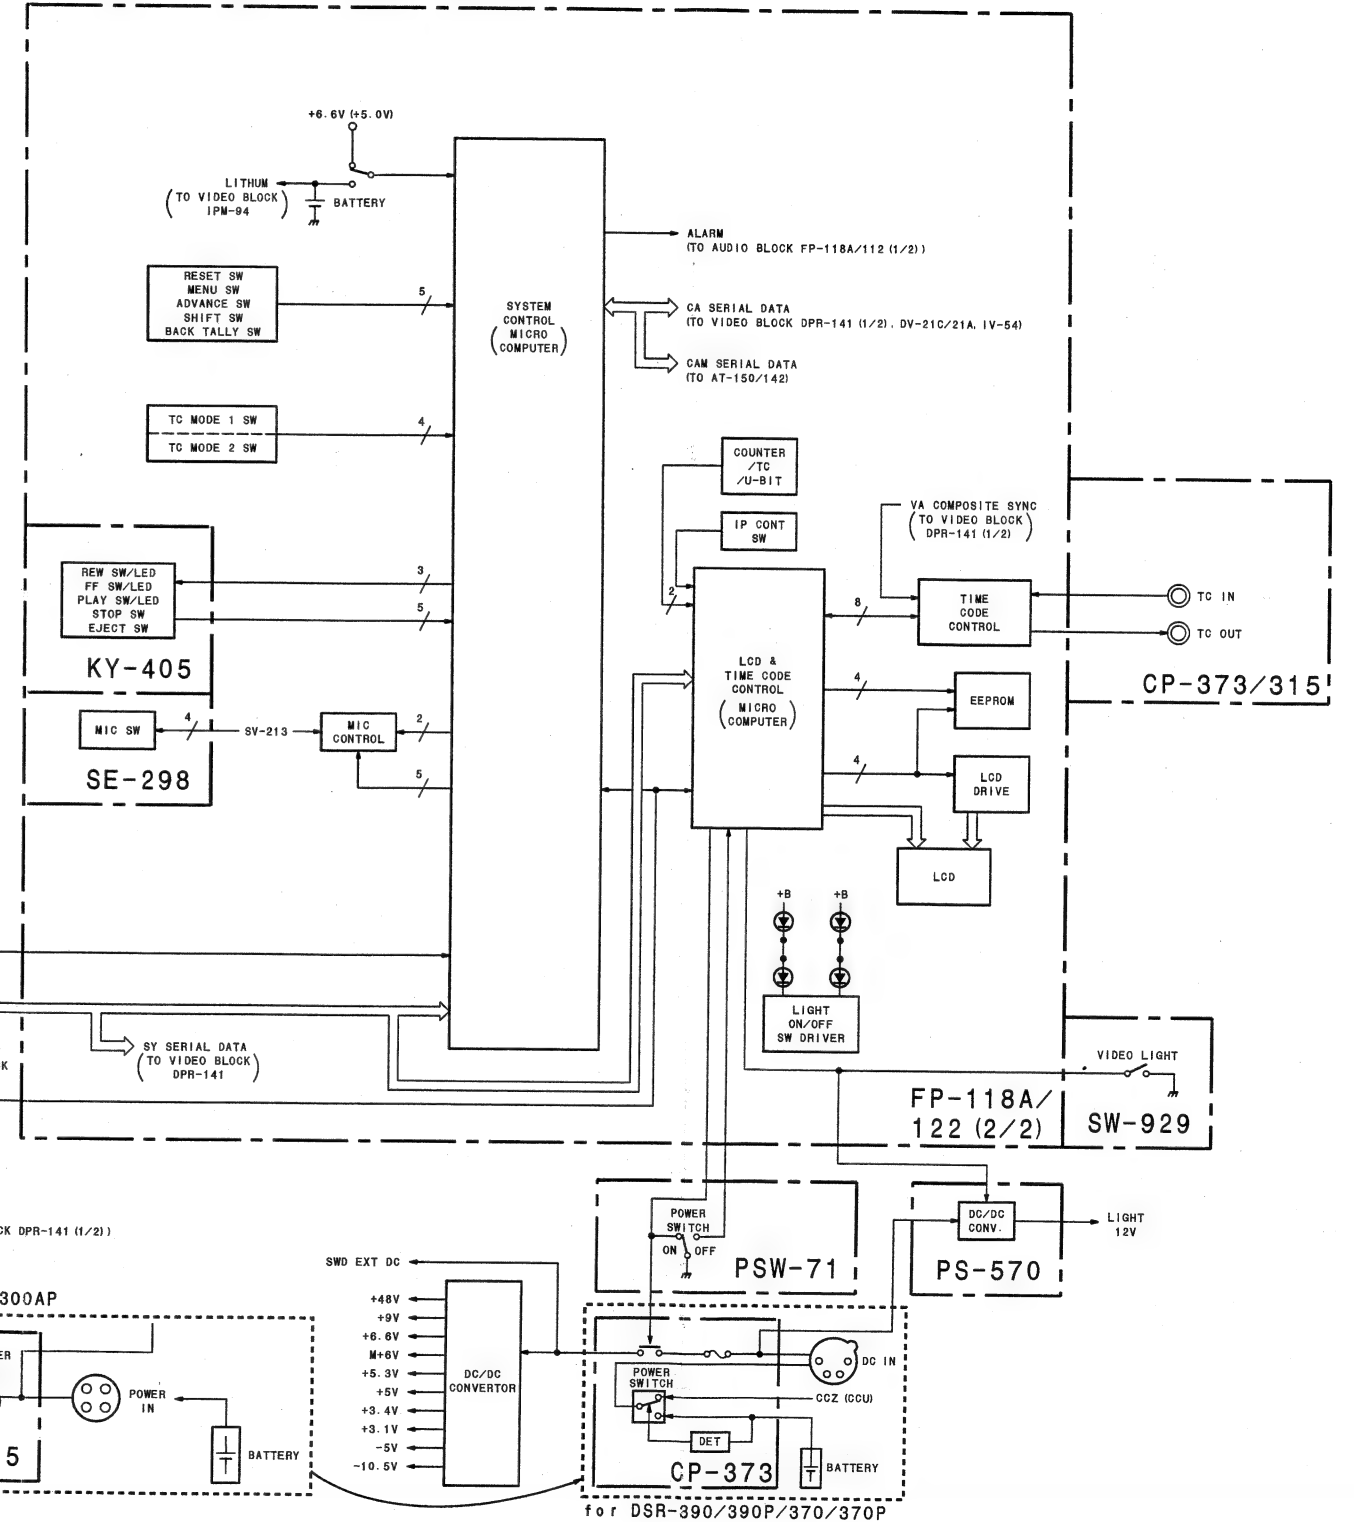


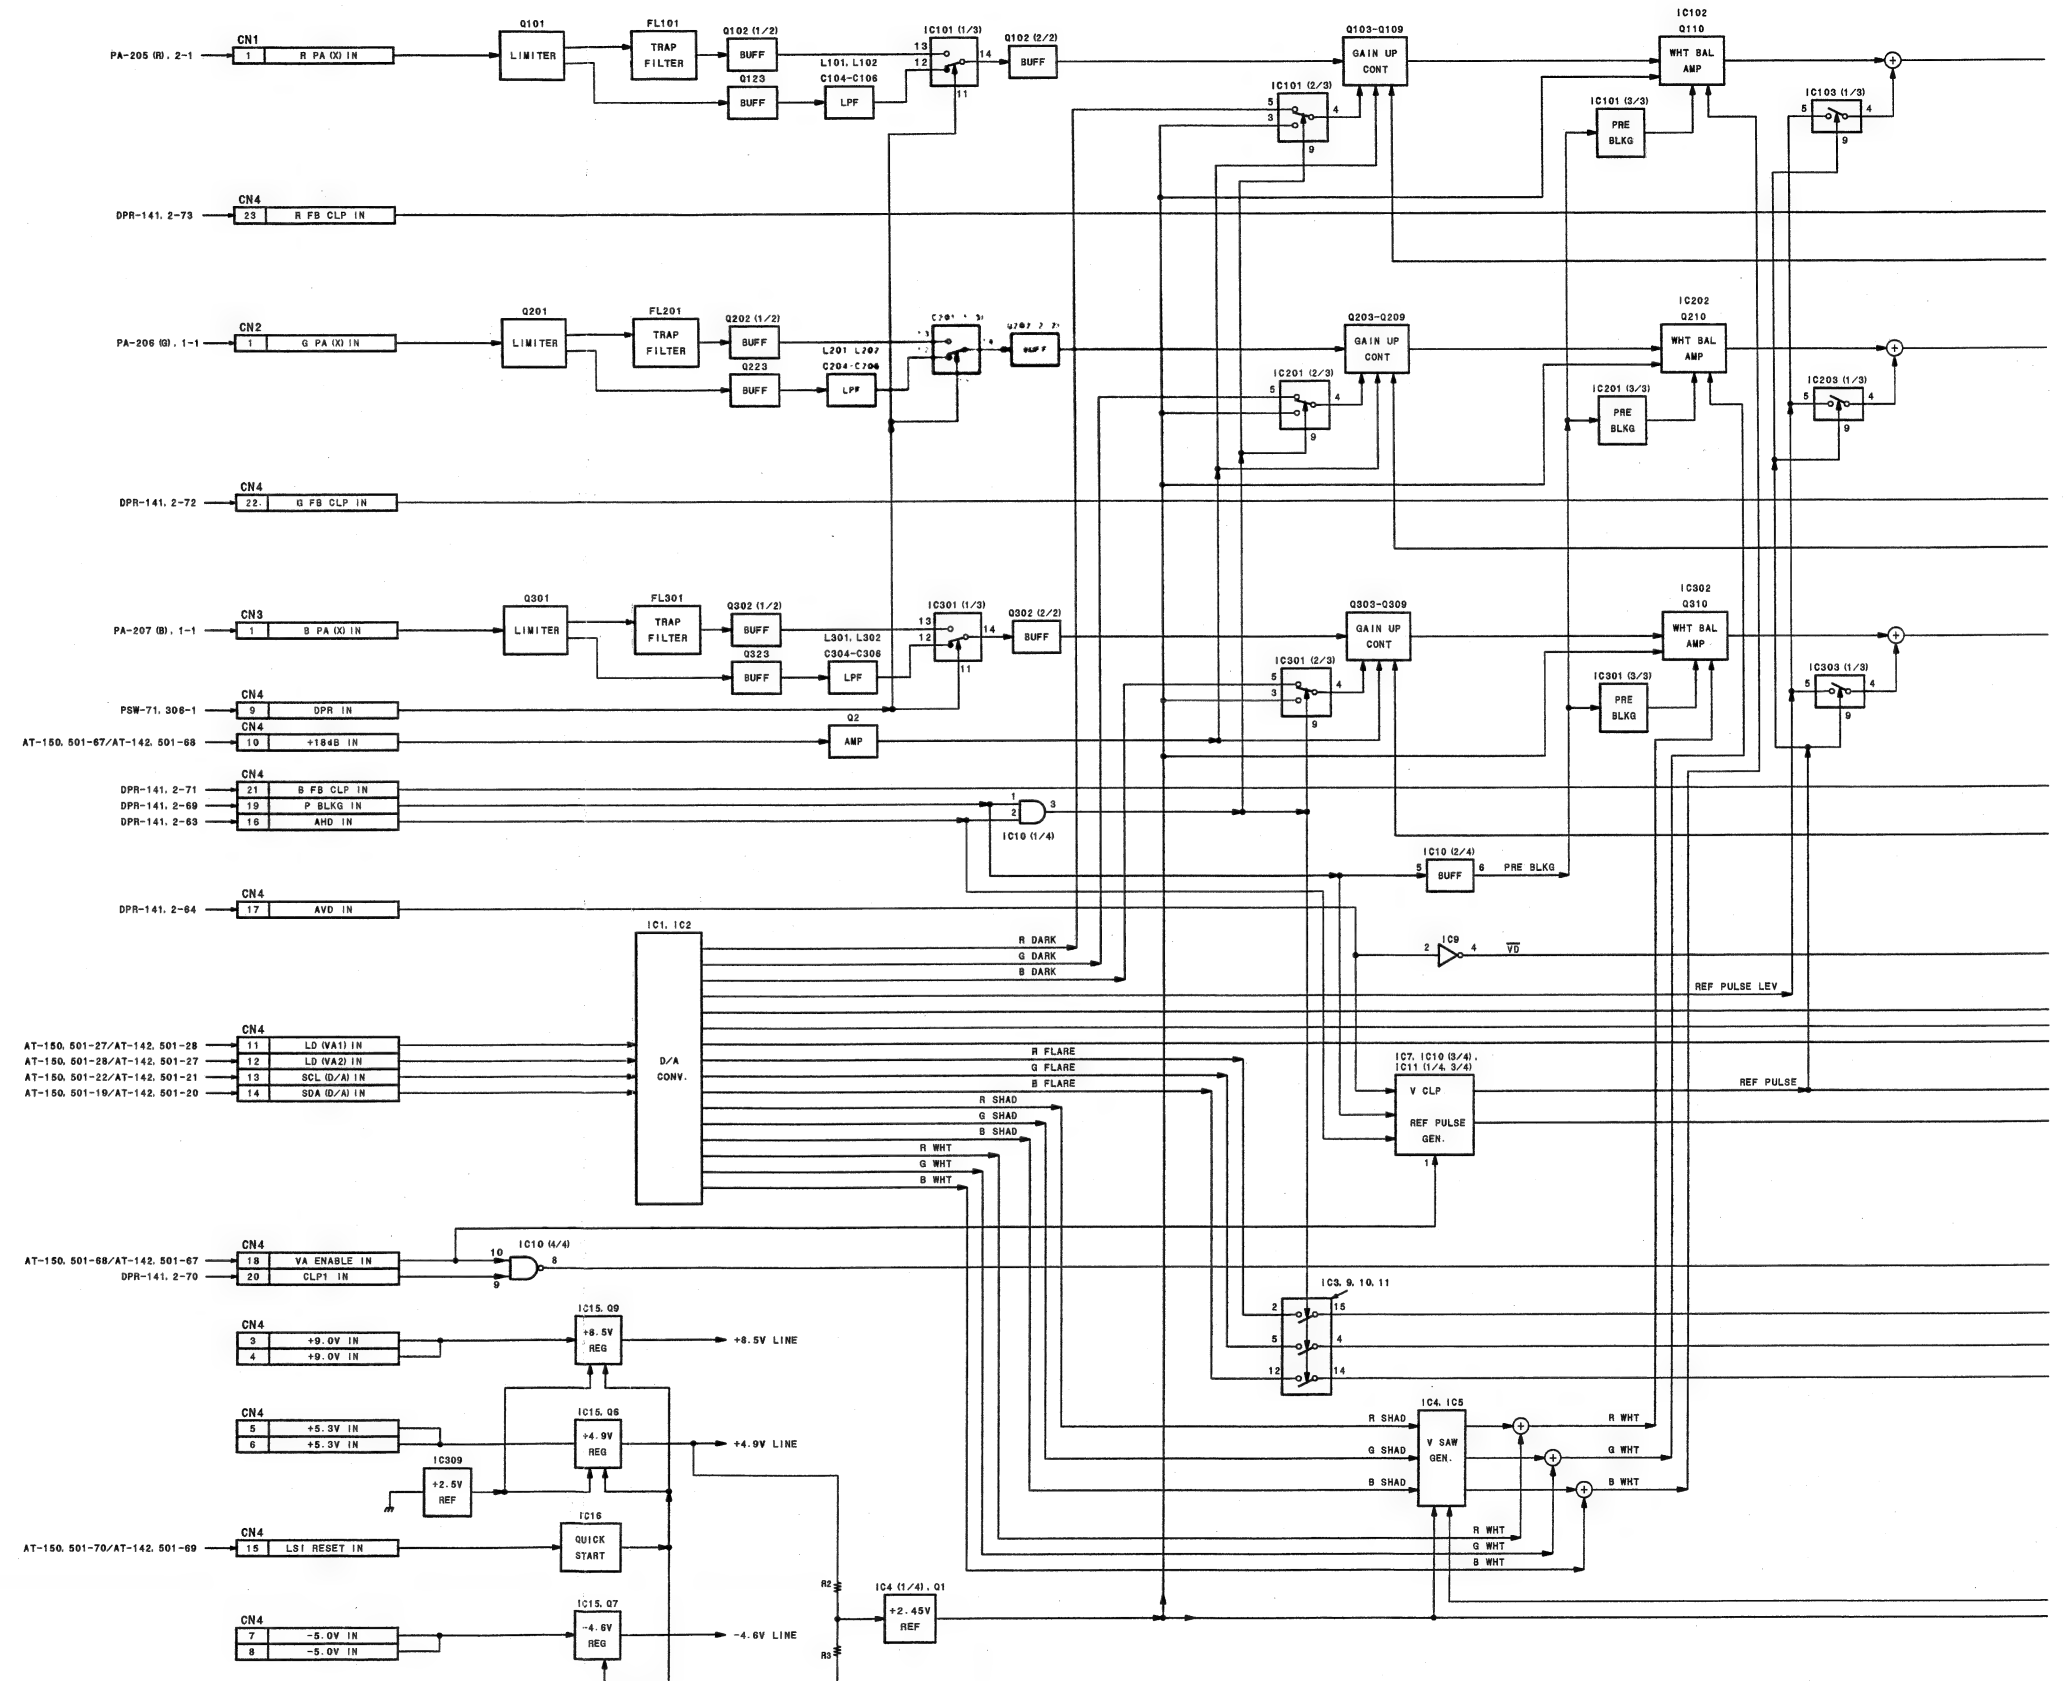

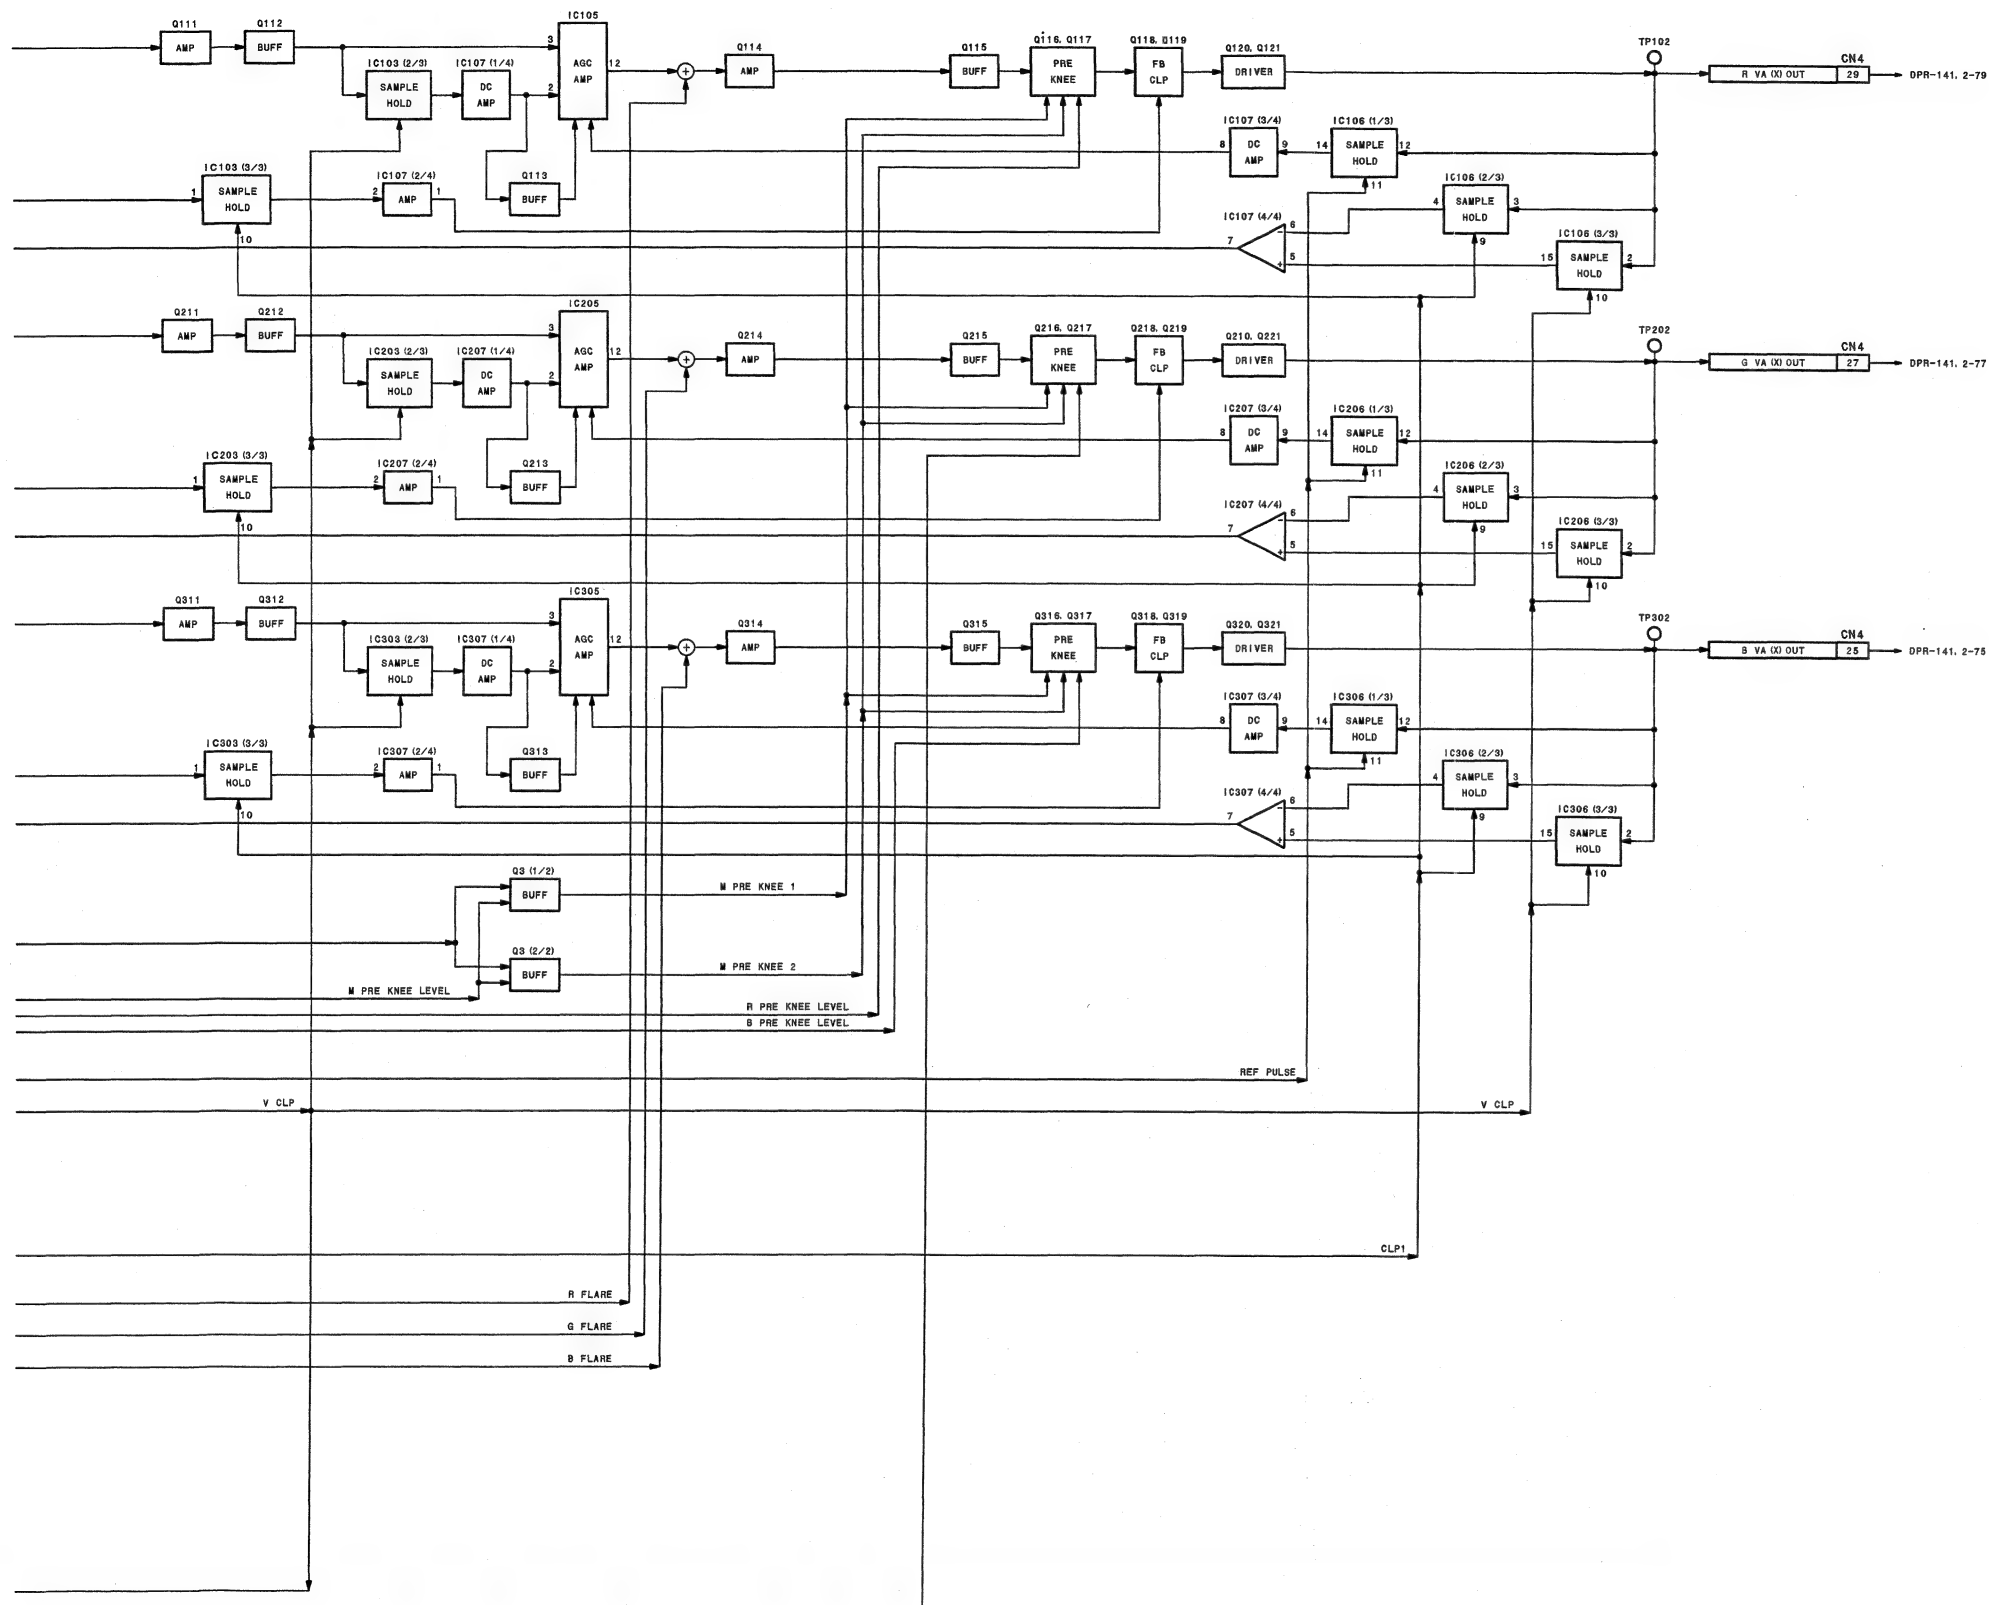





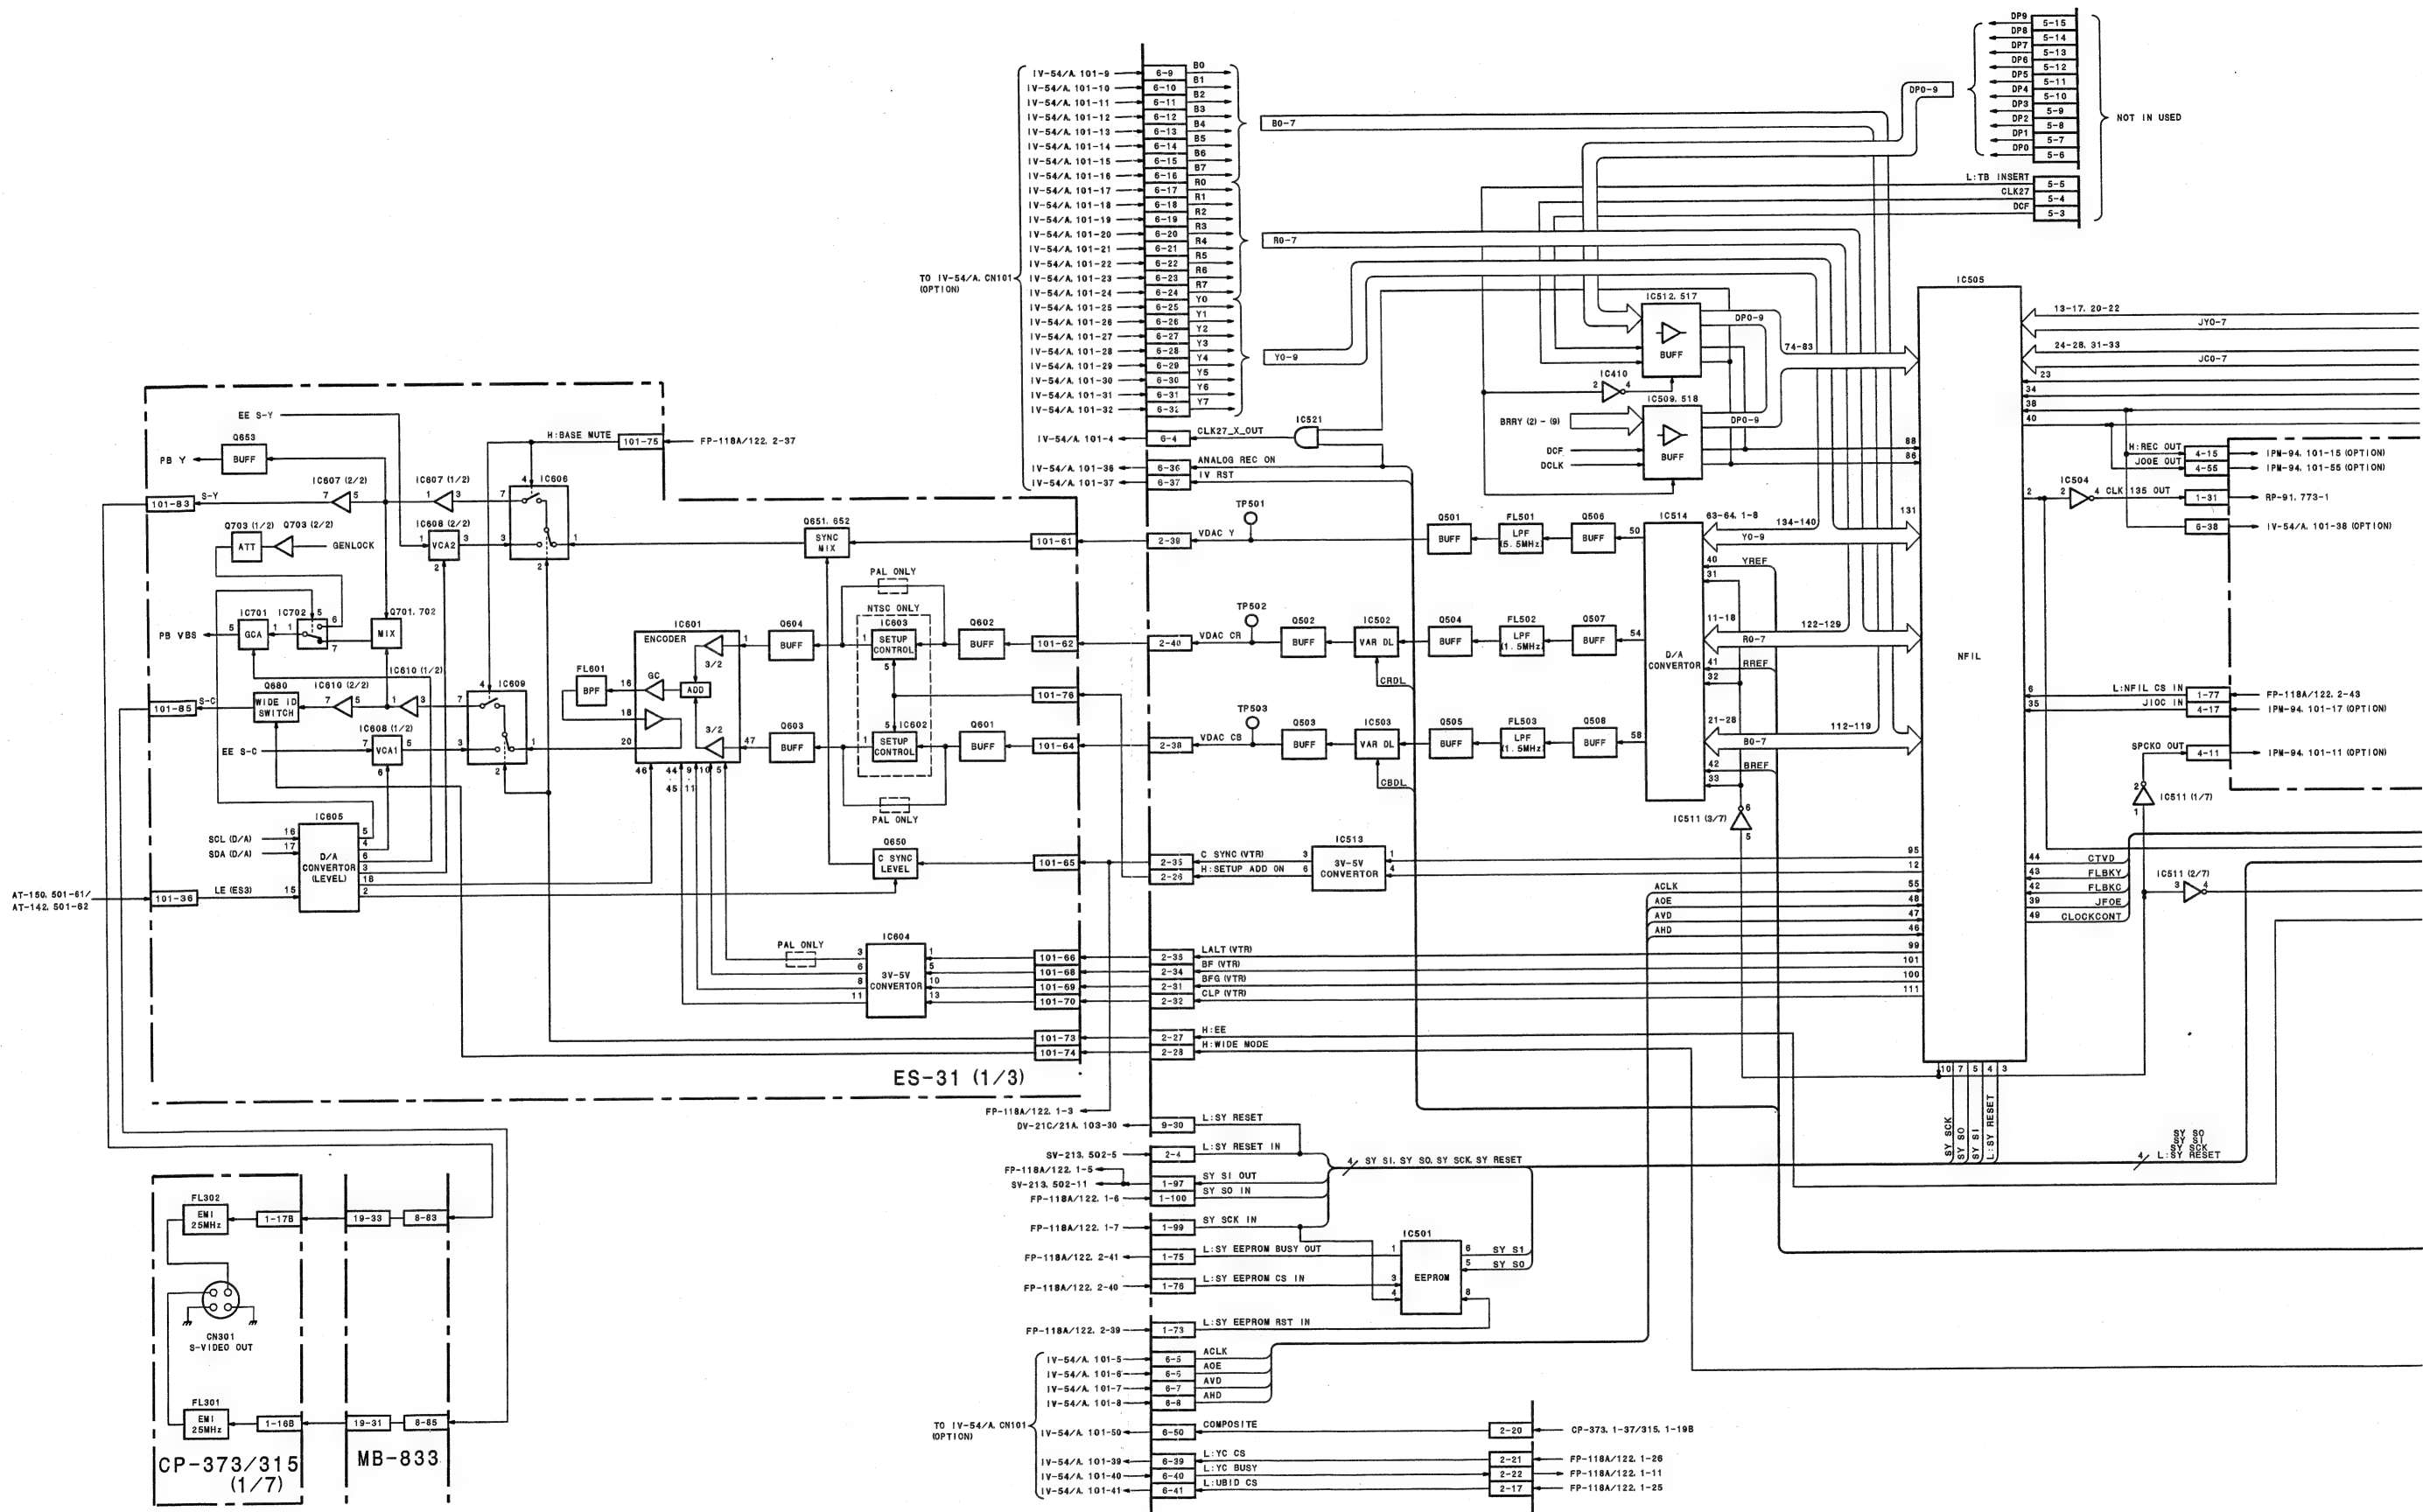


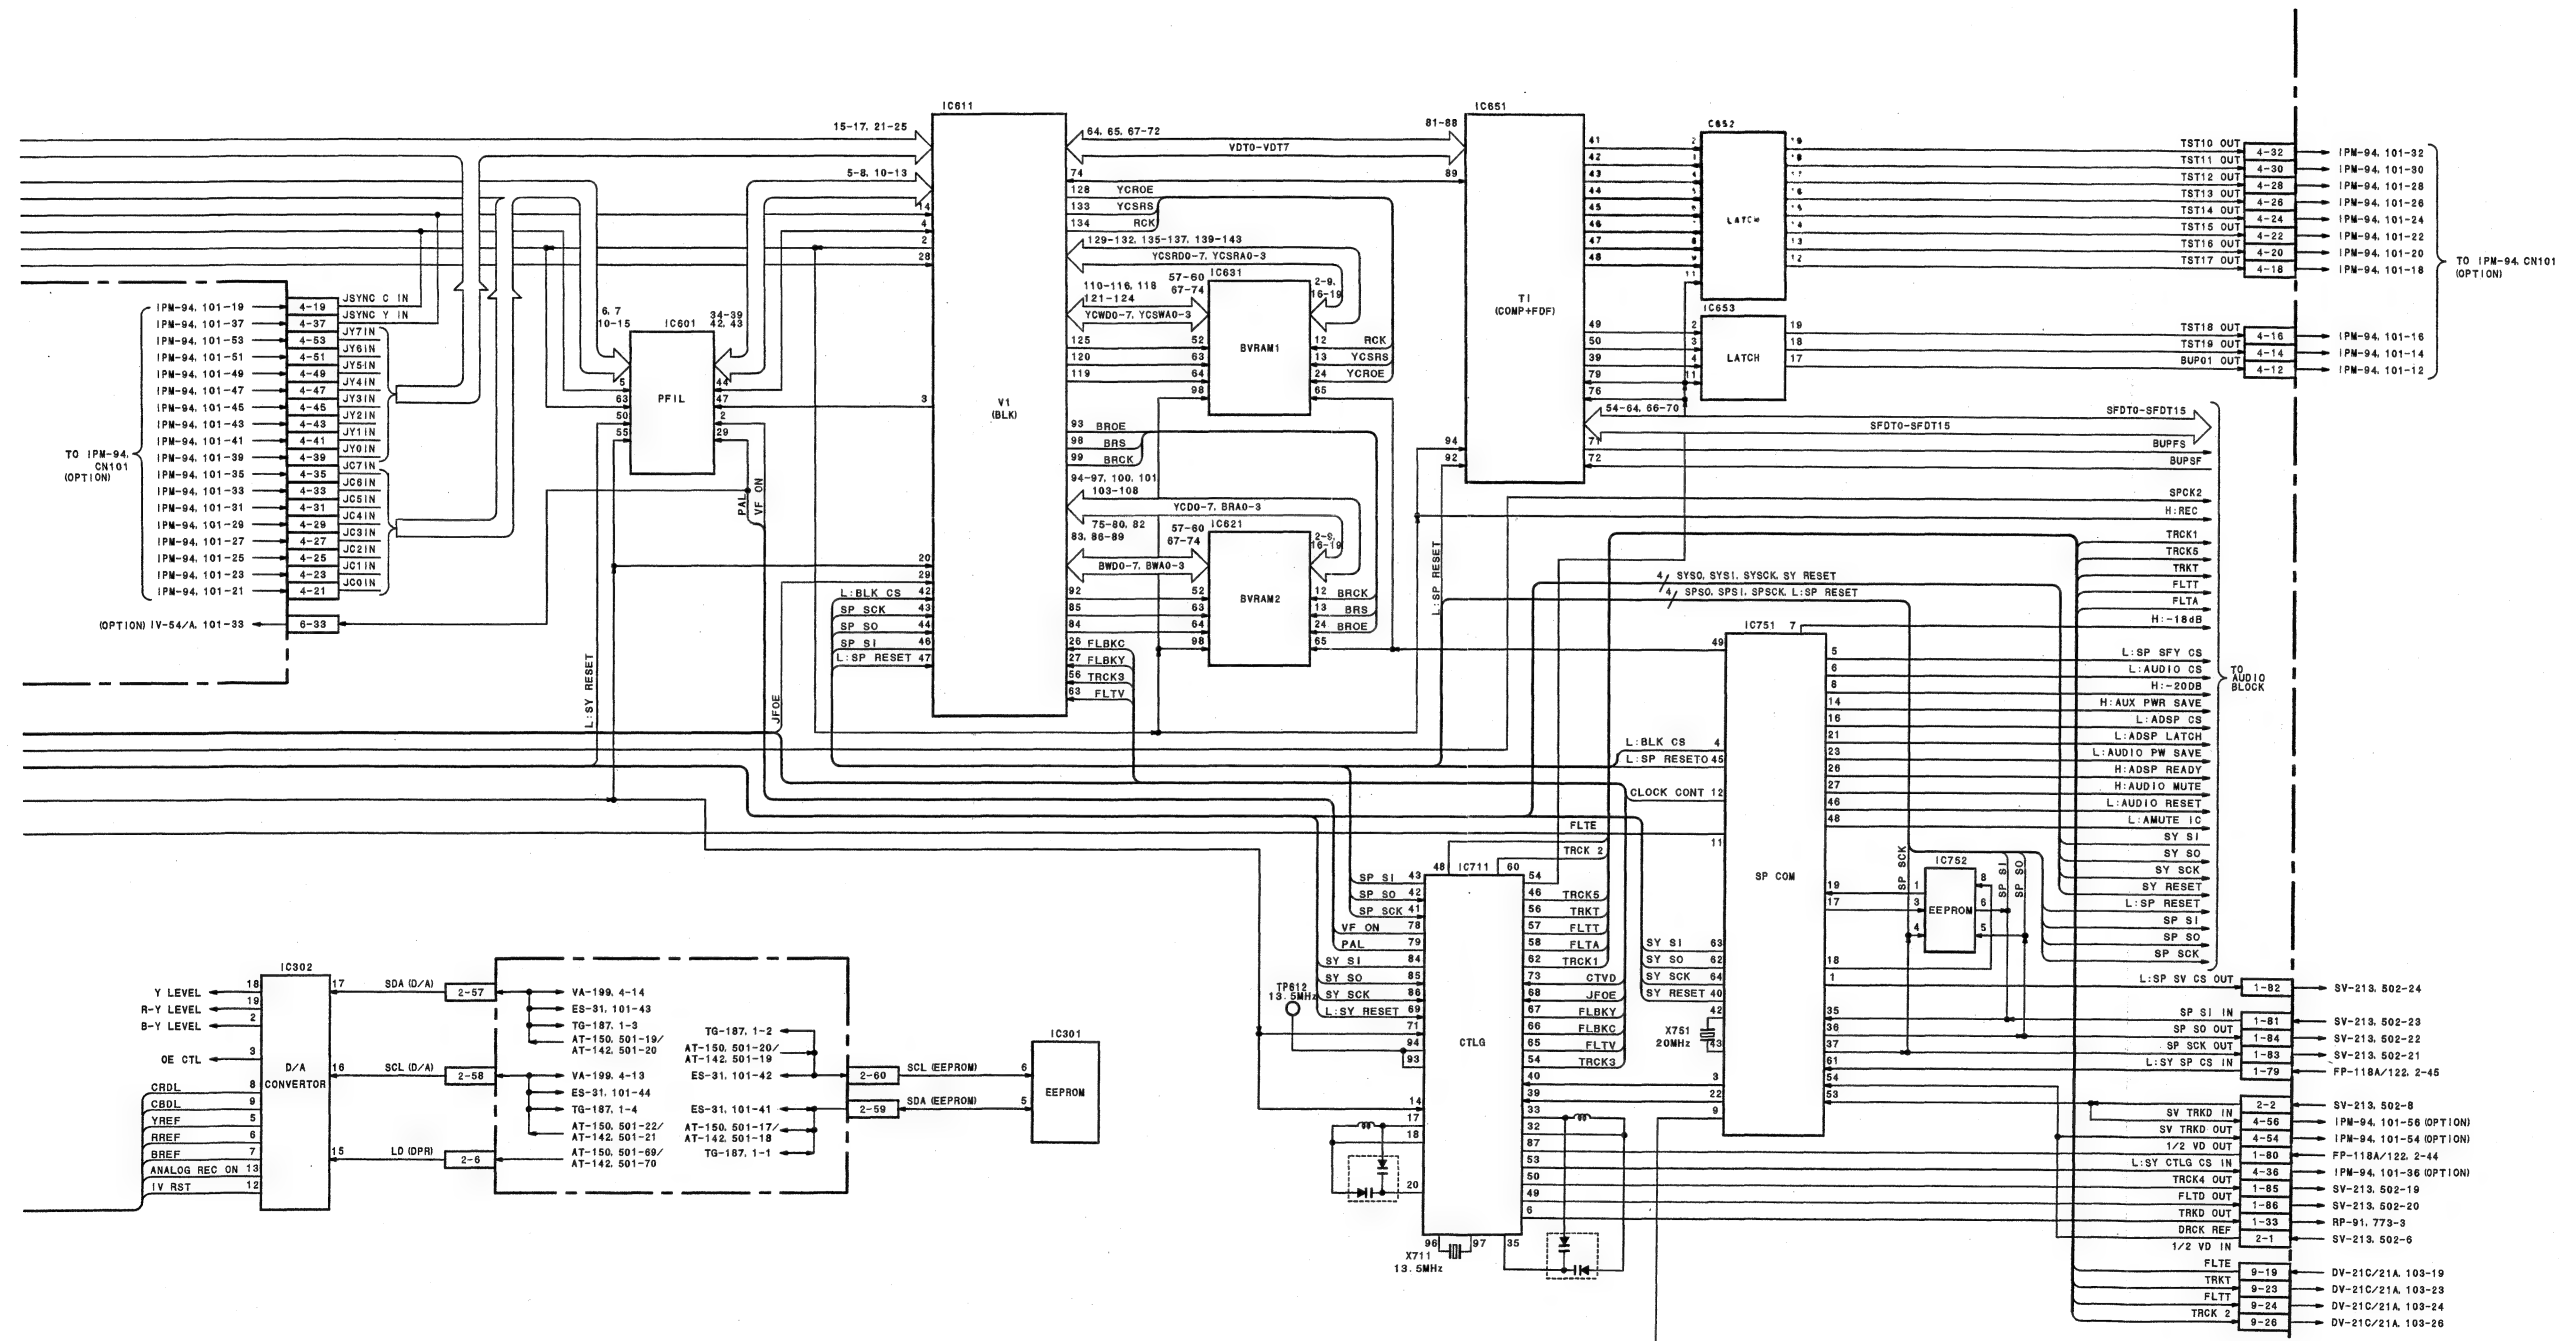


**DPR-141C/141A (1/3)**  
**CP-373/315 (1/7)**  
**ES-31 (1/3)**

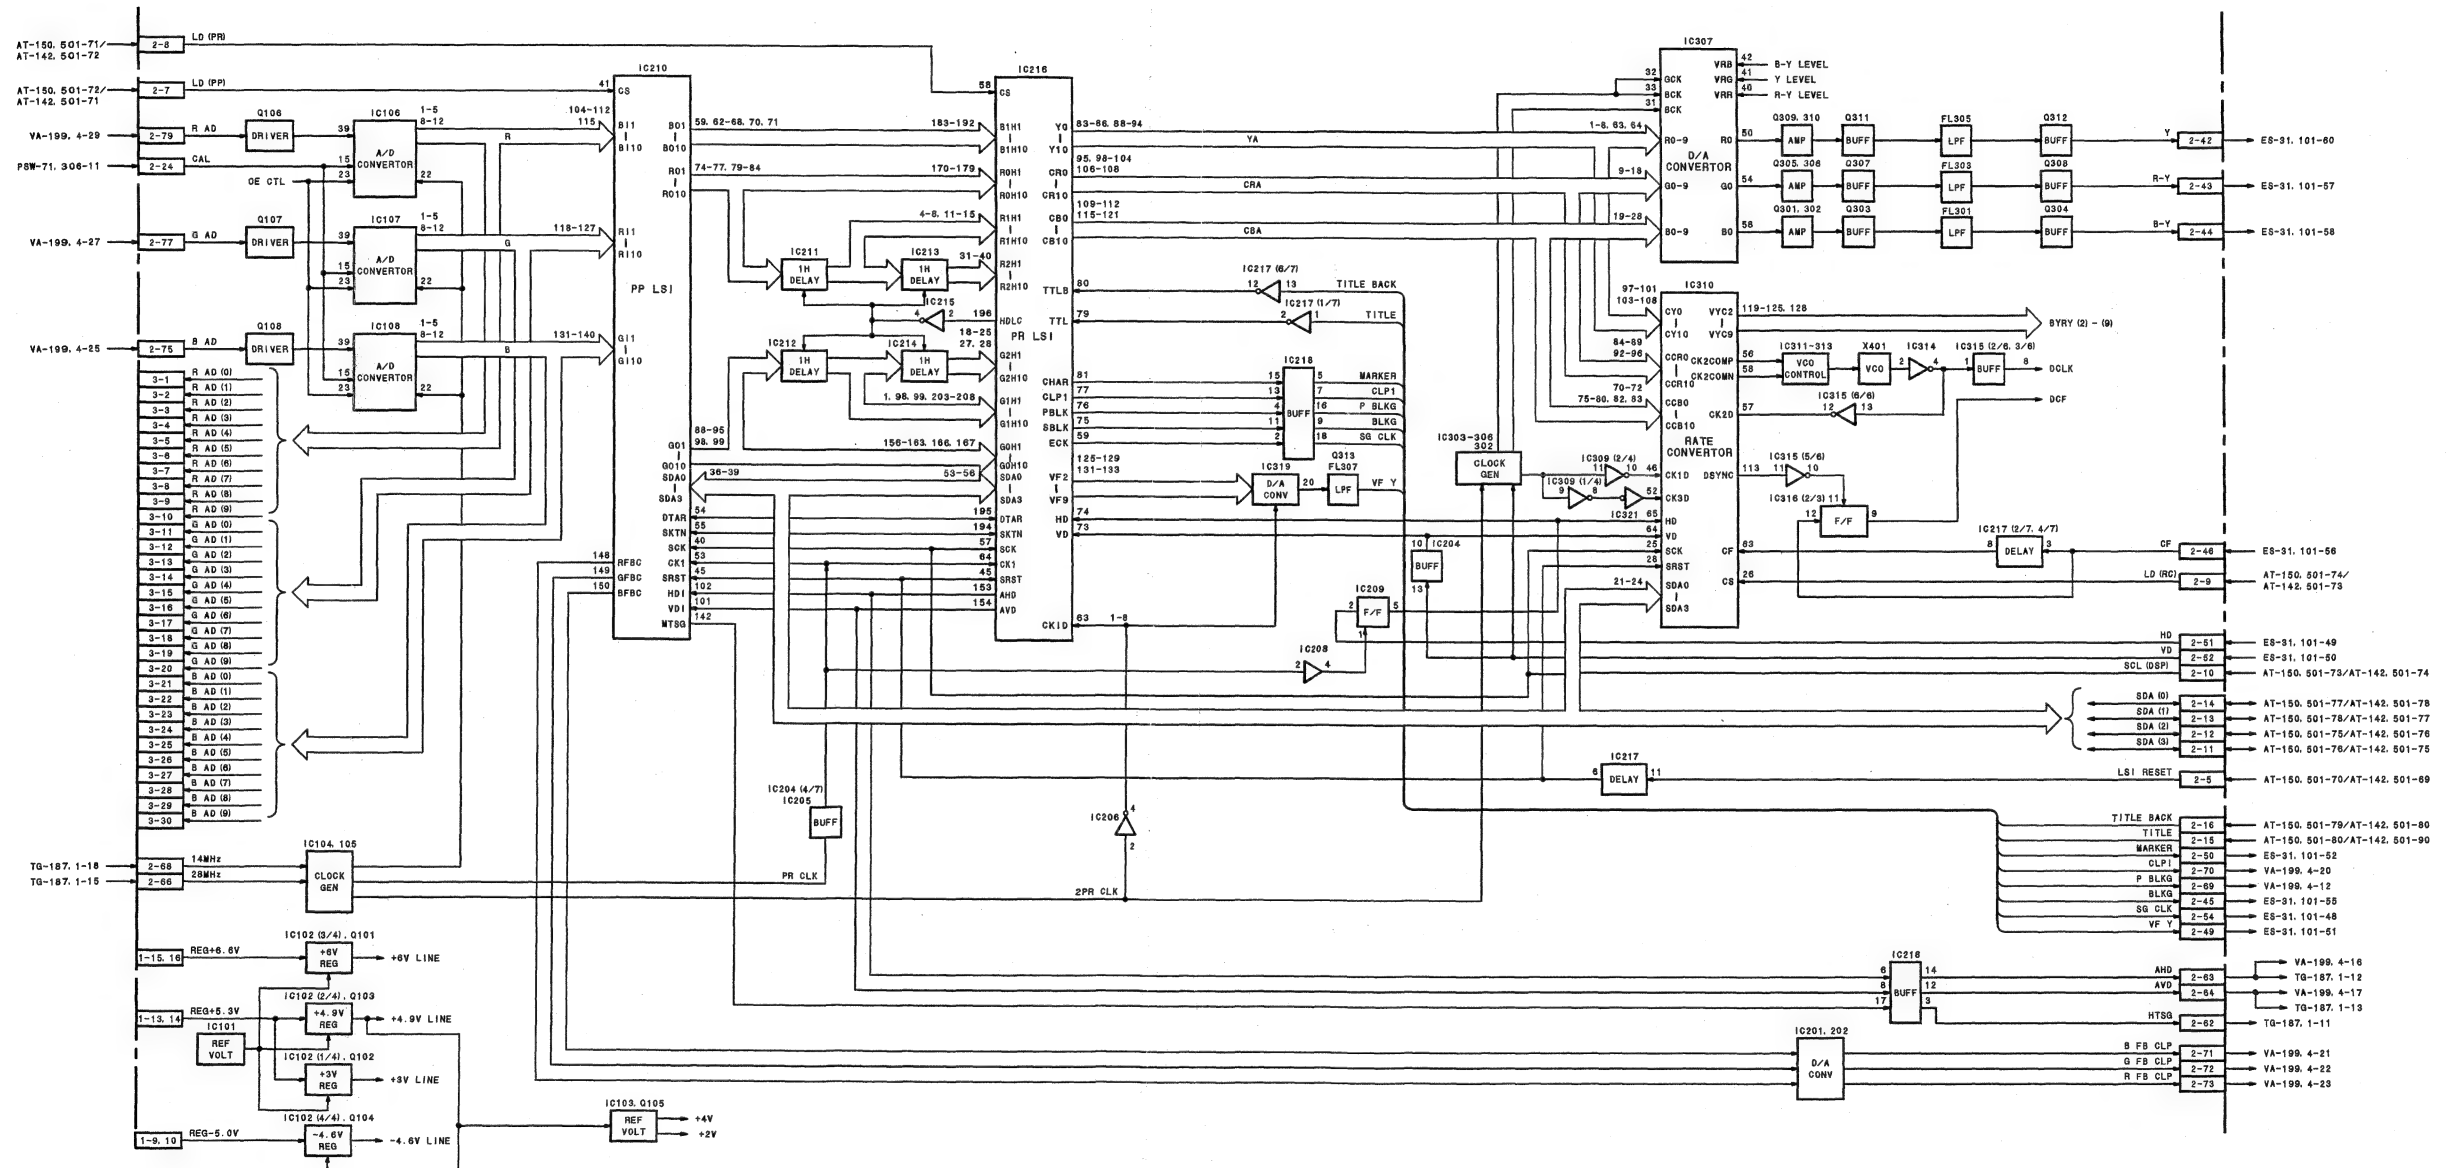


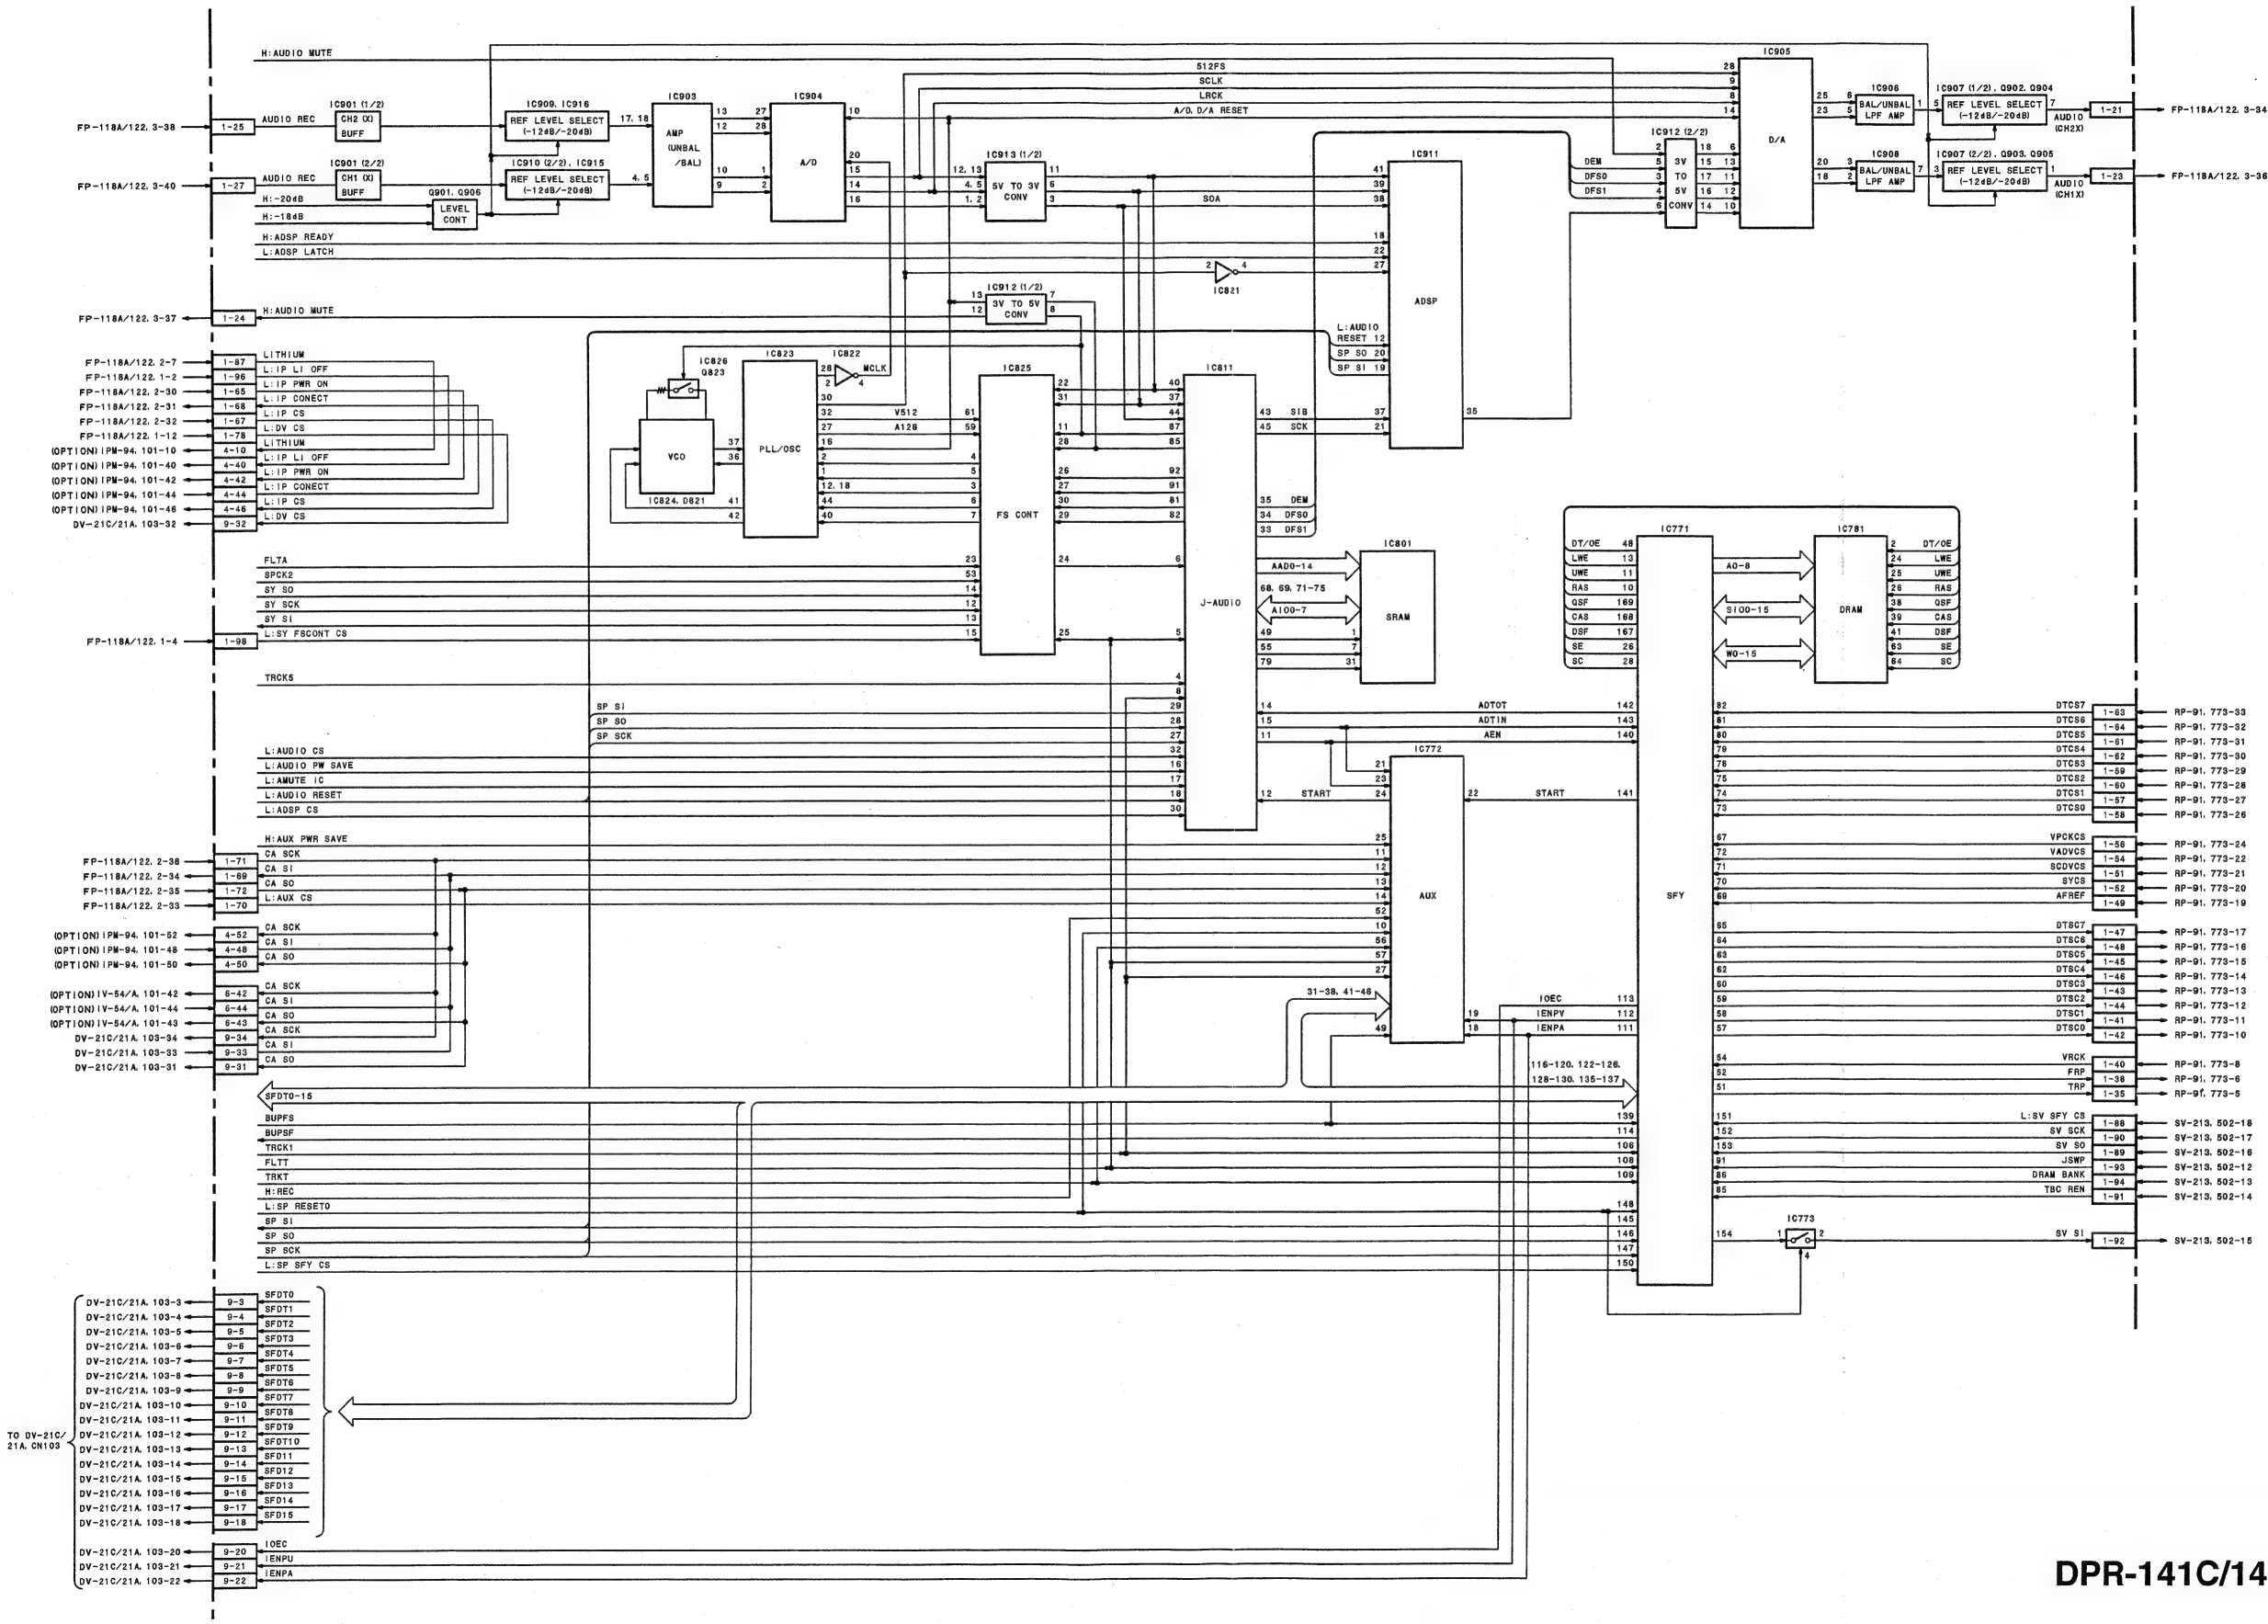

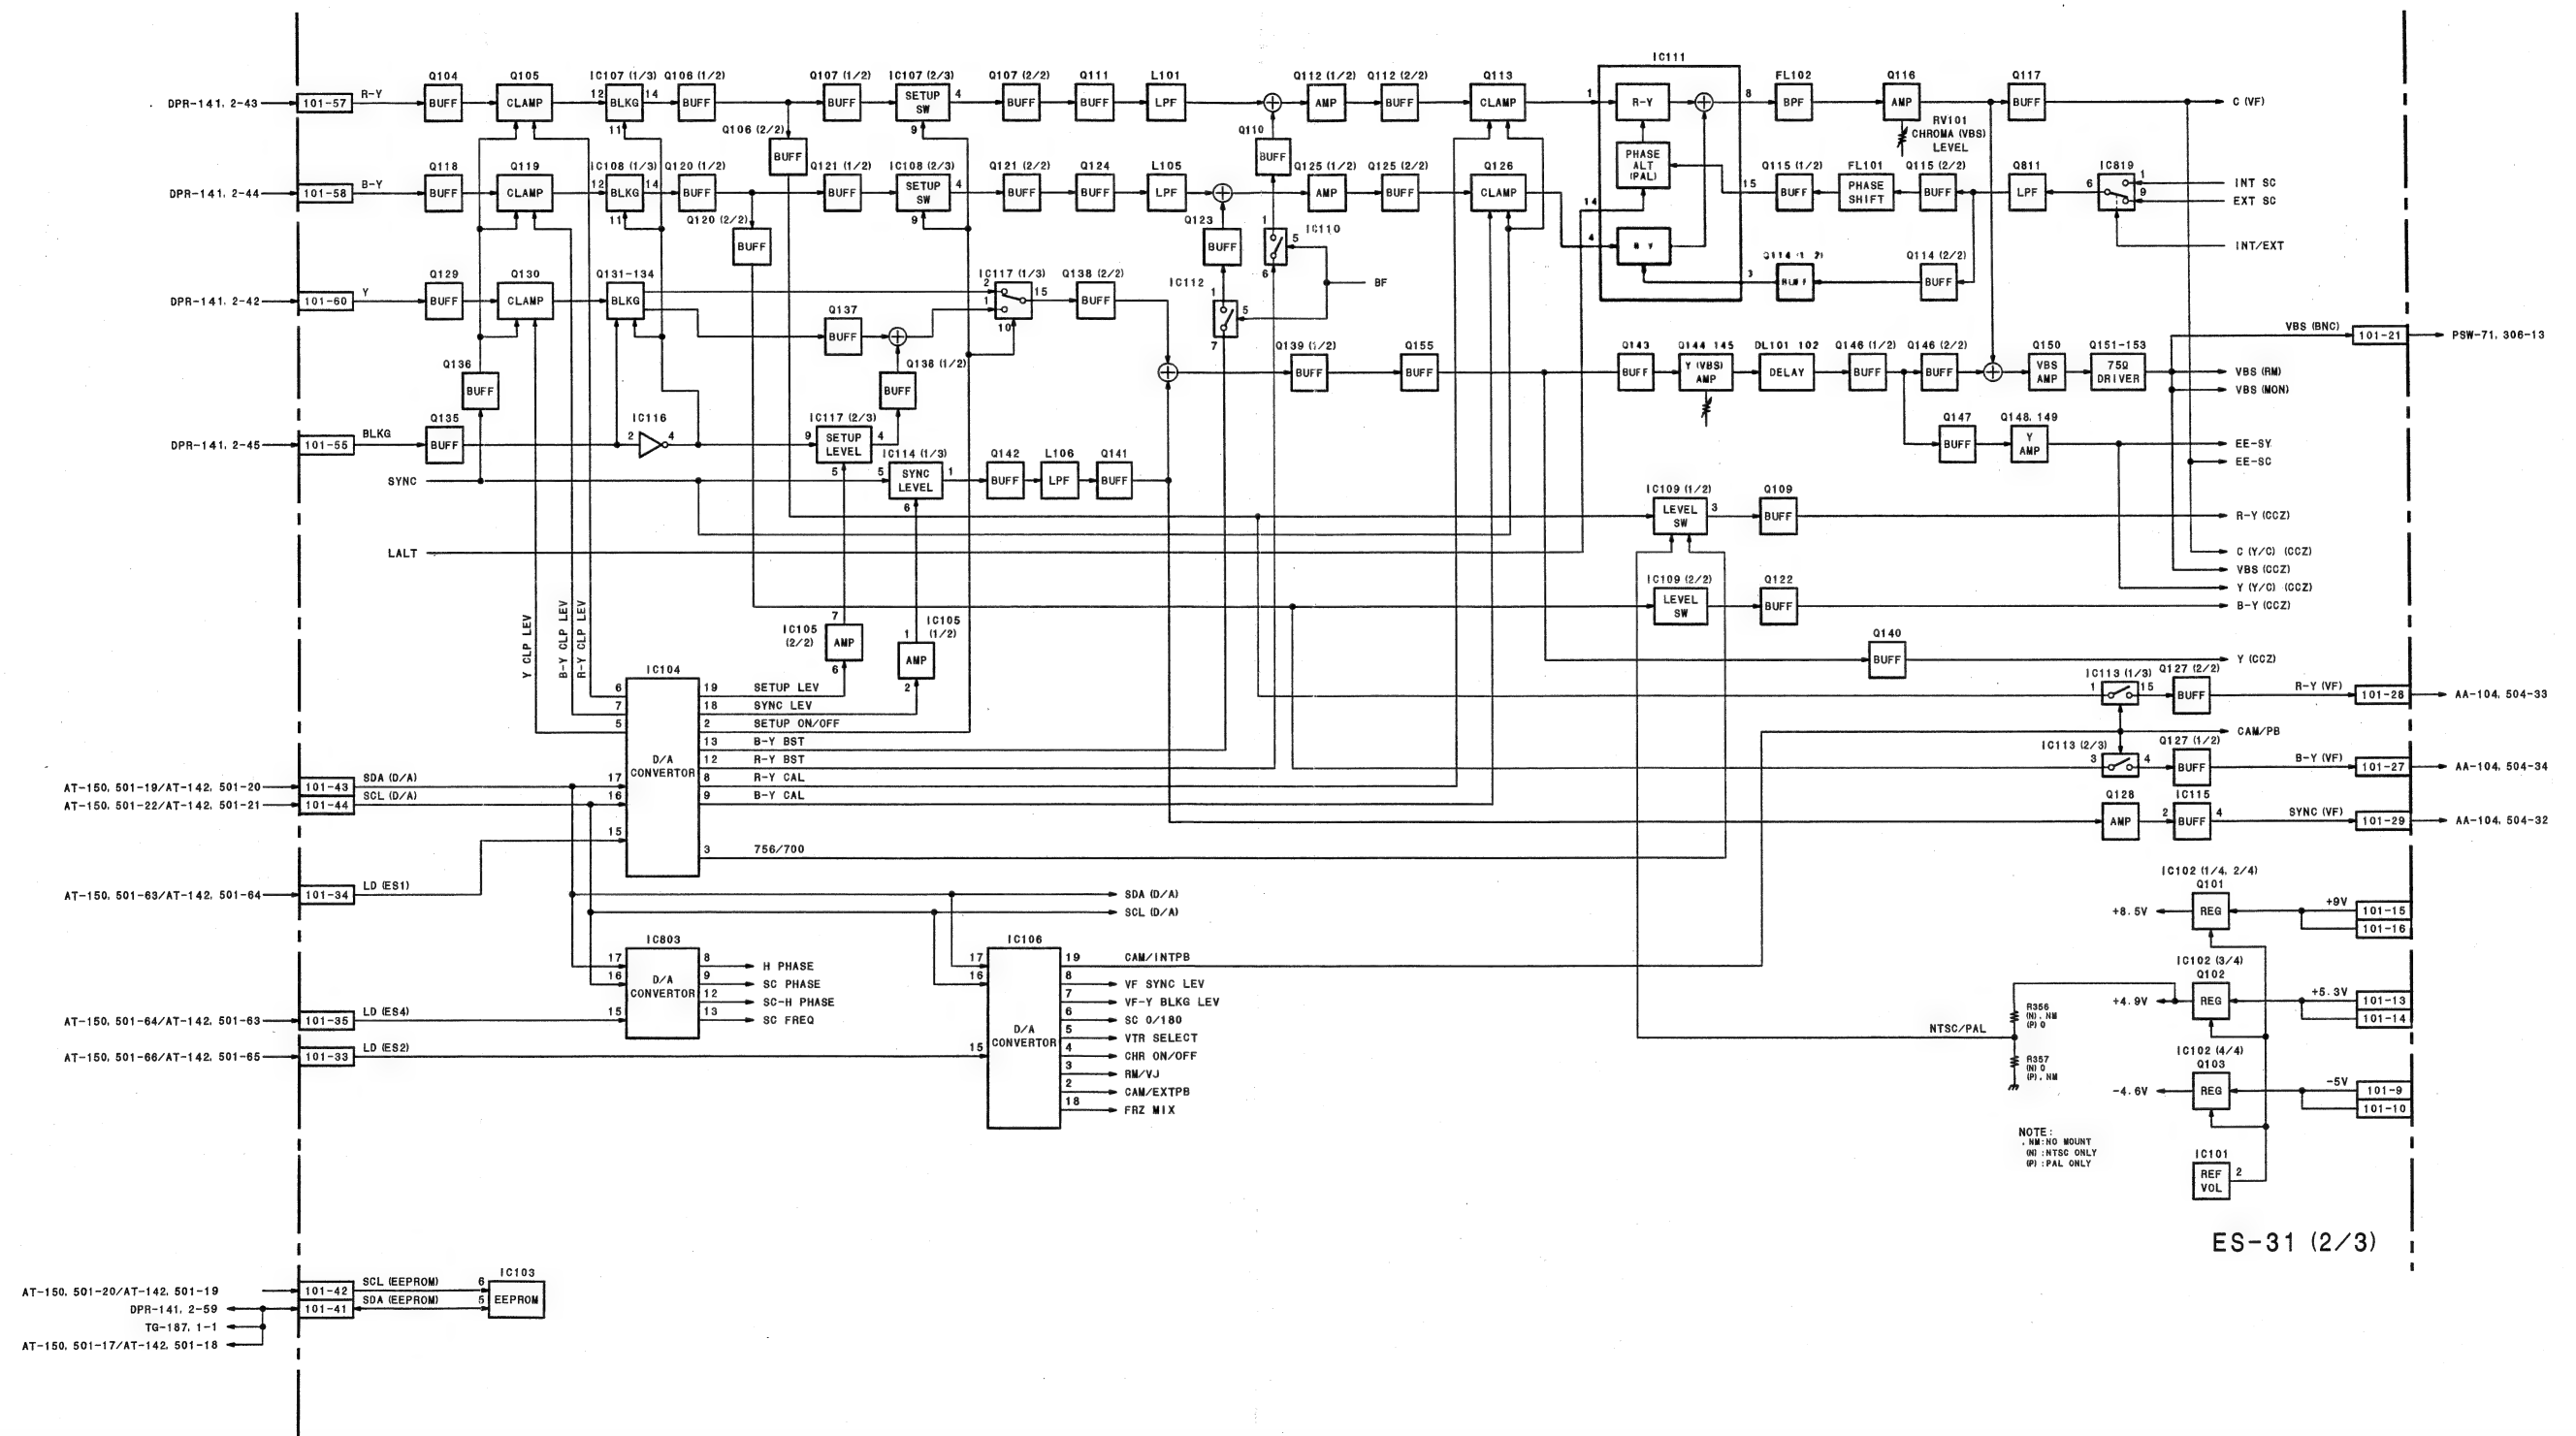


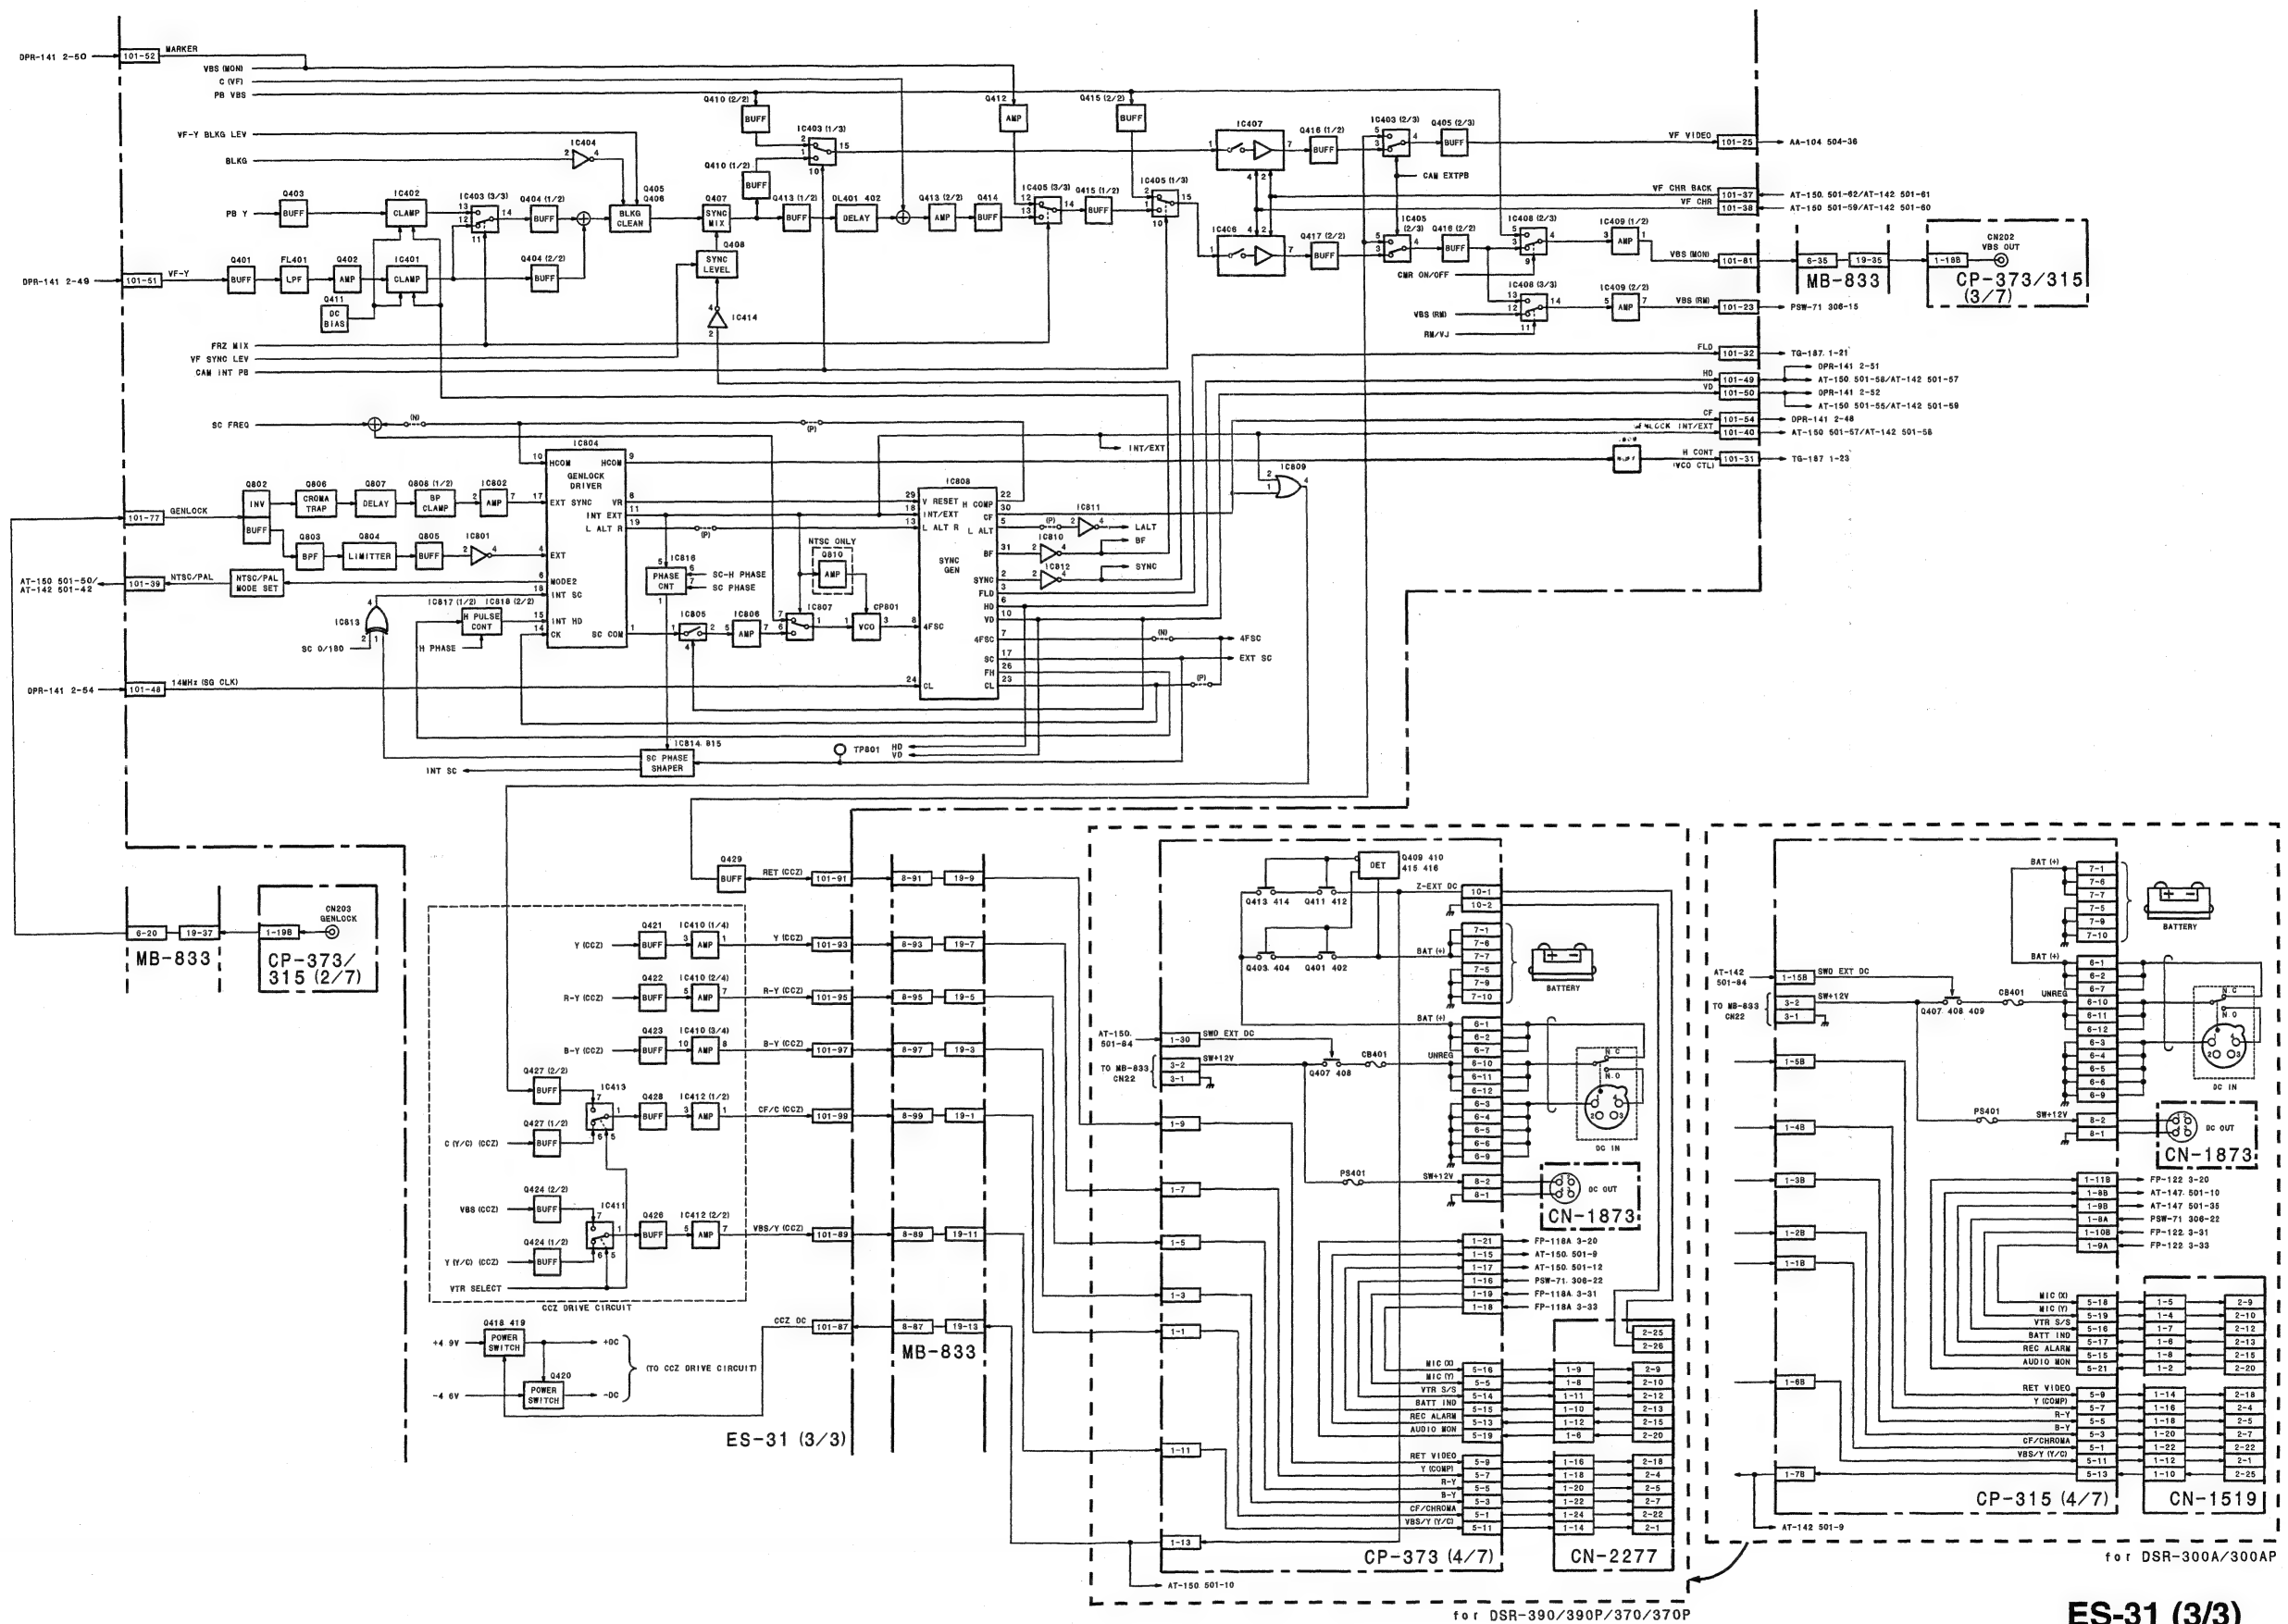




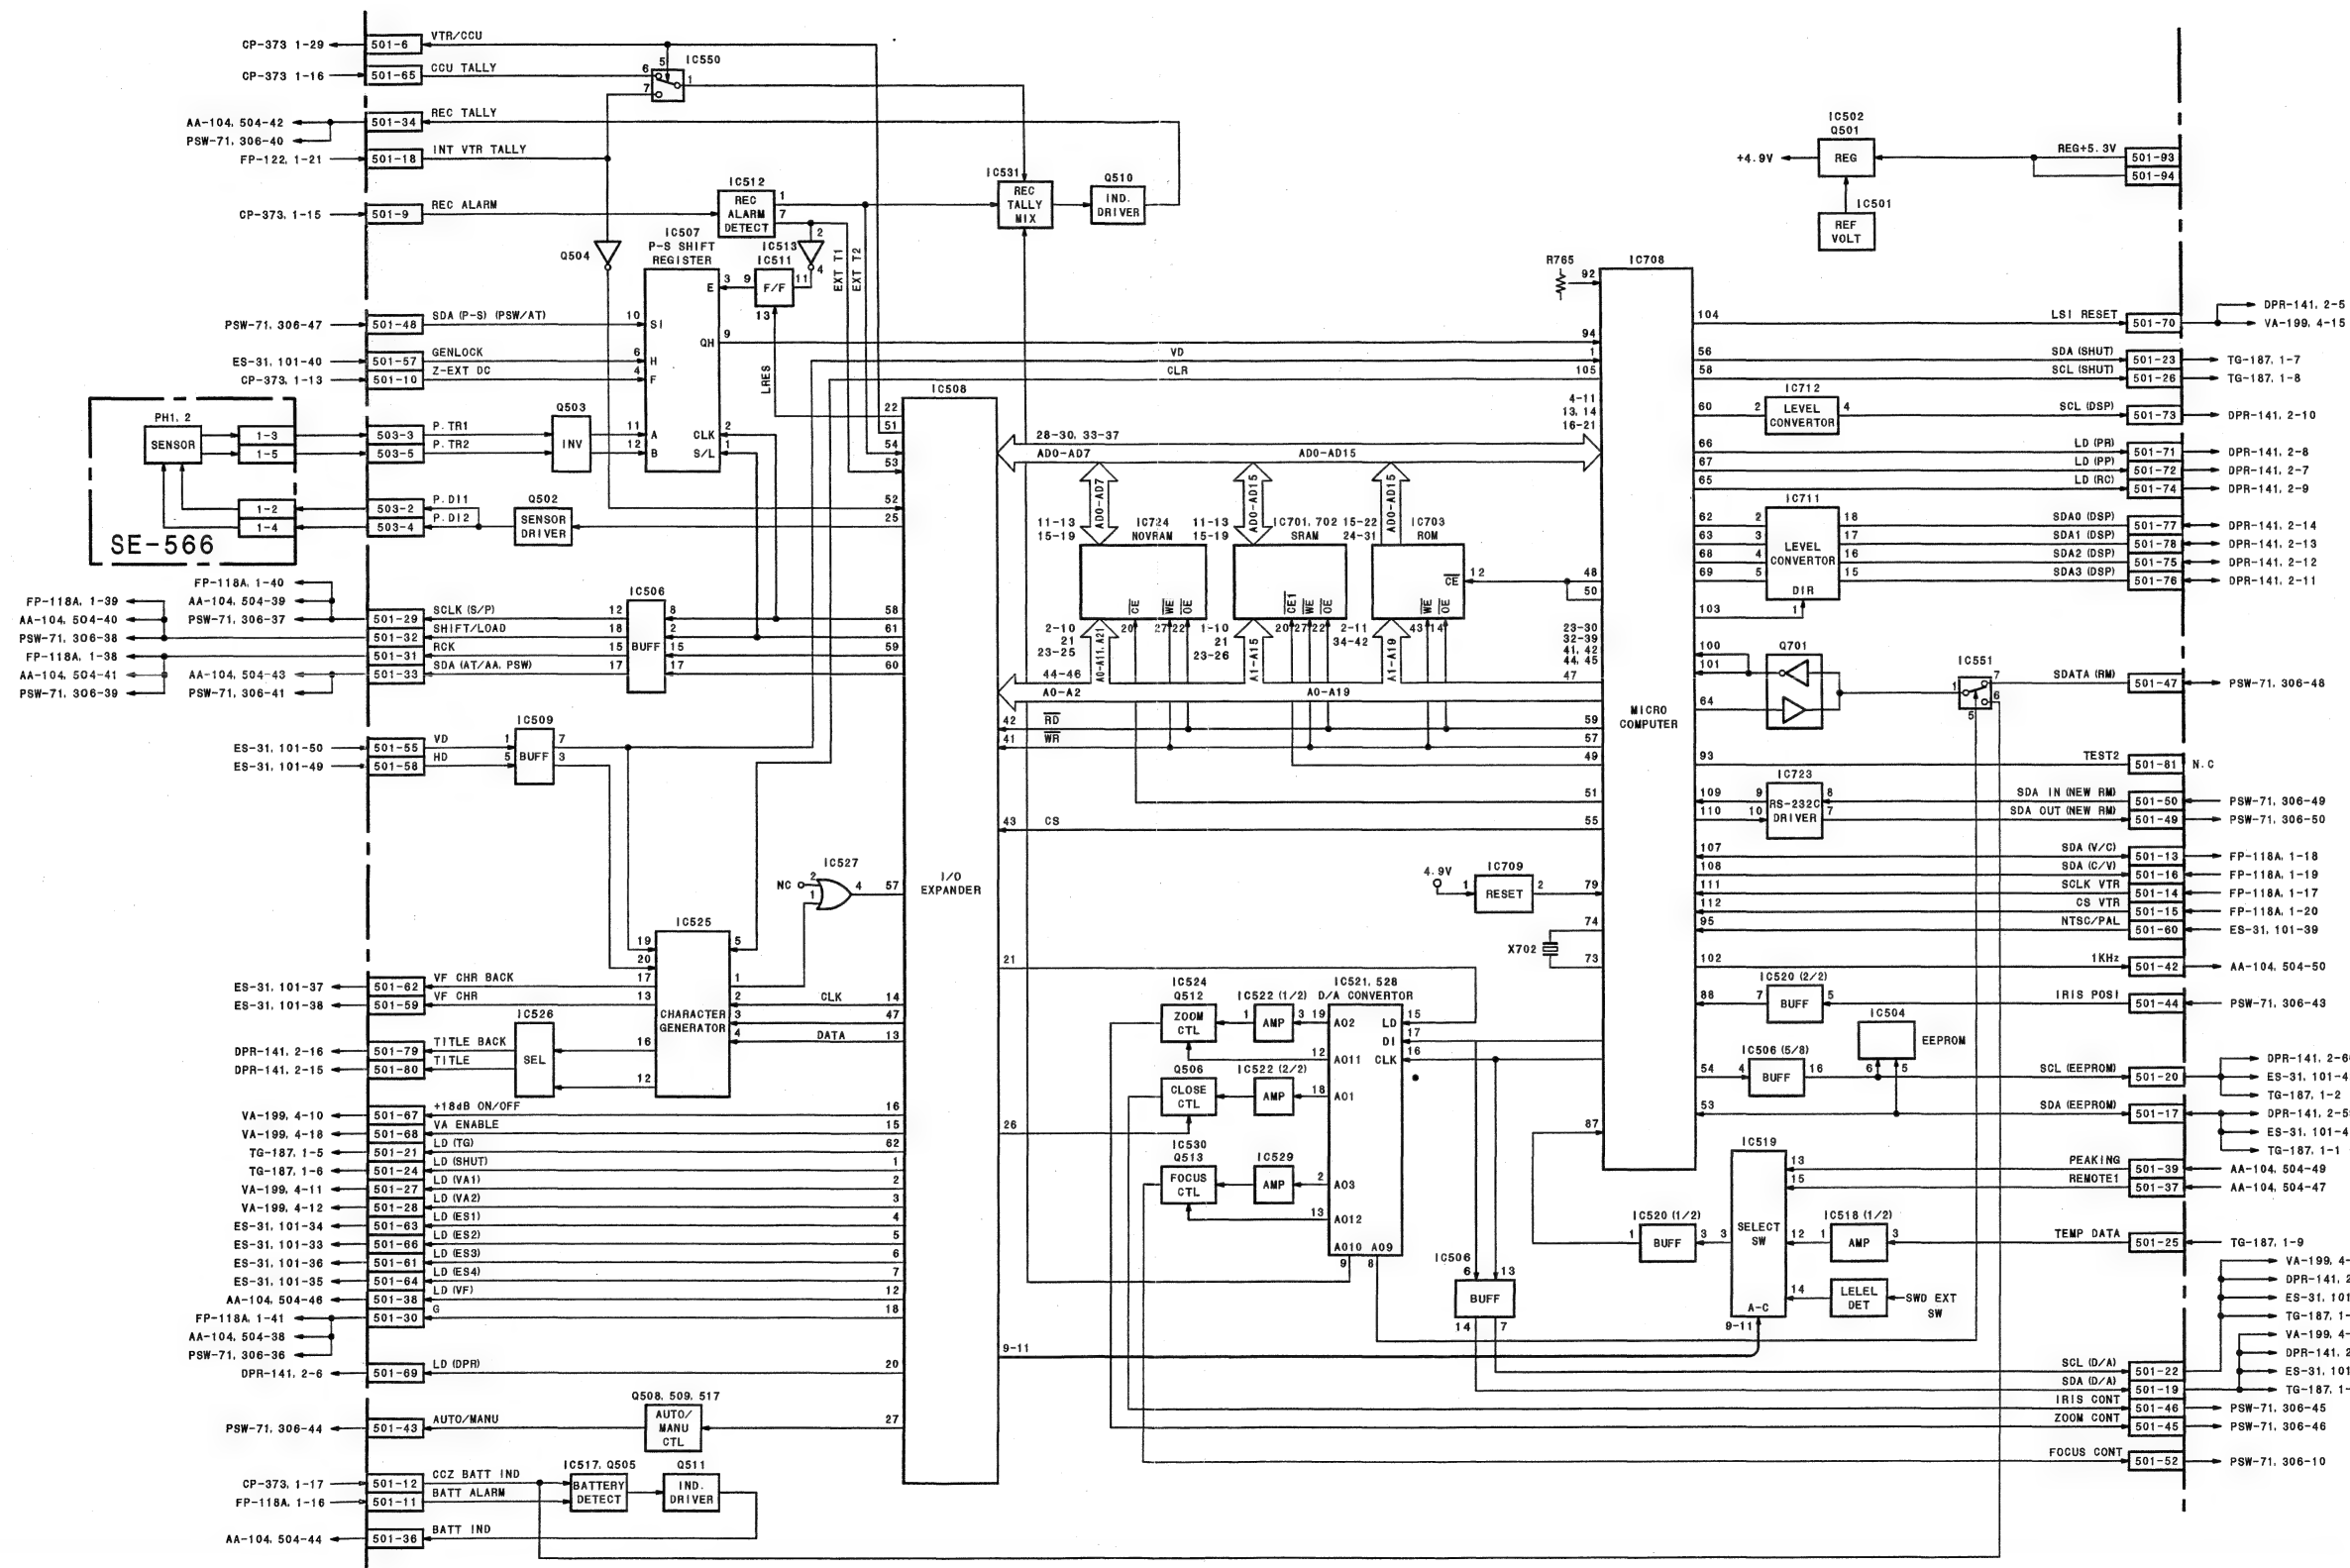


**AT-150**  
**SE-566**  
 FOR DSR-390/390P/370/370P

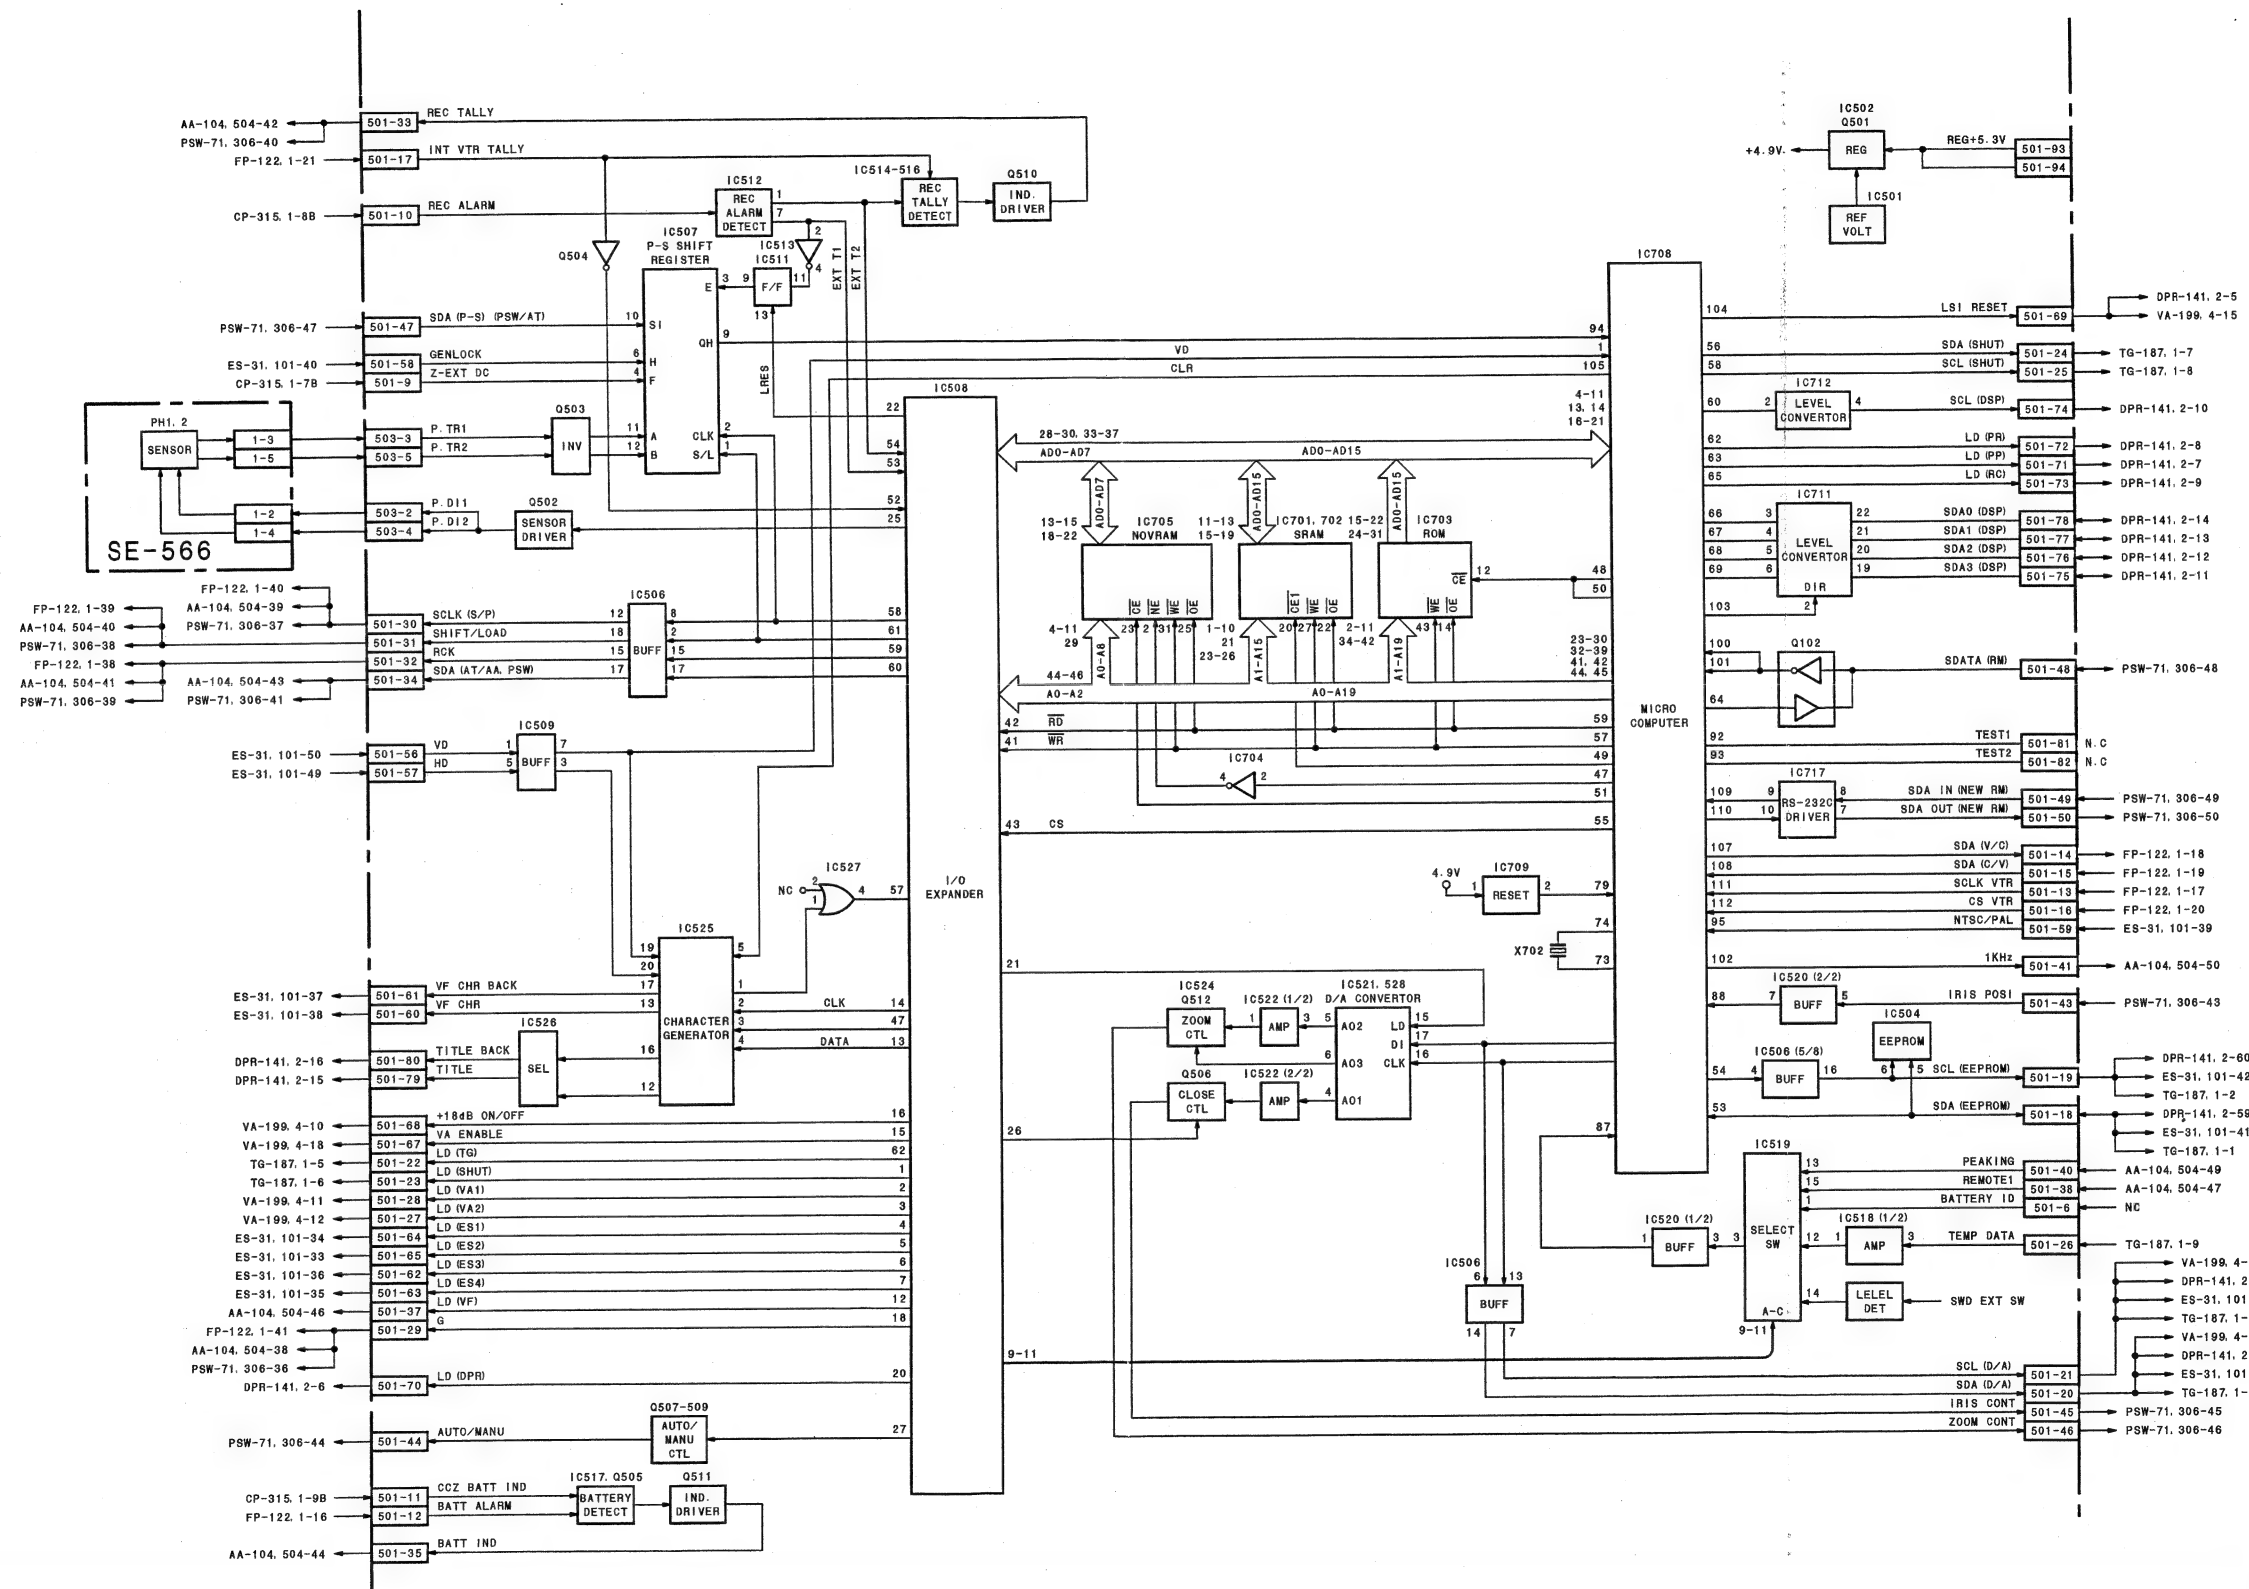


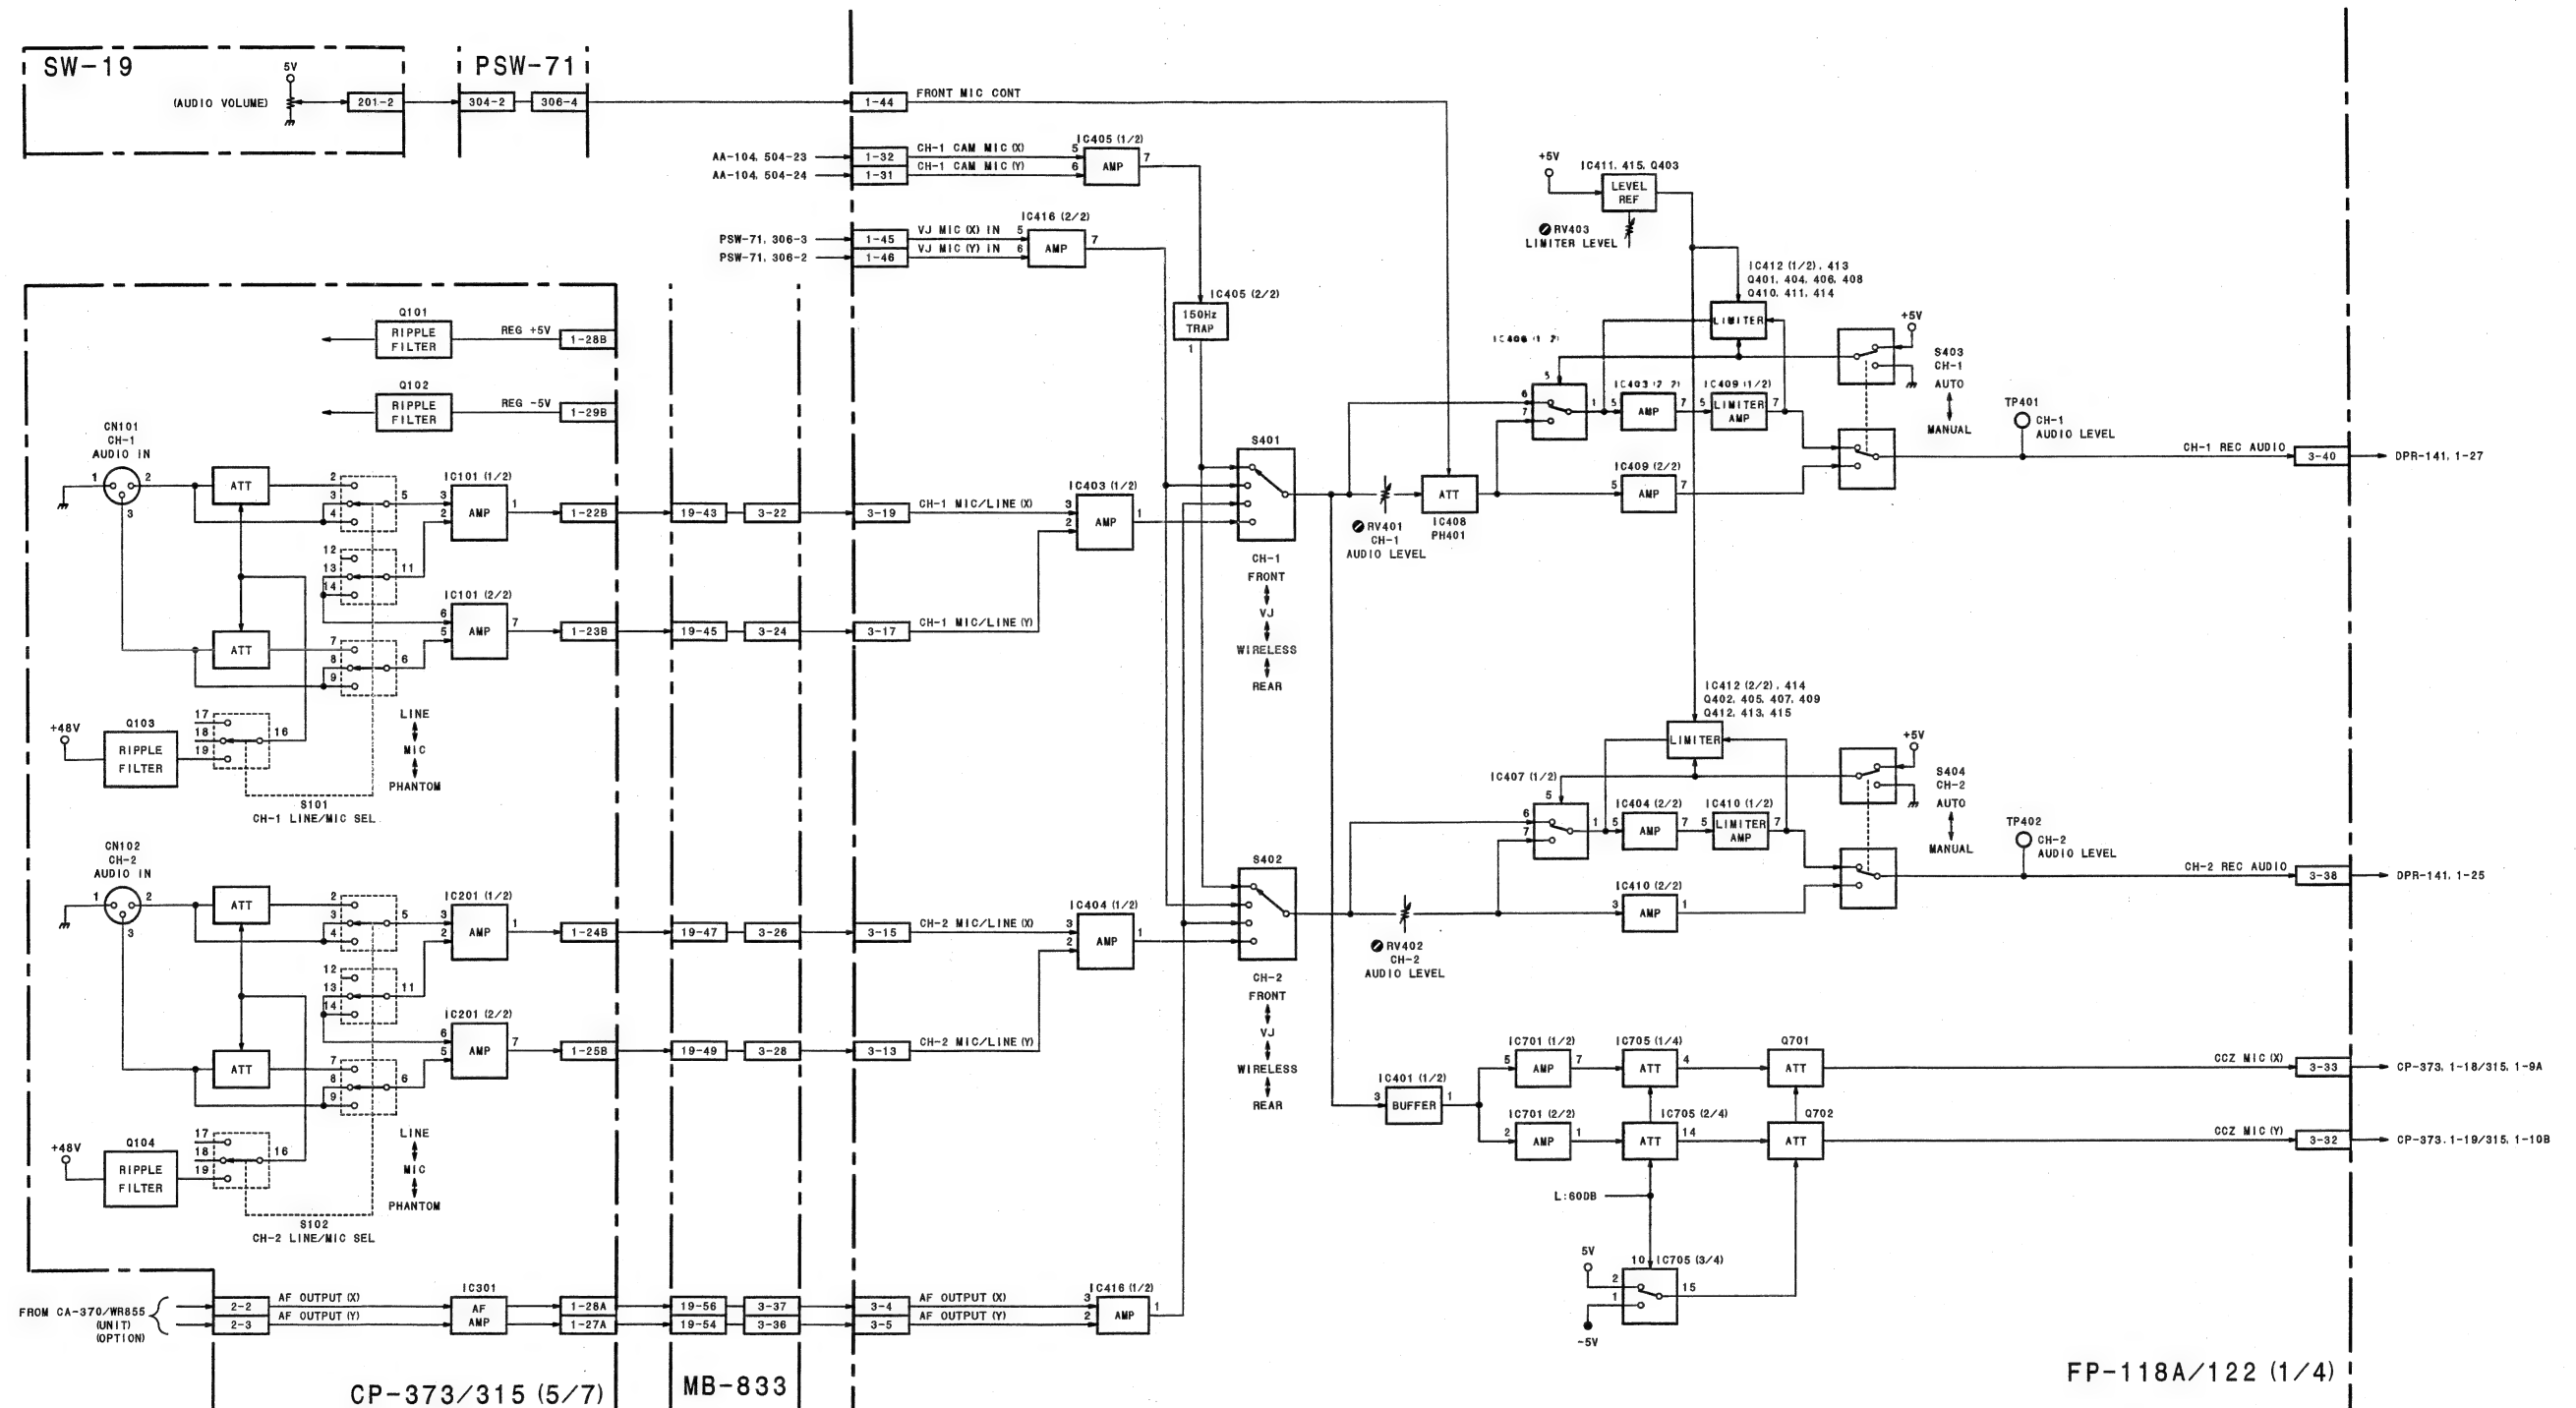


**Audio (1/2)**  
**CP-373/315 (5/7)**  
**FP-118A/122 (1/4)**  
**SW-19**

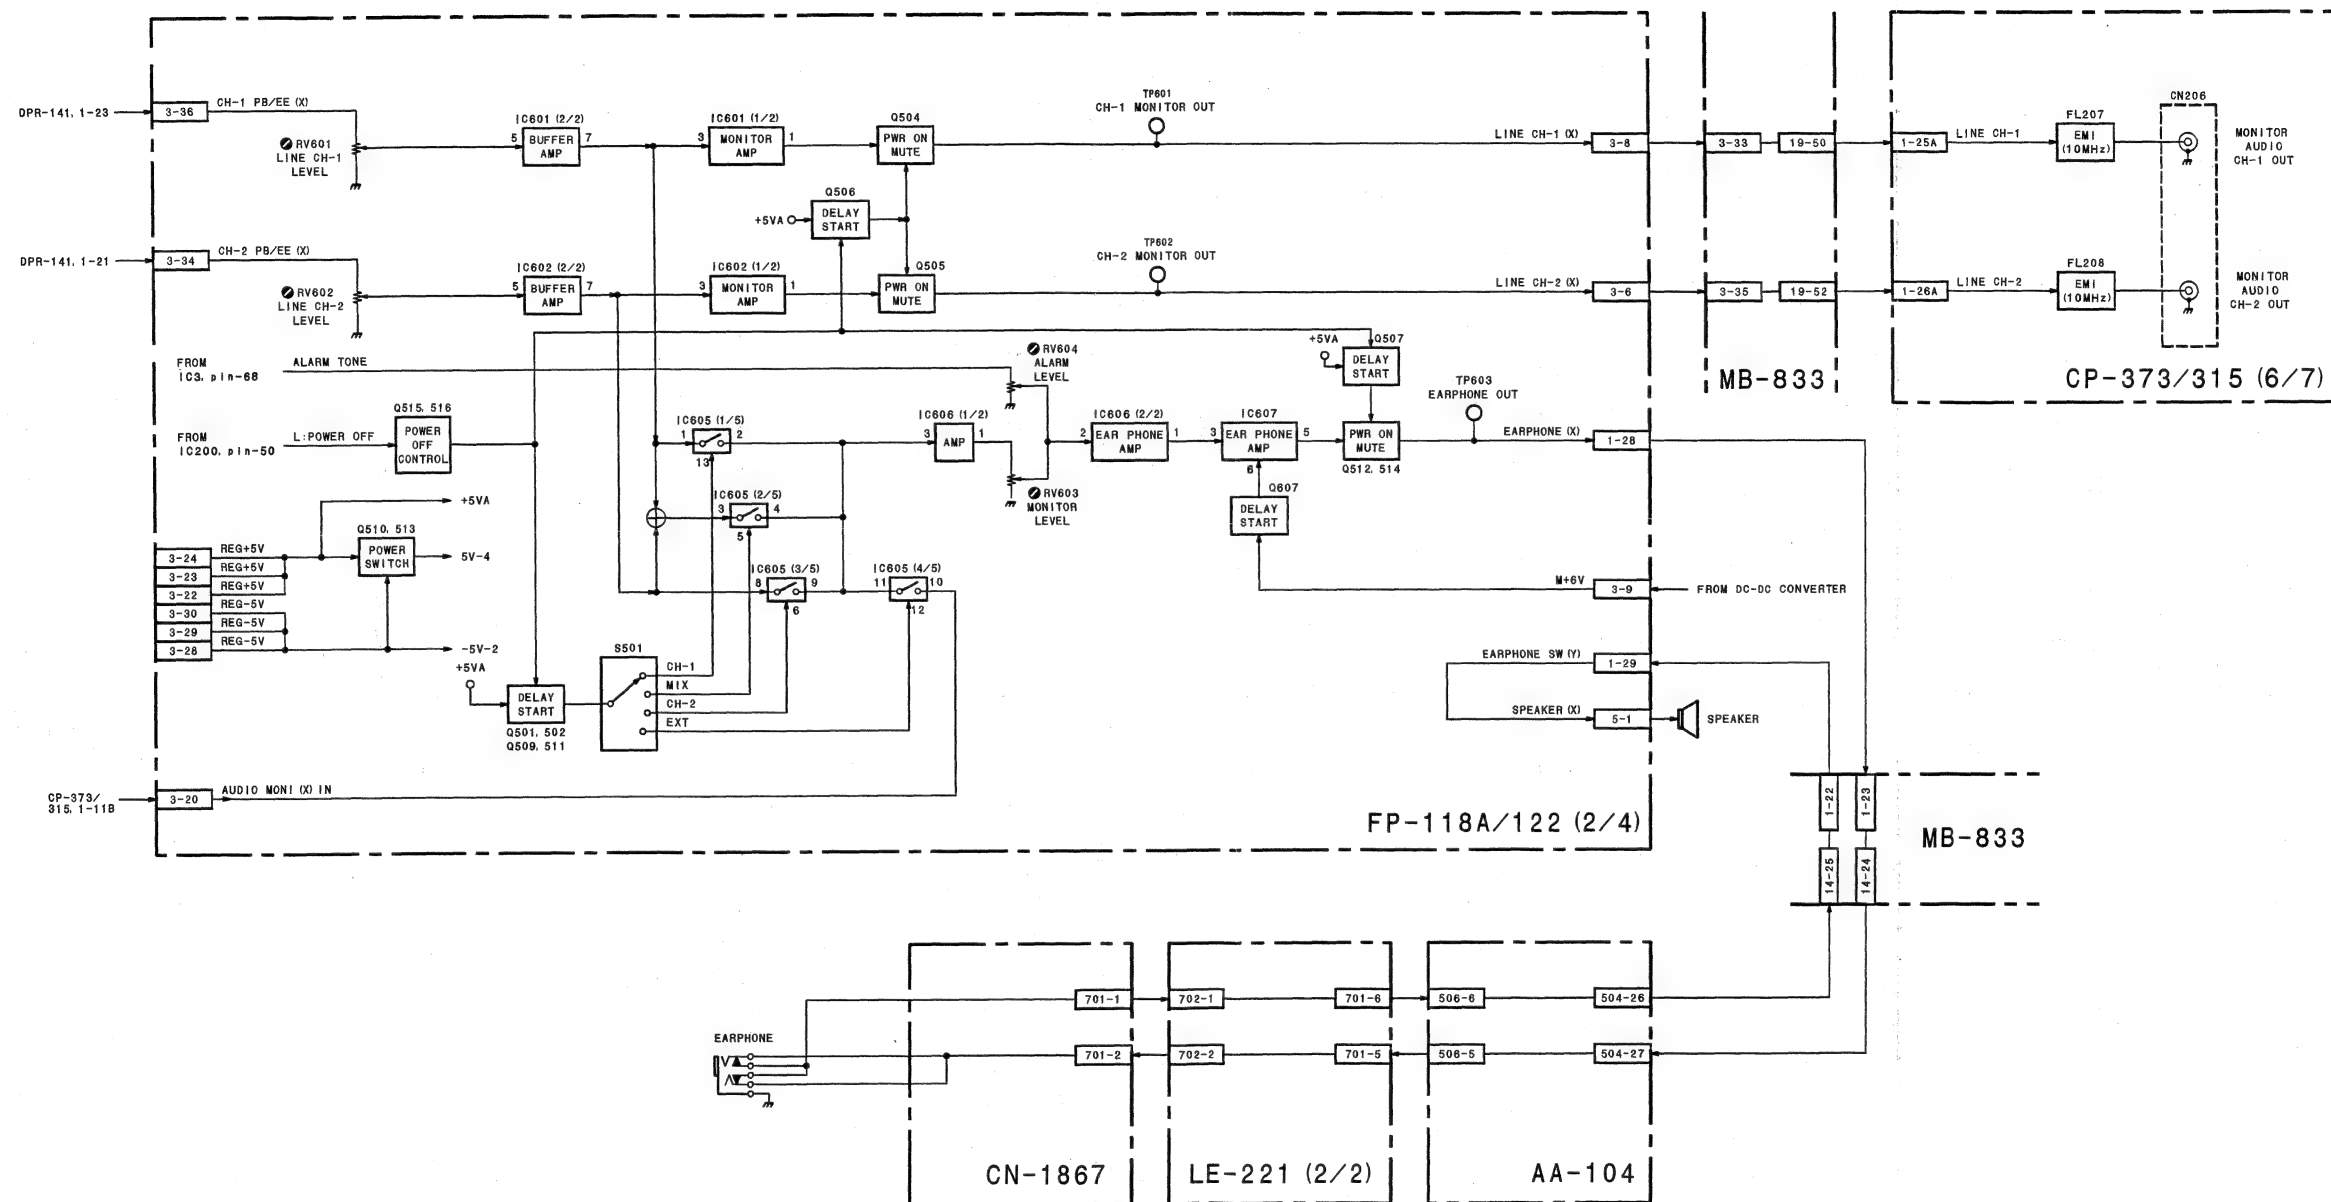

**Audio (2/2)**  
 AA-104  
 CP-373/315 (6/7)  
 CN-1867  
 FP-118A/122 (2/4)  
 LE-221 (2/2)

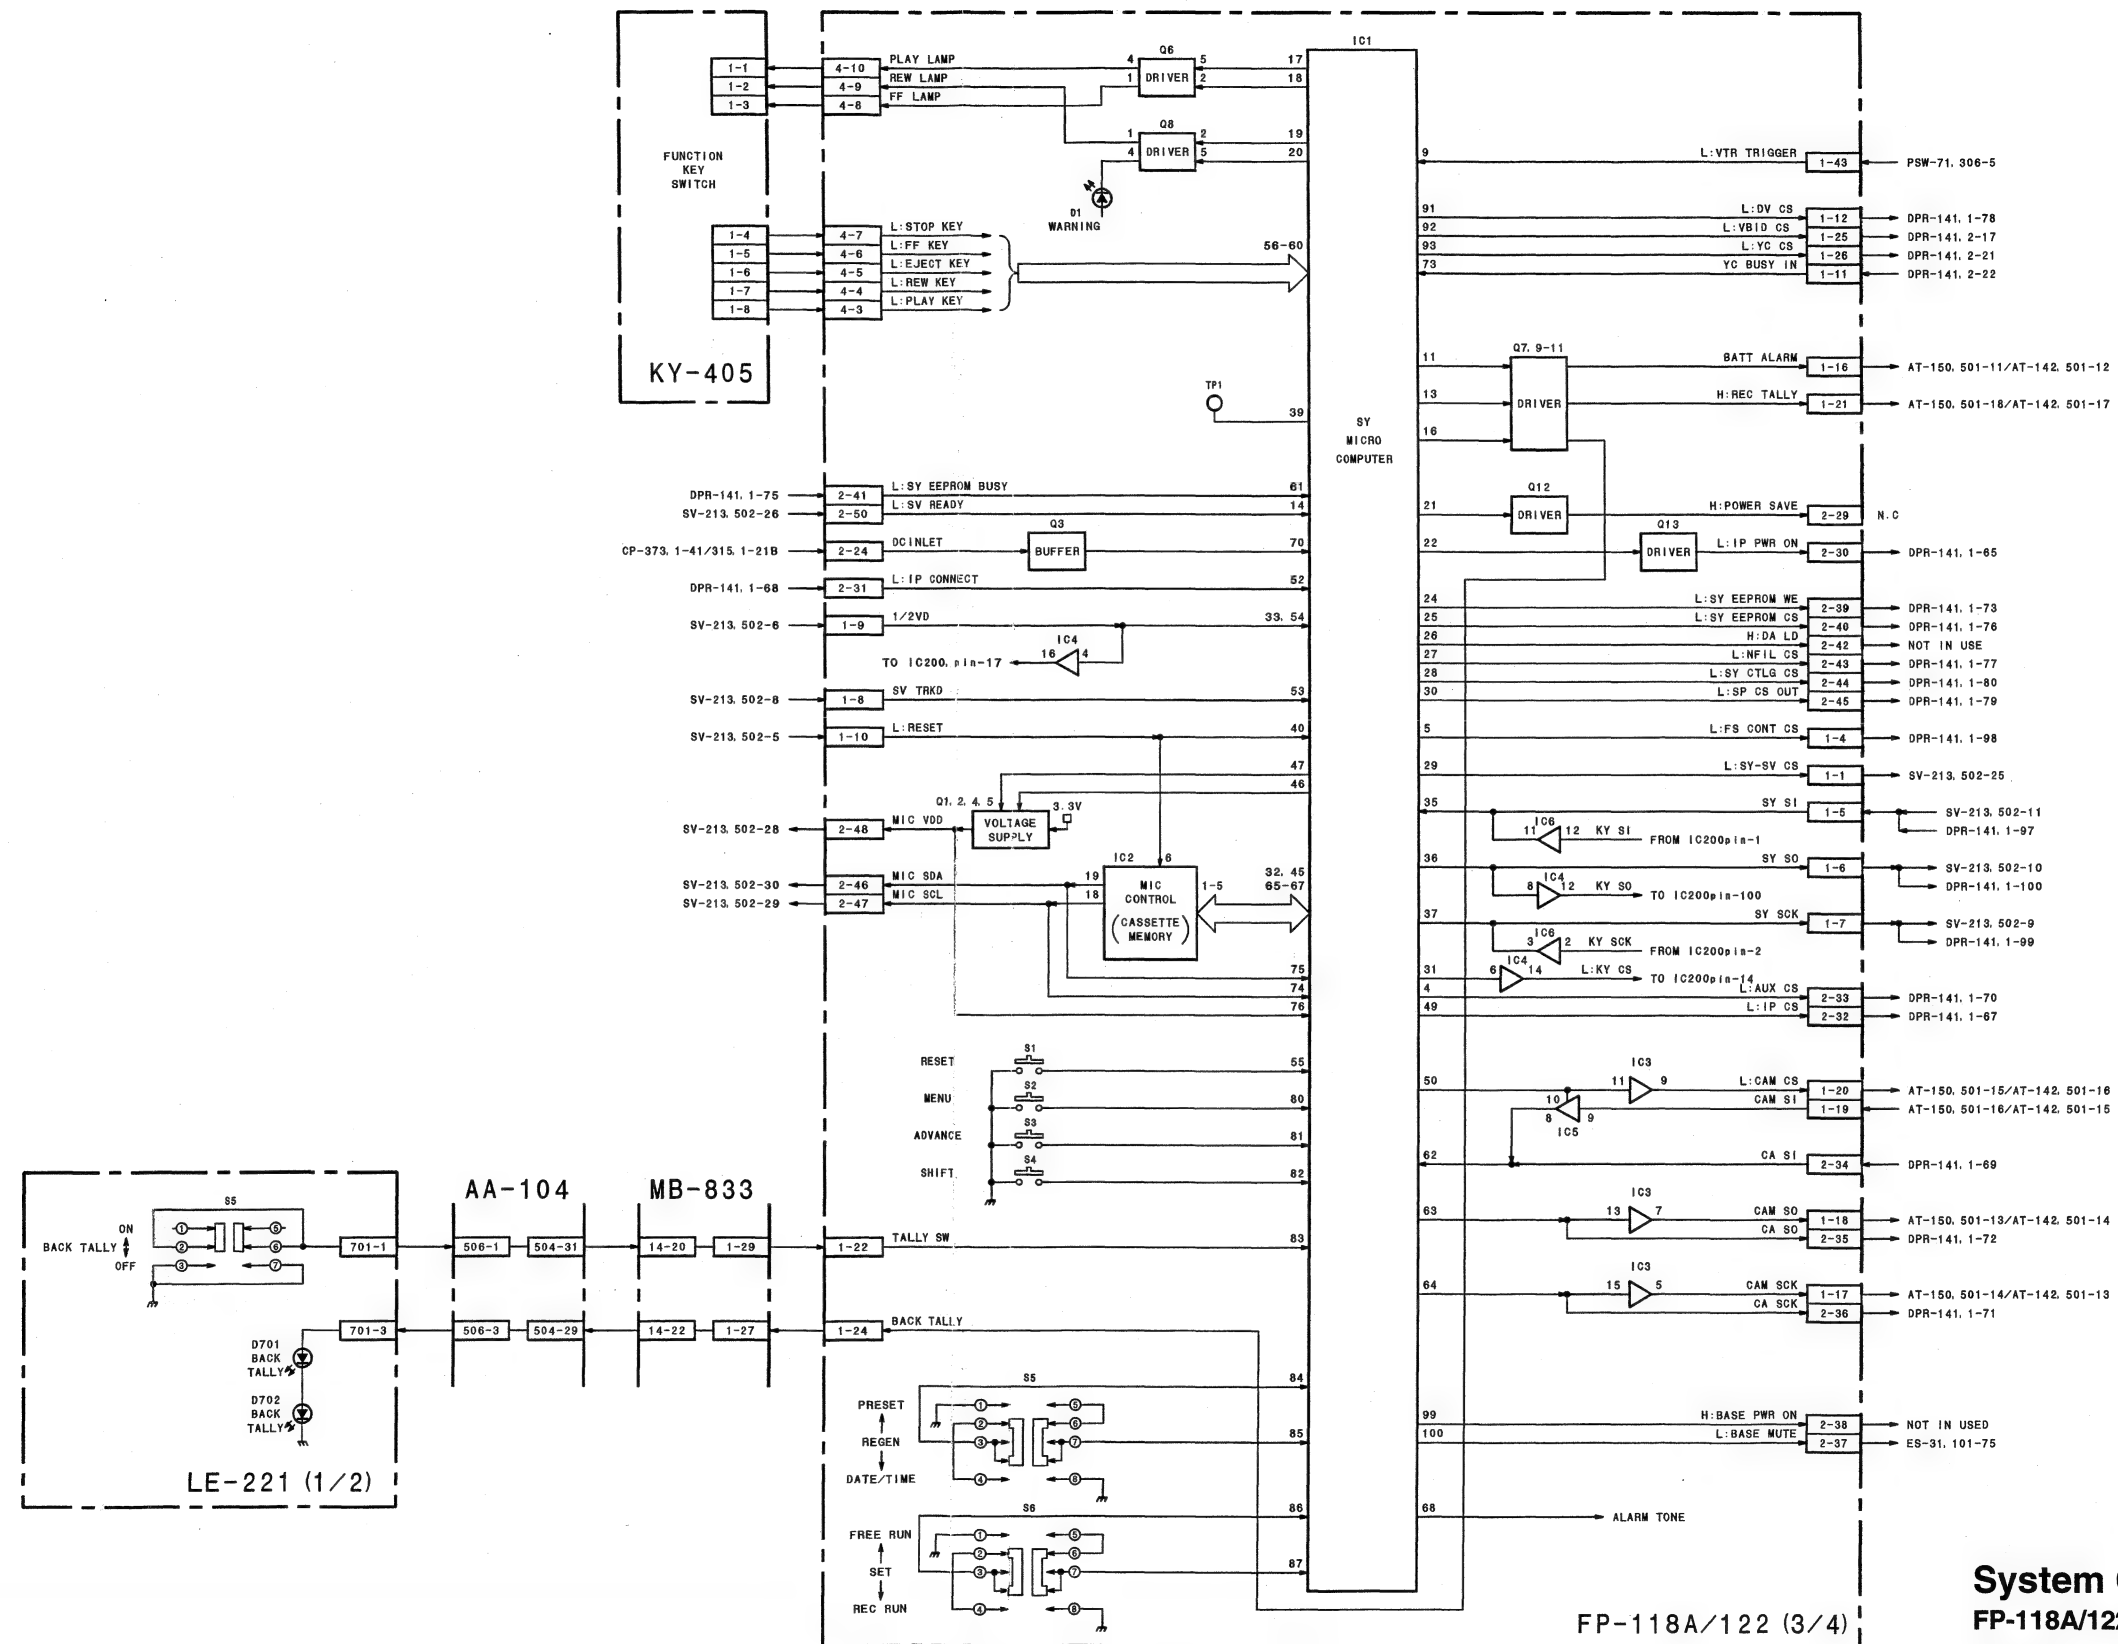

System Control (1/2)  
FP-118A/122 (3/4)  
KY-405  
LE-221 (1/2)

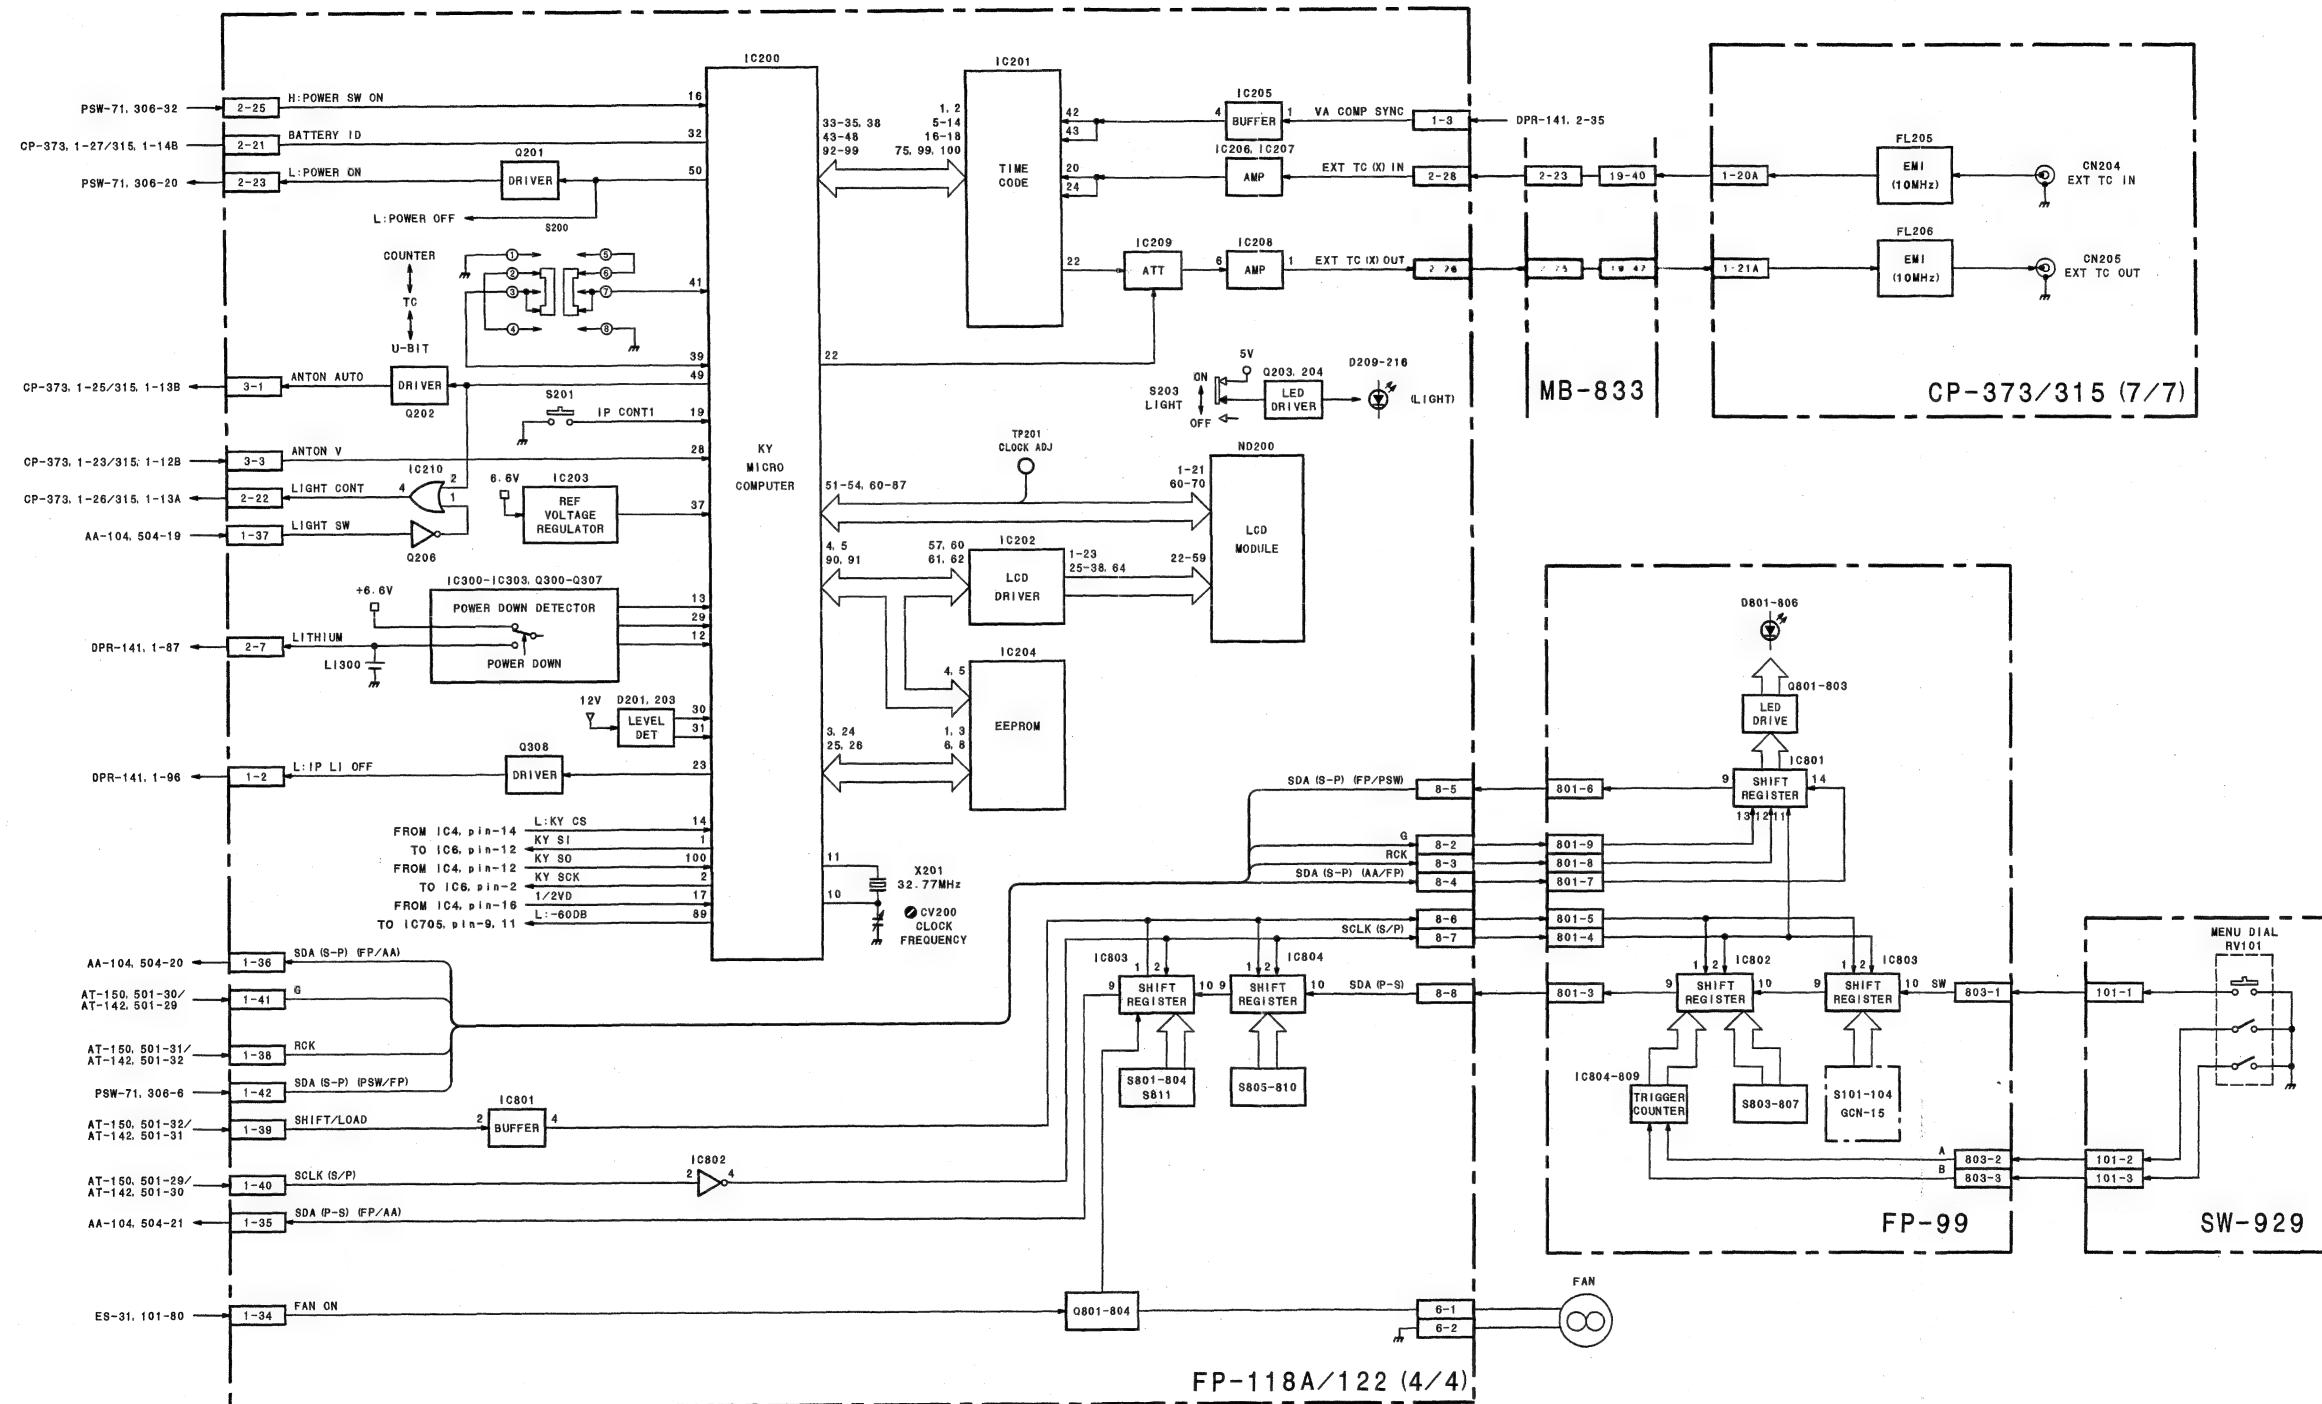

## System Control (2/2)


CP-373/315 (7/7)


FP-118A/122 (4/4)

FP-99


SW-929



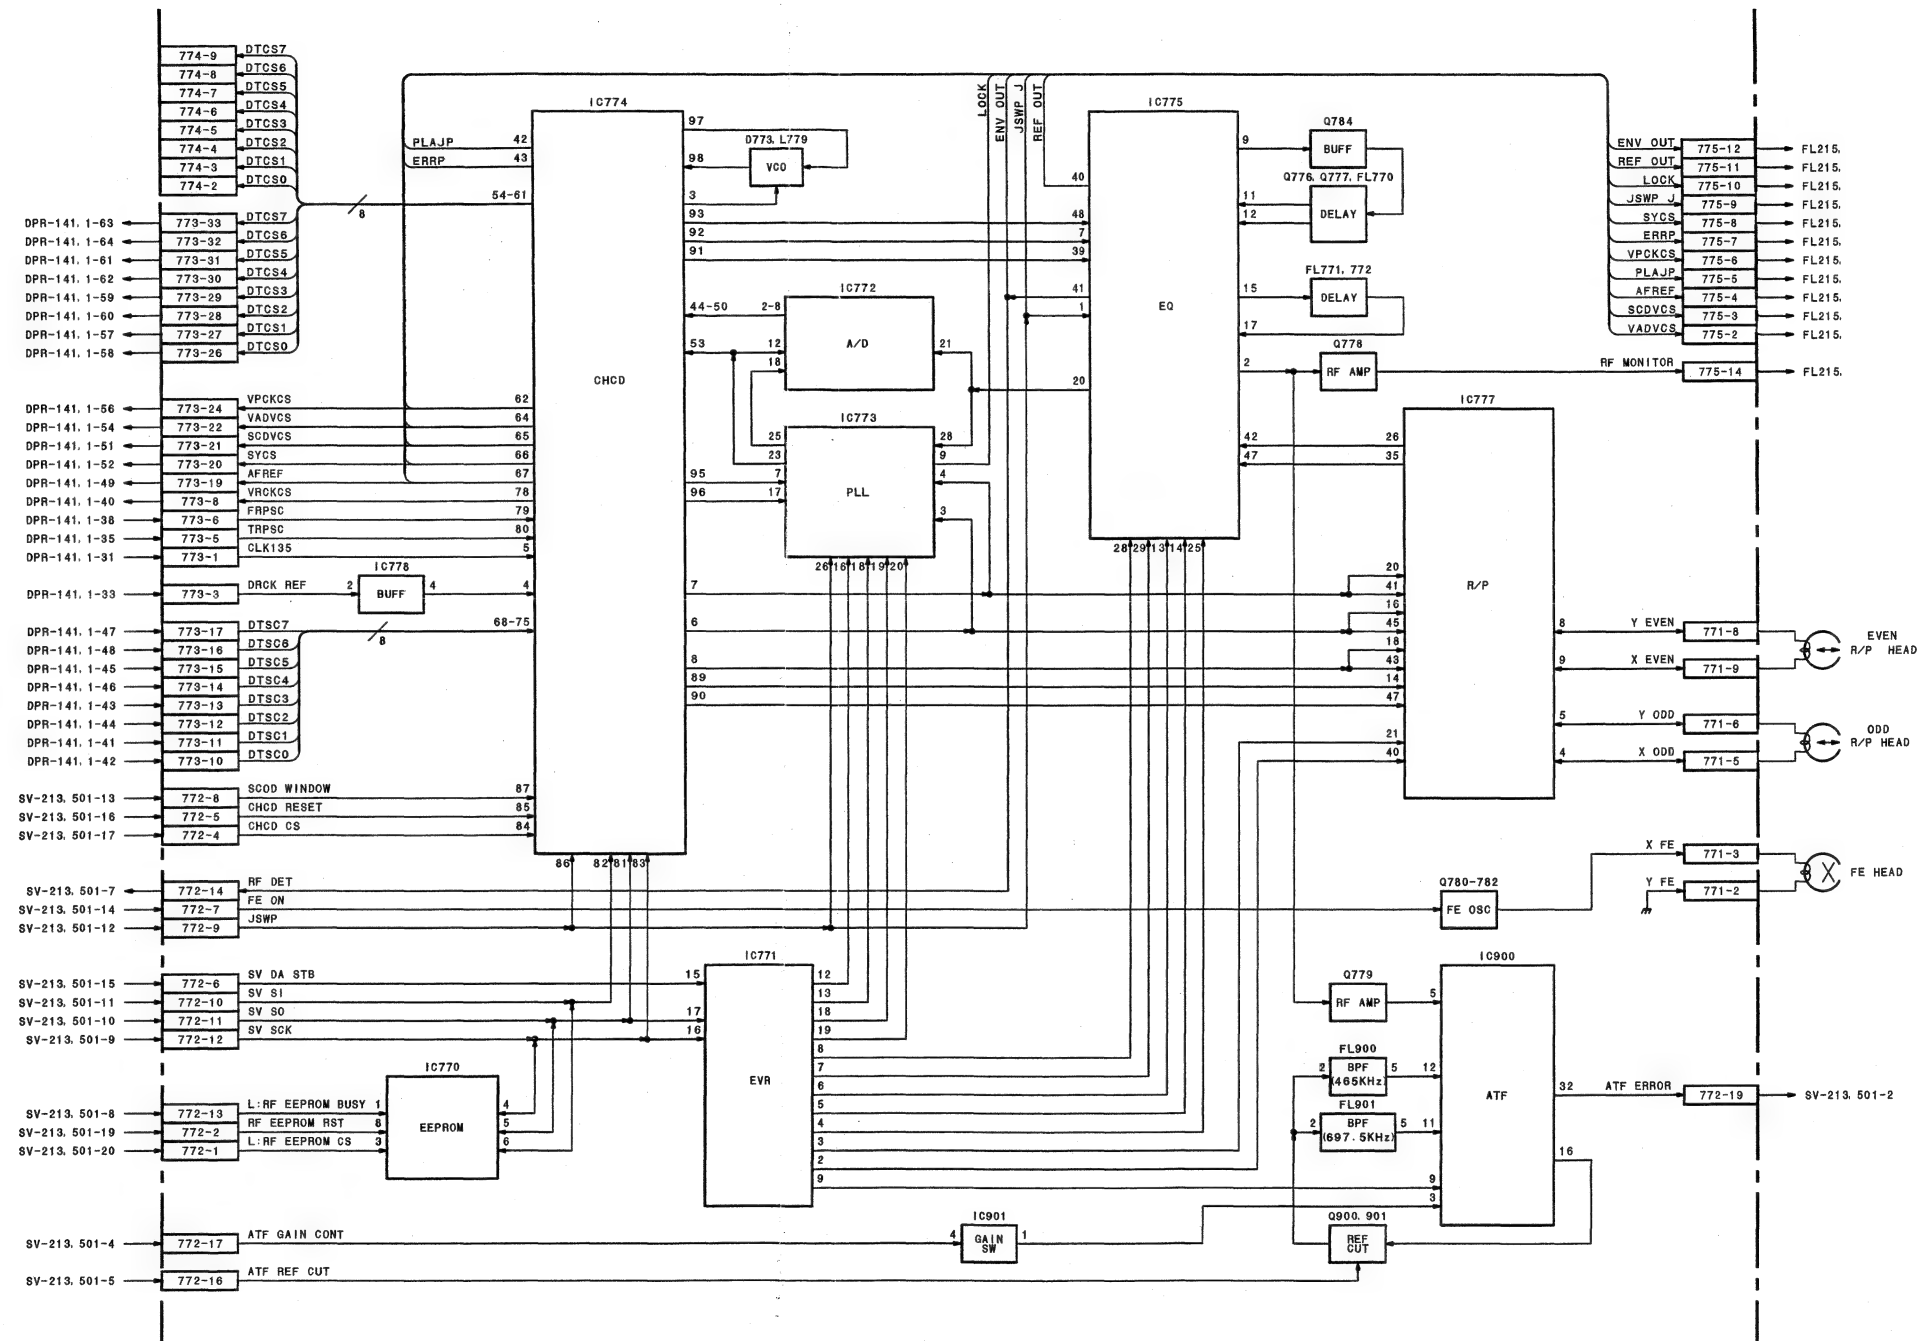


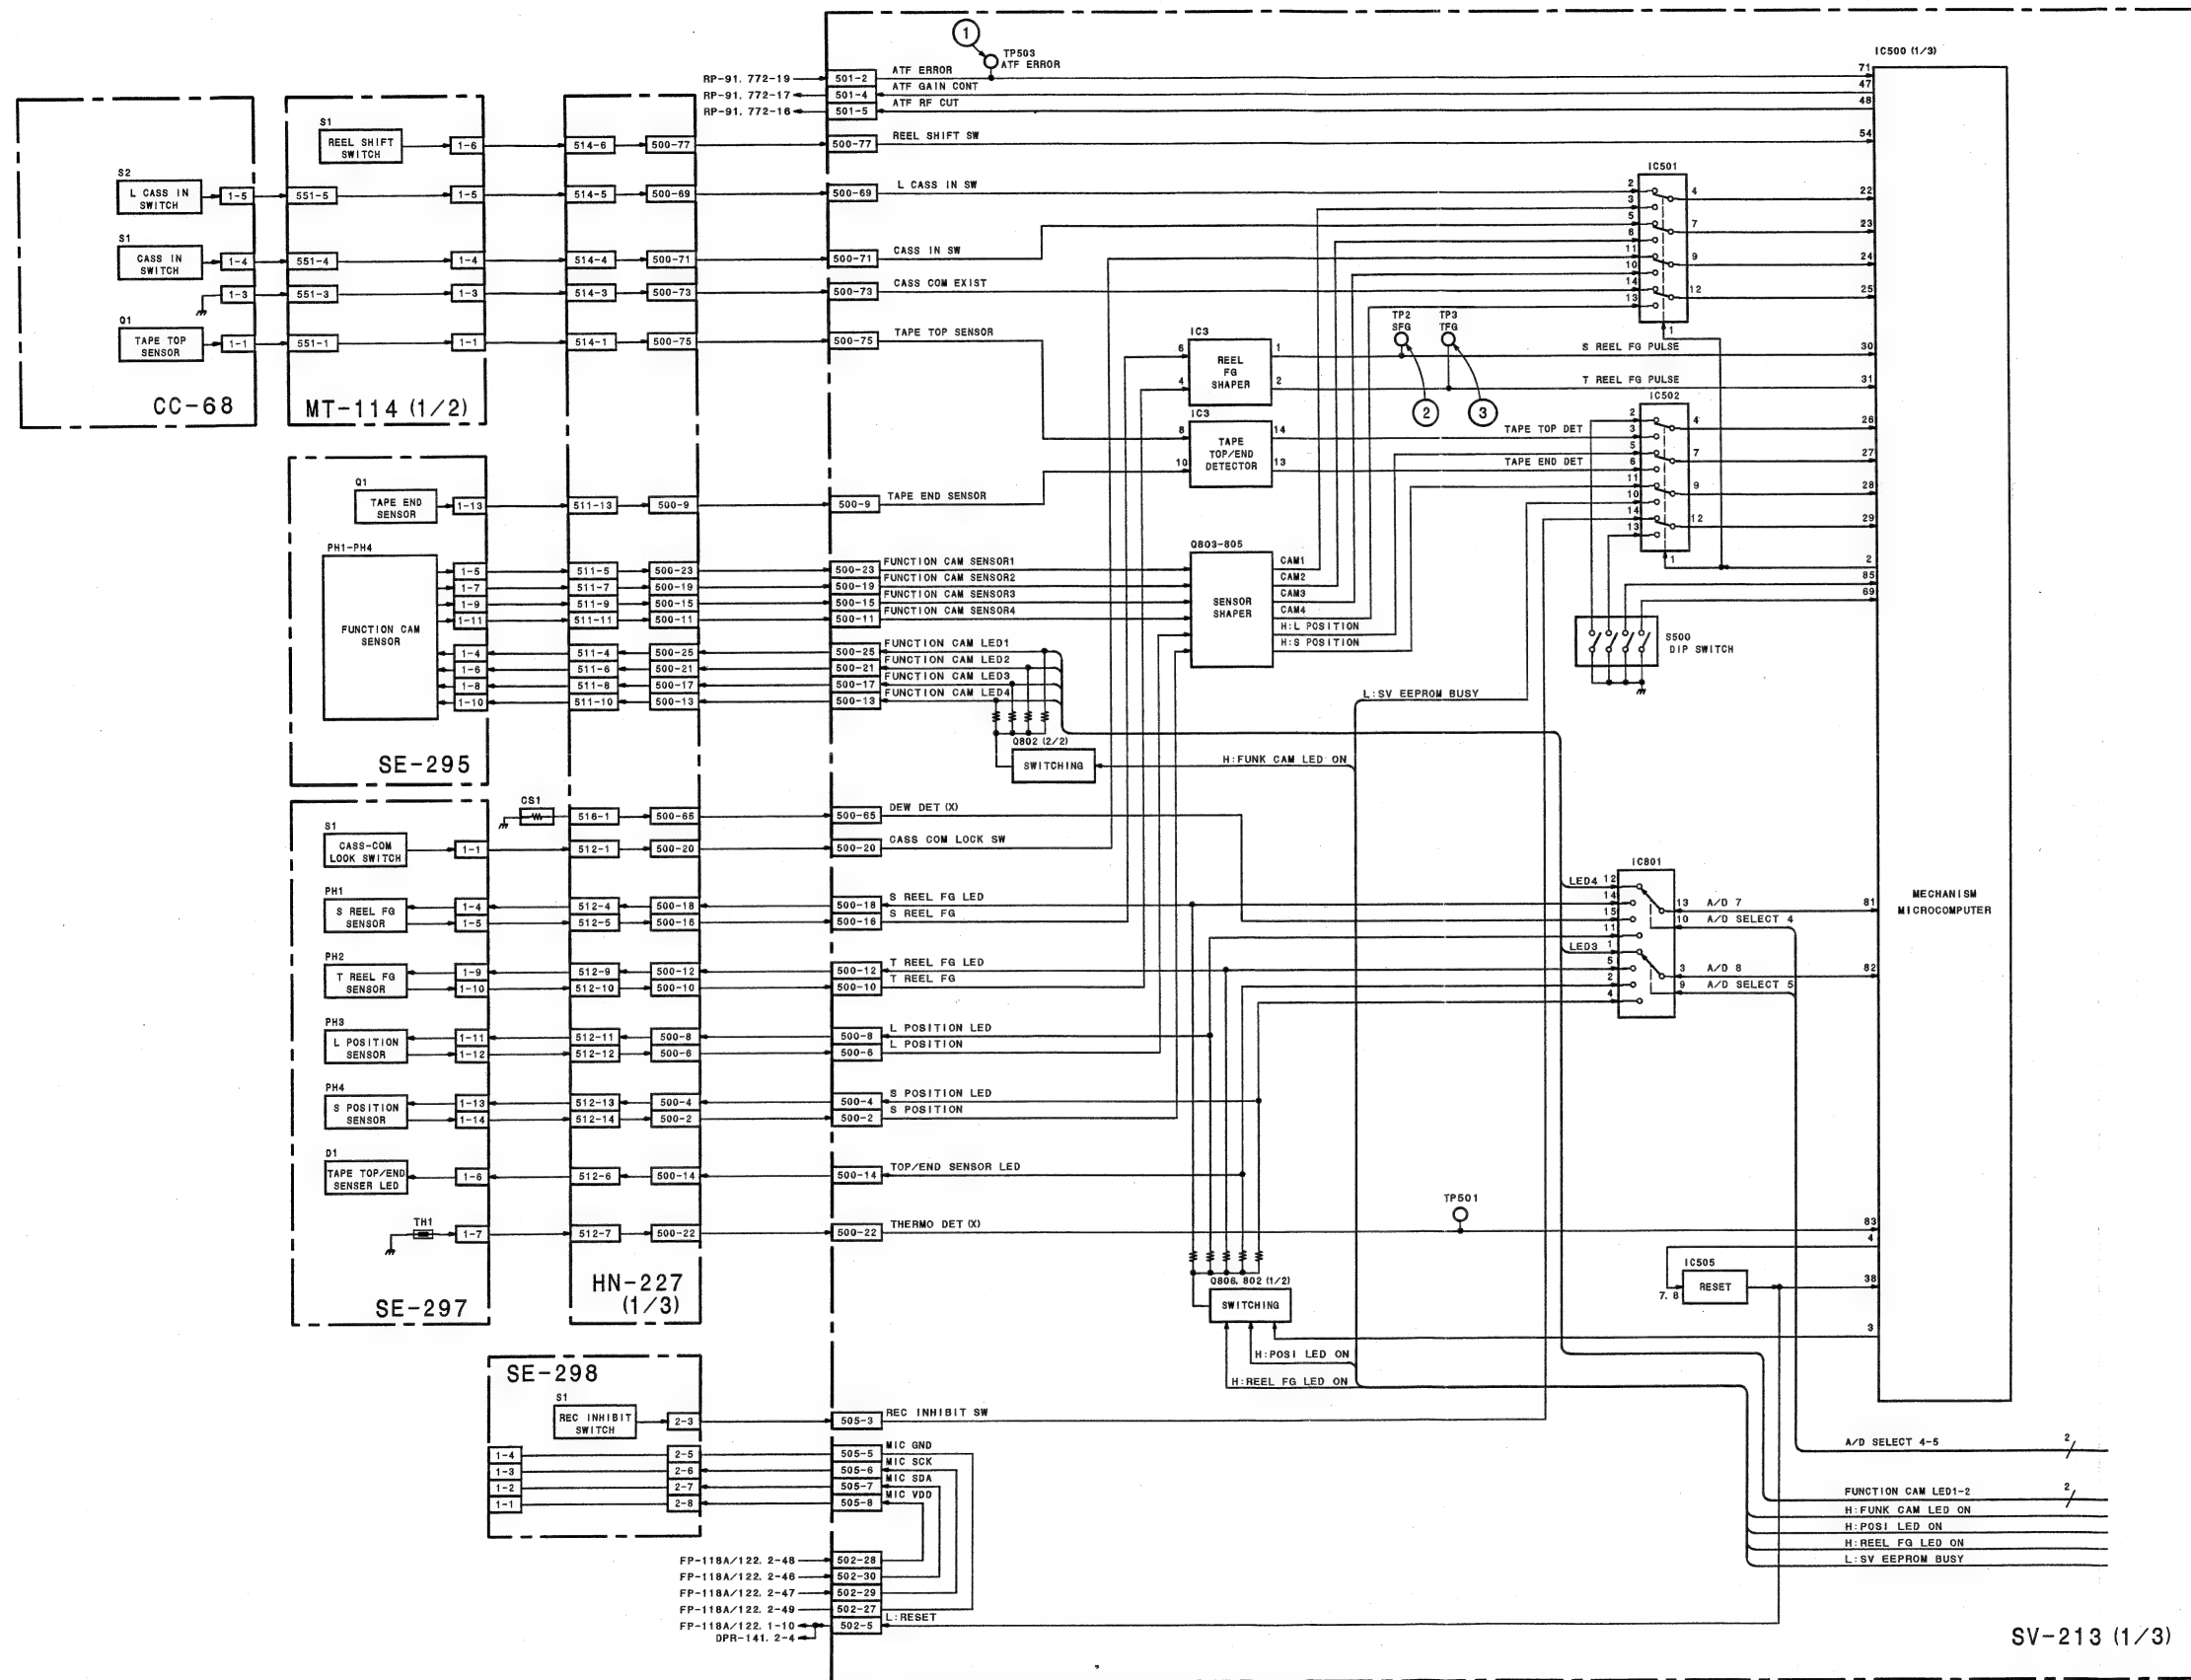

① TP503 PB mode

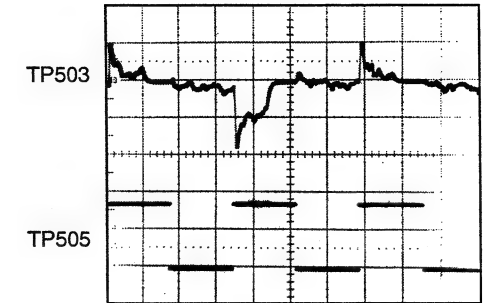


② TP2 REC/PB mode

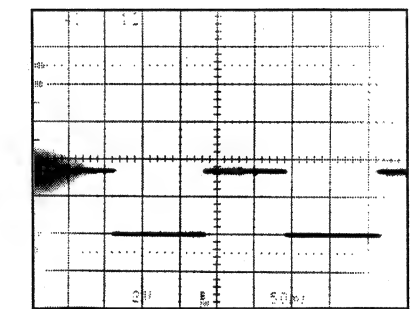

Mini Tape : Tape Top Side


③ TP3 REC/PB mode

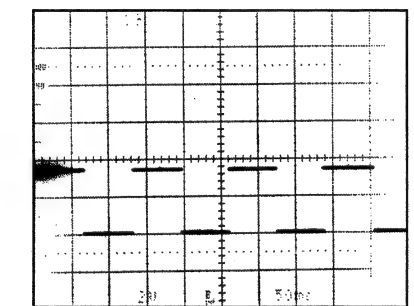


Mini Tape : Tape Top Side

Measurement Condition  
Y, R-Y, B-Y : 75% COLOR BARS  
SETUP 7.5% (for NTSC)  
100% COLOR BARS (for PAL)  
REC mode : XH5-1A (for NTSC)  
PB mode : XH5-1A (for NTSC)  
XH5-1AP (for PAL)  
100% COLOR BARS


**Servo (1/3)**  
CC-68  
HN-227 (1/3)  
MT-114 (1/2)  
SE-295  
SE-297  
SV-213 (1/3)

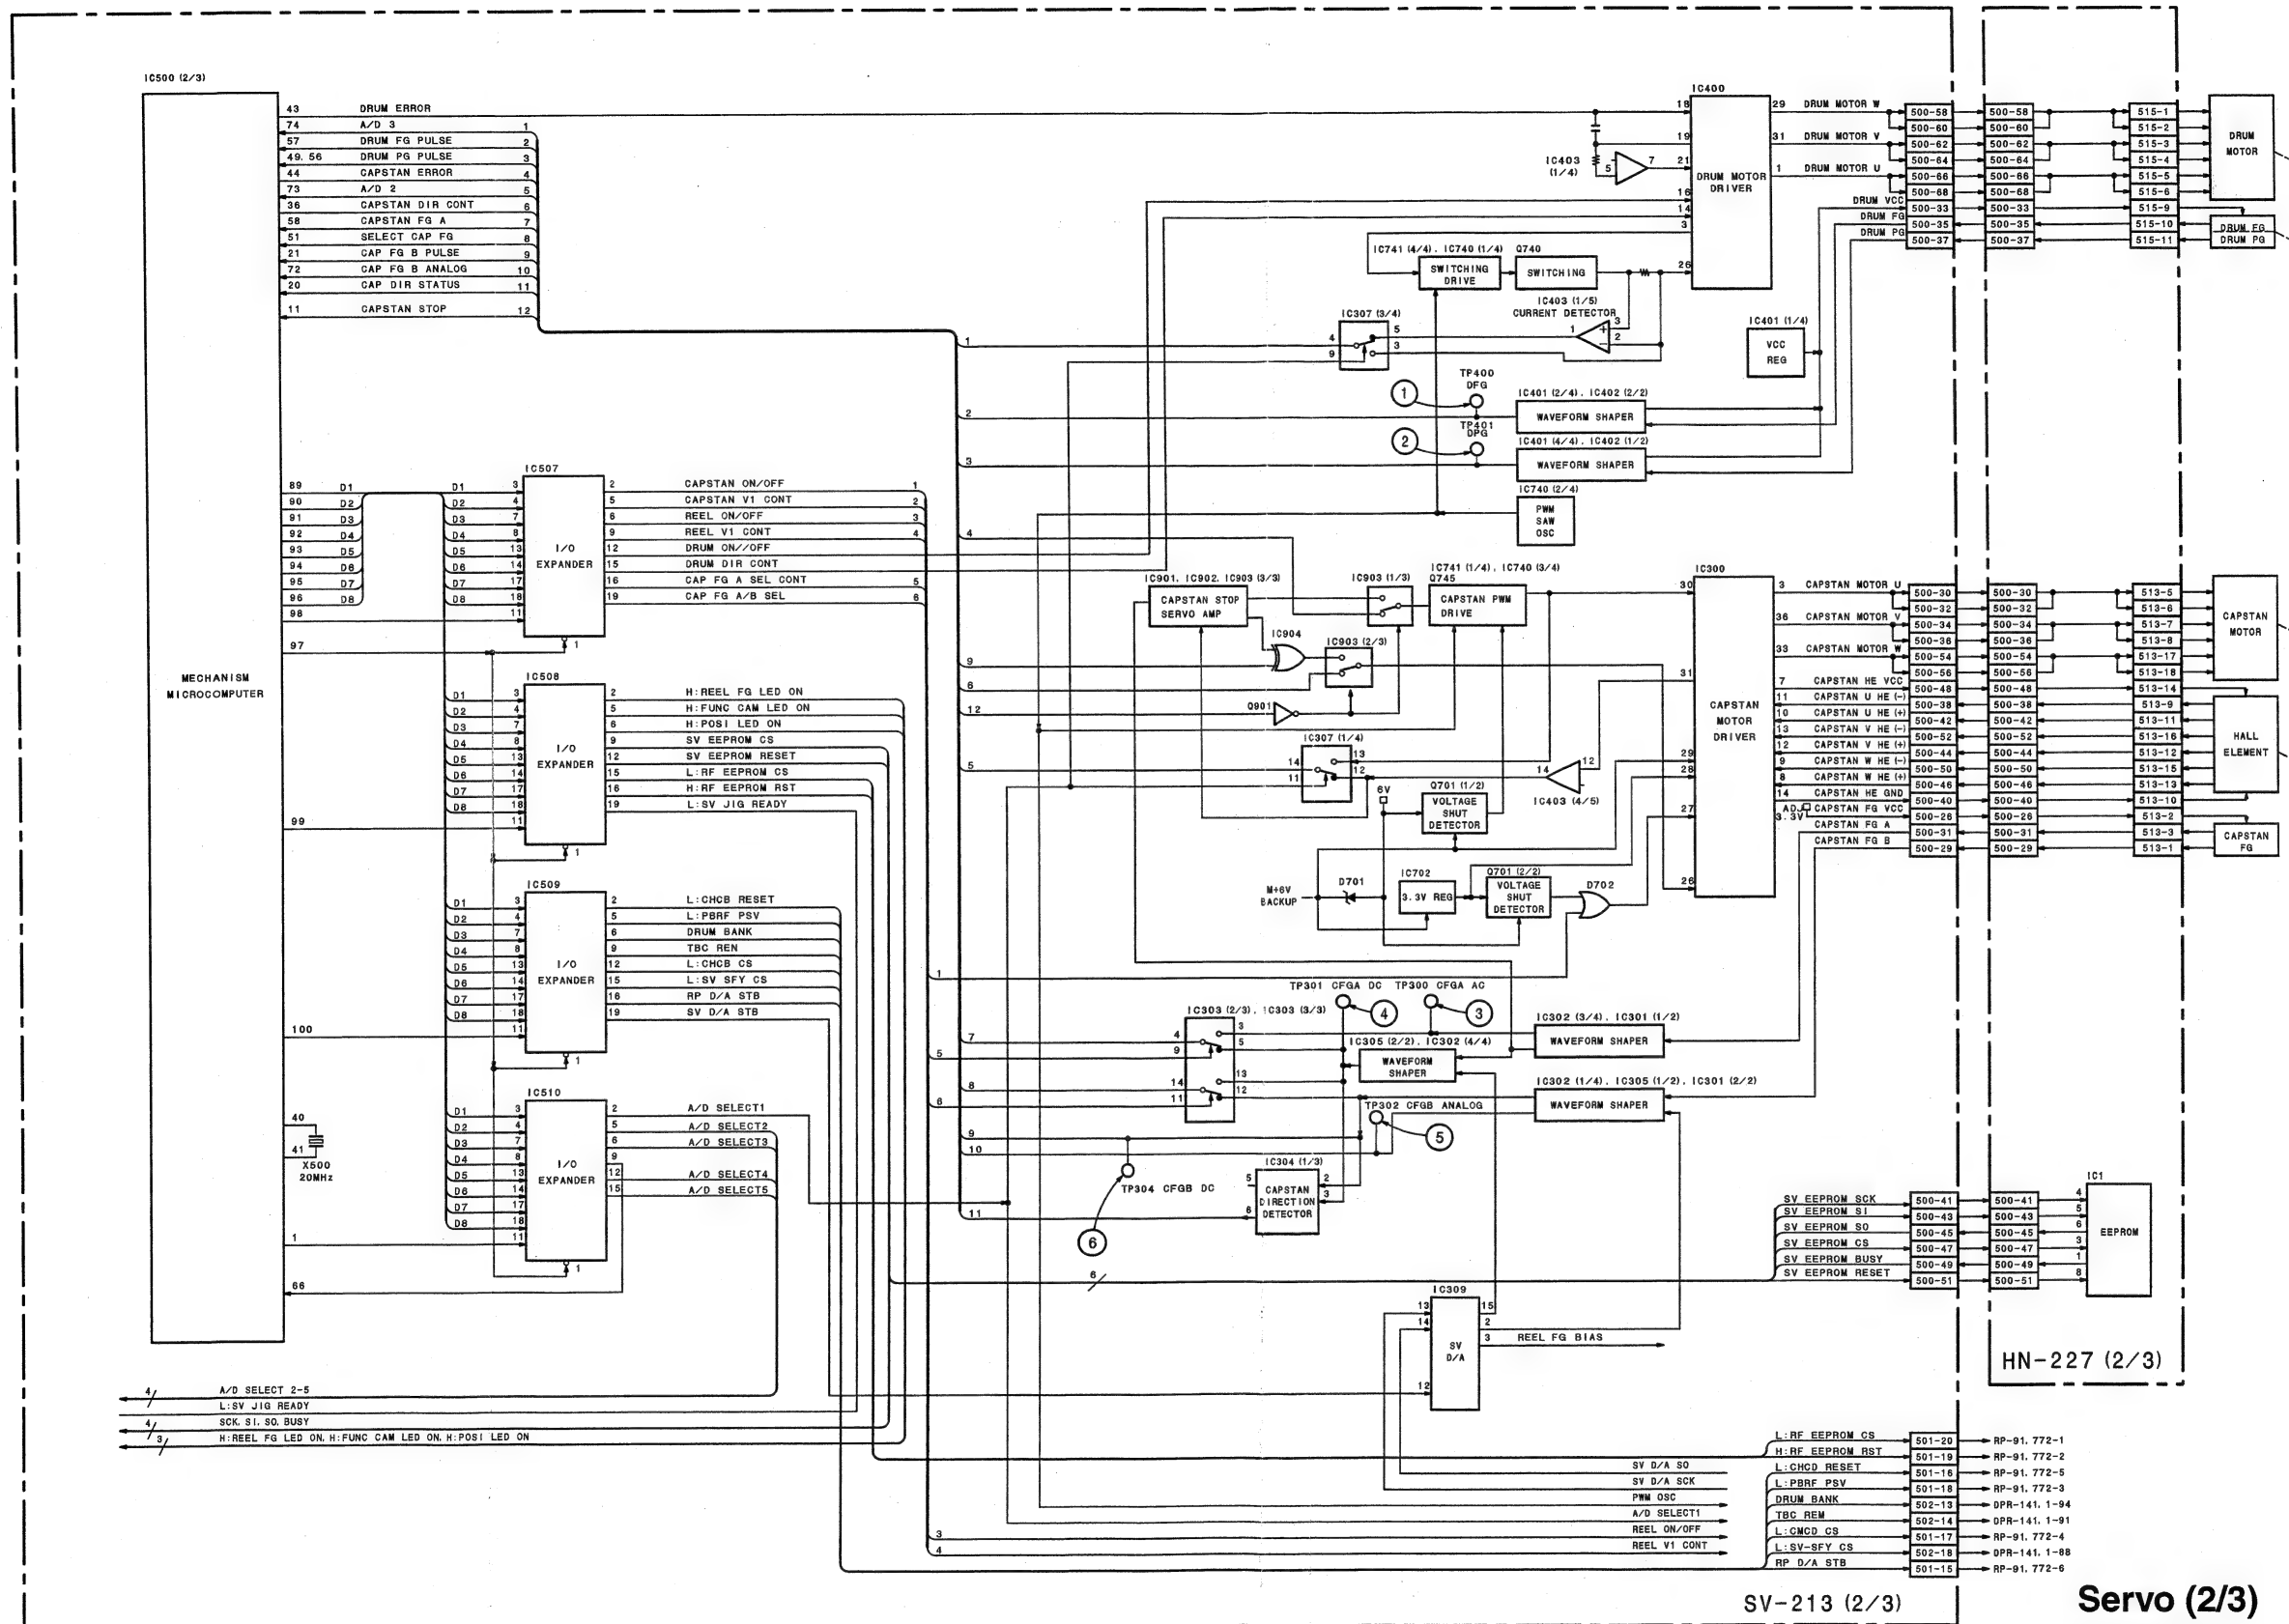


- ① TP400 EE (STBY-ON) /REC/PB mode  
② TP401 EE (STBY-ON) /REC/PB mode

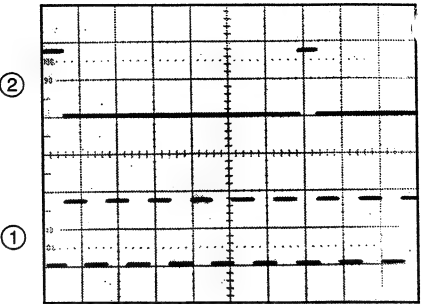


- ③ TP300 REC/PB mode  
④ TP301 REC/PB mode

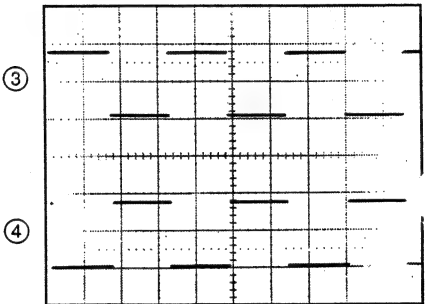

- ④ TP301 REC/PB mode  
⑥ TP304 REC/PB mode

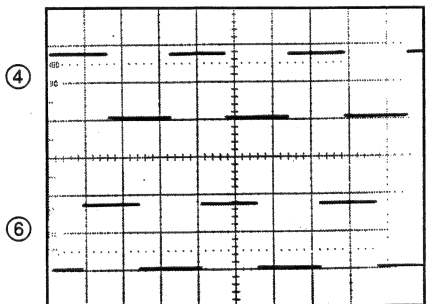


- ⑤ TP302 REC/PB mode  
⑥ TP304 REC/PB mode

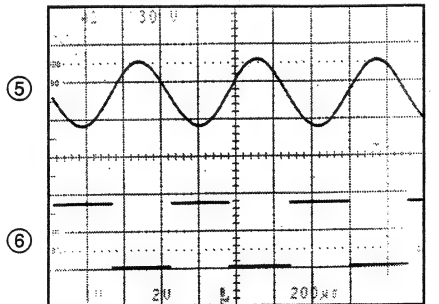

Measurement Condition  
Y, R-Y, B-Y : 75% COLOR BARS  
SETUP 7.5% (for NTSC)  
100% COLOR BARS (for PAL)

EE mode  
REC mode : XH5-1A (for NTSC)  
PB mode : XH5-1AP (for PAL)  
75% COLOR BARS  
100% COLOR BARS


**Servo (2/3)**  
HN-227 (2/3)  
SV-213 (2/3)

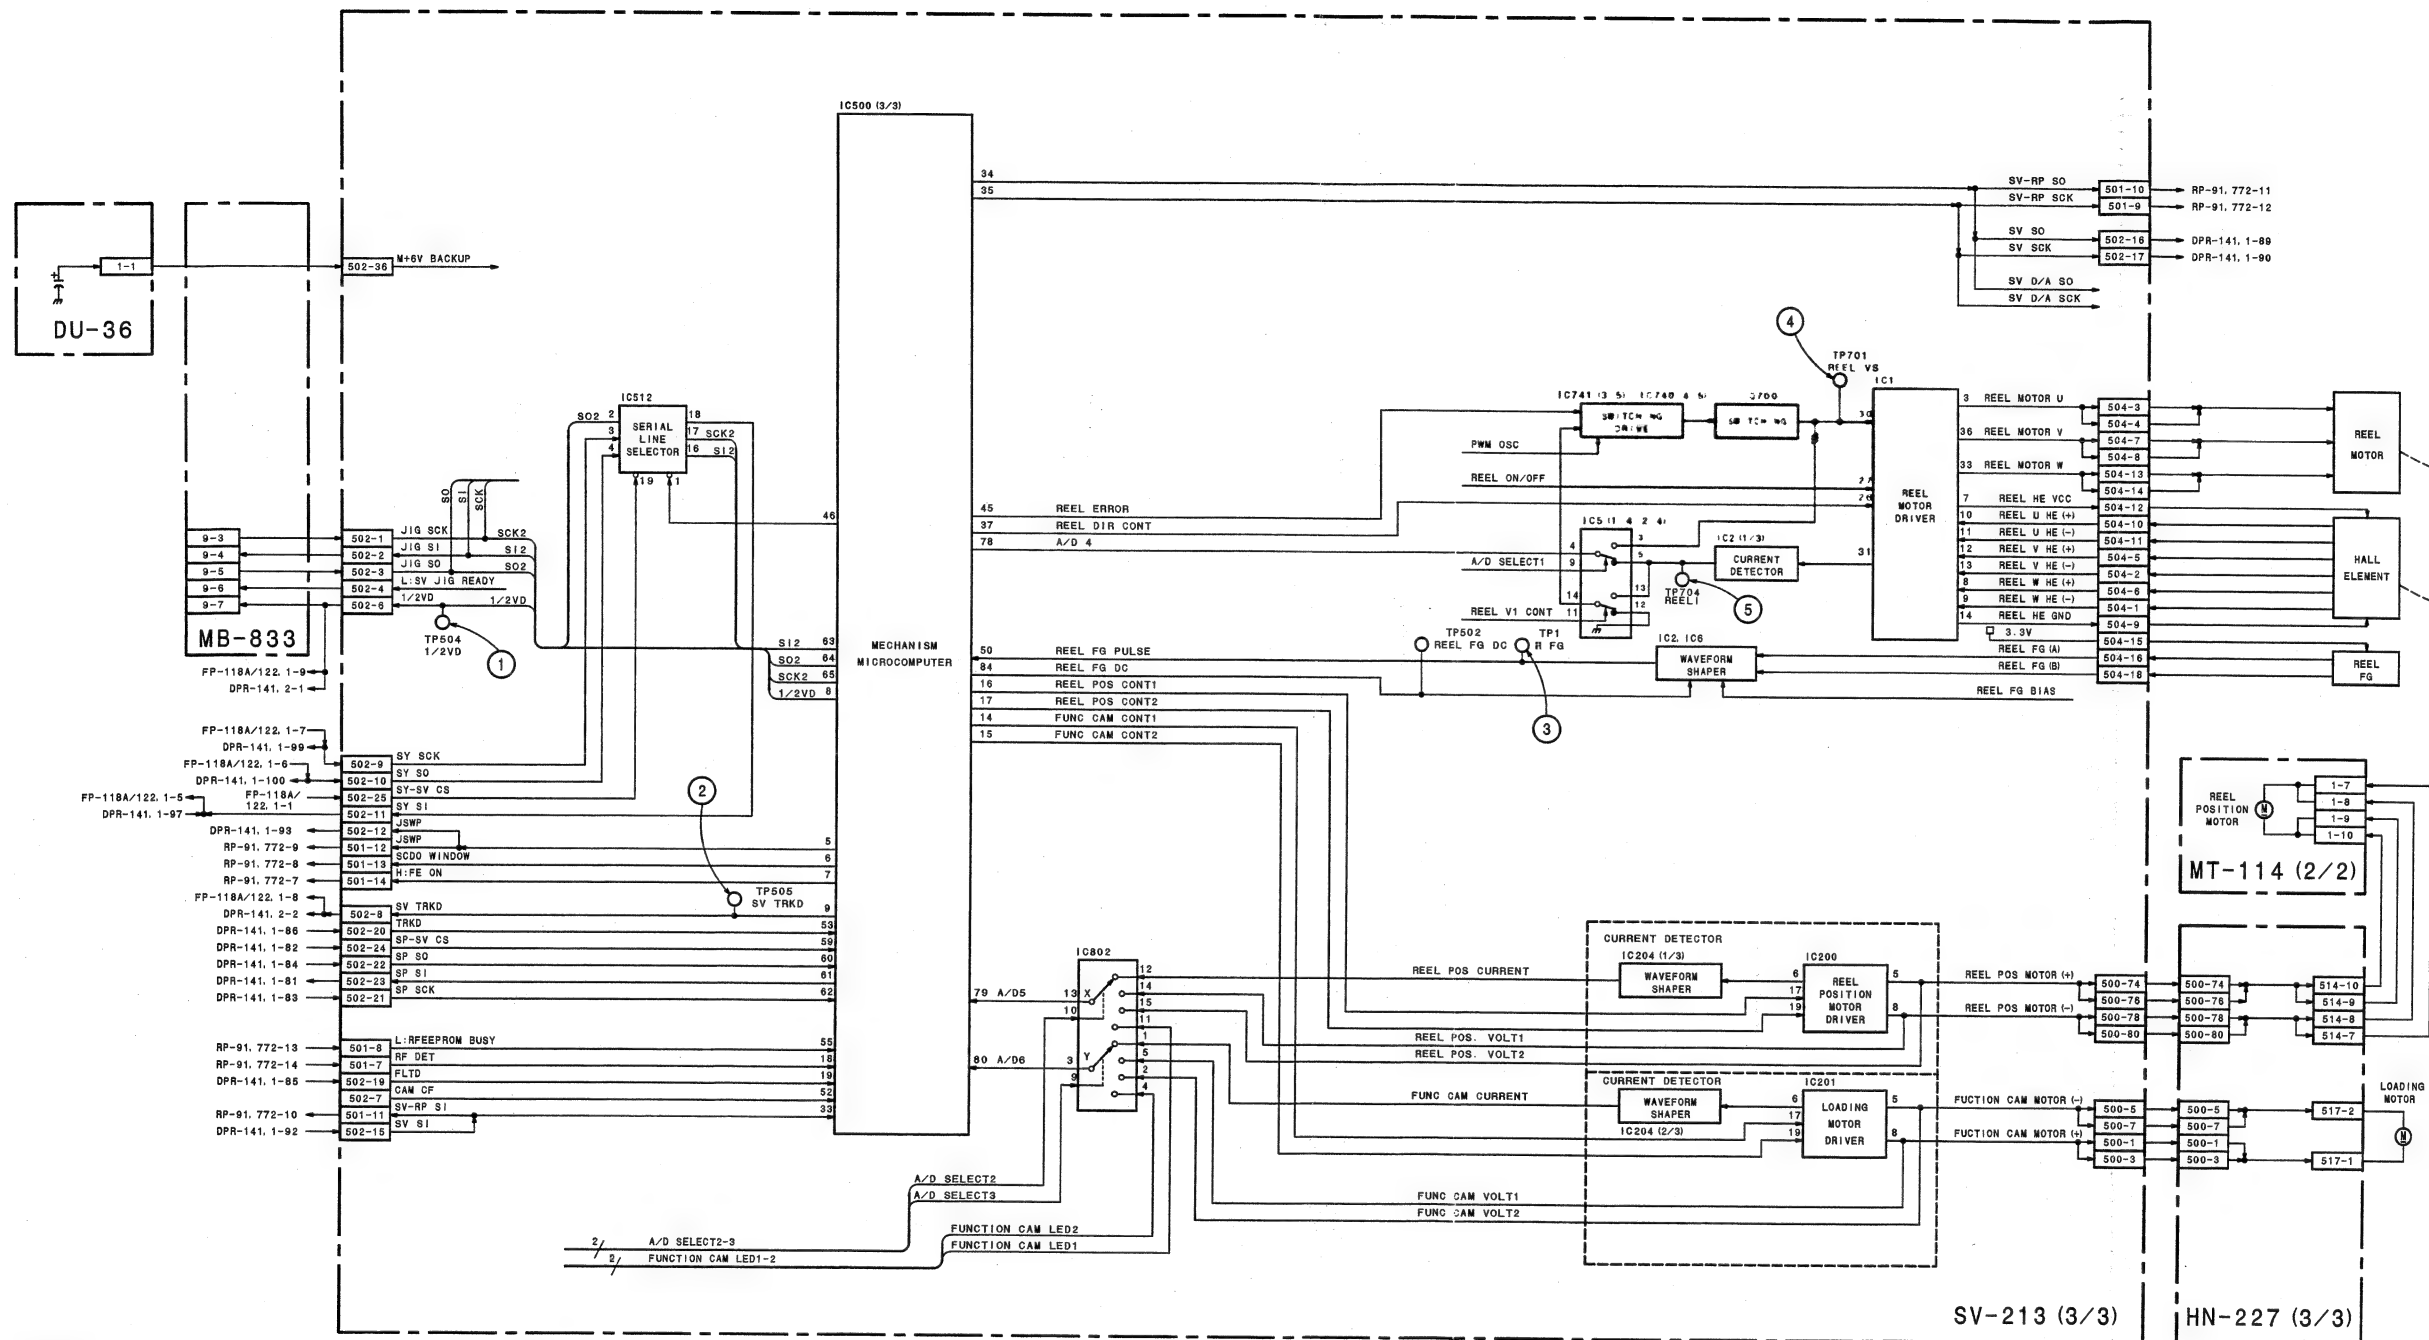

**Servo (3/3)**  
**DU-36**  
**HN-227 (3/3)**  
**MB-833**  
**MT-114 (2/2)**  
**SV-213 (3/3)**


<NTSC>

- ① TP504 EE/REC/PB mode
- ② TP505 EE/REC/PB mode

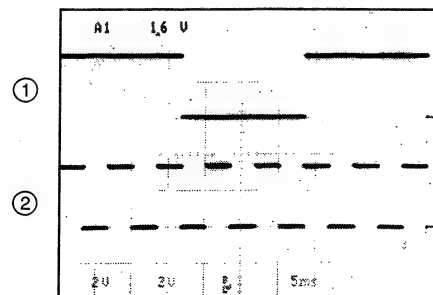


<PAL>

- ① TP504 EE/REC/PB mode
- ② TP505 EE/REC/PB mode

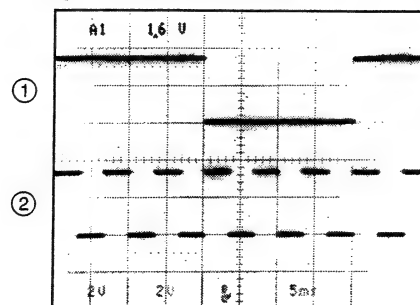


- ③ TP1 REC/PB mode

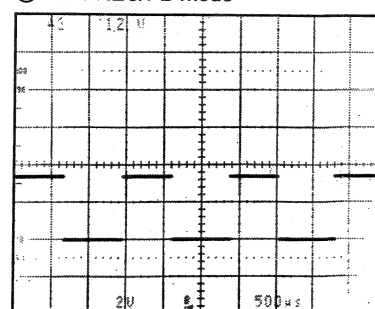


Mini Tape : Tape Top Side

- ④ TP701

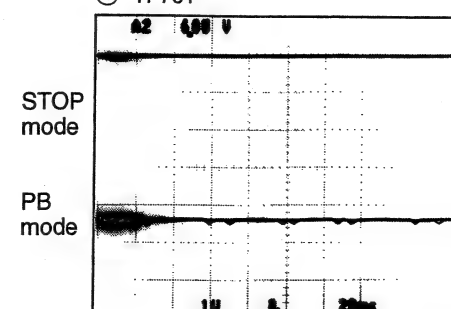


- ⑤ TP704

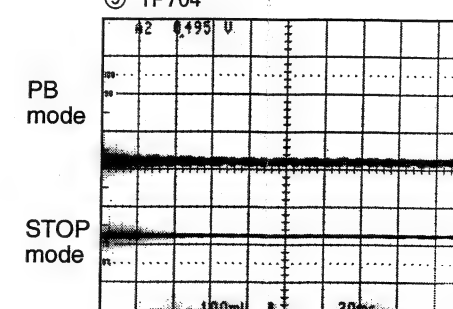

Measurement Condition  
Y, R-Y, B-Y : 75% COLOR BARS  
SETUP 7.5% (for NTSC)  
100% COLOR BARS (for PAL)

EE mode  
REC mode  
PB mode : XH5-1A (for NTSC)  
XH5-1AP (for PAL)  
100% COLOR BARS

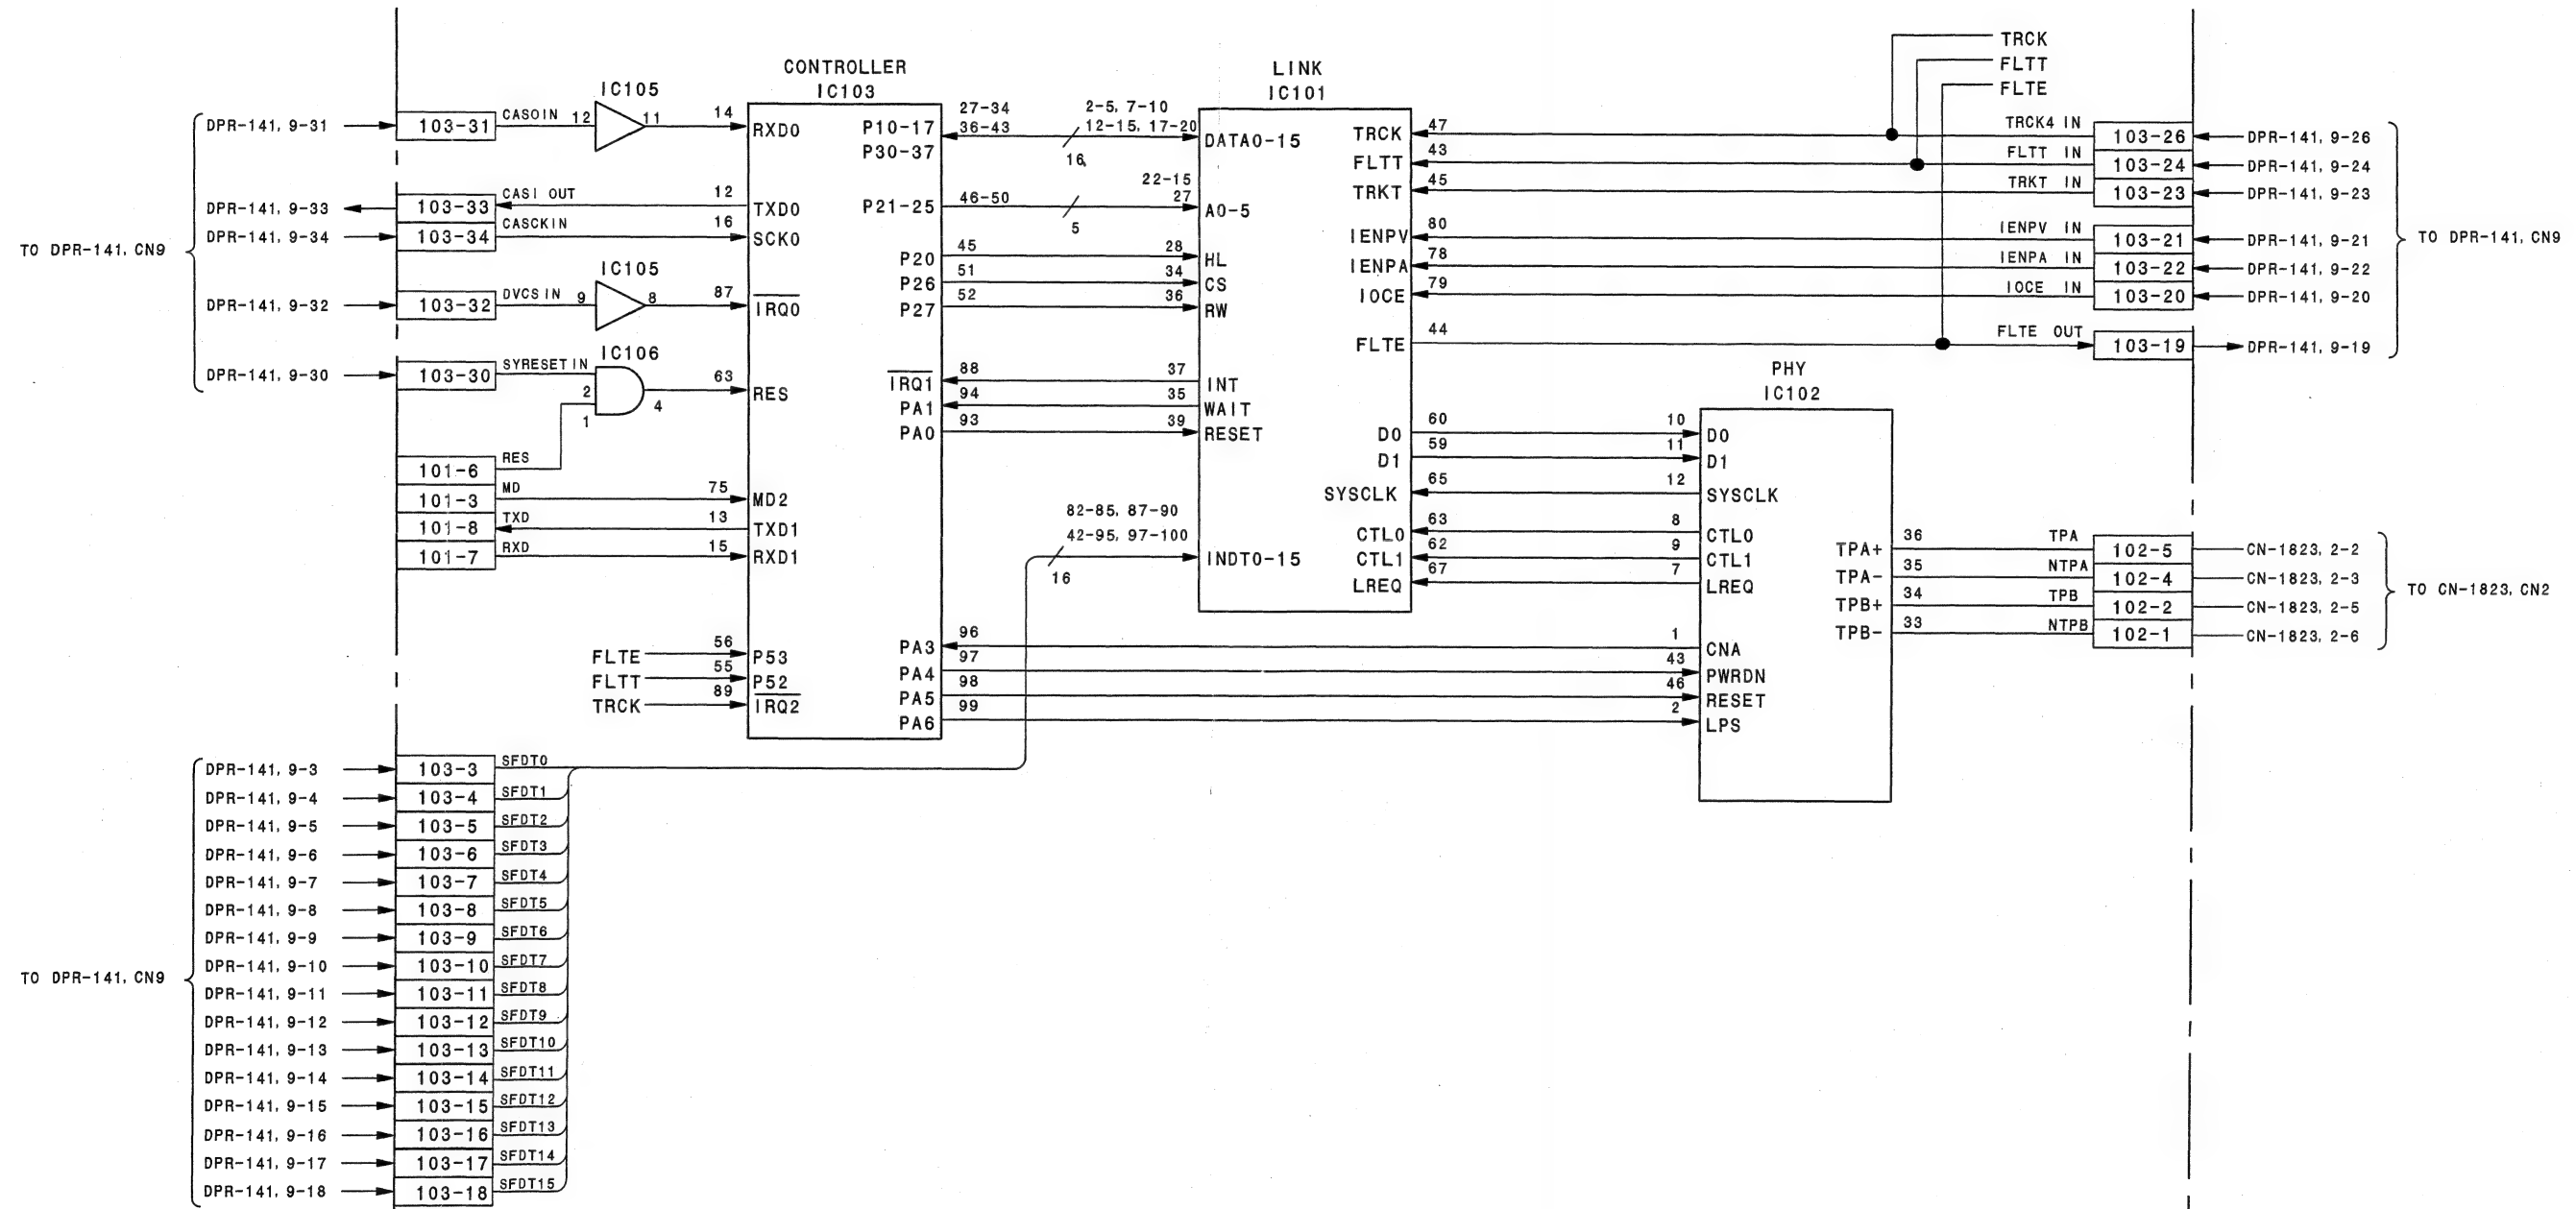


# **Section 4** **Schematic Diagrams and Frame Wiring**

**Index**

Board	Page	Remarks
AA-104	4-79	
AT-142	4-42	DSR-300A/300AP
AT-150	4-38	DSR-390/390P/370/370P
CC-68	4-78	
CN-1519	4-89	DSR-300A/300AP
CN-1811	4-45	
CN-1823	4-90	
CN-1864	4-80	
CN-1865	4-80	
CN-1866	4-79	
CN-1867	4-79	
CN-1873	4-89	
CN-1874	4-89	
CN-2277	4-86	DSR-390/390P/370/370P
CP-315	4-87	DSR-300A/300AP
CP-373	4-81	DSR-390/390P/370/370P
DPR-141C/141A	4-12	
DU-36	4-94	
DV-21C/21A	4-90	
ES-31/31P	4-30	
FP-118A	4-46	DSR-390/390P/370/370P
FP-122	4-56	DSR-300A/300AP
FP-99	4-65	
GCN-16	4-65	
HN-227	4-78	
IR-33	4-80	
KY-405	4-46	
LE-221	4-79	
MB-833	4-92	
MT-114	4-78	
PA-205 (R)	4-3	
PA-206 (G)	4-3	
PA-207 (B)	4-3	
PS-570	4-89	
PSW-71	4-80	
RP-91	4-66	
SE-295	4-78	
SE-297	4-78	
SE-298	4-70	
SE-566	4-38	
SV-213	4-70	
SW-18	4-79	
SW-19	4-80	
SW-929	4-65	
TG-187/187P	4-4	
VA-199	4-6	
Frame Wiring	4-2	



# Frame Wiring      Frame Wiring

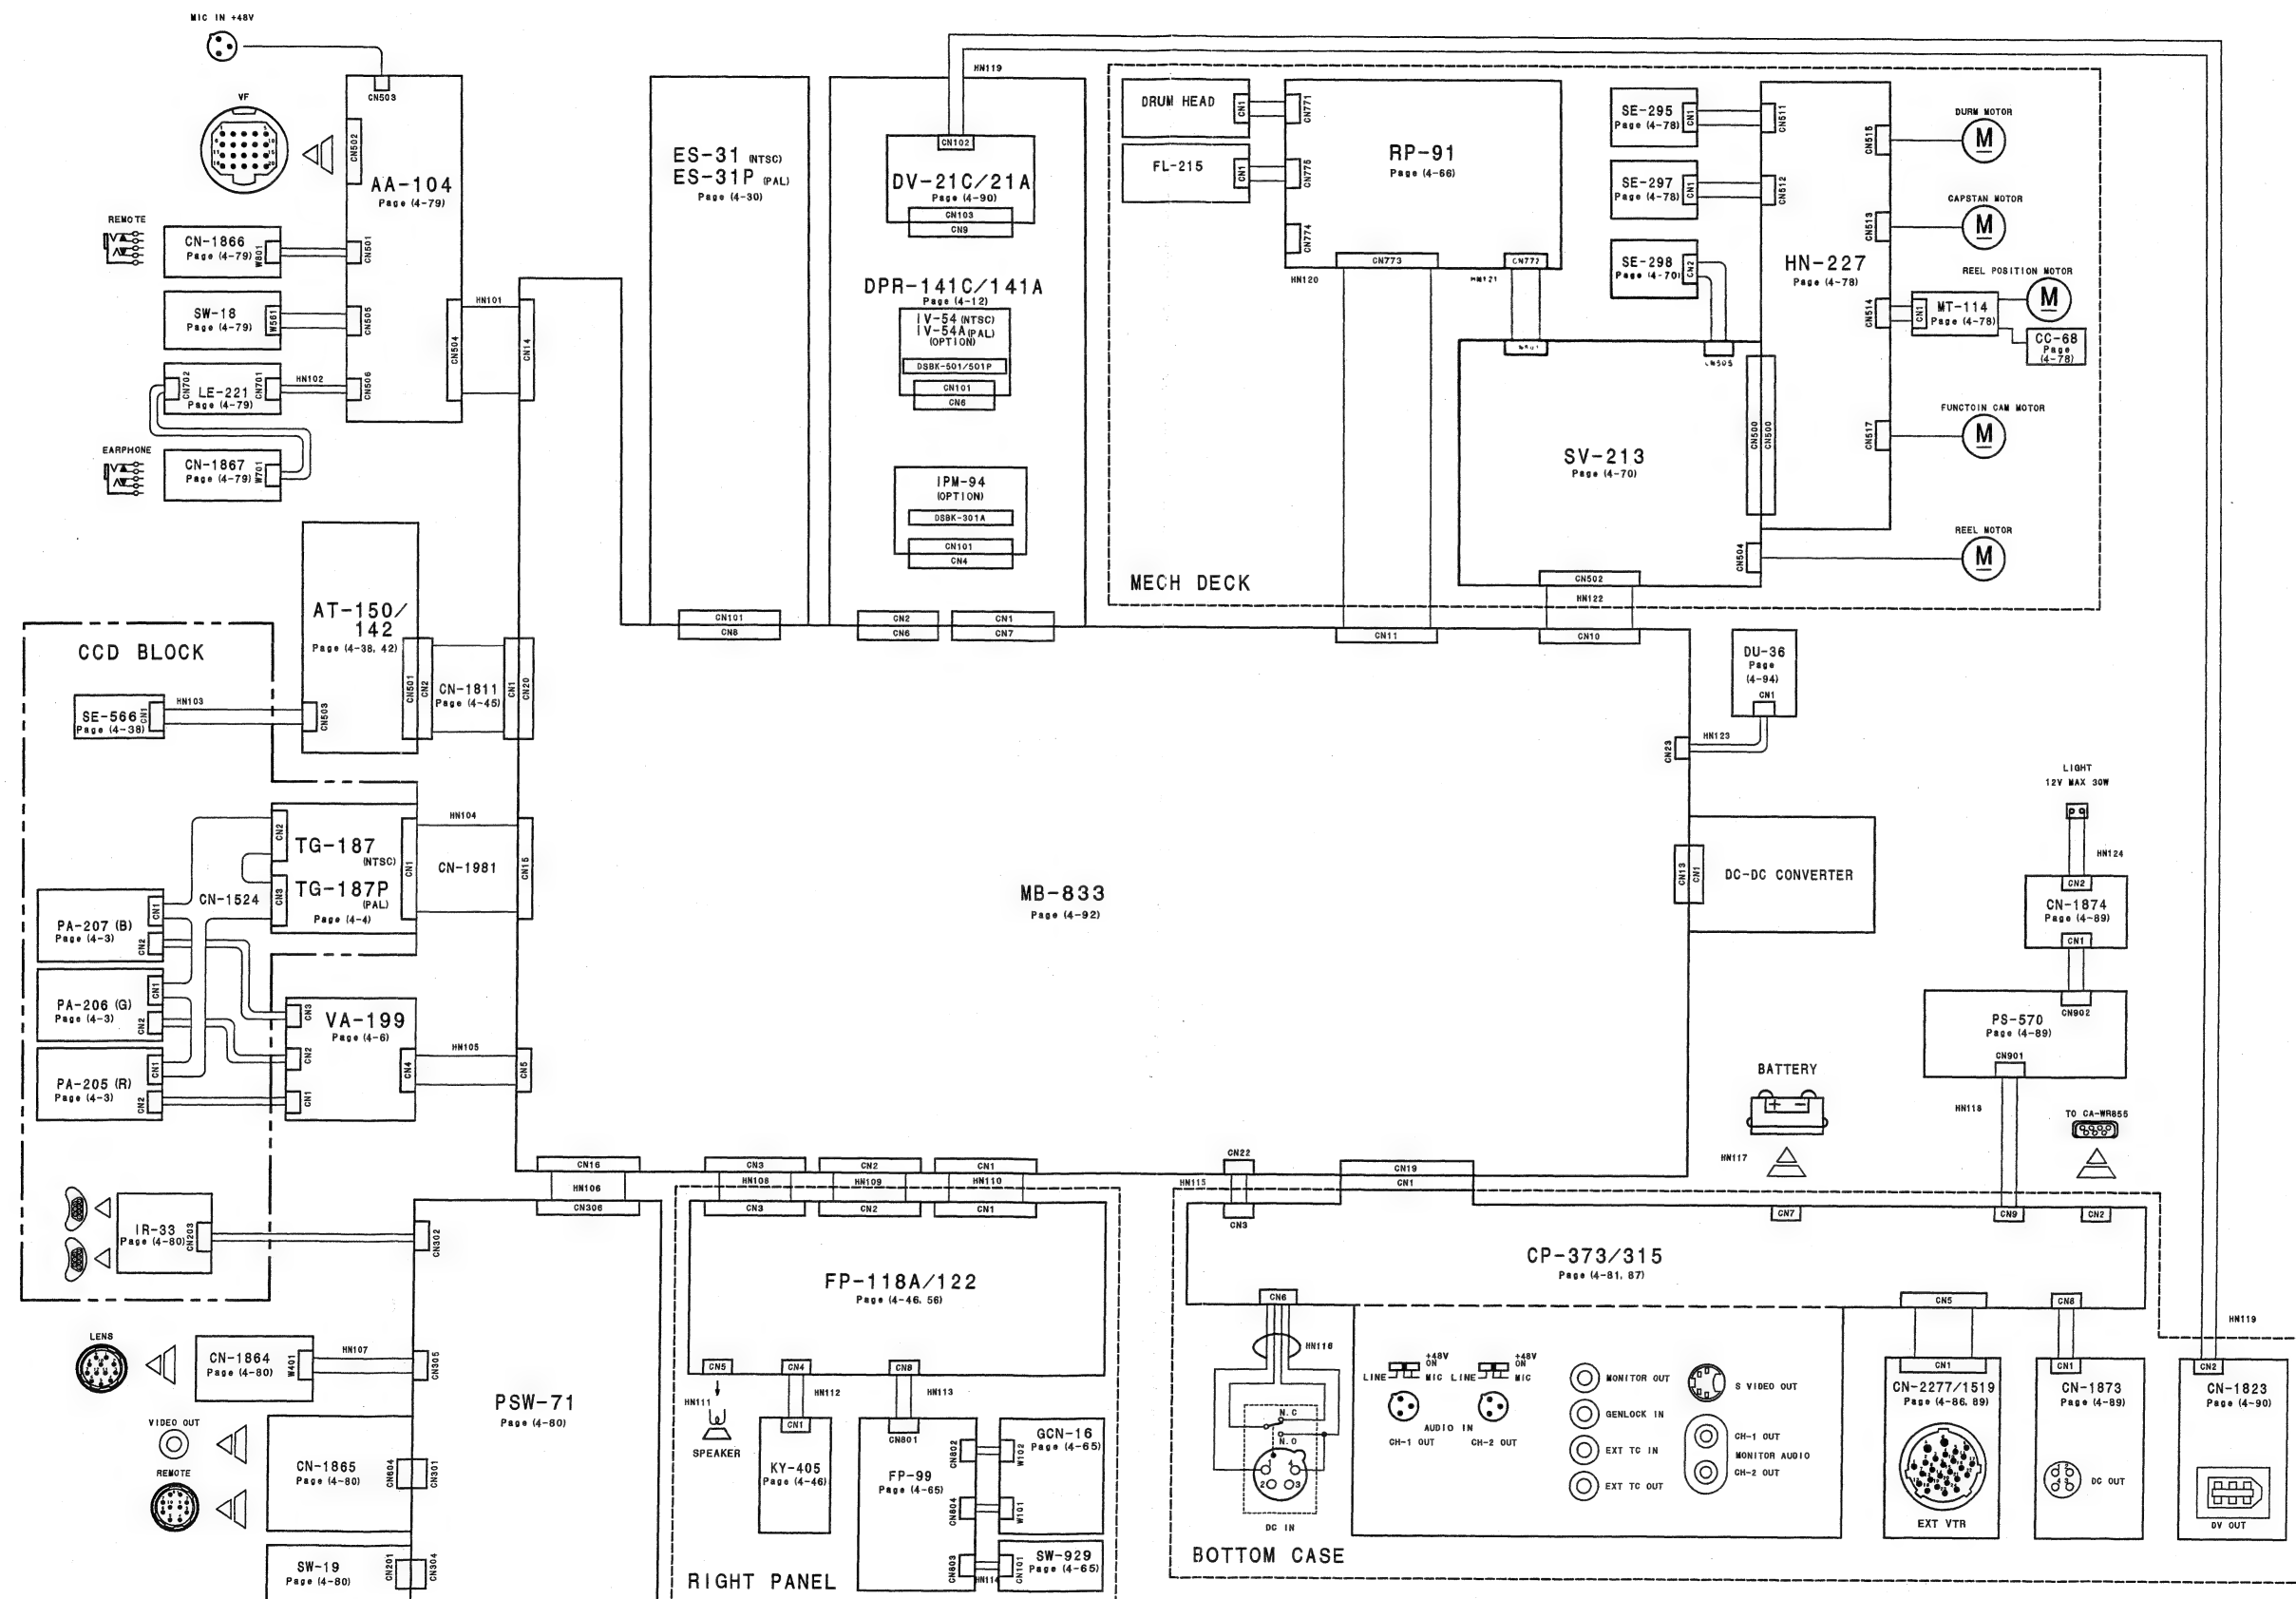


## Frame Wiring


PA-205 (R), PA-206 (G), PA-207 (B) PA-205 (R), PA-206 (G), PA-207 (B)

NOTE  
NM: NO MOUNT


REF NO	CHANGE INFORMATION	LOT NO
C21	10V → 10V	211
R7	1k → 0	341

**PA-205 (R)**  
BOARD NO. 1-669-096-12  
**PA-206 (G)**  
BOARD NO. 1-669-097-12  
**PA-207 (B)**  
BOARD NO. 1-669-098-12  
B-DSR300-PA-SM

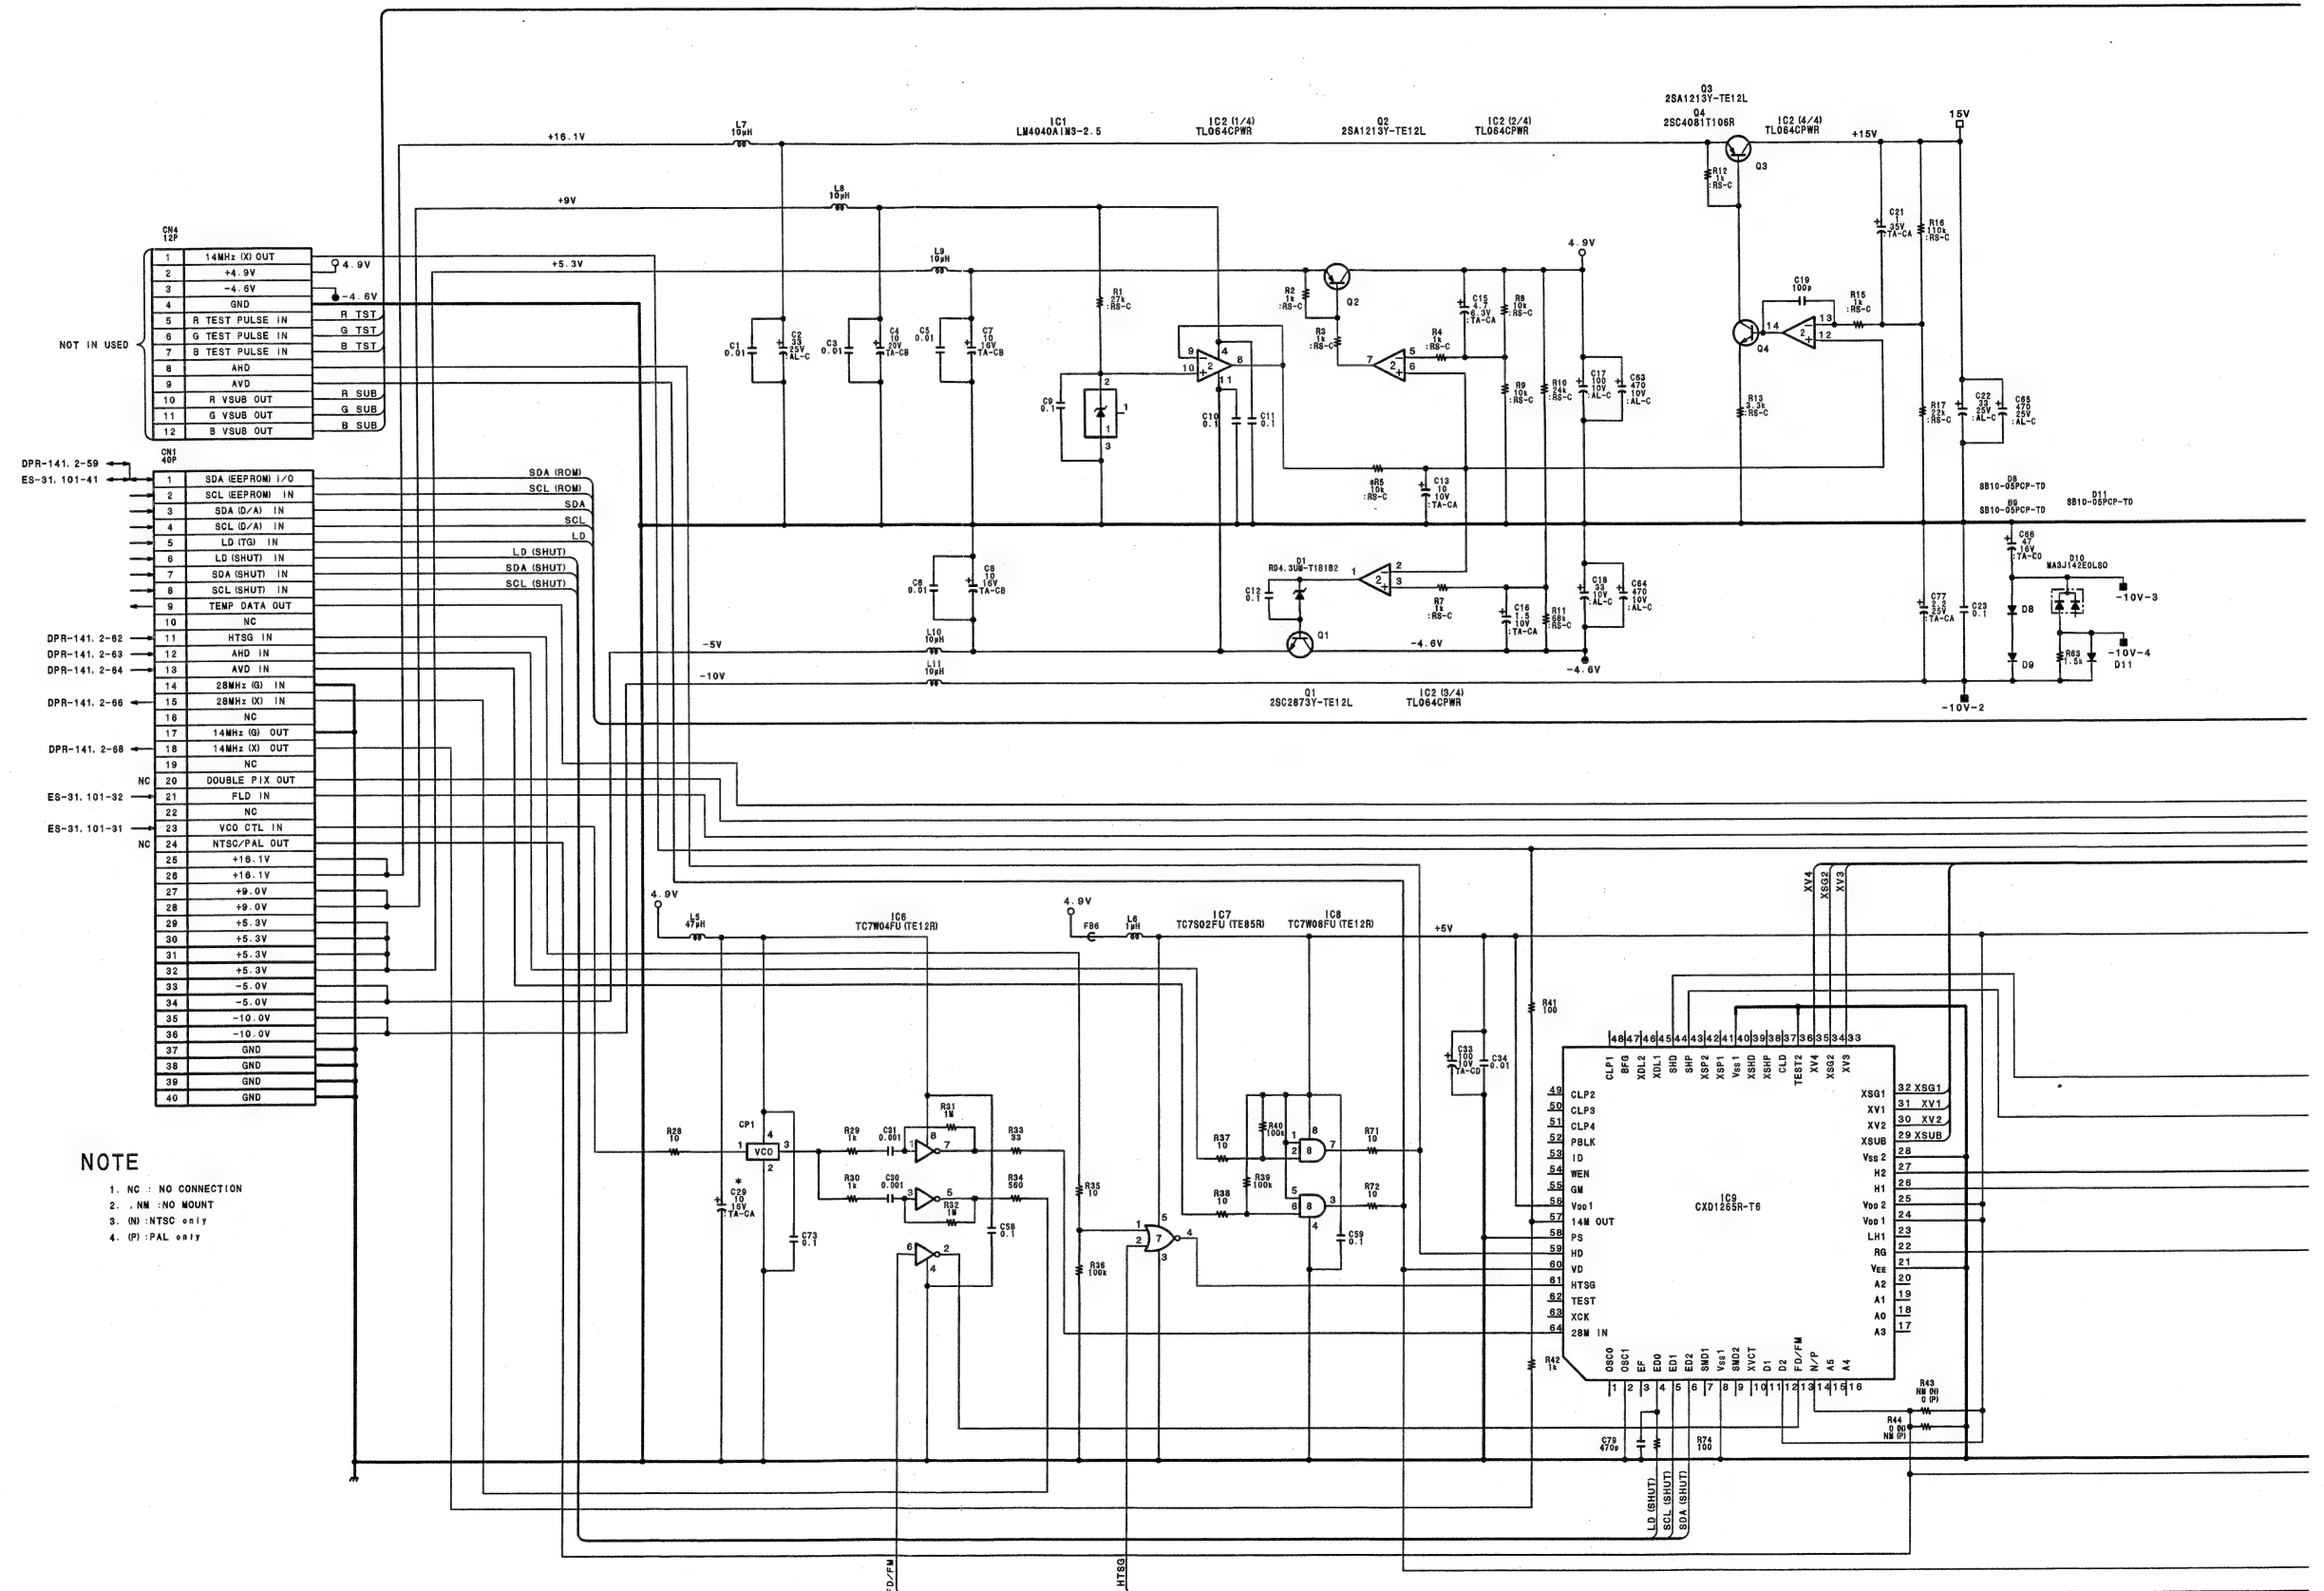


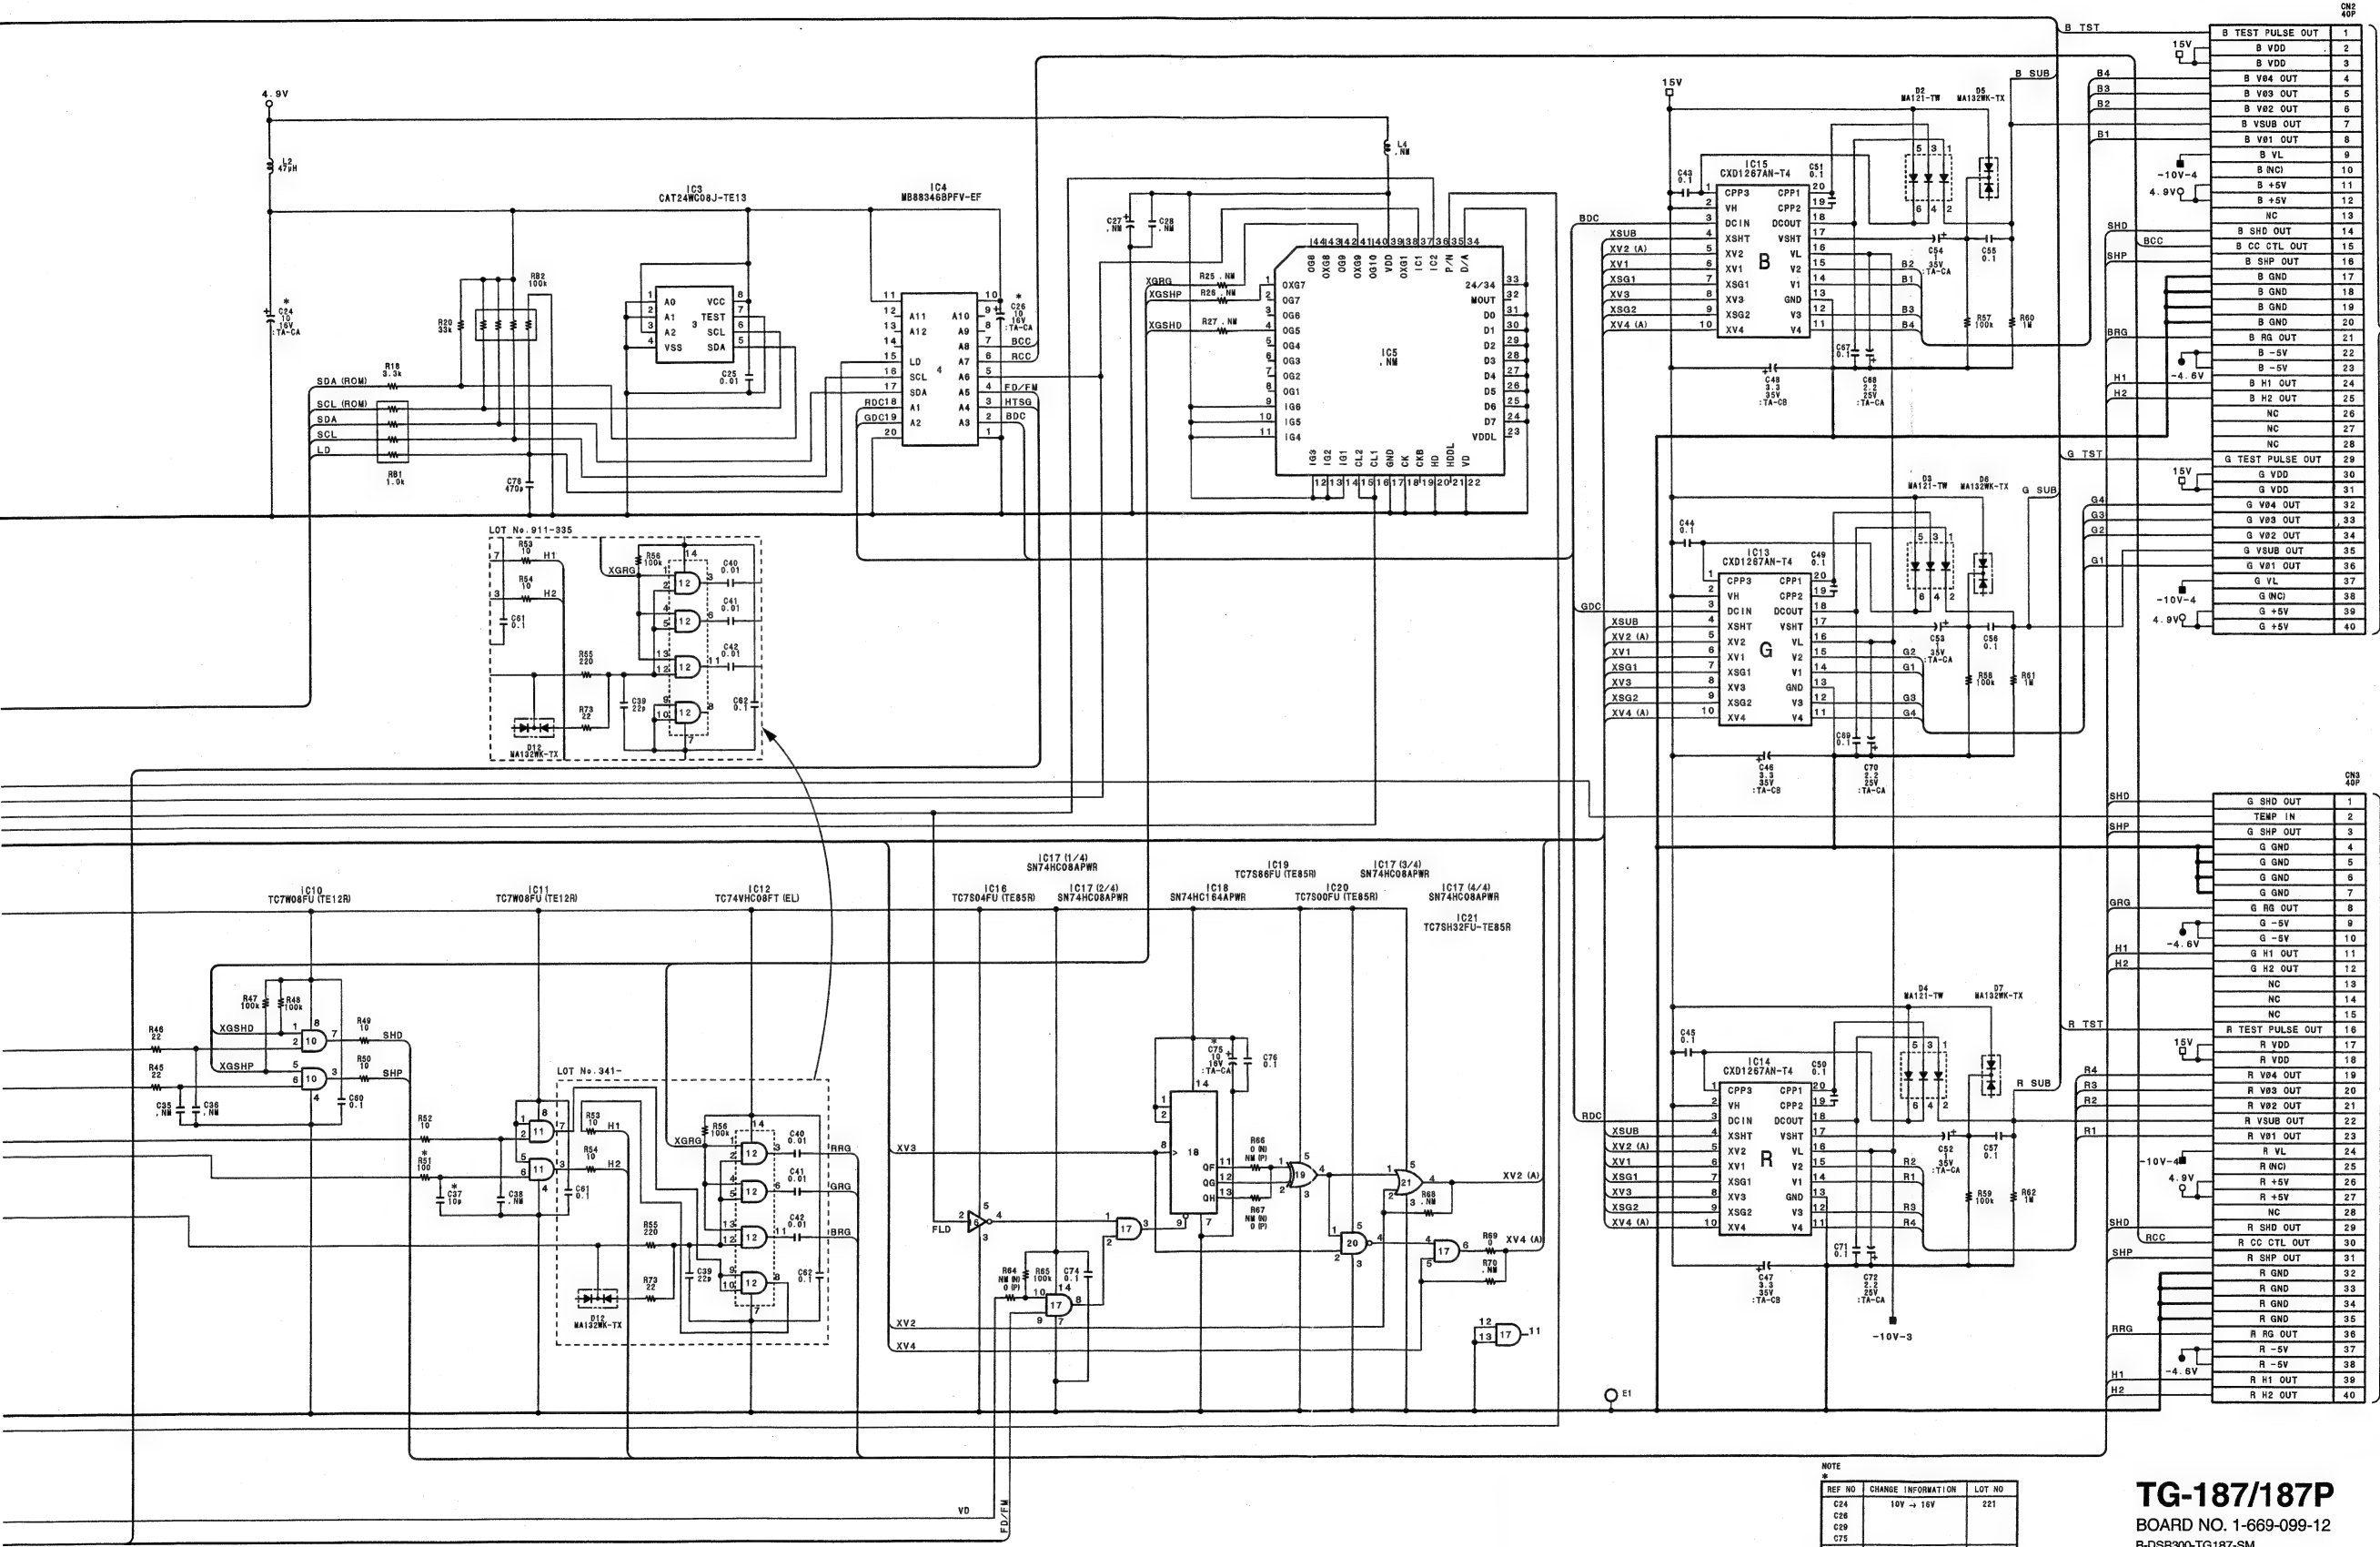

VA-199 (1/3) VA-199 (1/3)

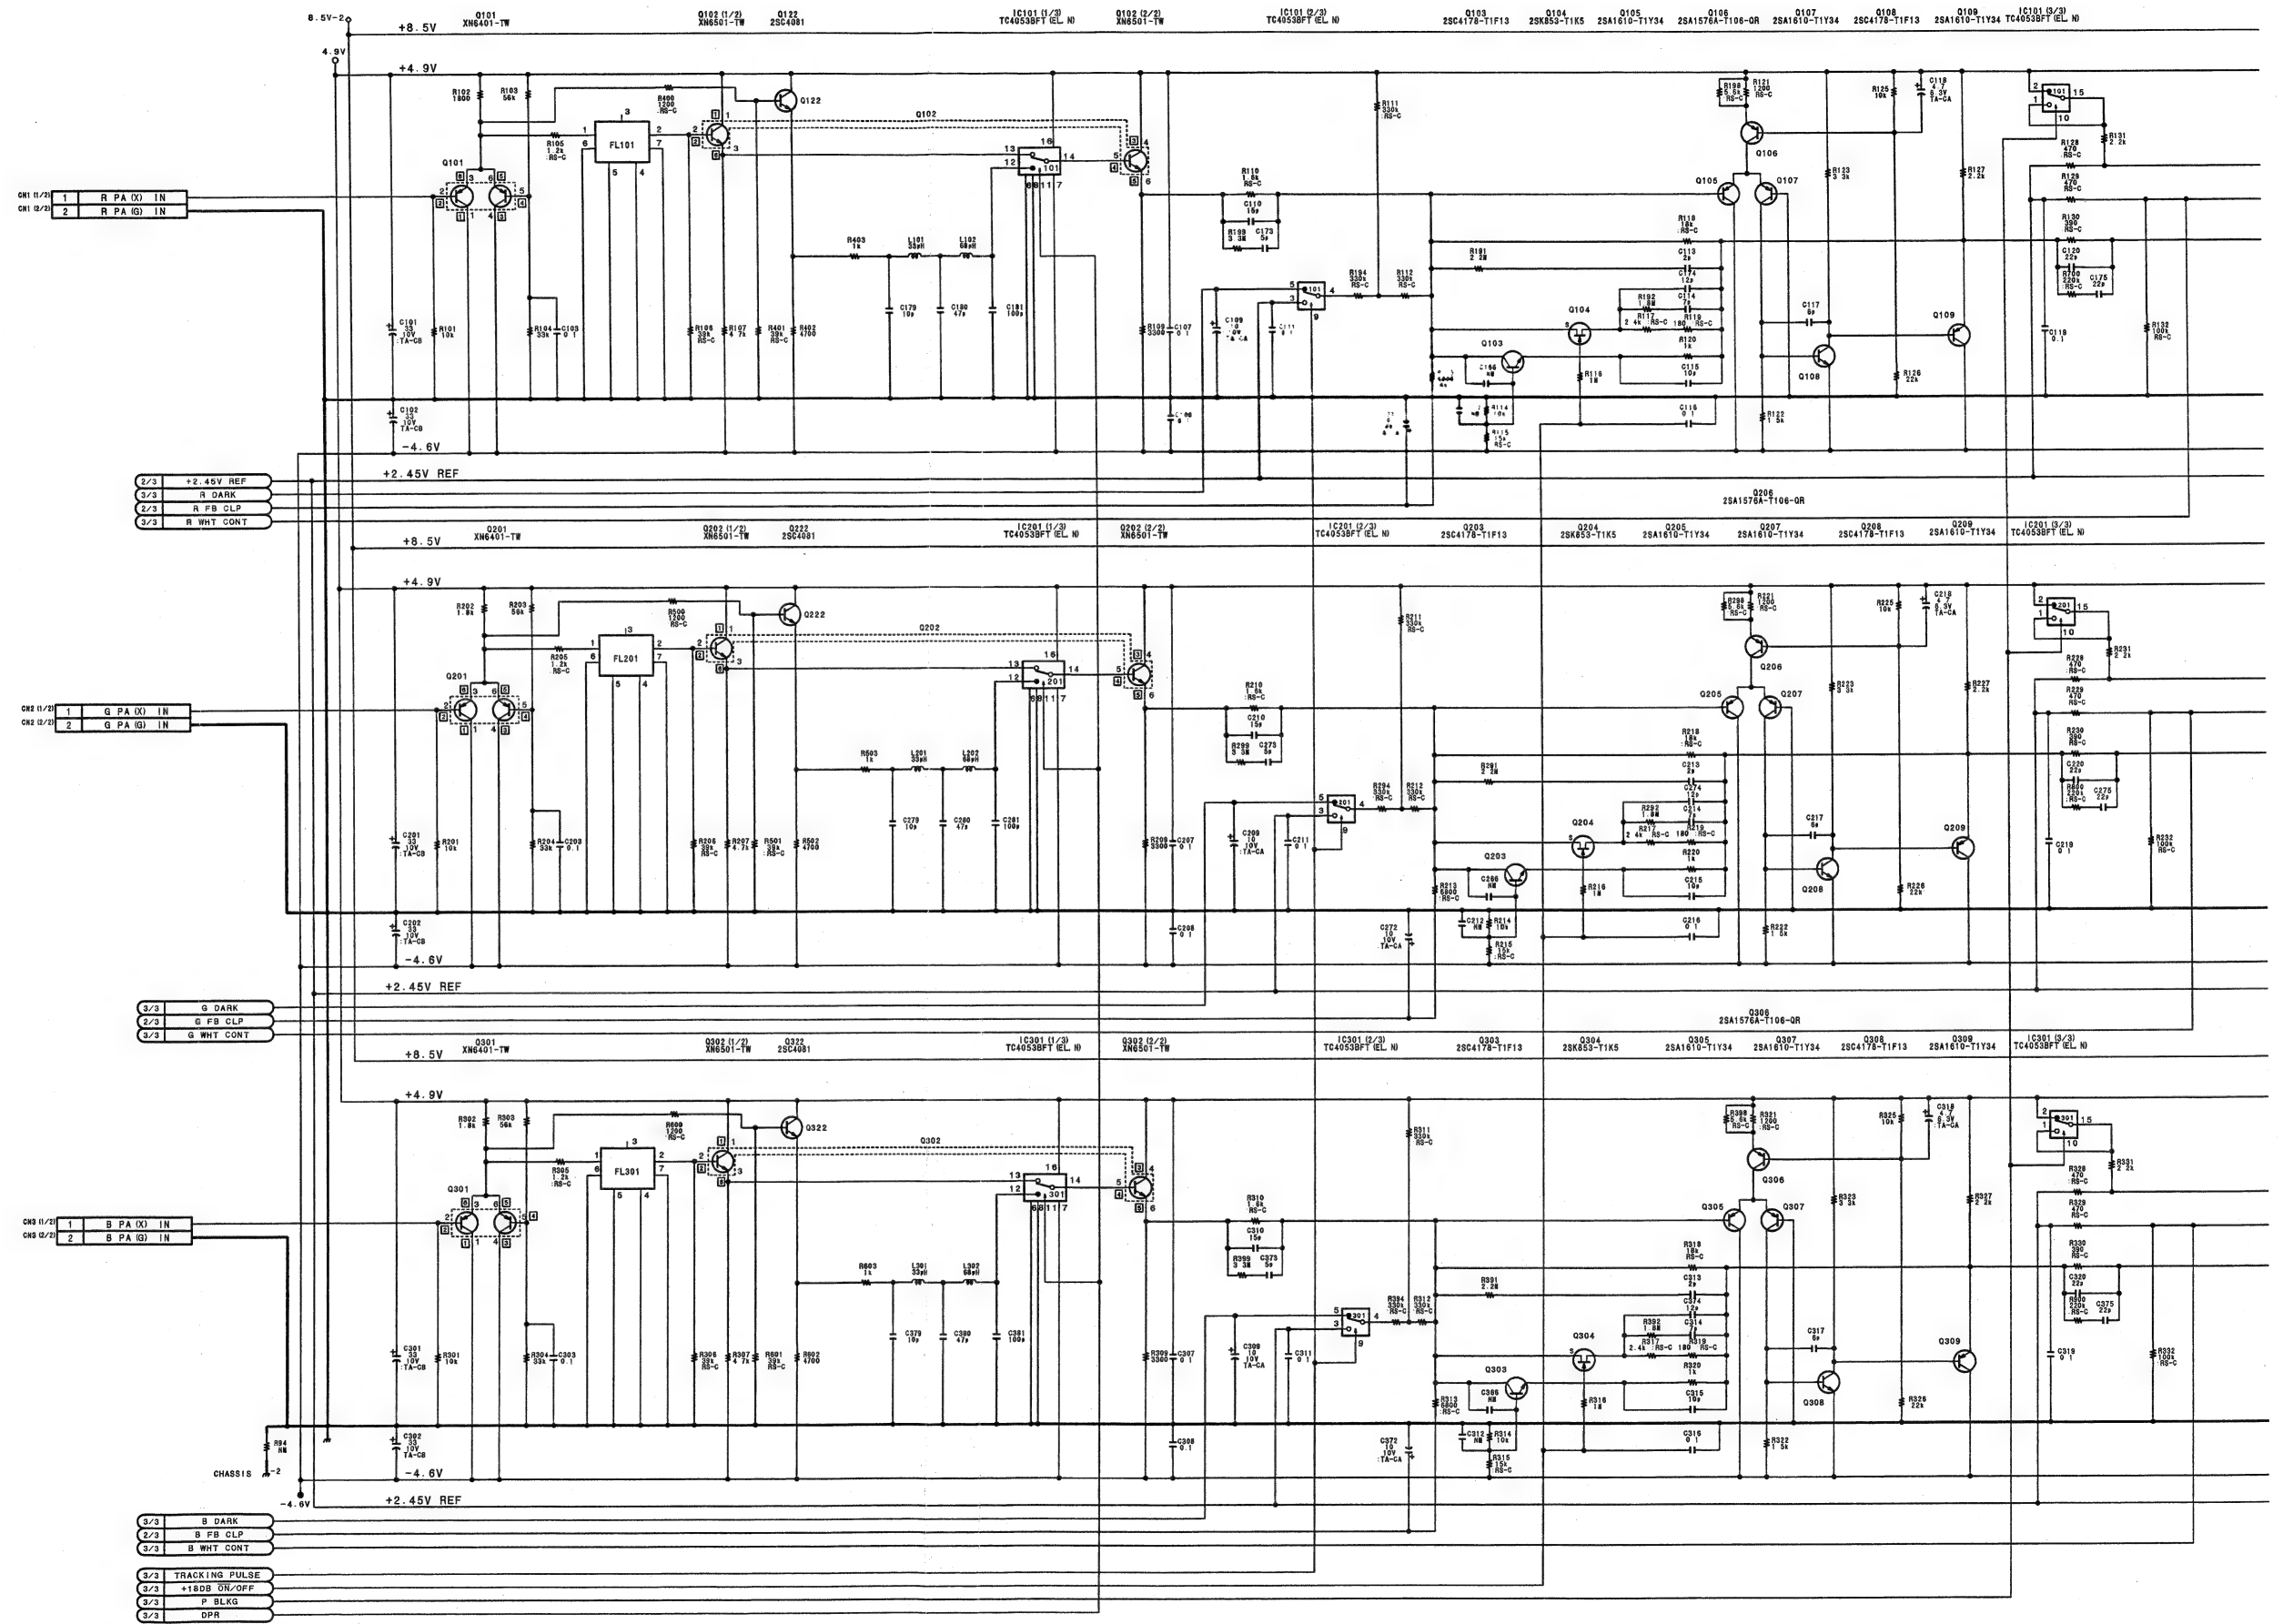




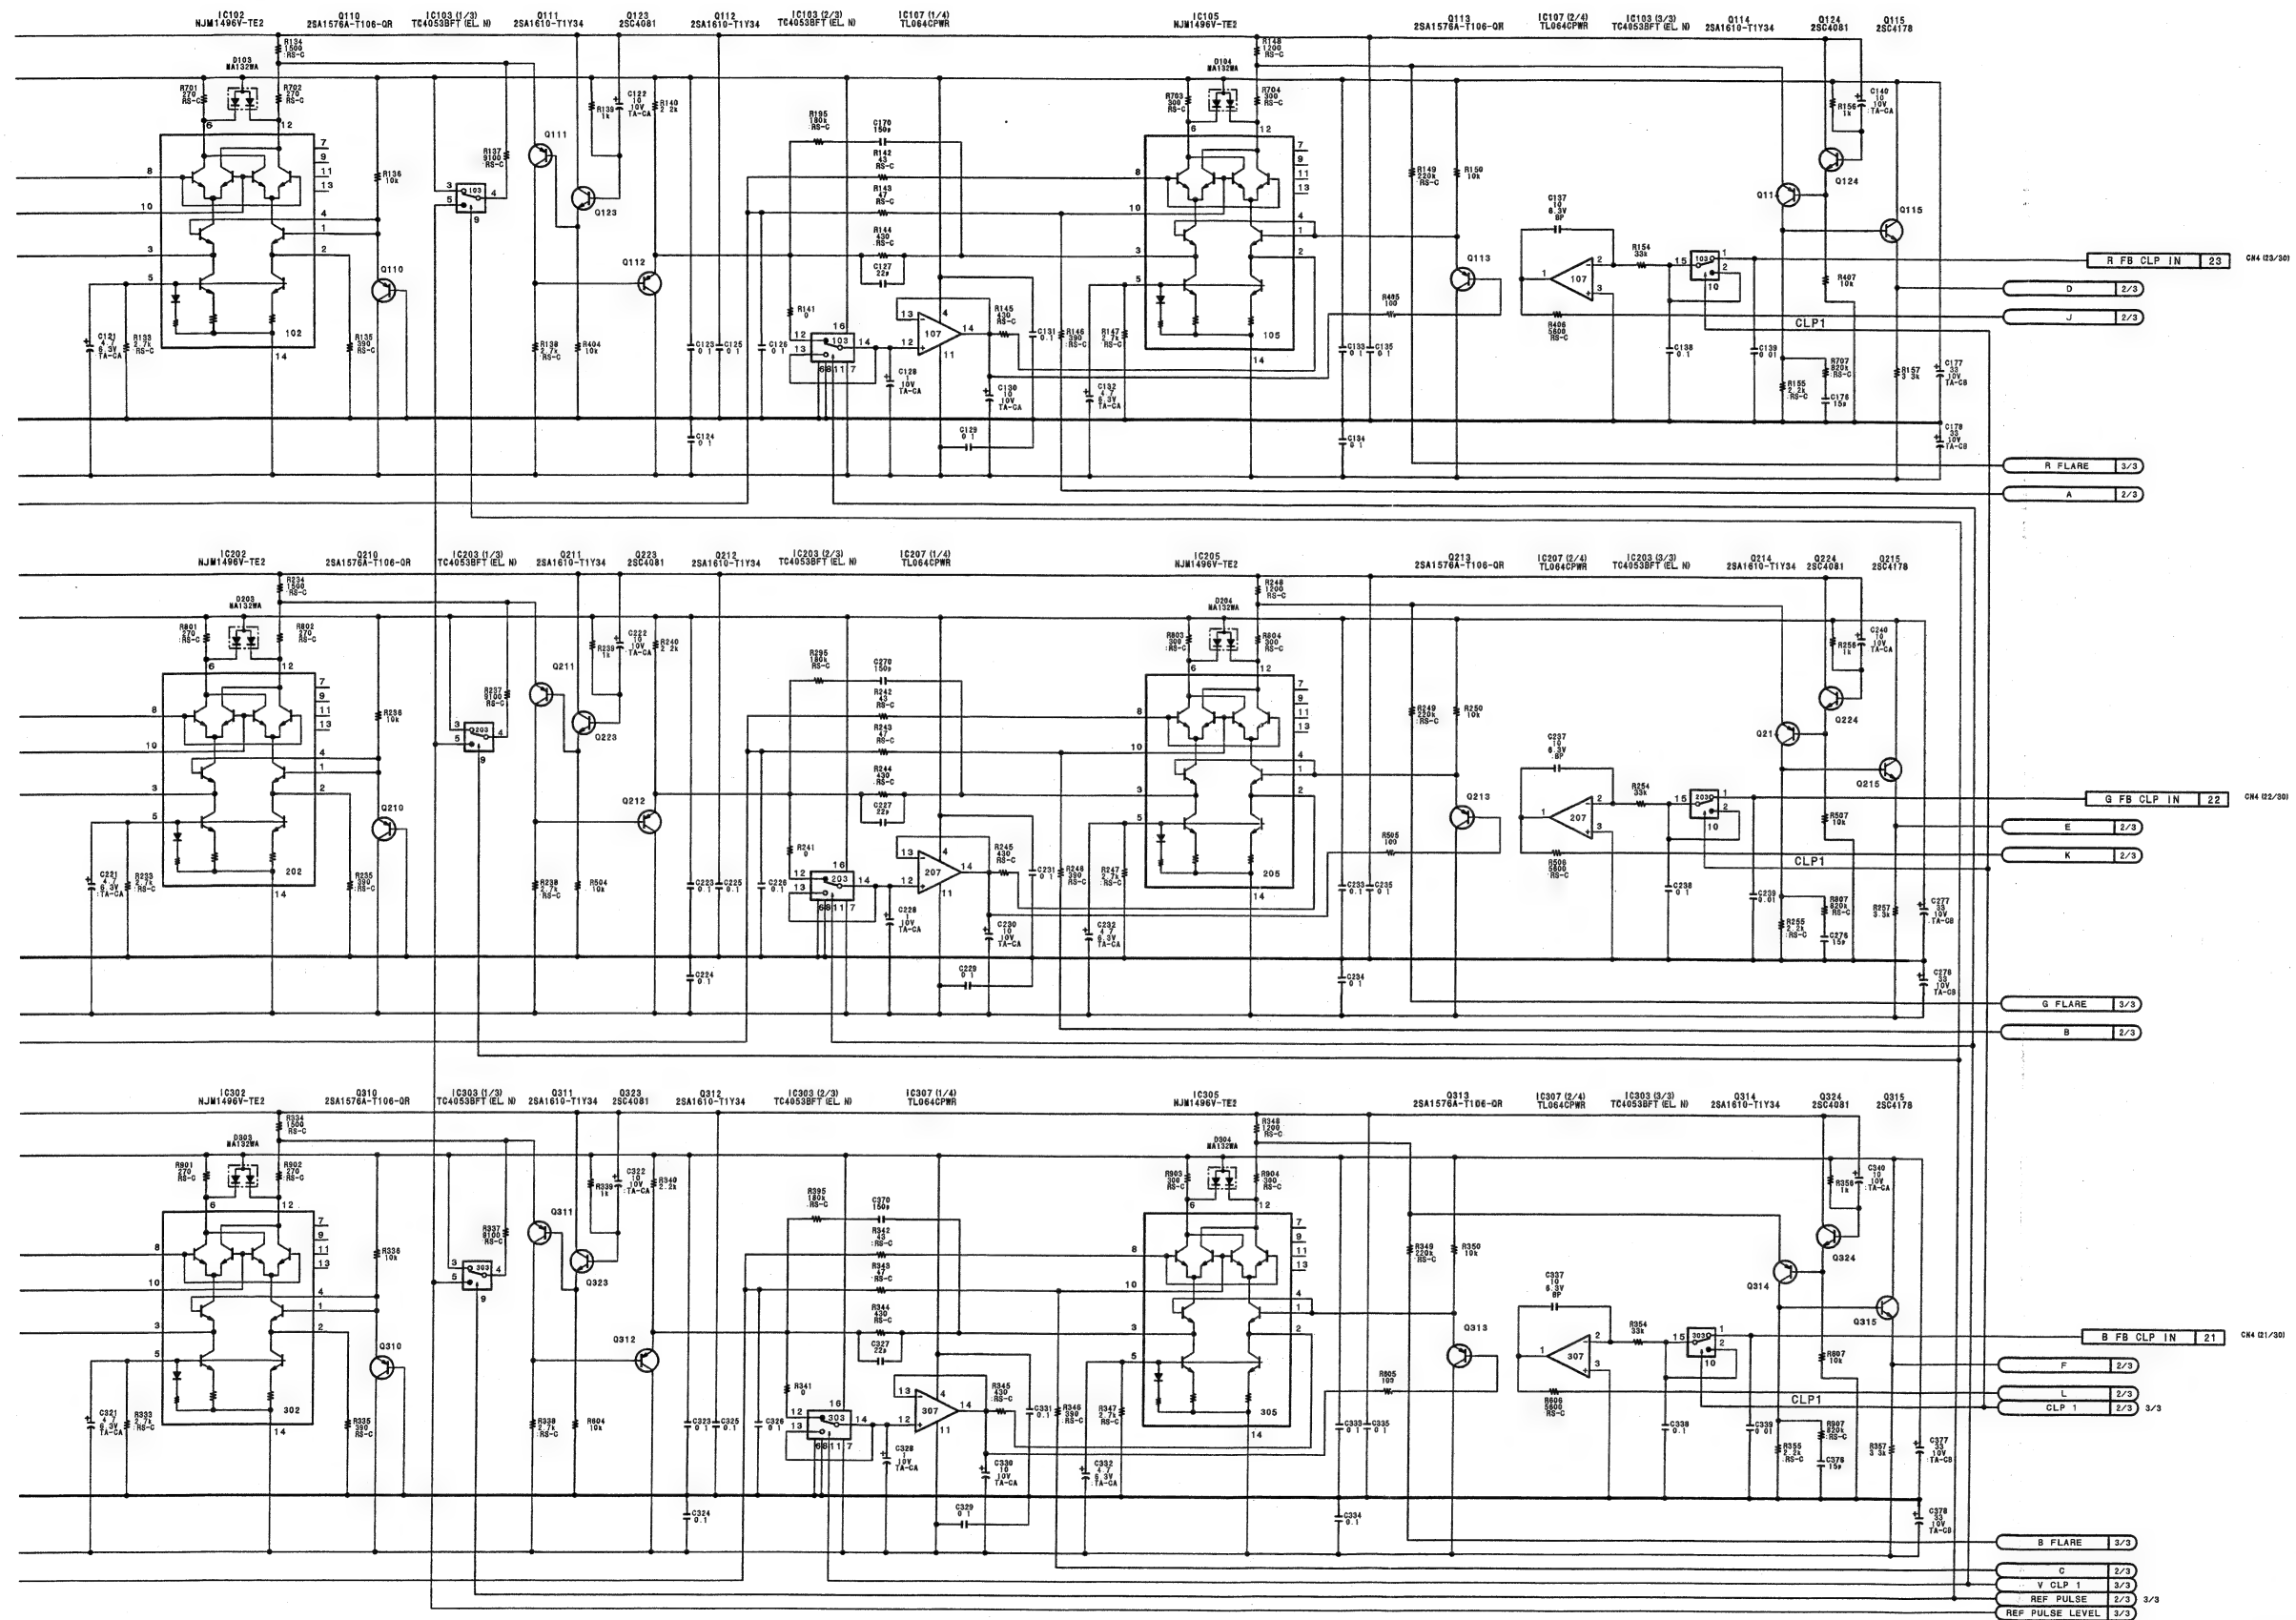


VA-199 (1/3)  
BOARD NO. 1-677-373-11, 12  
B-DSR300A-VA199-11





5



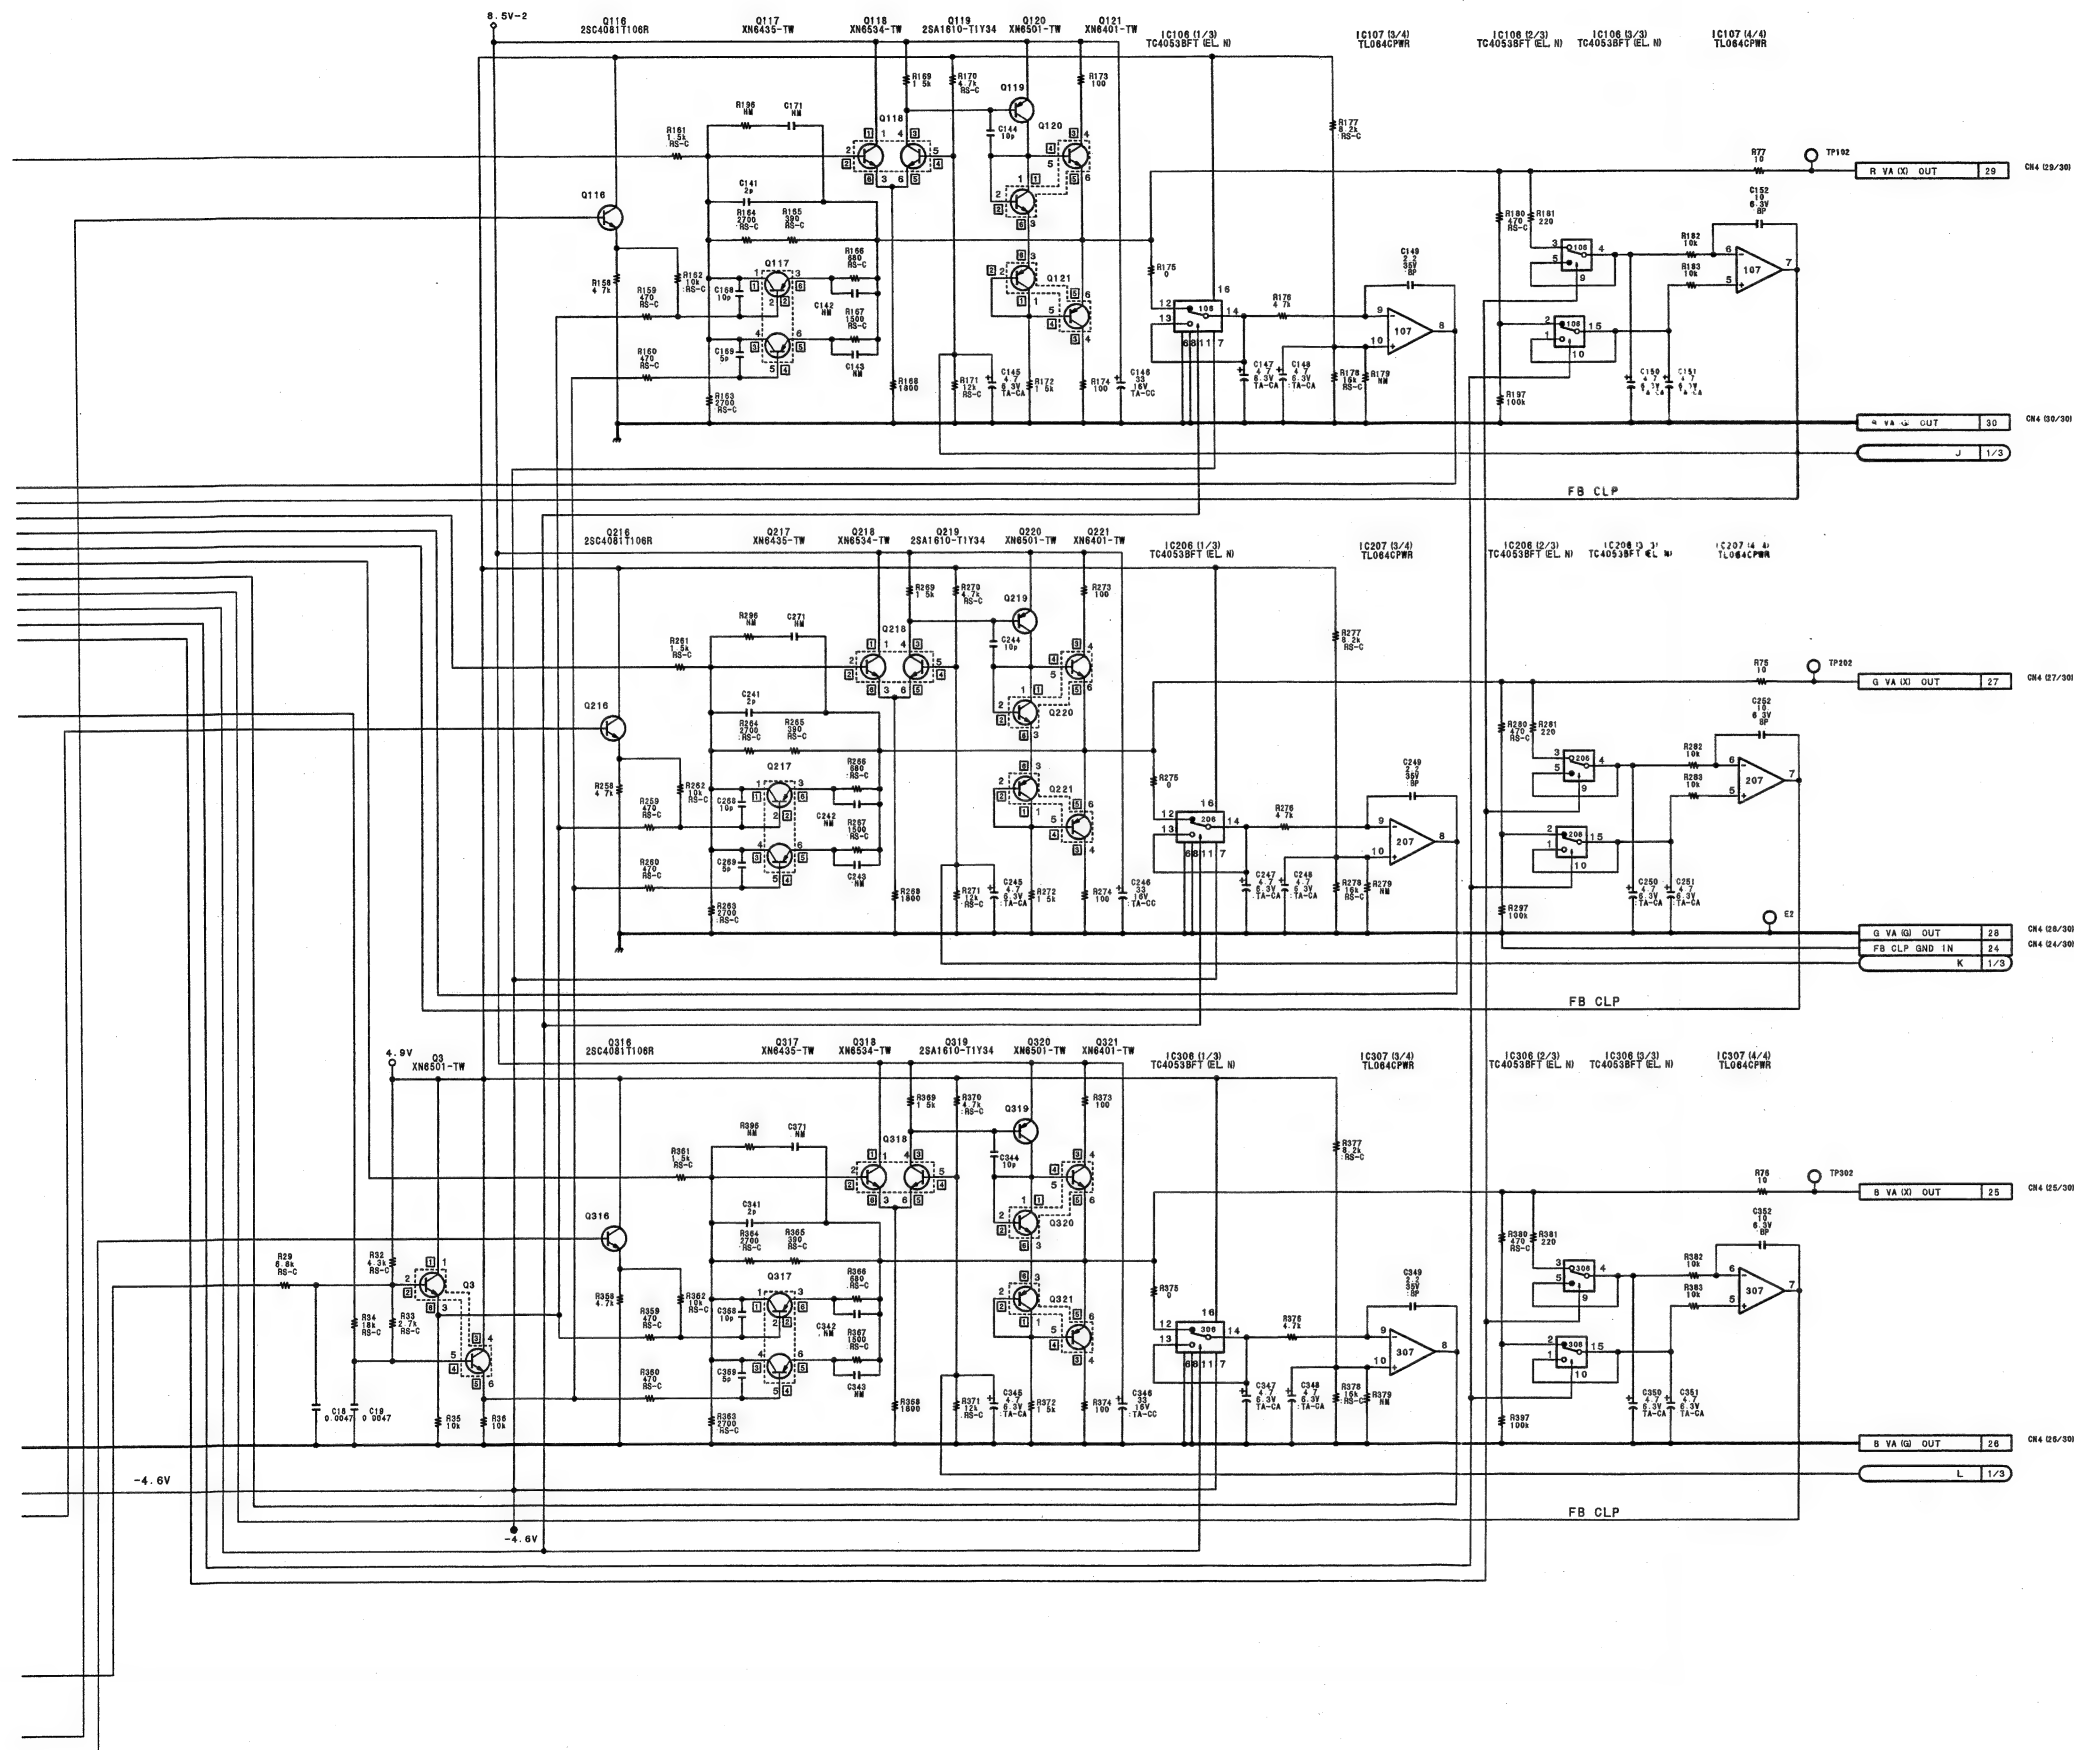

**VA-199 (2/3)**  
BOARD NO. 1-677-373-11, 12  
B-DSR300A-VA199-11

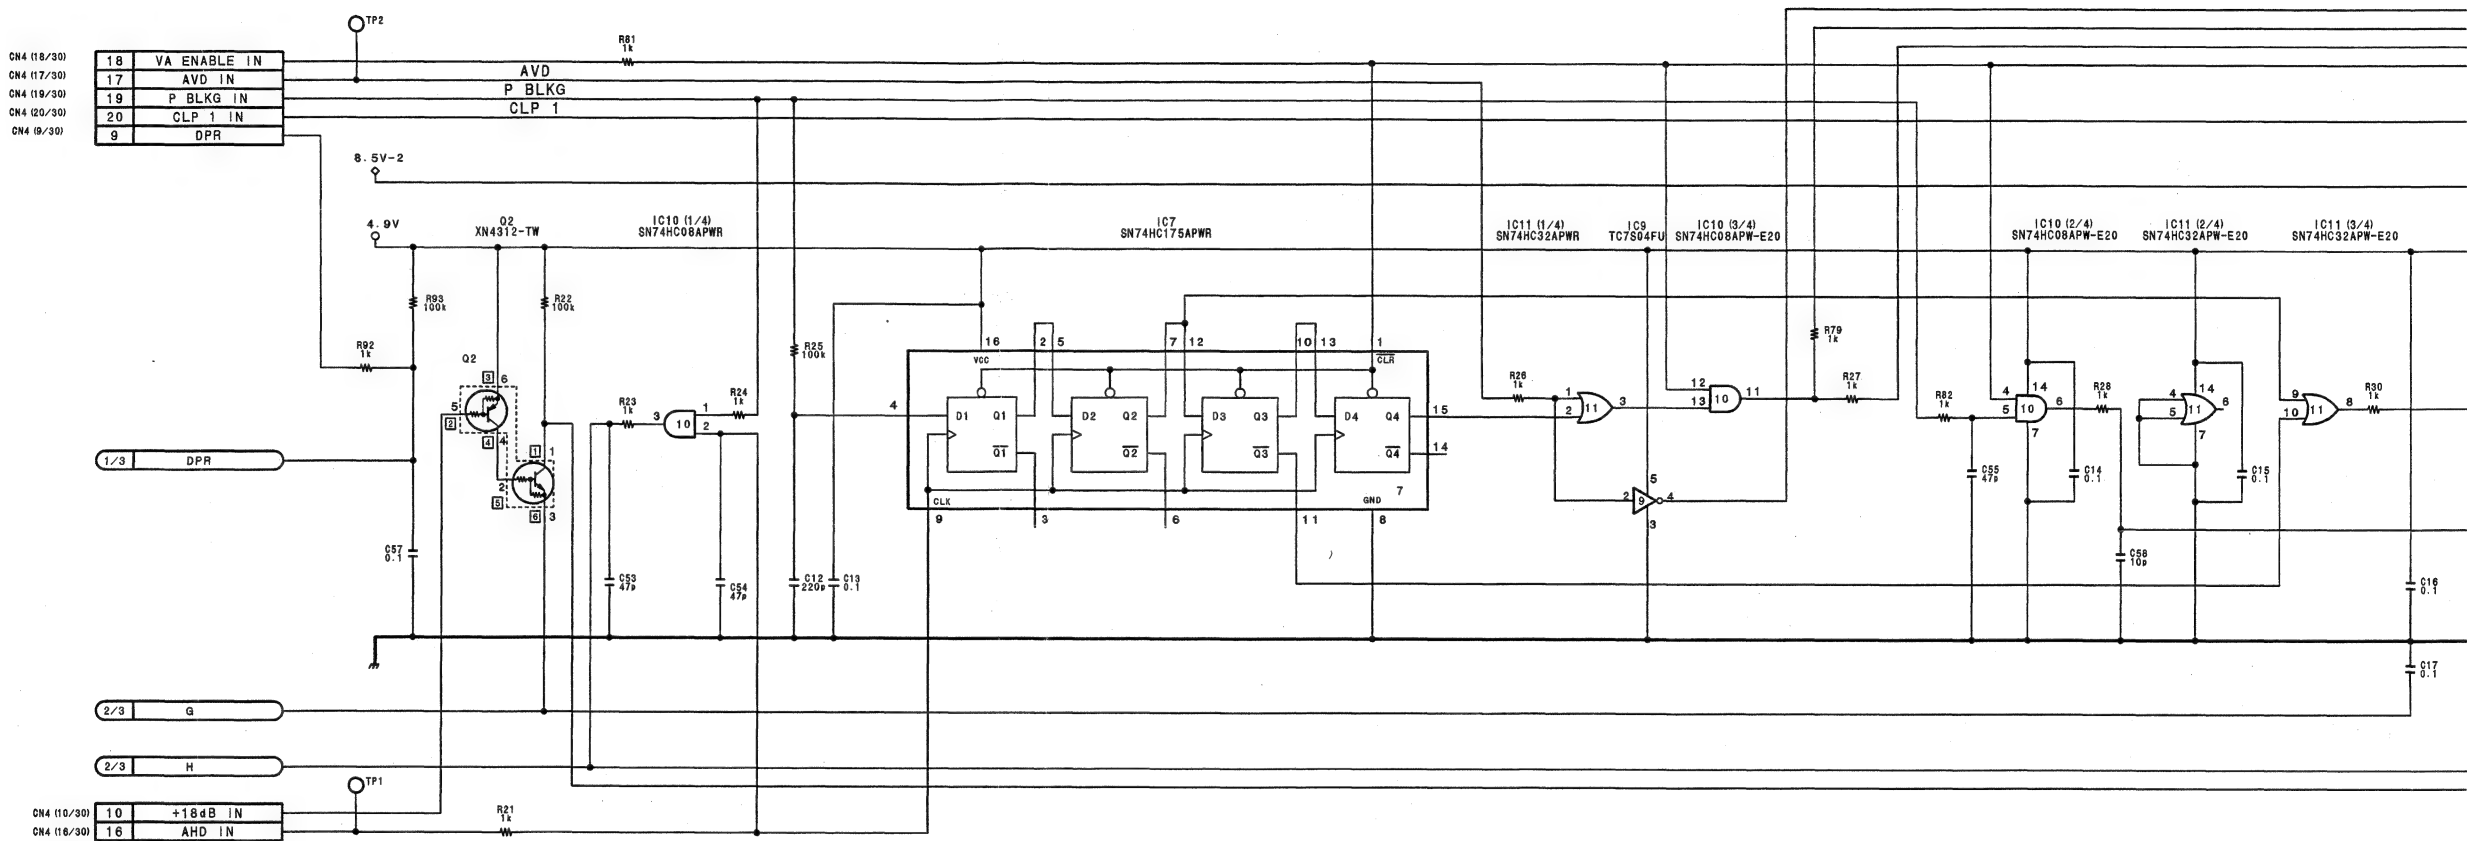


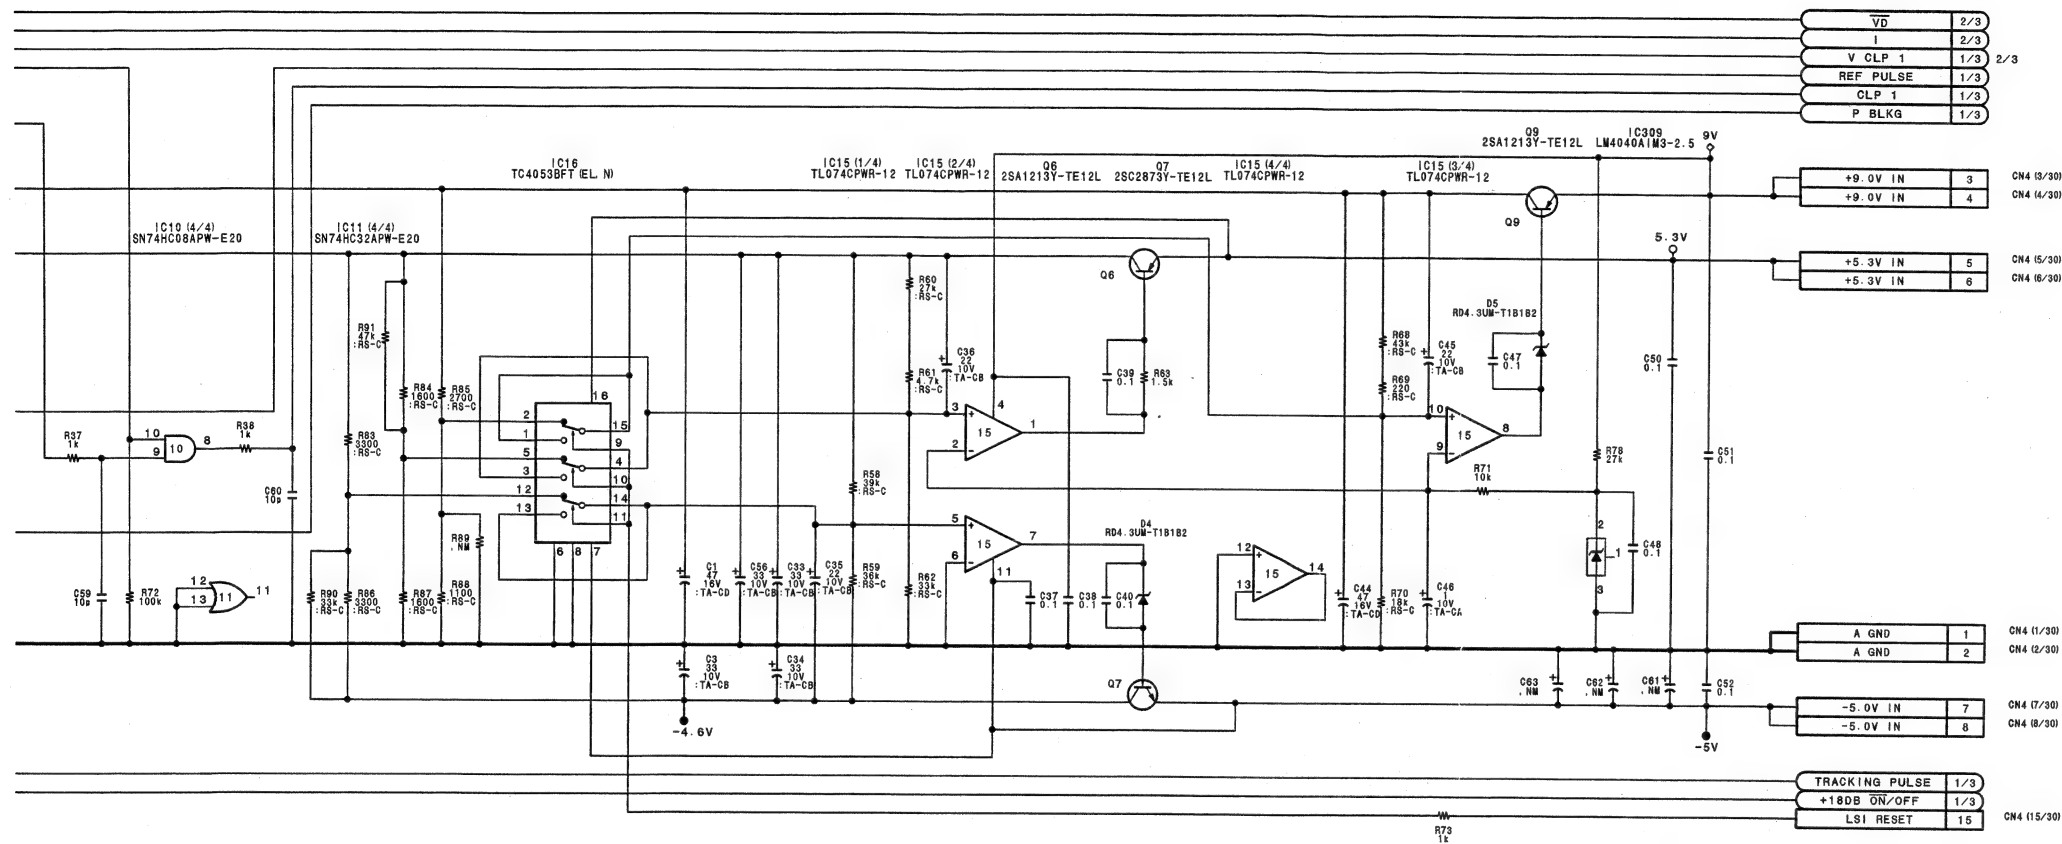


DPR-141C/141A (1/9)  
SUFFIX: -13, -14

DPR-141C/141A (1/9)  
SUFFIX: -13, -14

This circuit diagram is common to  
DSR-570WS/570WSP/500WS/500WSP.

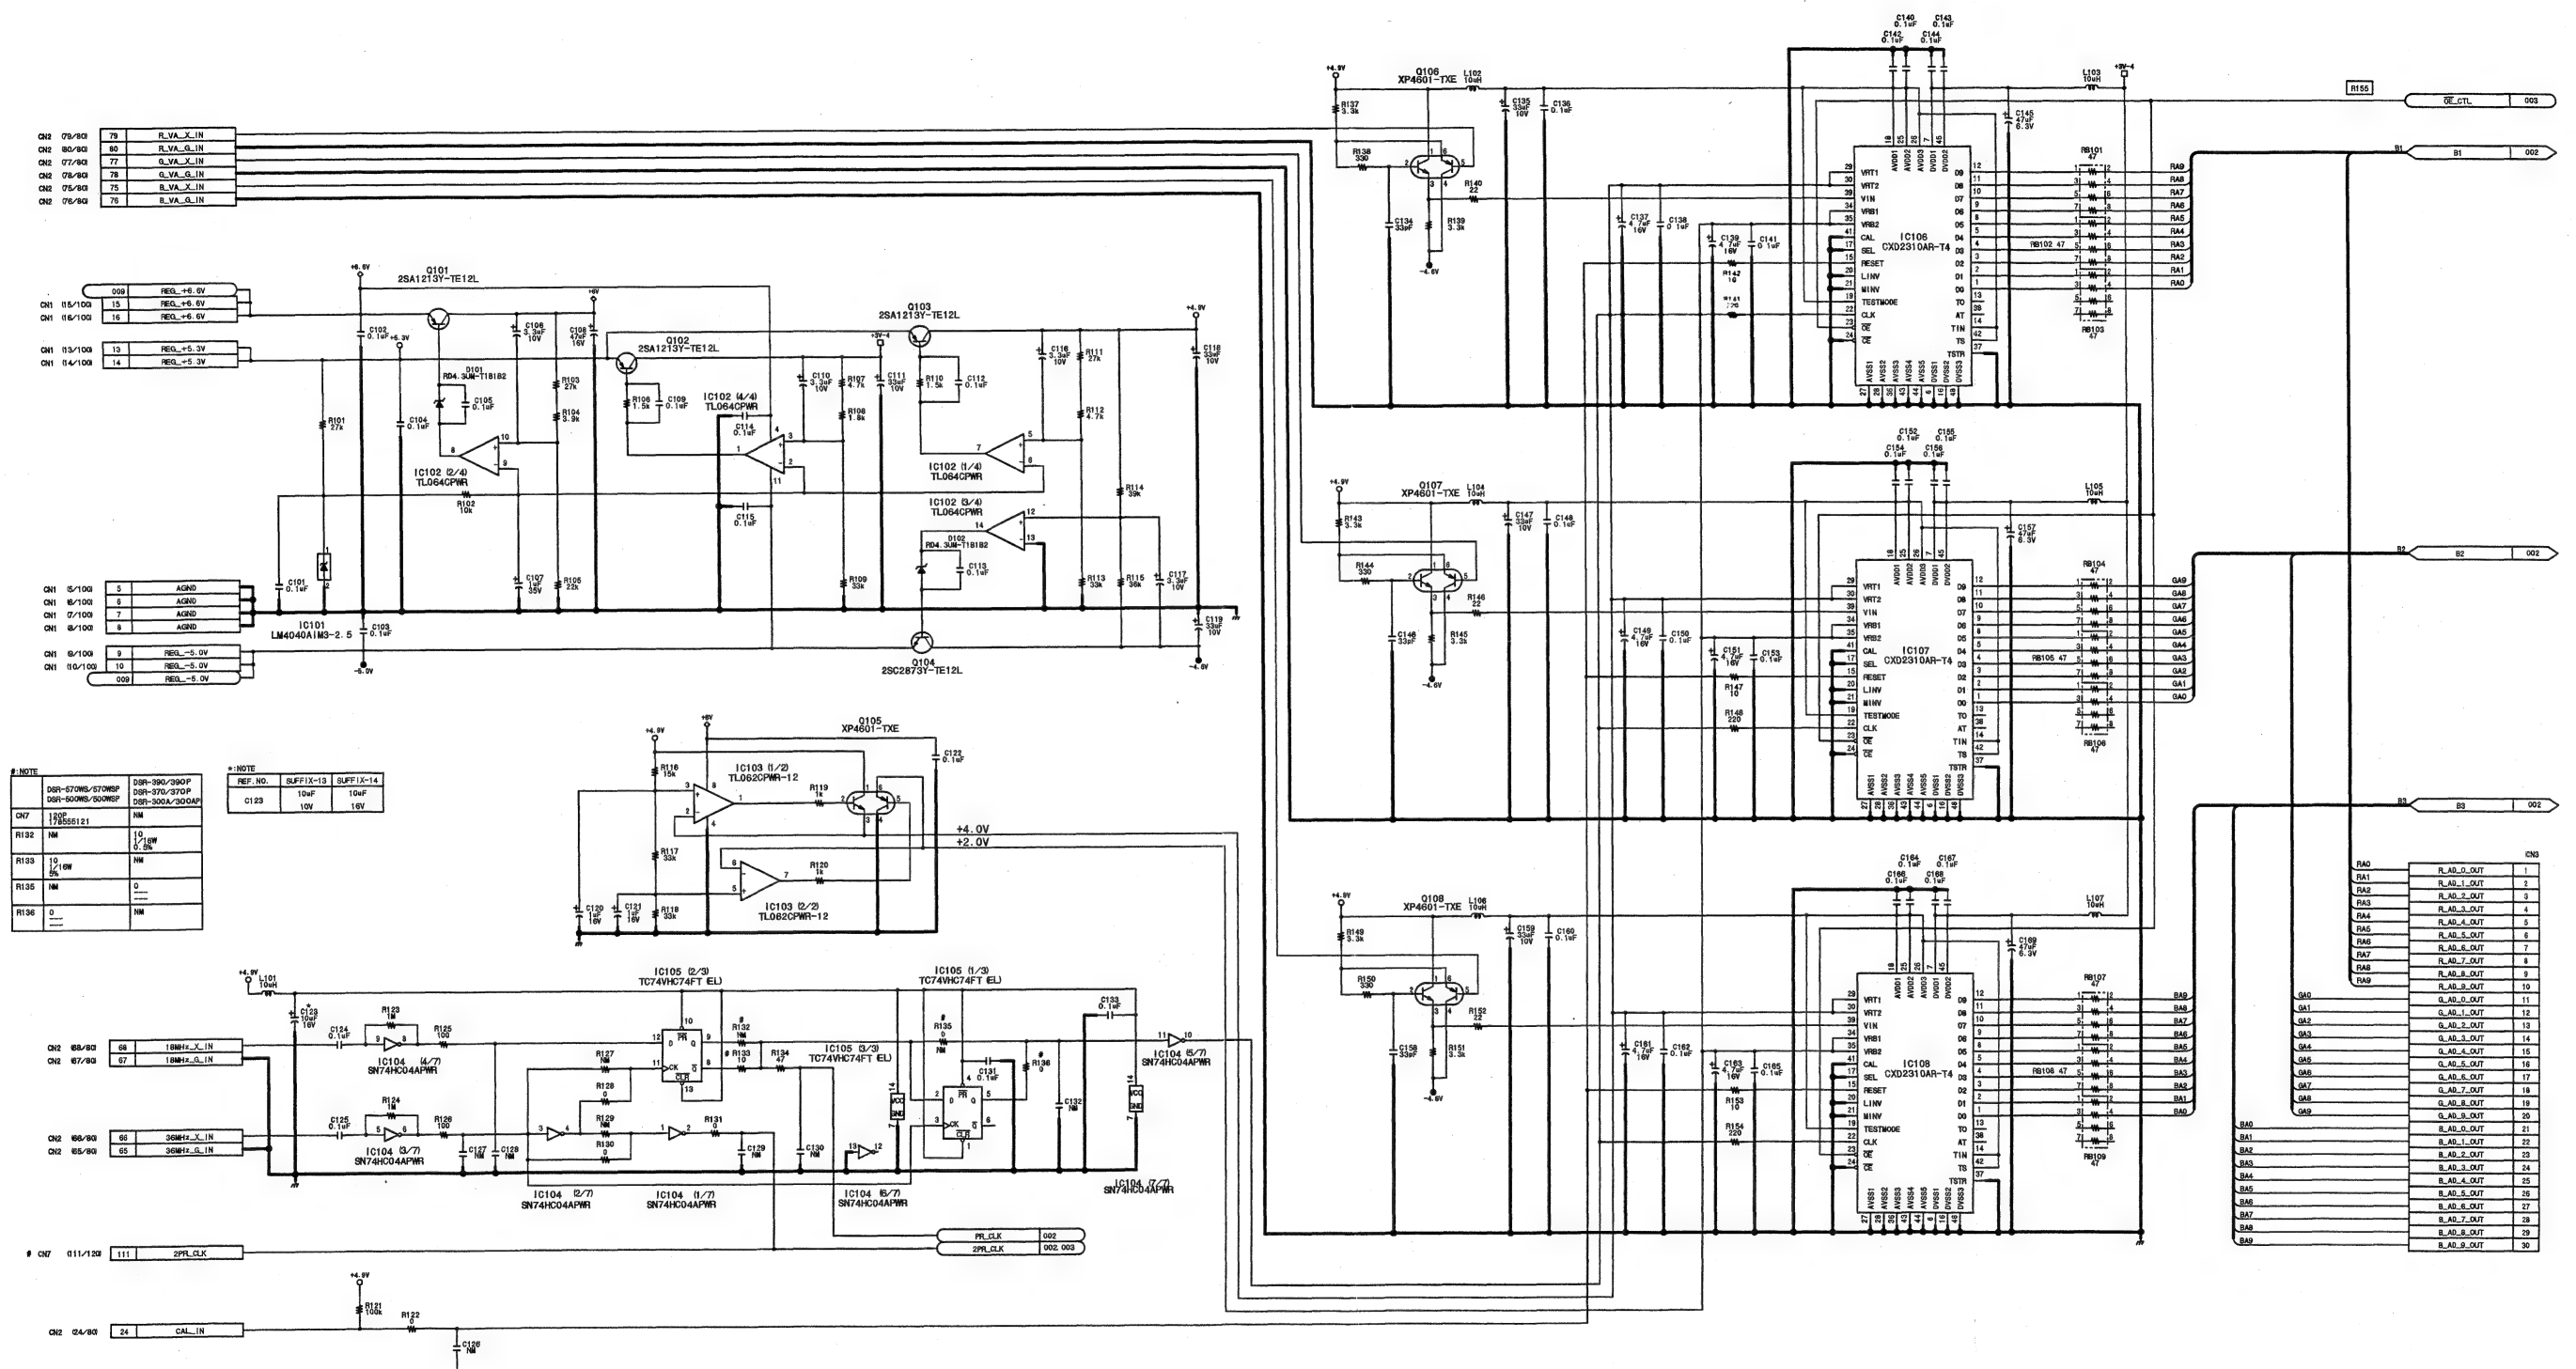

**DPR-141C/141A (2/9)**  
**SUFFIX: -13, -14**



## H



**DPR-141C/141A (2/9)**  
**SUFFIX: -13, -14**

1




3

4

5


**DPR-141C/141A (3/9)**  
SUFFIX: -13, -14

**DPR-141C/141A (3/9)**  
SUFFIX: -13, -14

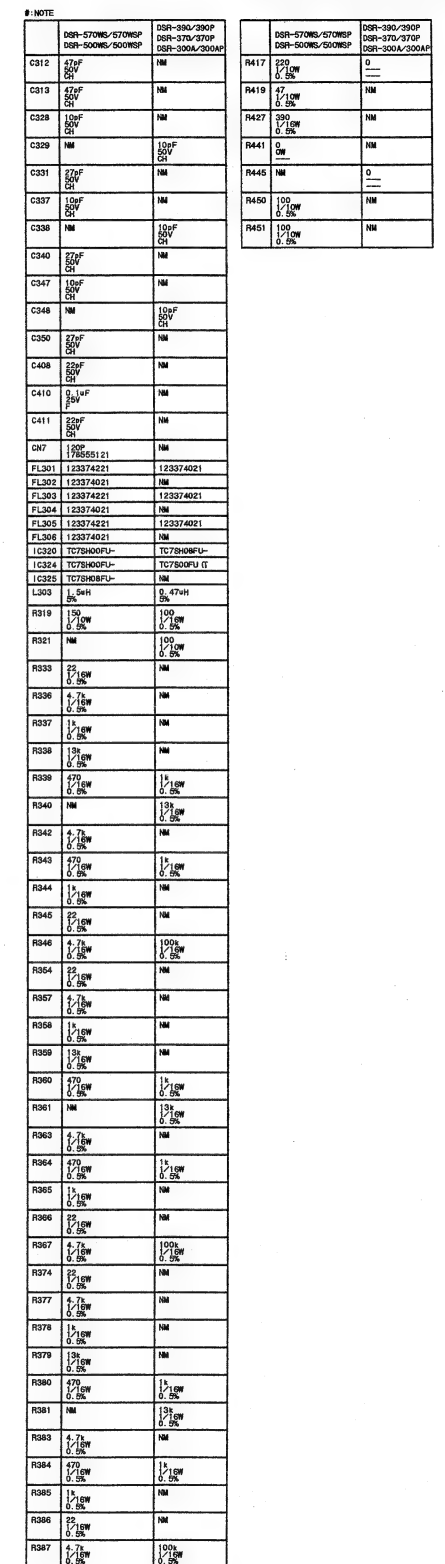

**DPR-141C/141A (3/9)**  
BOARD NO. 1-673-975-13, 14  
DSR-370\_DPR-141\_016\_3


**DPR-141C/141A (4/9)**  
SUFFIX: -13, -14



## H

DPR-141C/141A (4/9)  
SUFFIX: -13, -14


DPR-141C/141A (4/9)  
SUFFIX: -13, -14

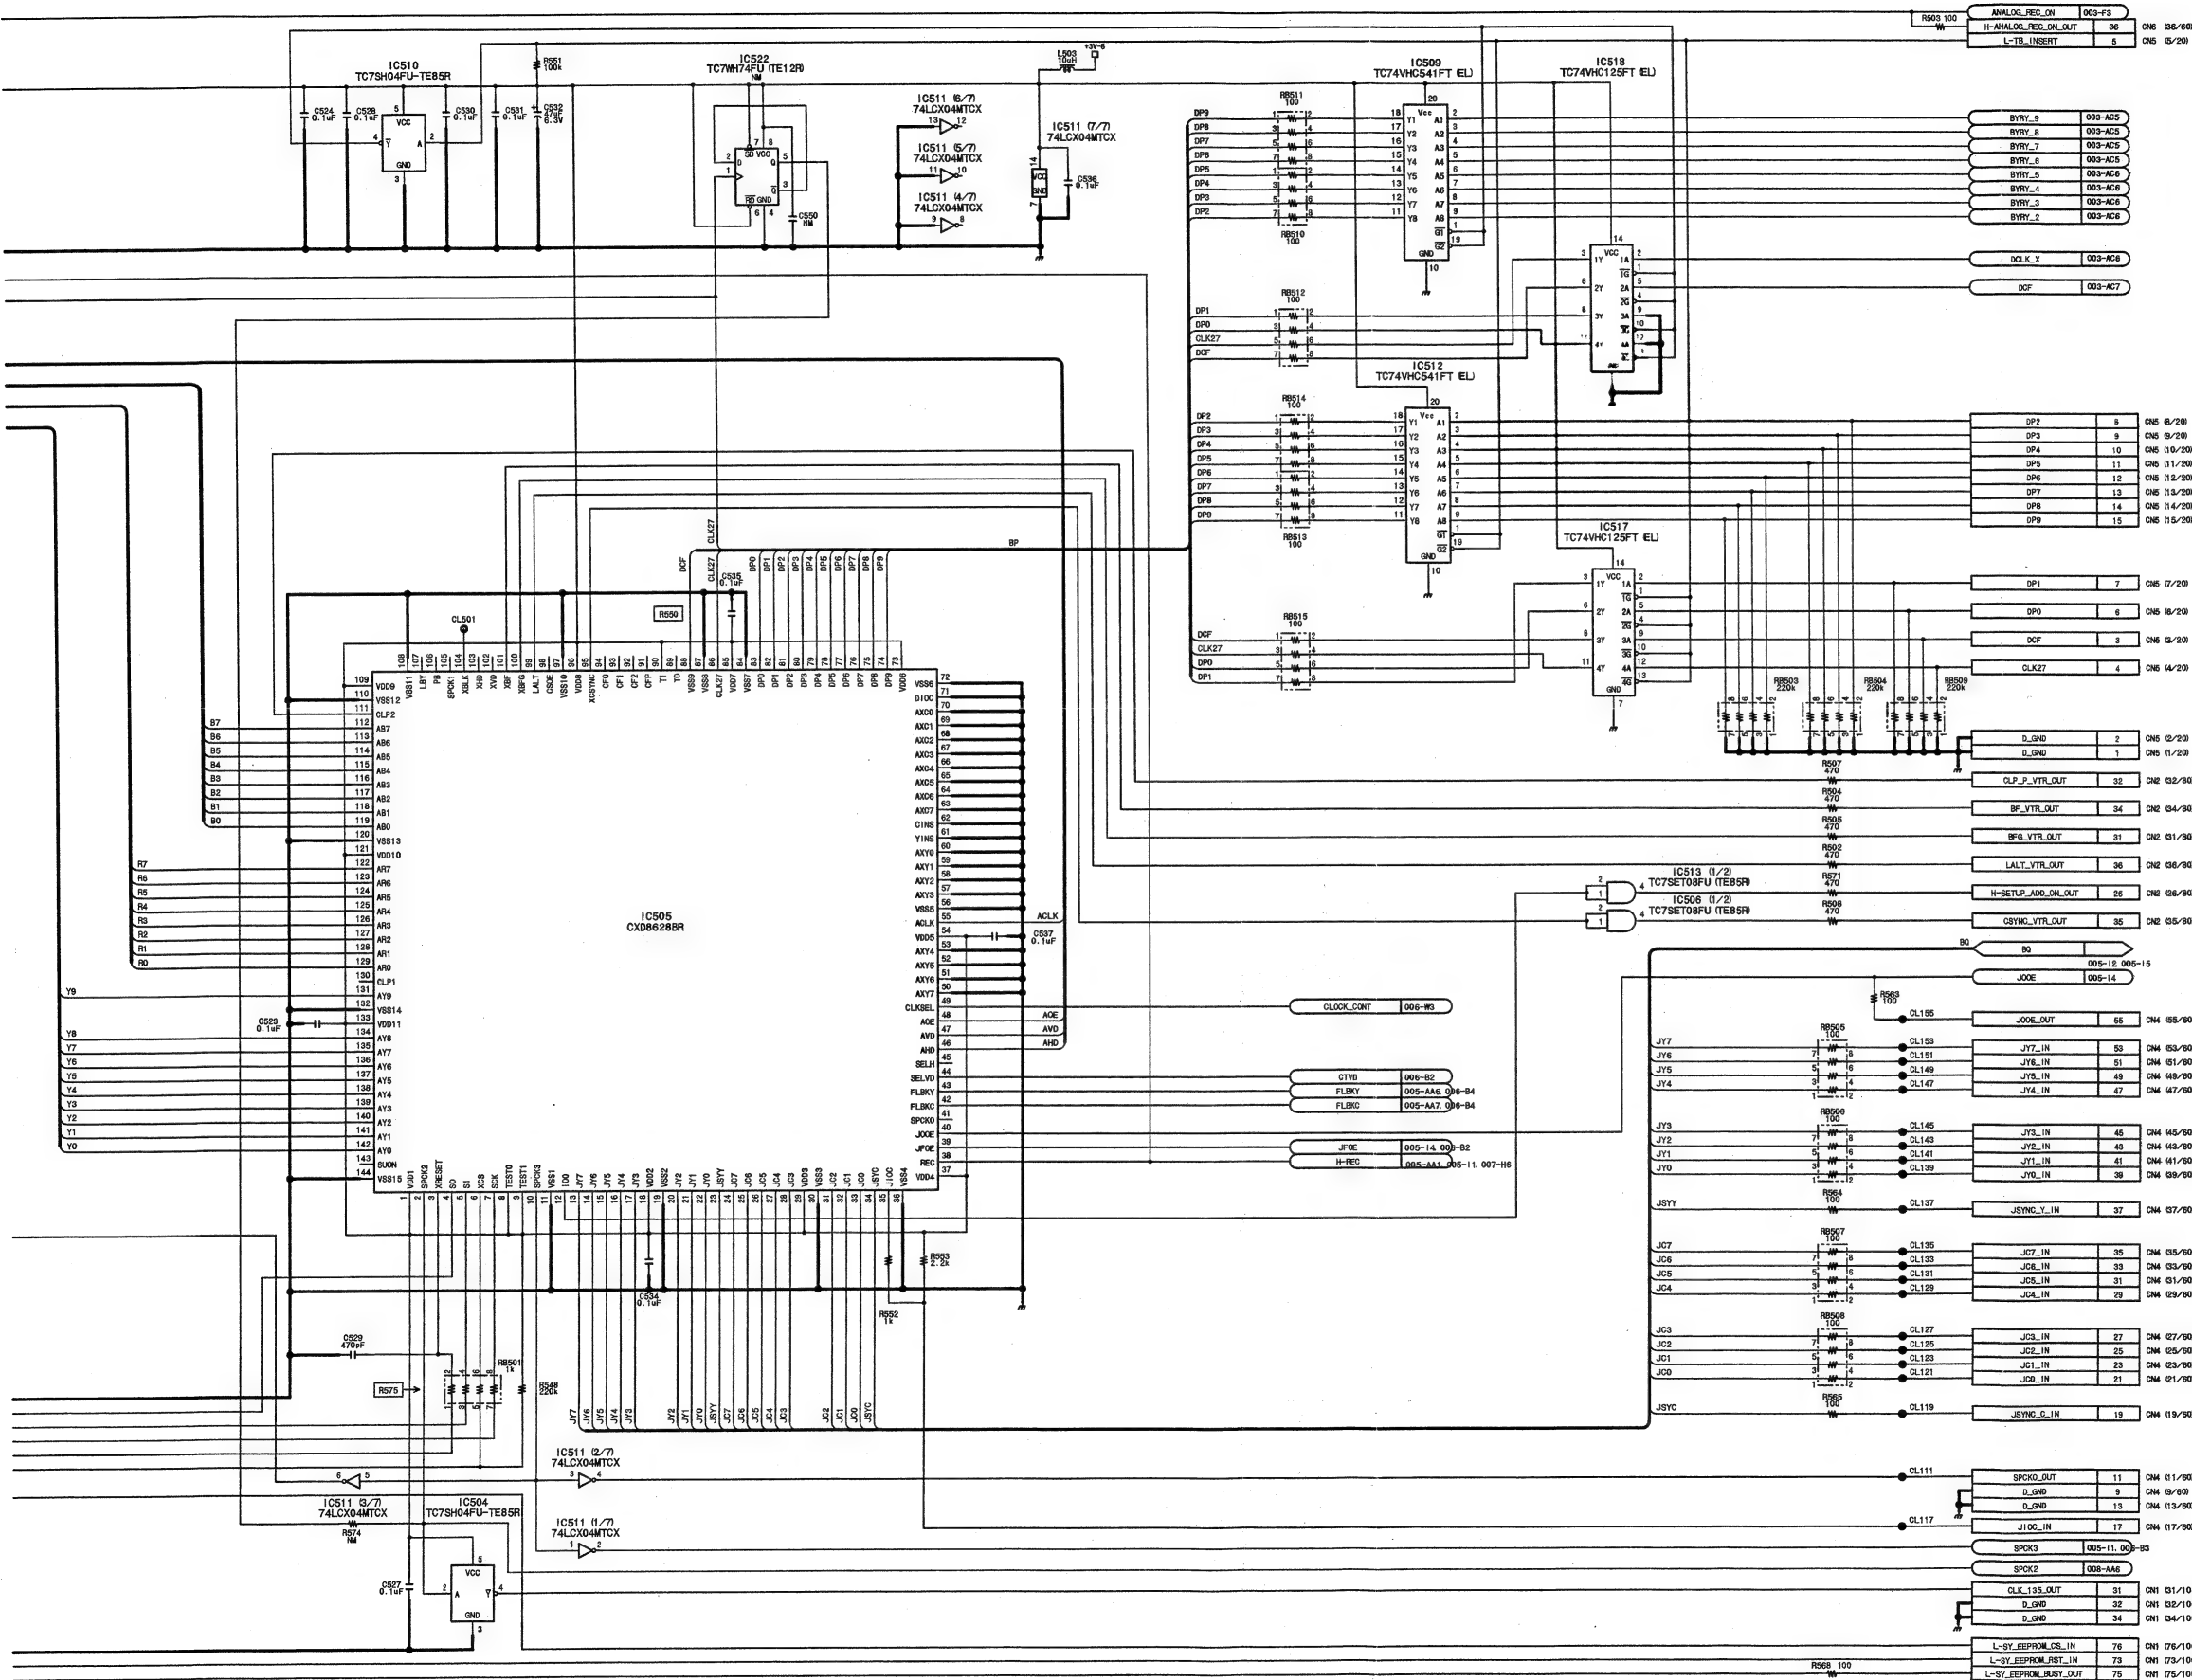



DPR-141C/141A (5/9)  
SUFFIX: -13, -14

DPR-141C/141A (5/9)  
SUFFIX: -13, -14

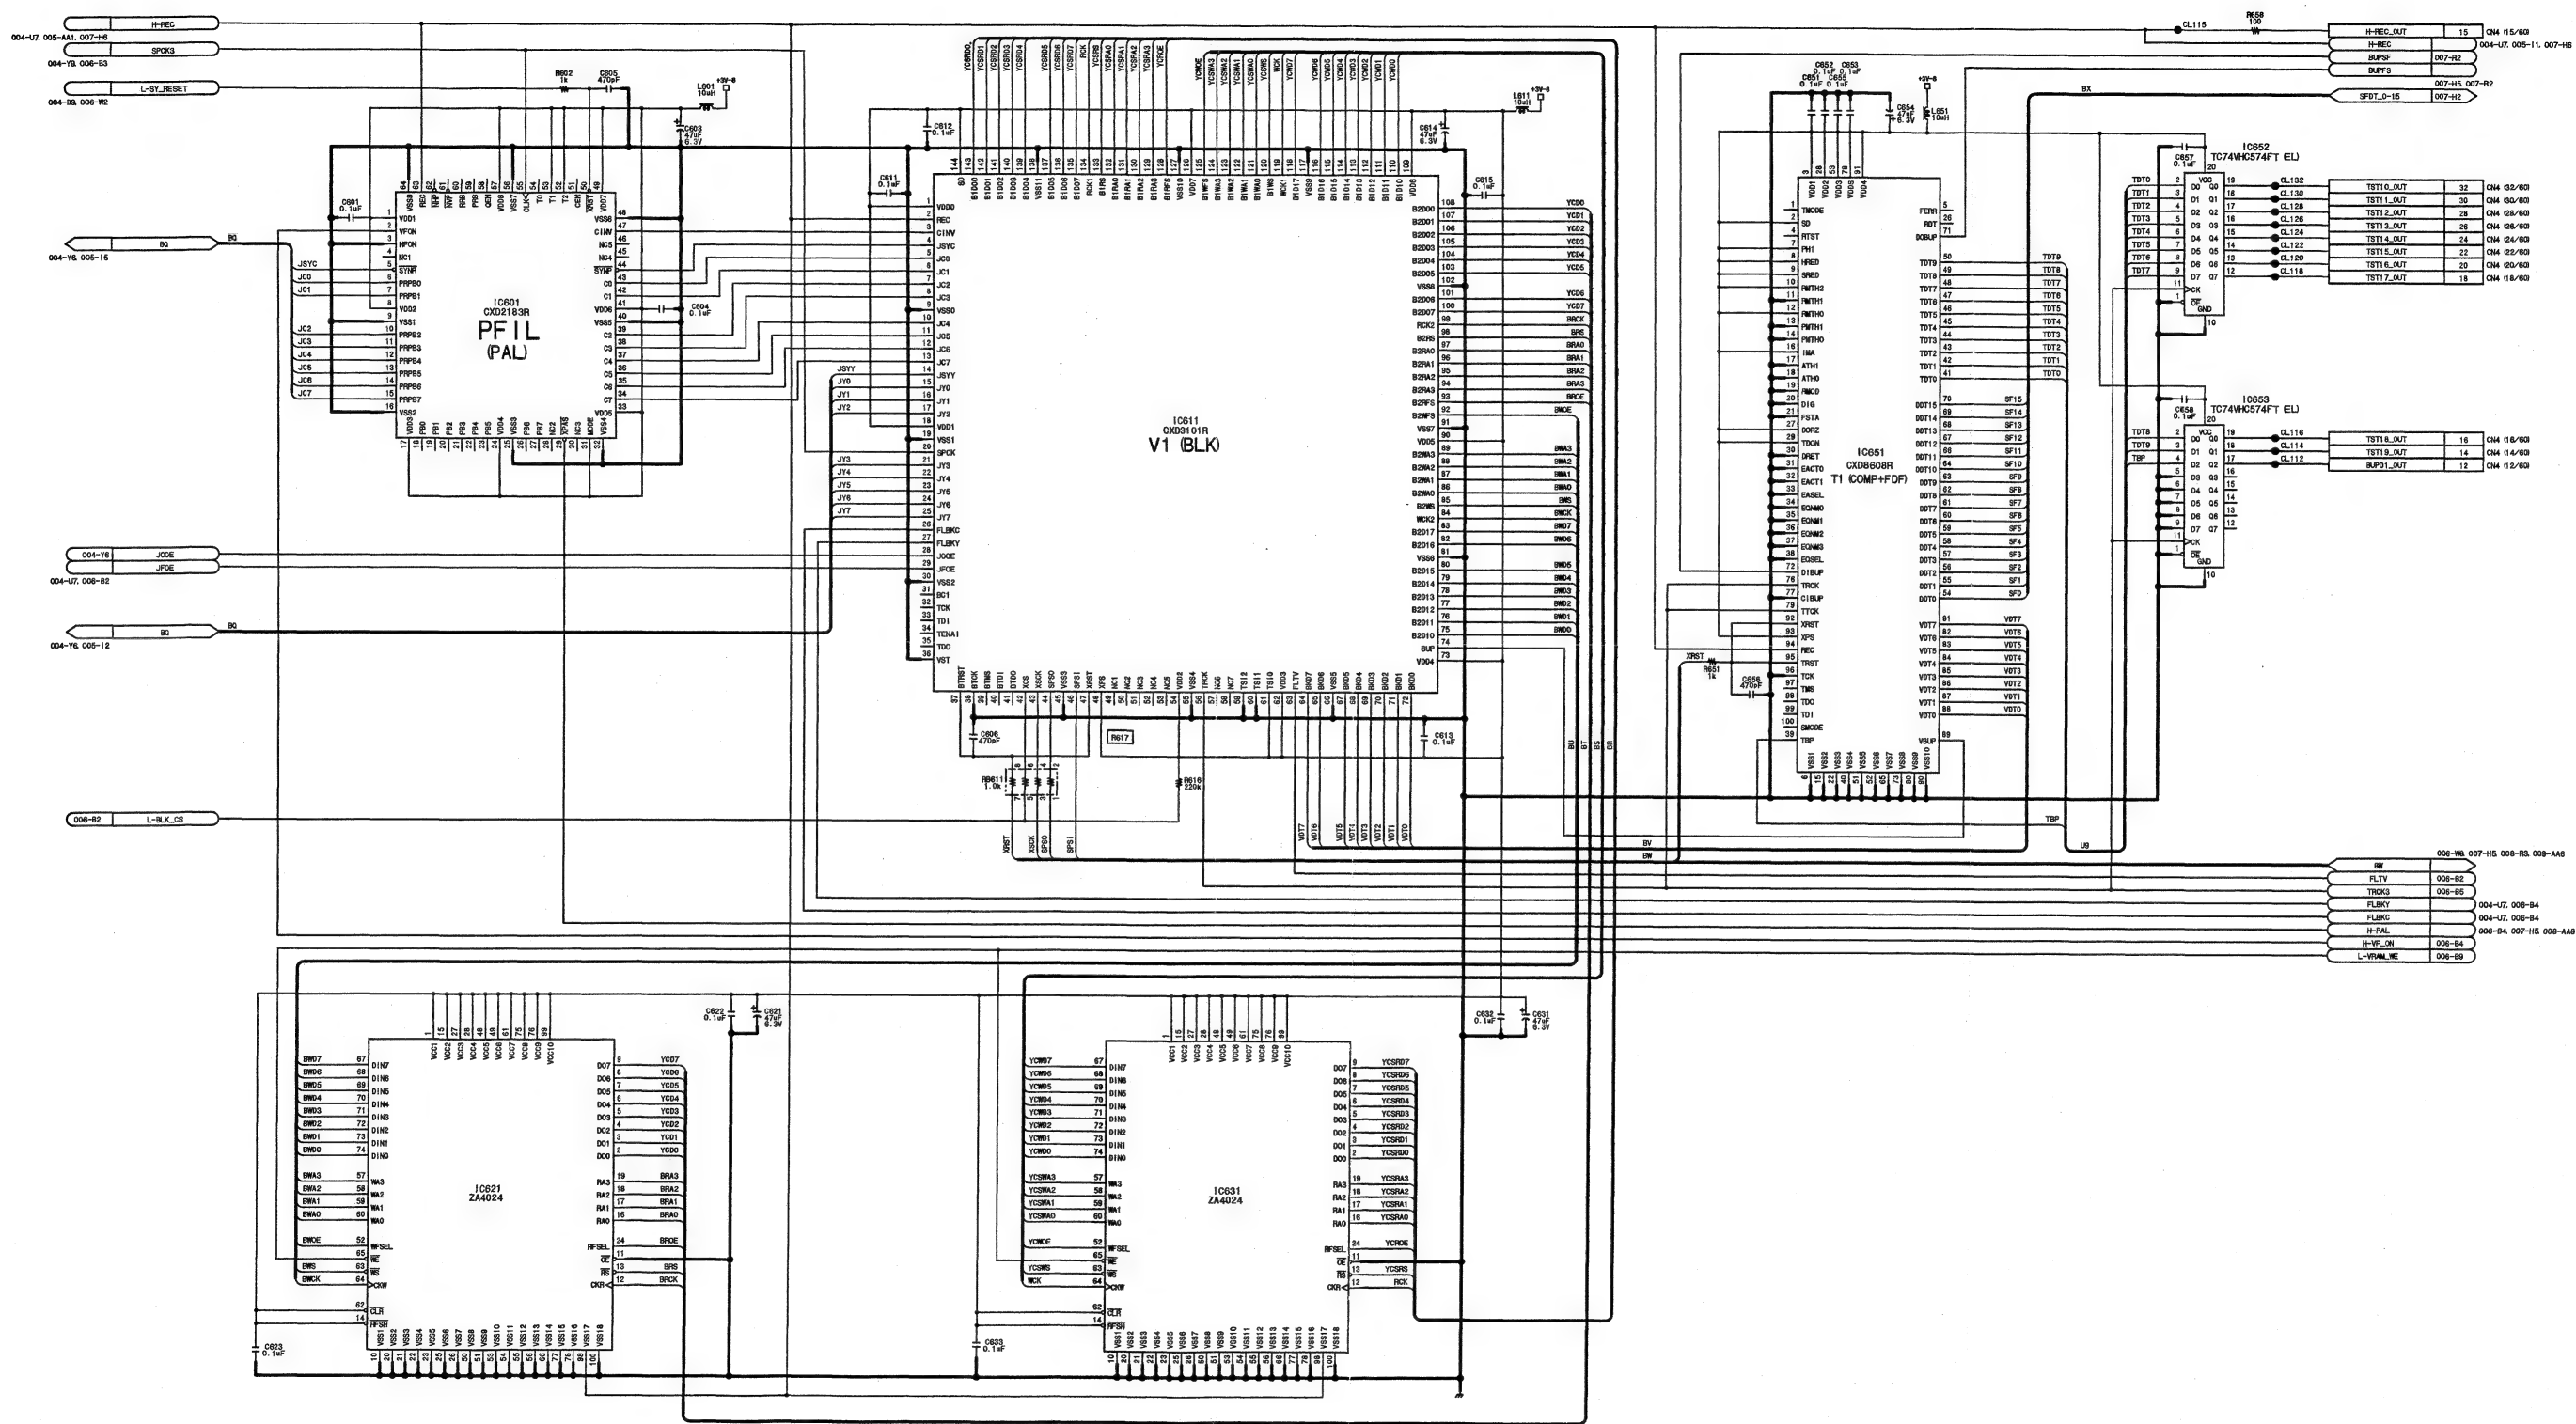


DPR-141C/141A (5/9)  
BOARD NO. 1-673-975-13, 14  
DSR-370\_DPR-141\_016\_5




DPR-141C/141A (6/9)  
SUFFIX: -13, -14

DPR-141C/141A (6/9)  
SUFFIX: -13, -14

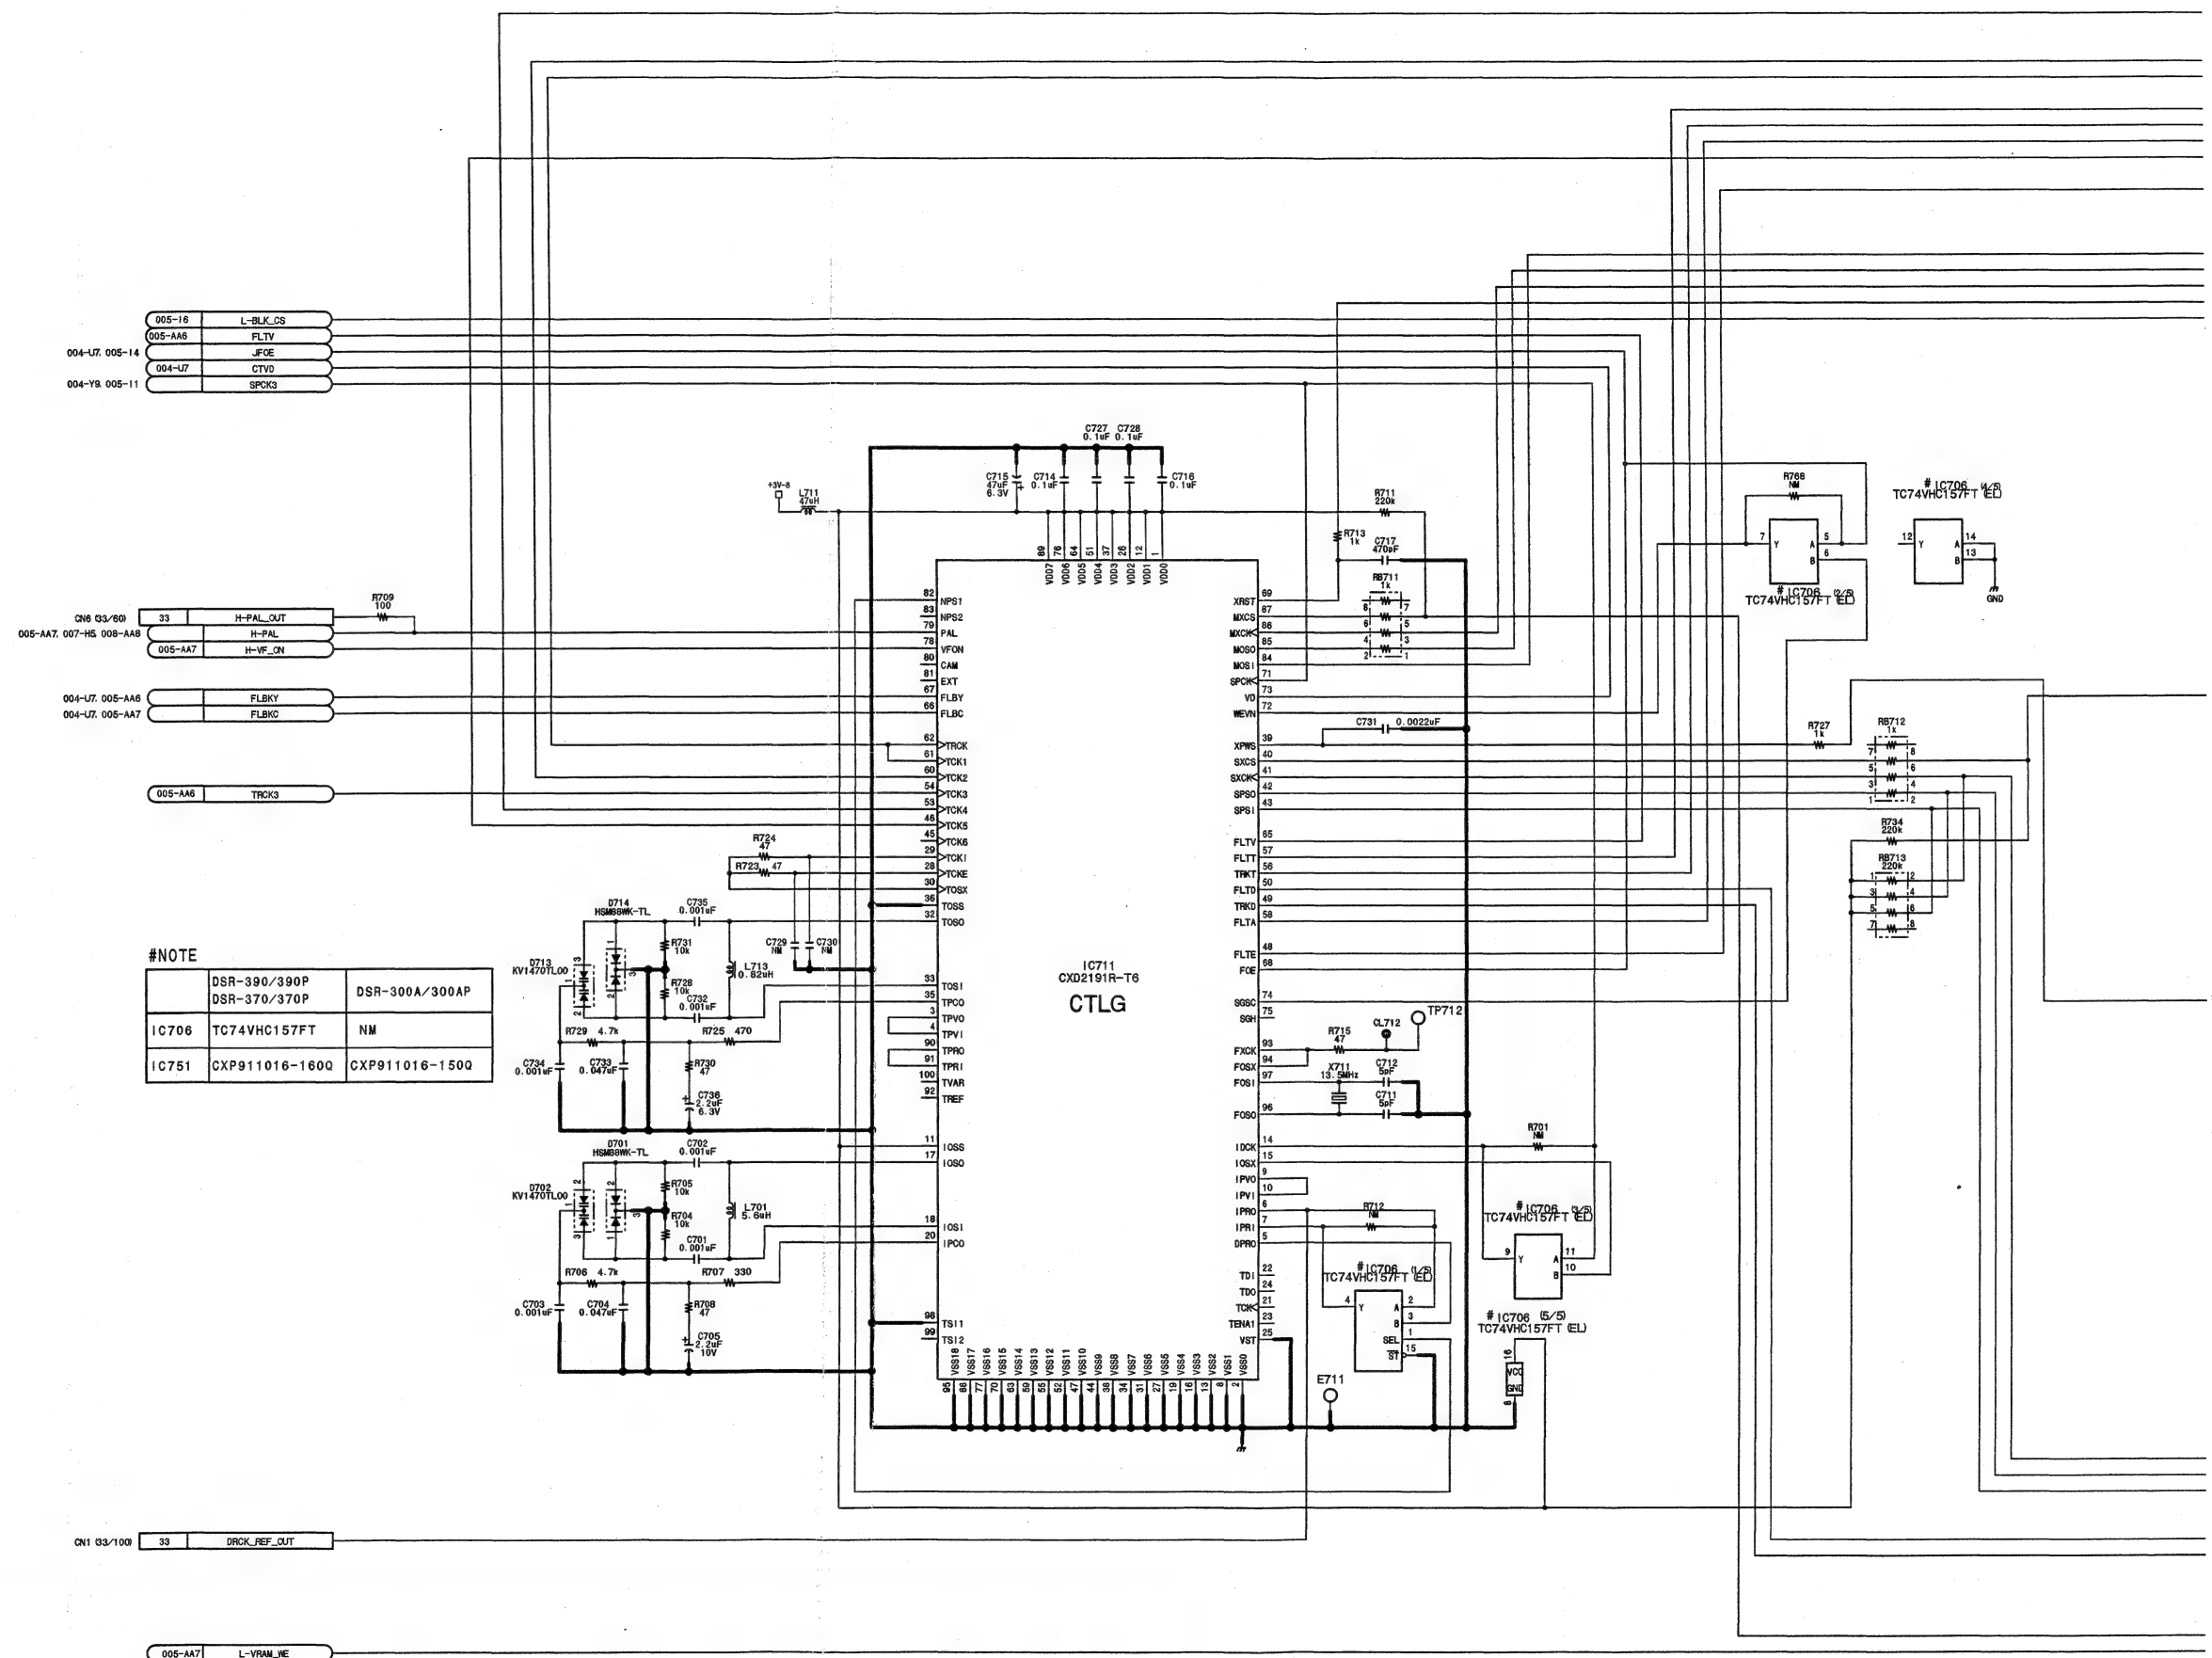


DPR-141C/141A (6/9)  
SUFFIX: -13, -14

DPR-141C/141A (6/9)  
SUFFIX: -13, -14

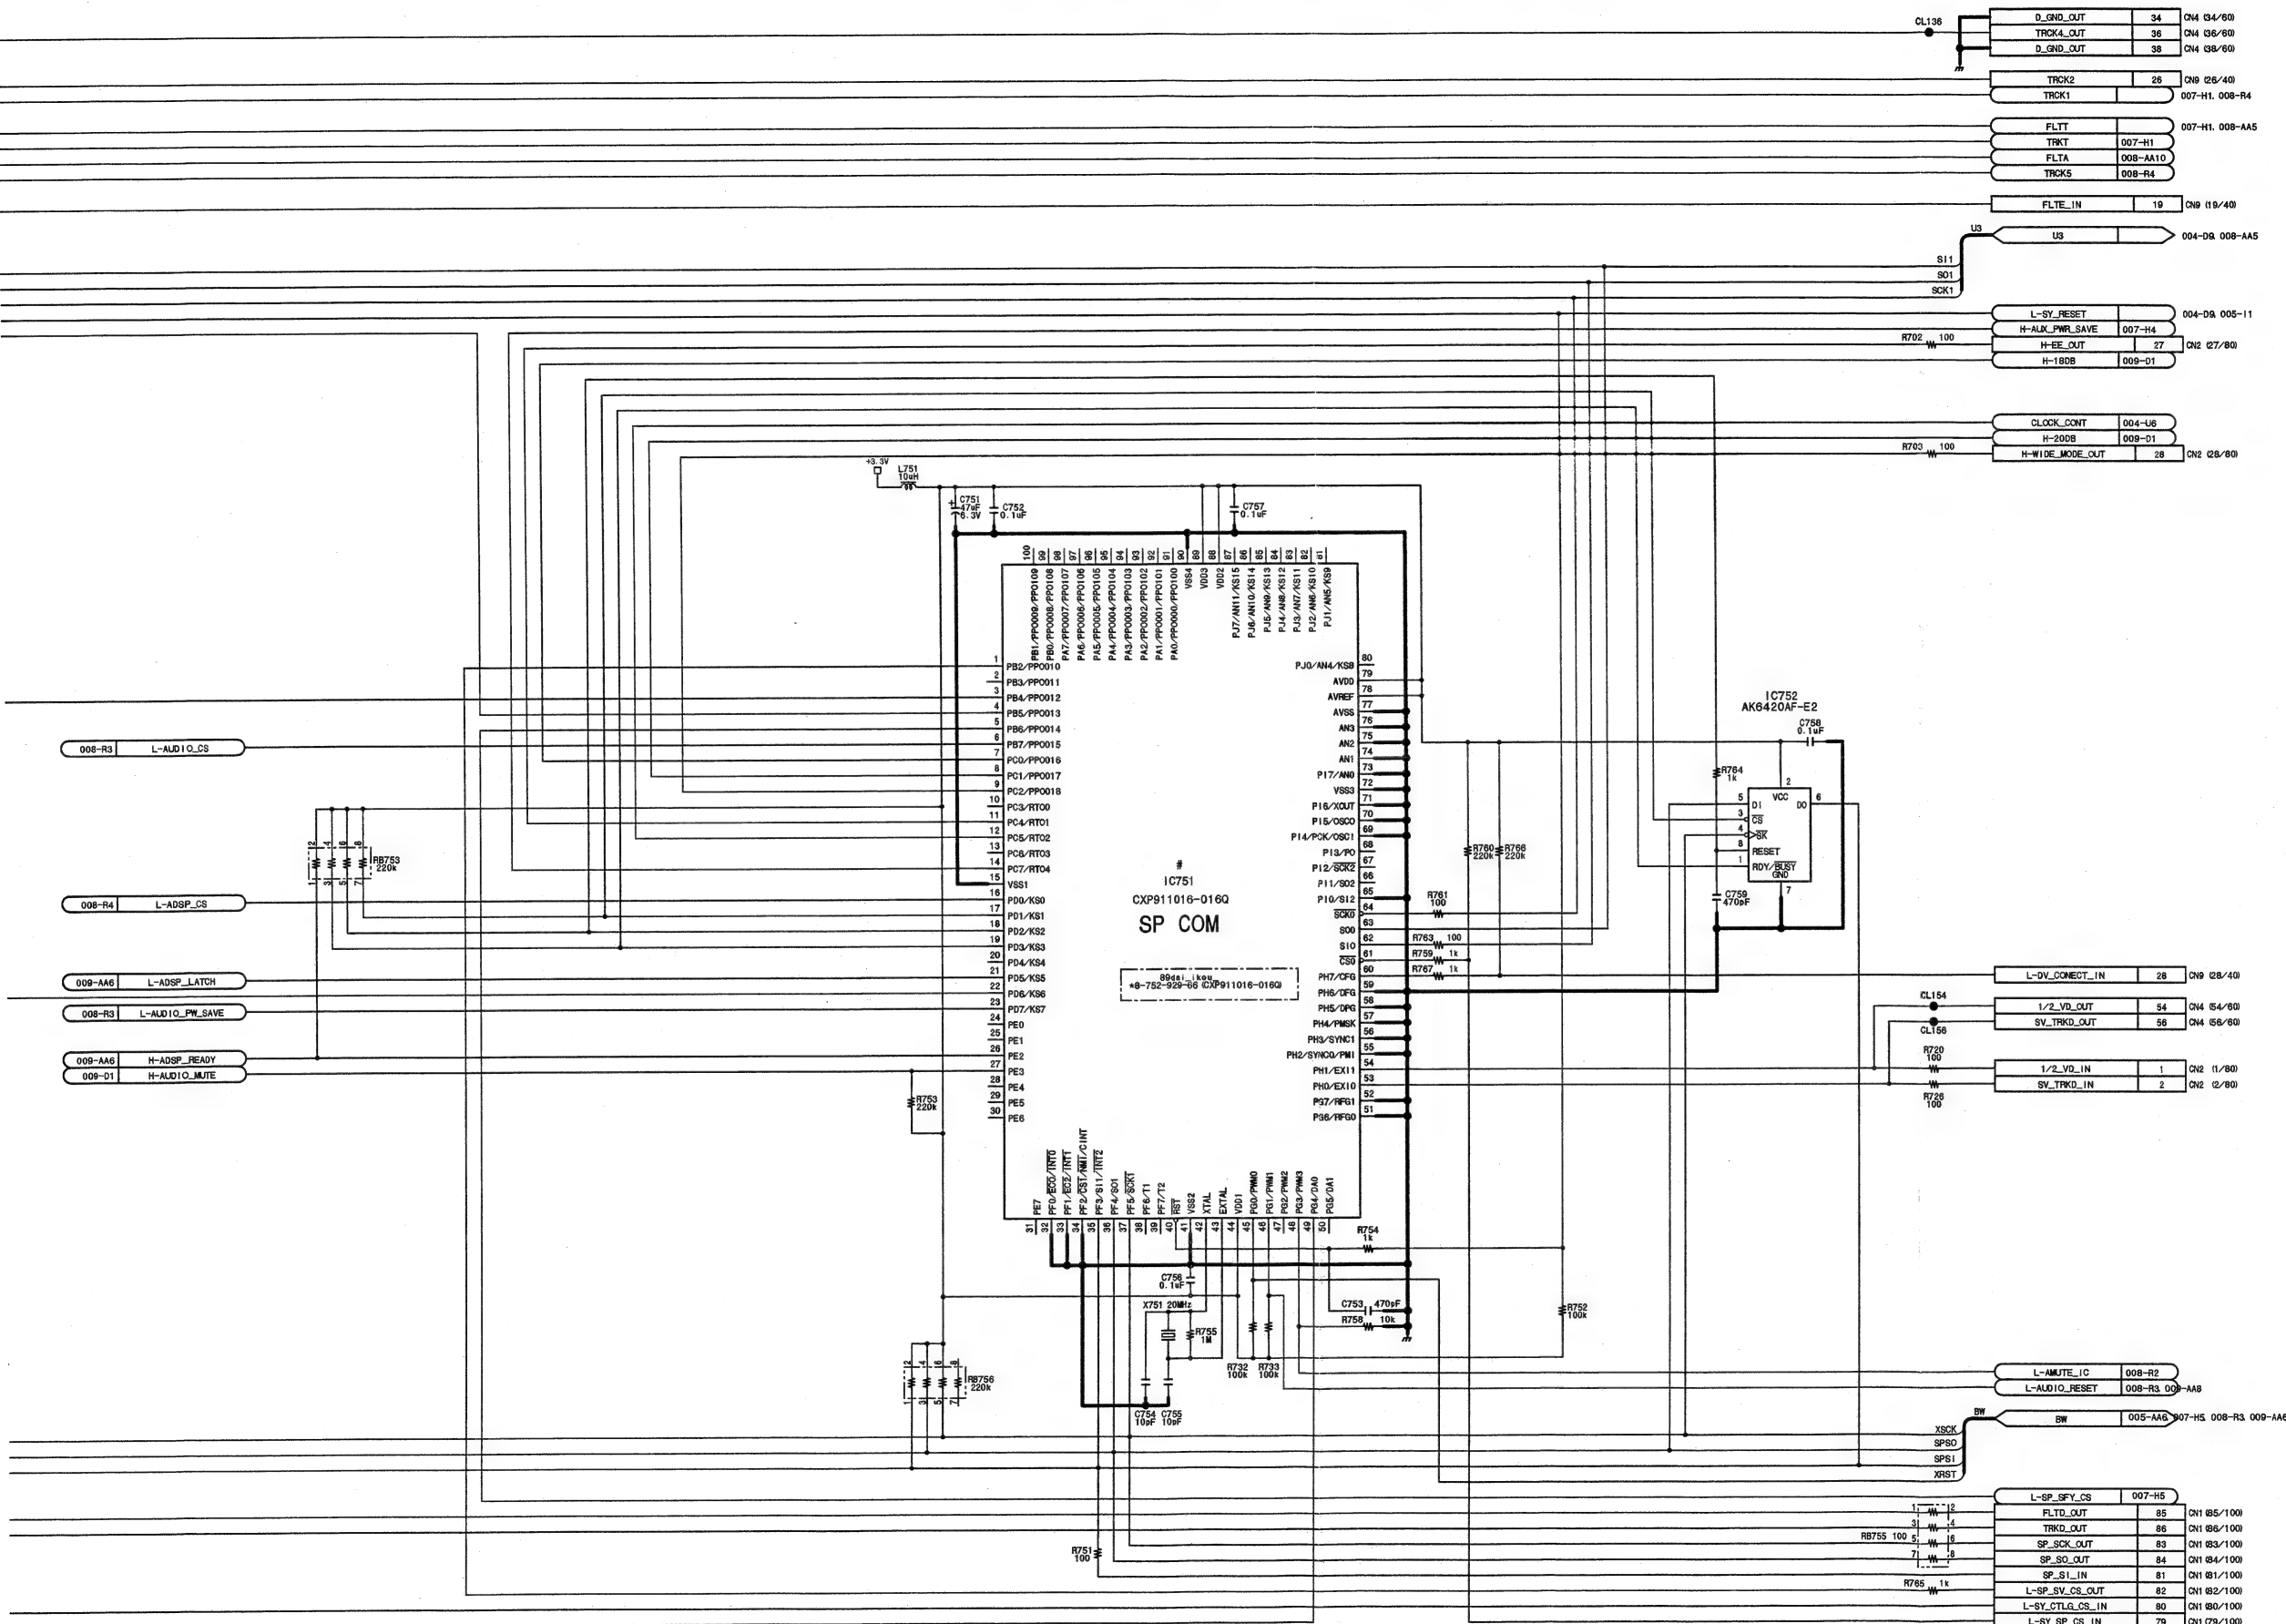

DPR-141C/141A (7/9)  
SUFFIX: -13, -14


DPR-141C/141A (7/9)  
SUFFIX: -13, -14

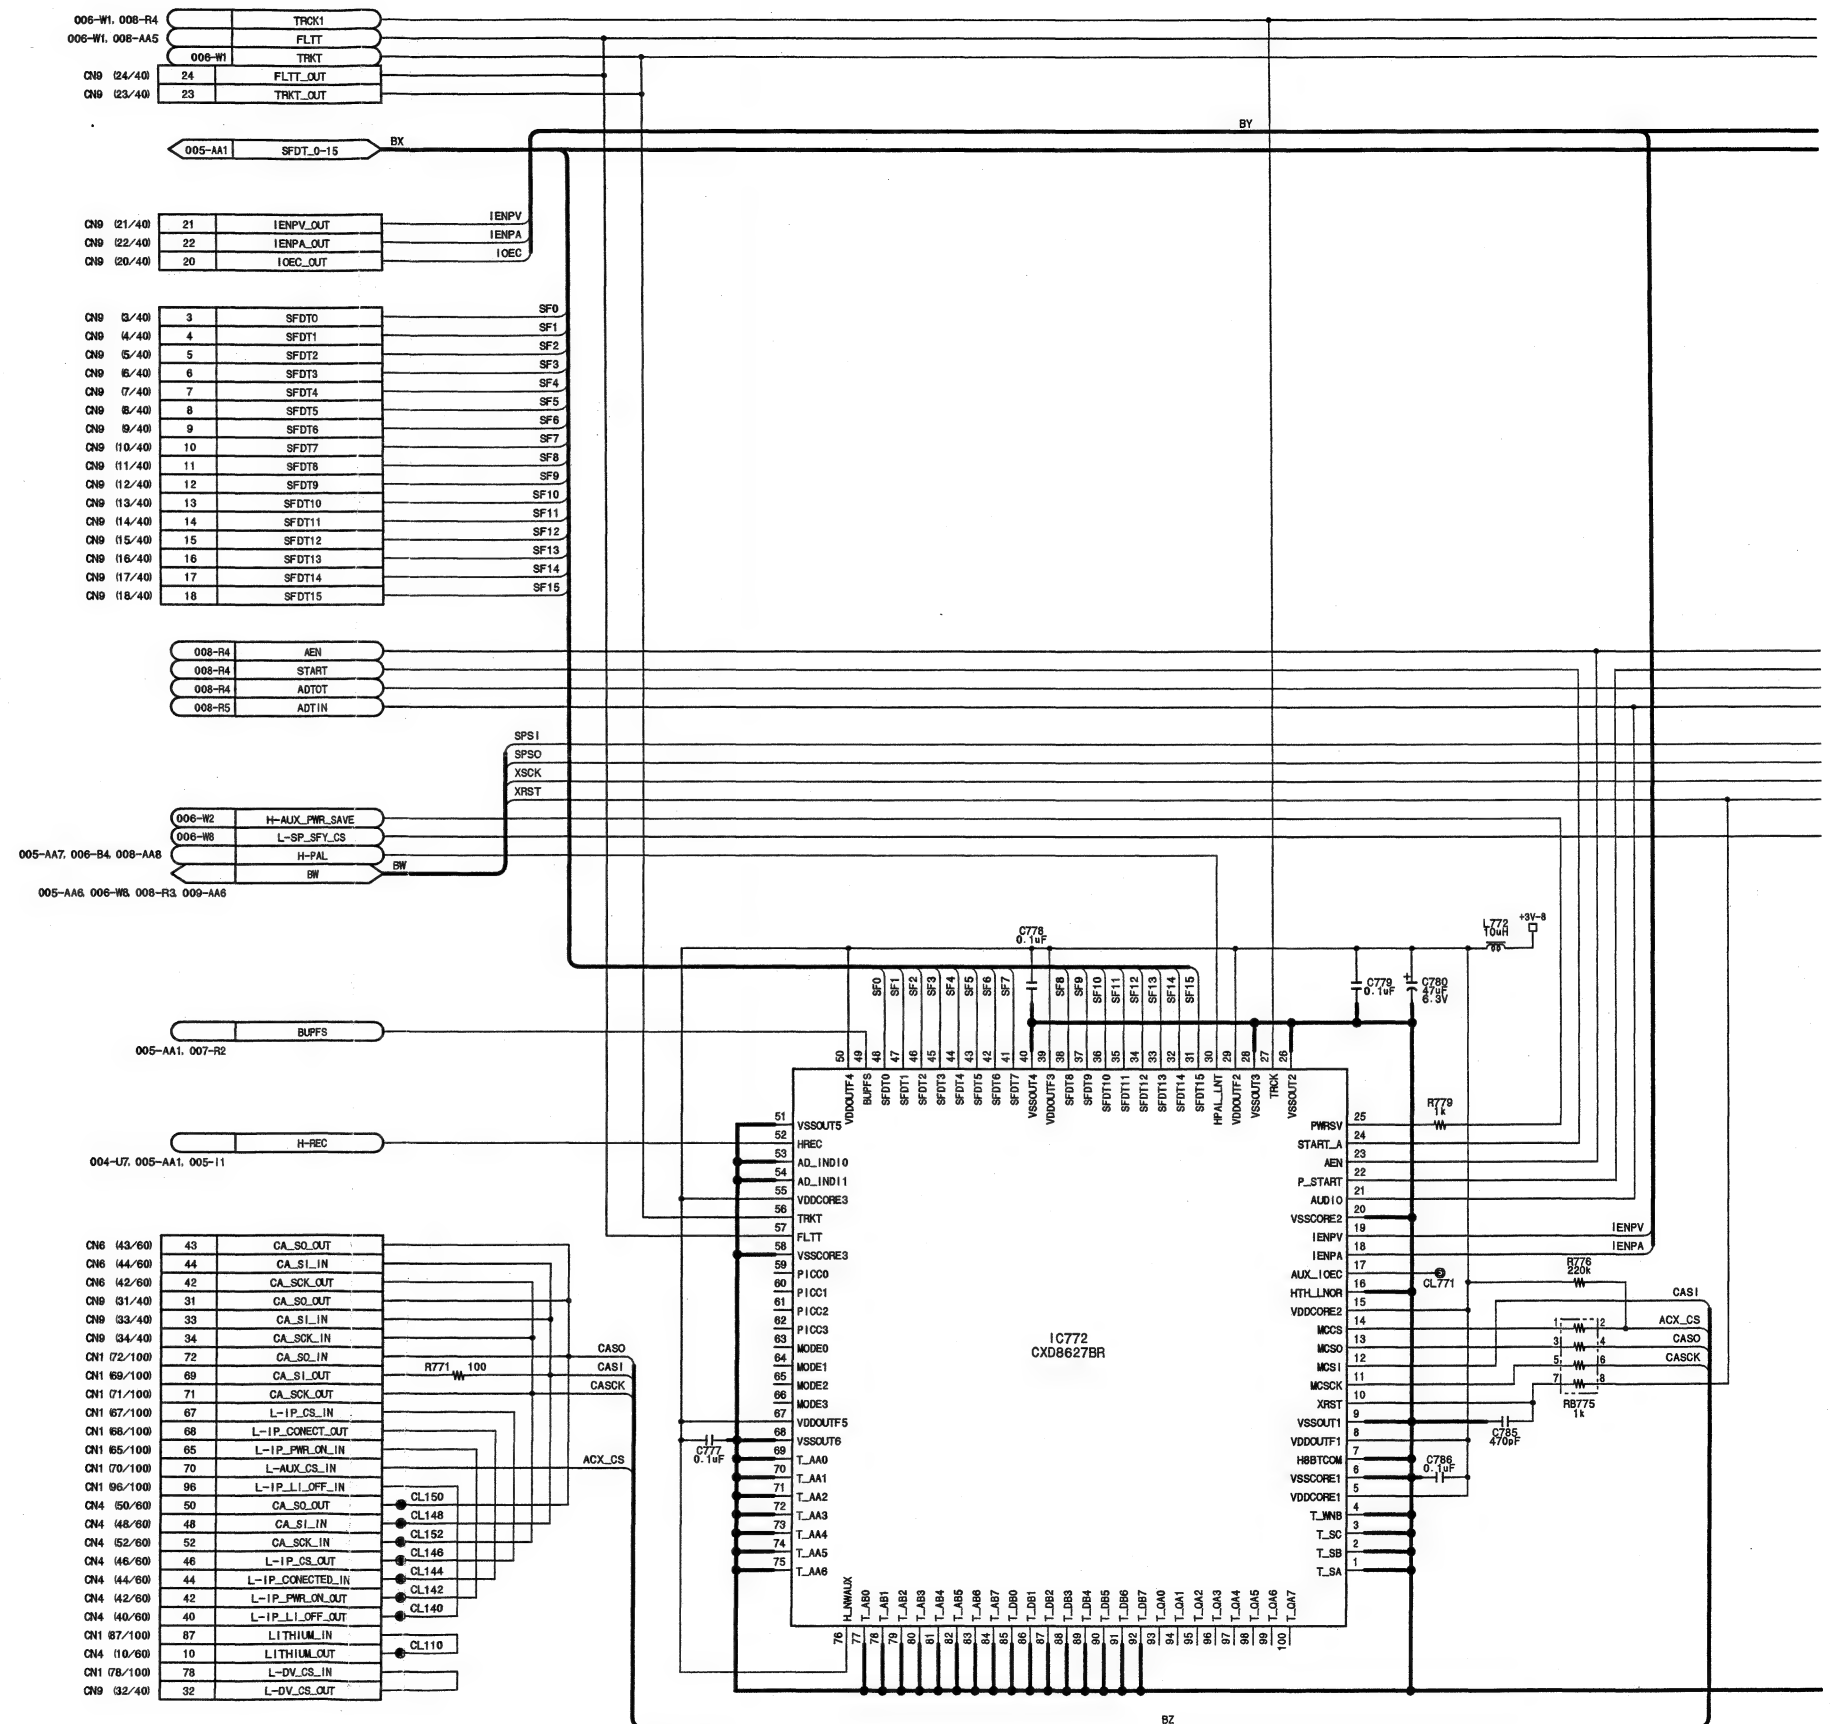

4-24 (b)


4-24 (b)

**DPR-141C/141A (7/9)**  
**SUFFIX: -13, -14**



DPR-141C/141A (8/9)  
SUFFIX: -13, -14

DPR-141C/141A (8/9)  
SUFFIX: -13, -14

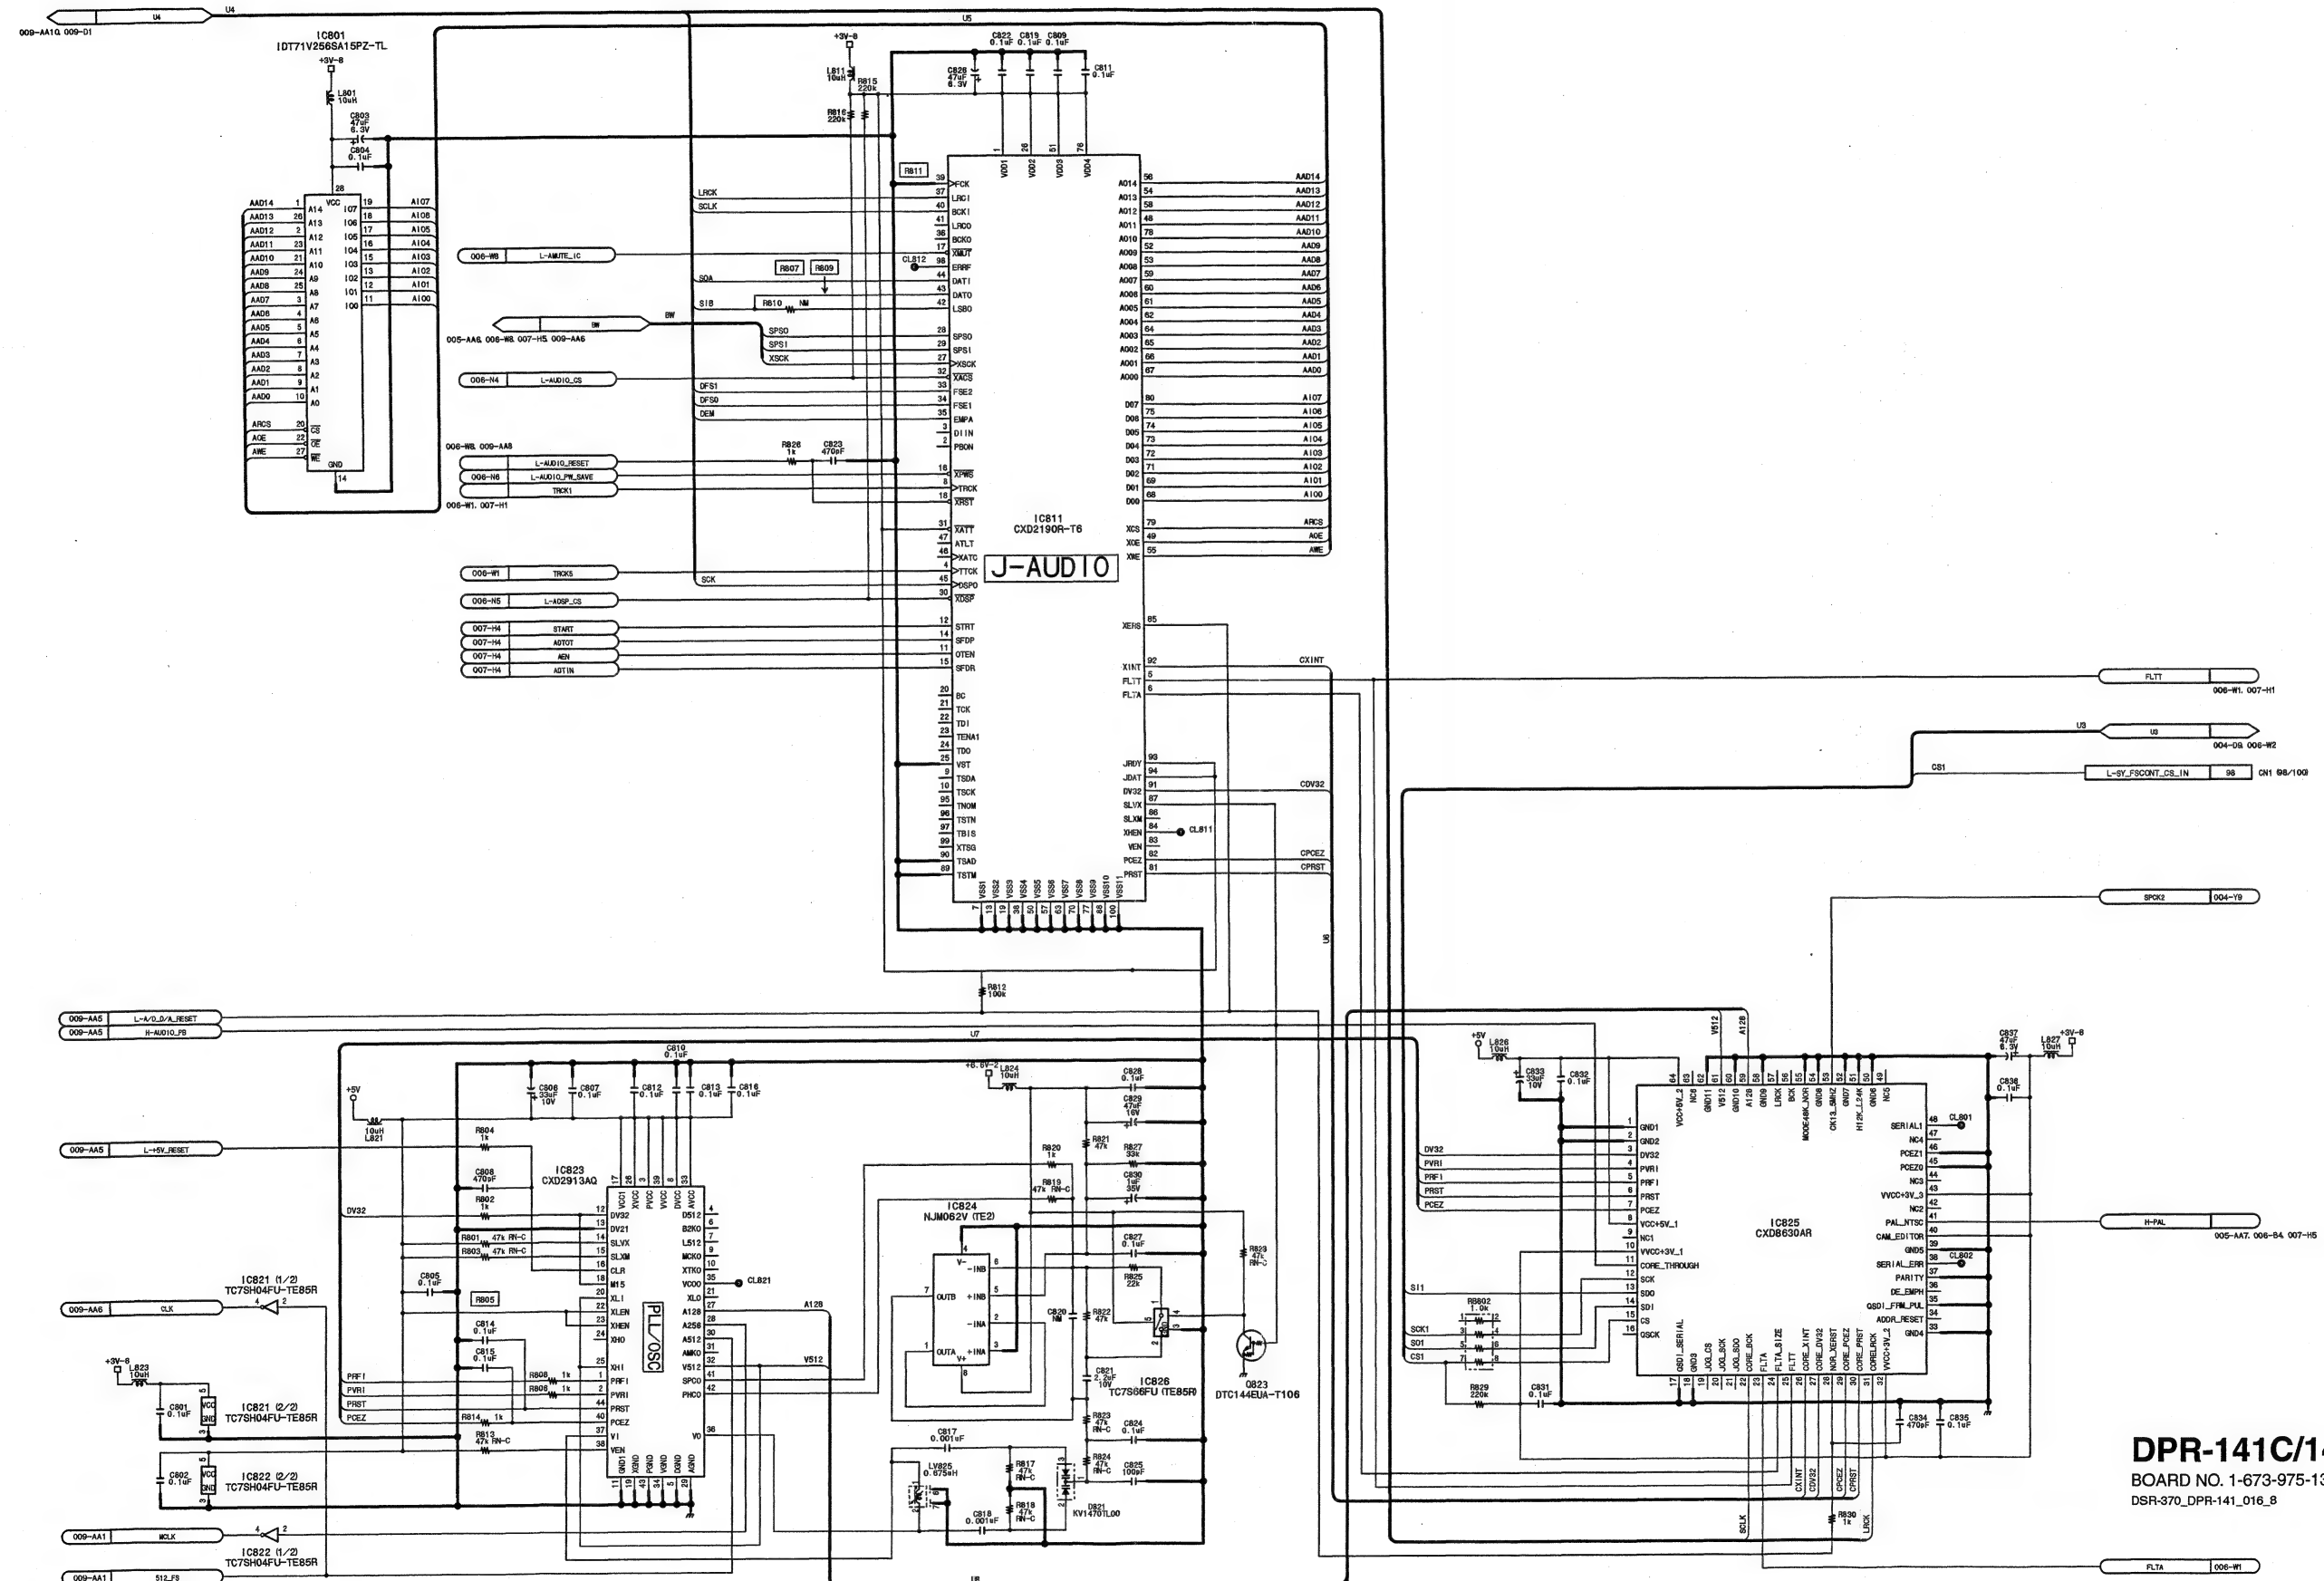


DPR-141C/141A (8/9)  
BOARD NO. 1-673-975-13, 14  
DSR-370\_DPR-141\_016\_8

**DPR-141C/141A (9/9)**  
**SUFFIX: -13, -14**




DPR-141C/141A (9/9)  
SUFFIX: -13, -14

DPR-141C/141A (9/9)  
SUFFIX: -13, -14

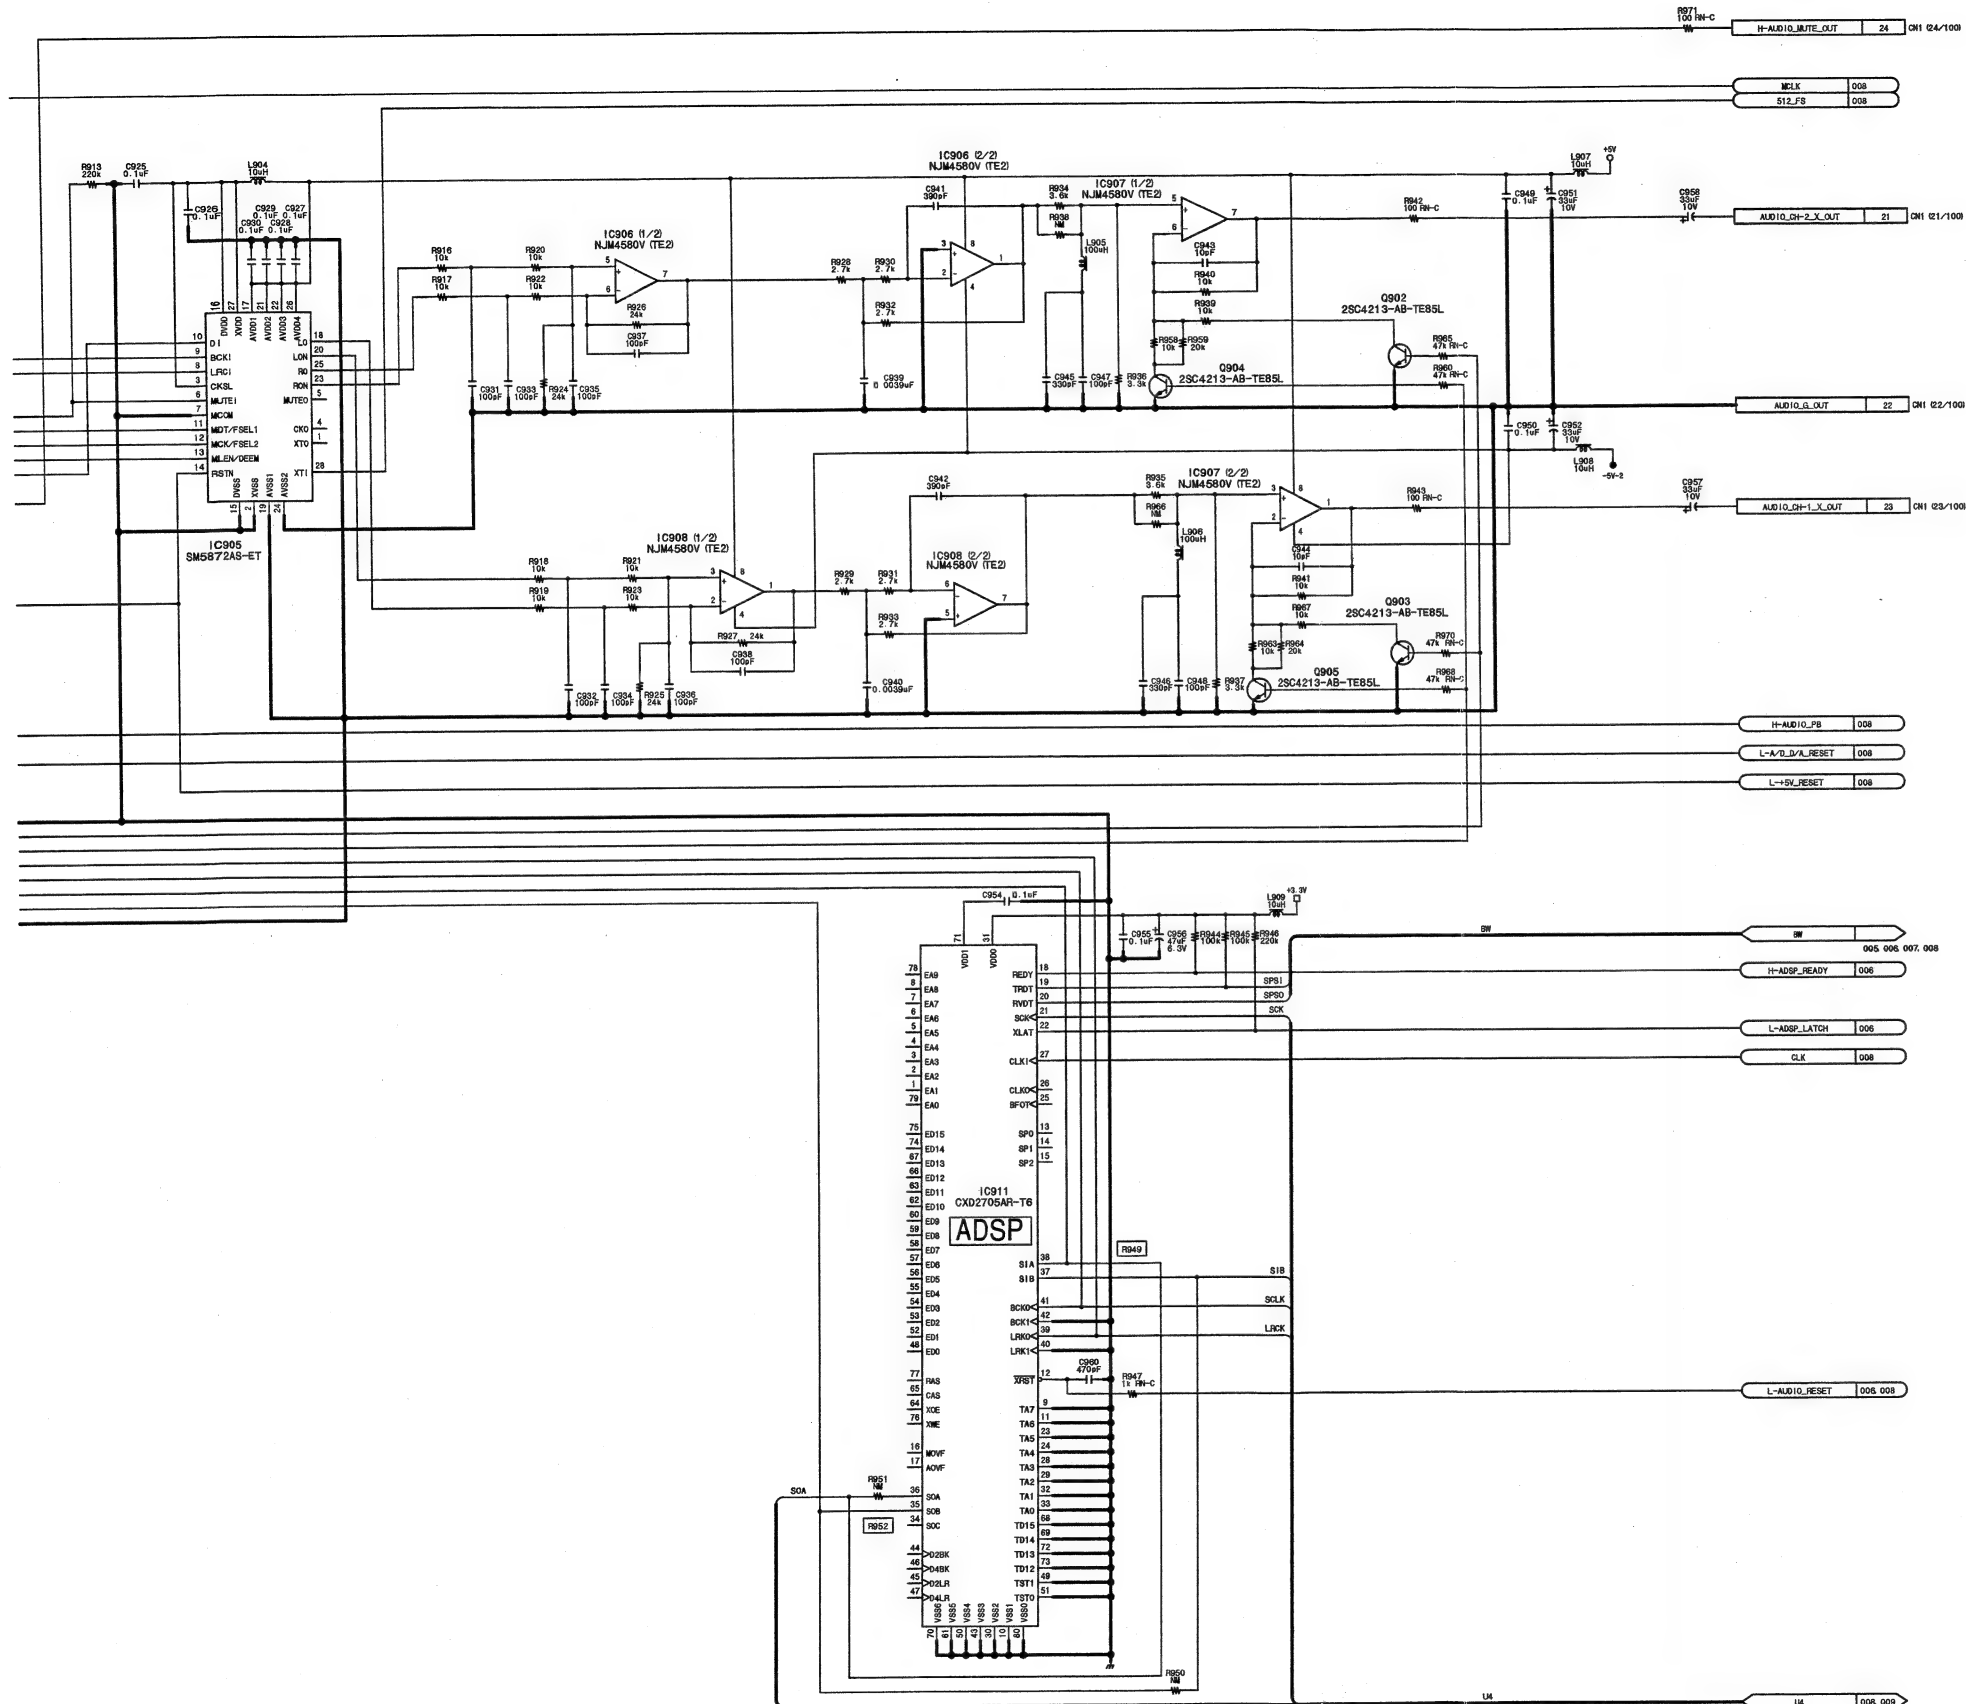


DPR-141C/141A (9/9)  
BOARD NO. 1-673-975-13, 14  
DSR-370\_DPR-141\_016\_9

**DPR-141A (1/9)**  
**SUFFIX: -11**

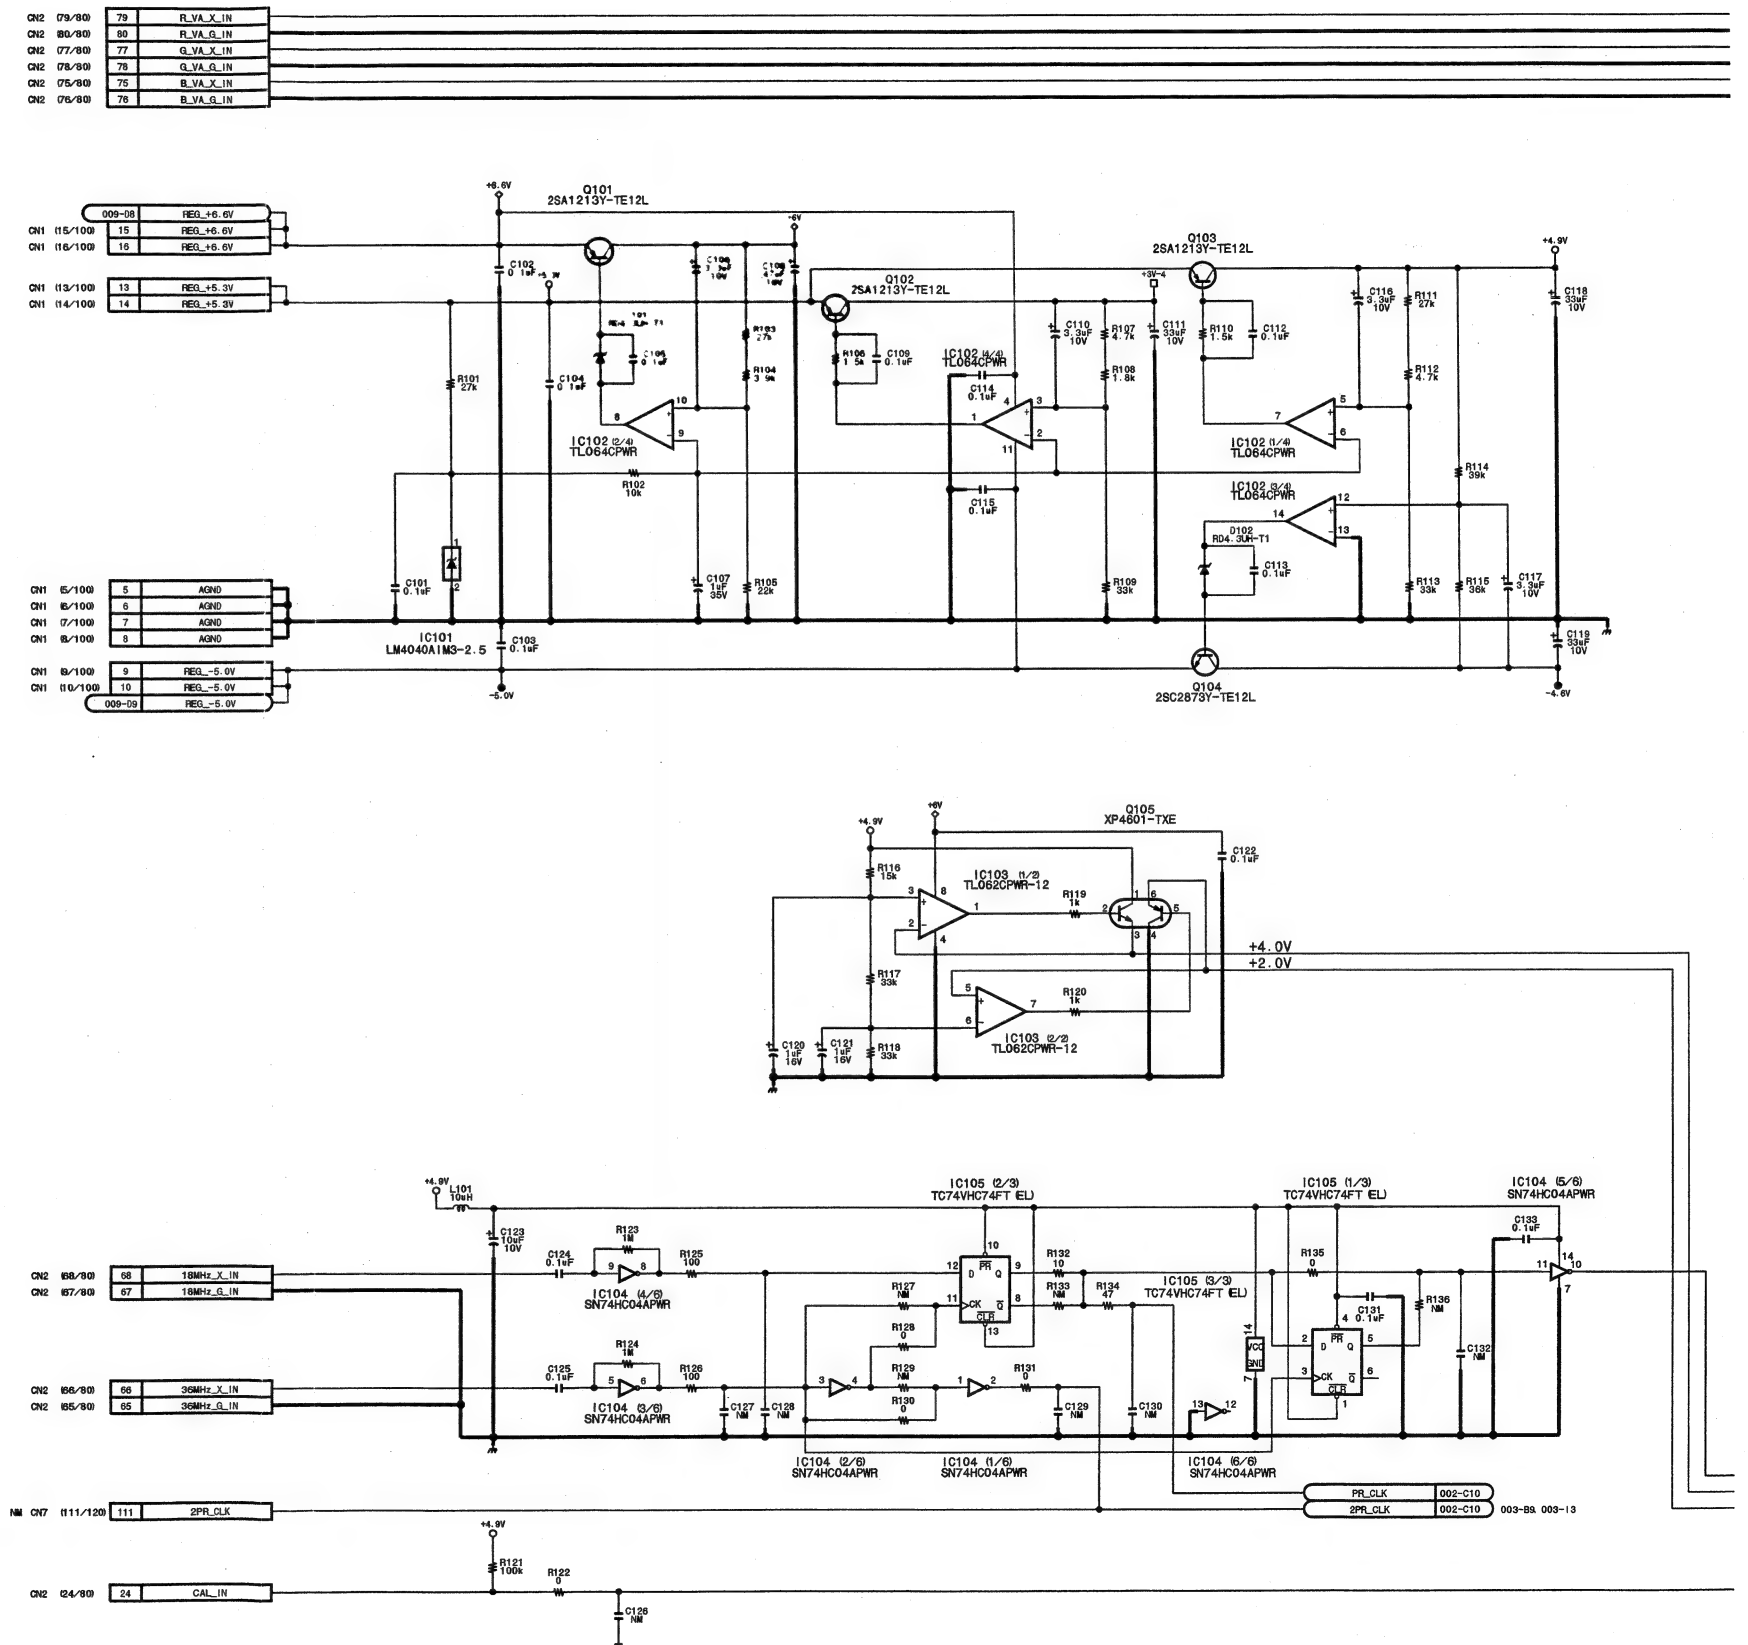


4-12 (a)


**DPR-141A (1/9)**  
**SUFFIX: -11**

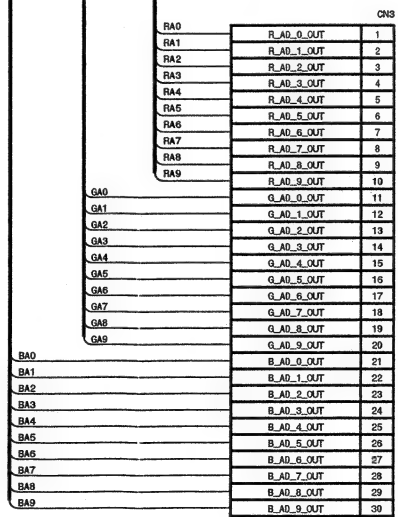


**P**

**DPR-141A (2/9)**  
**SUFFIX: -11**




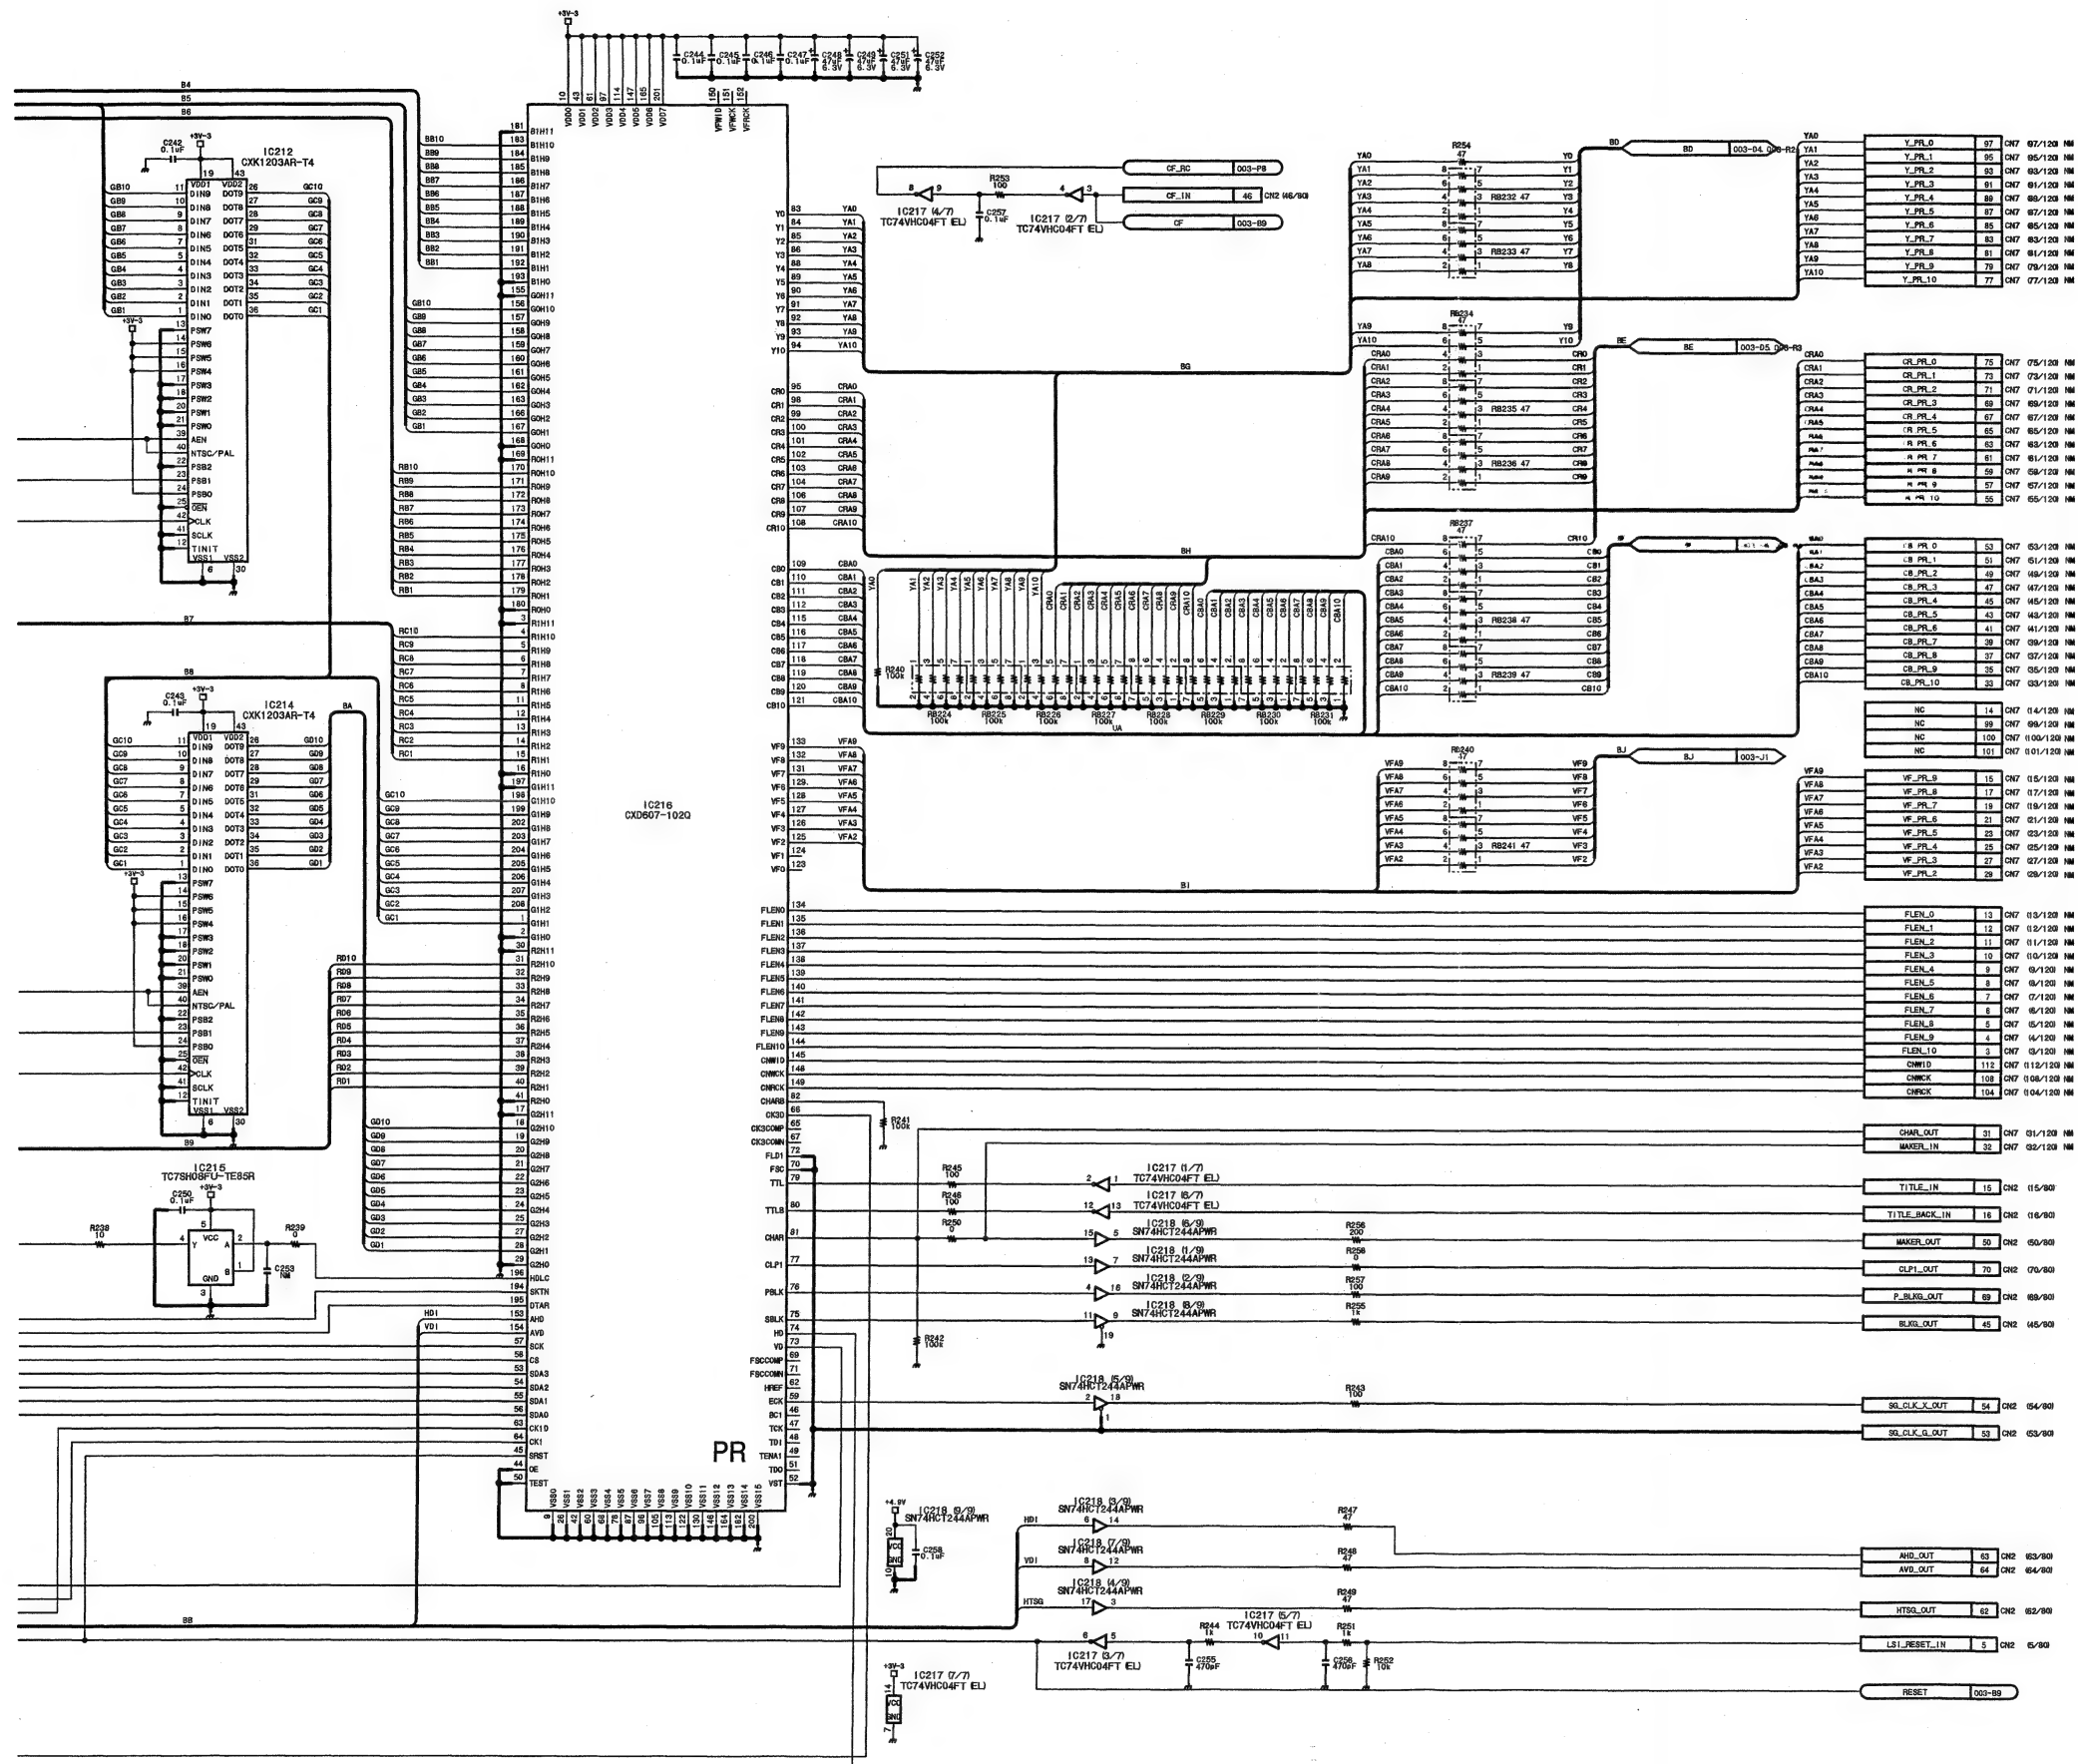


1  
2  
3  
4  
5

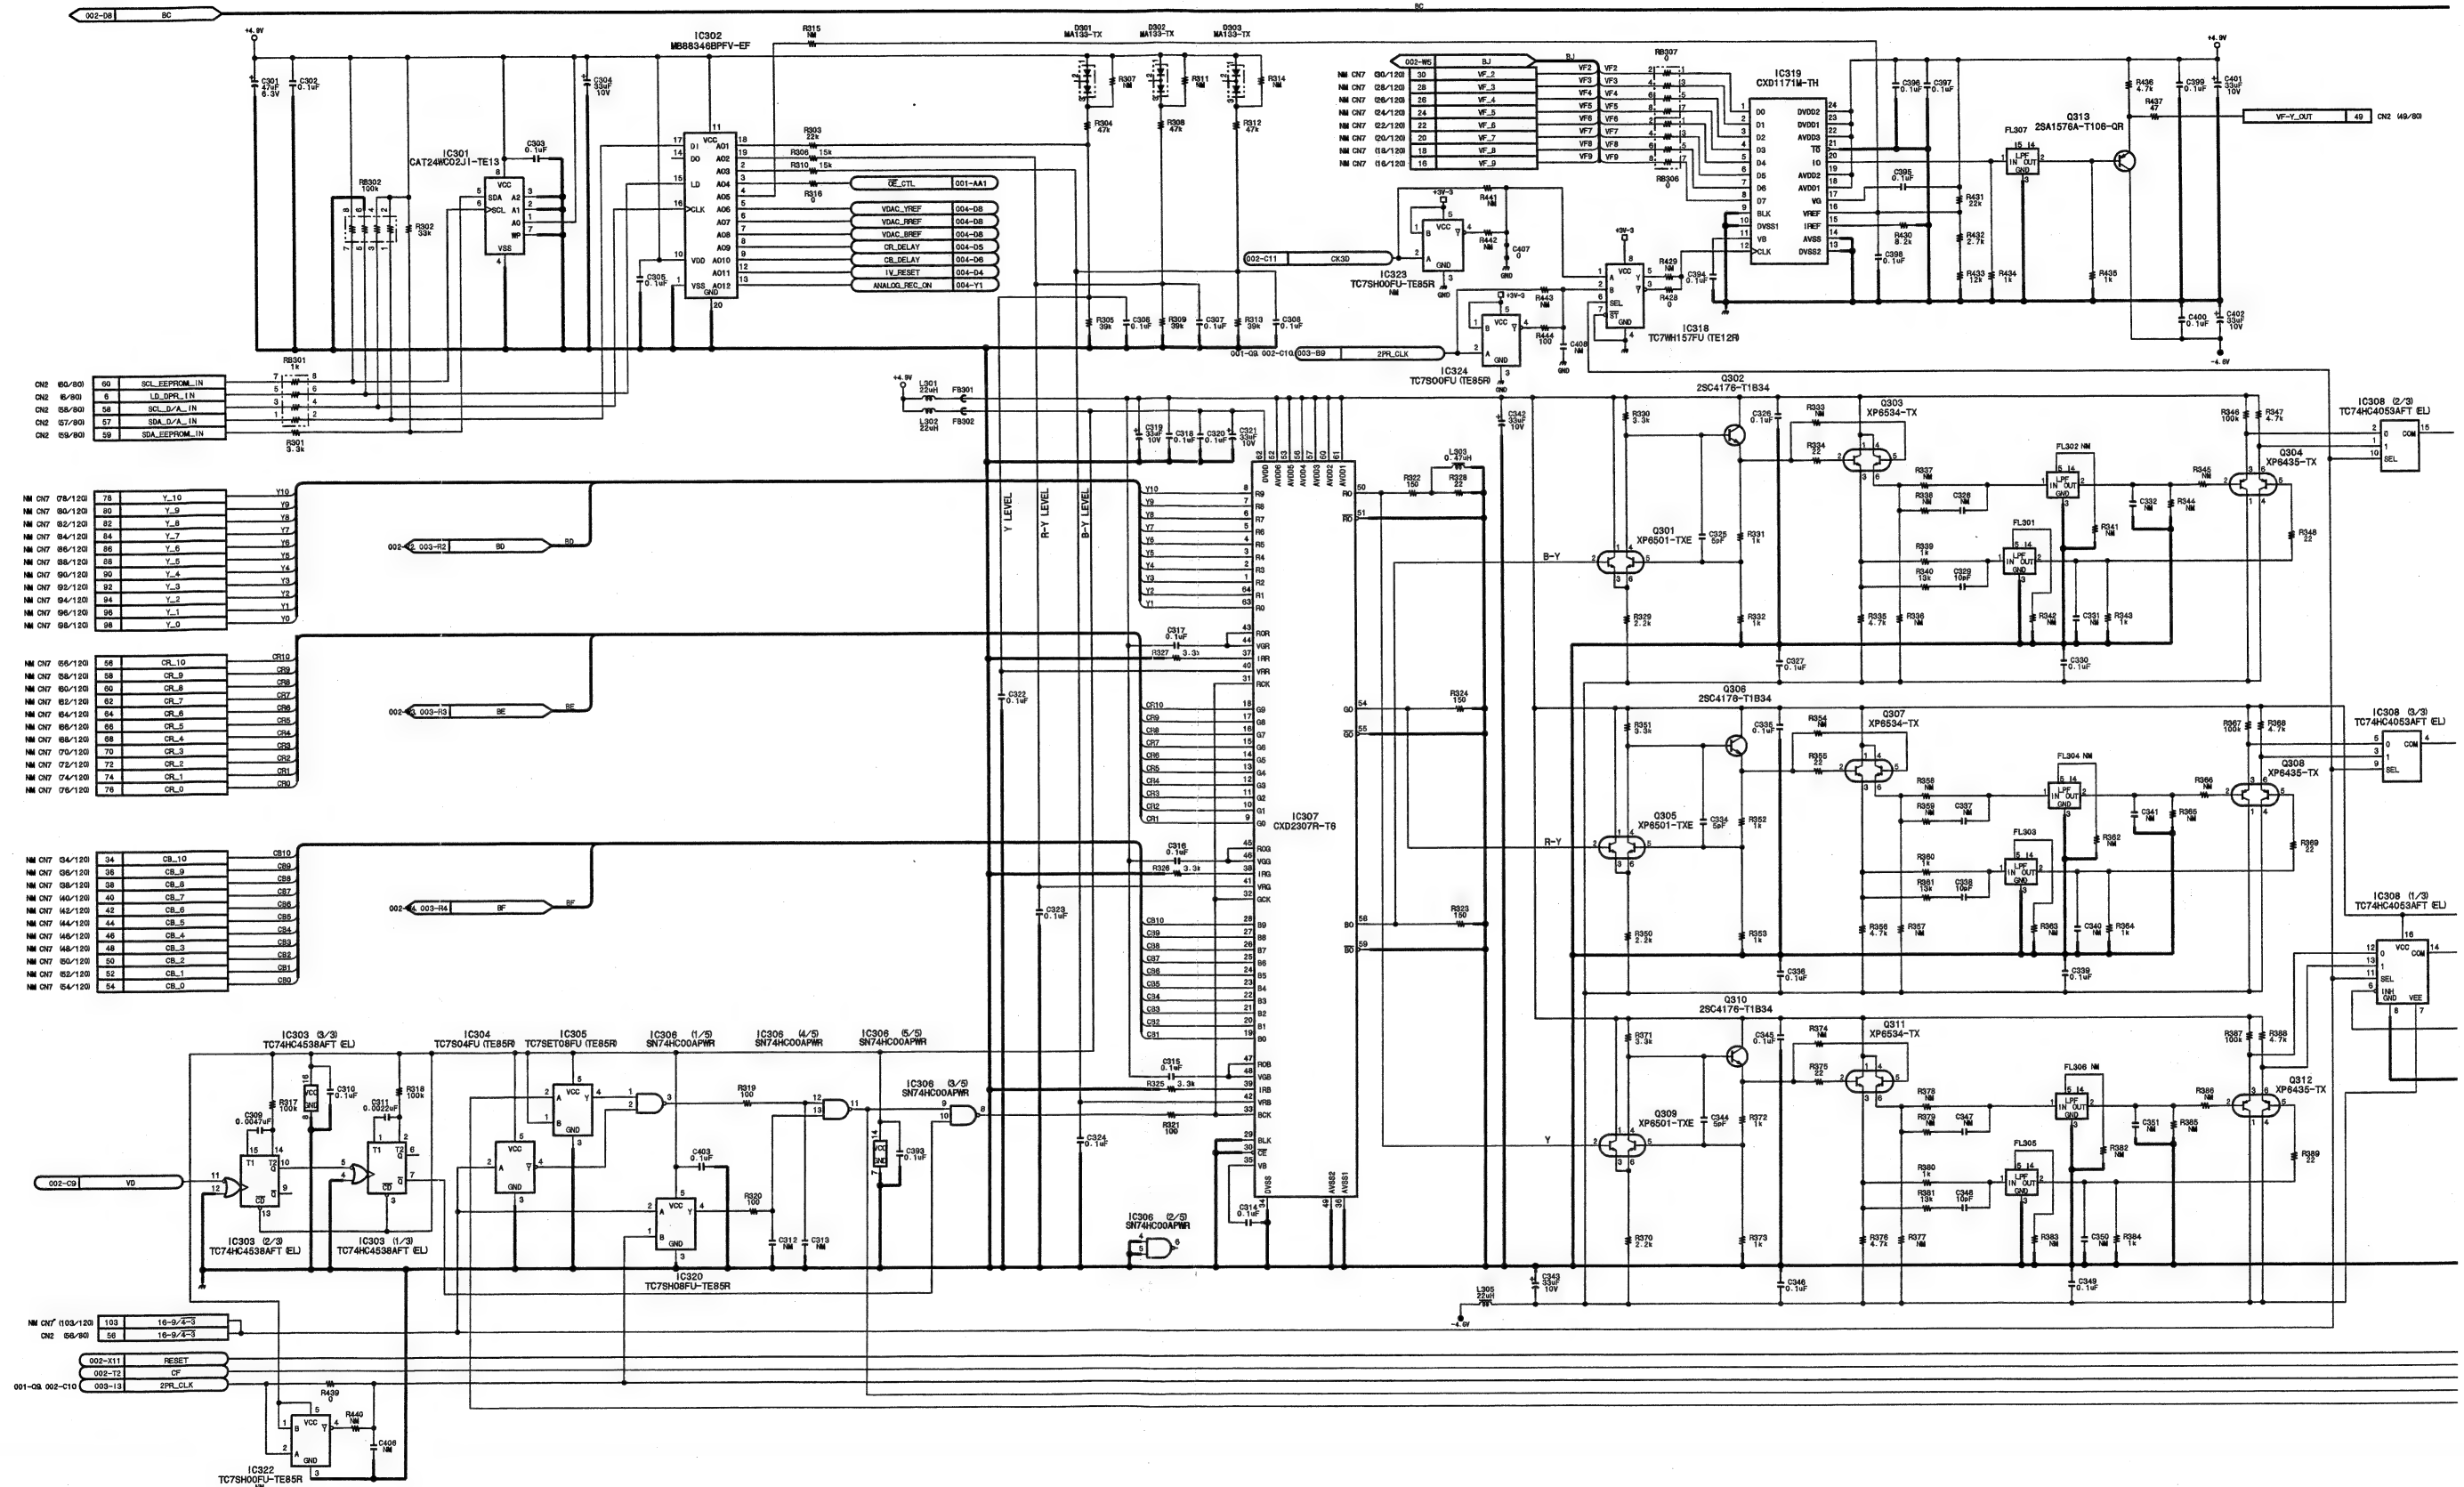



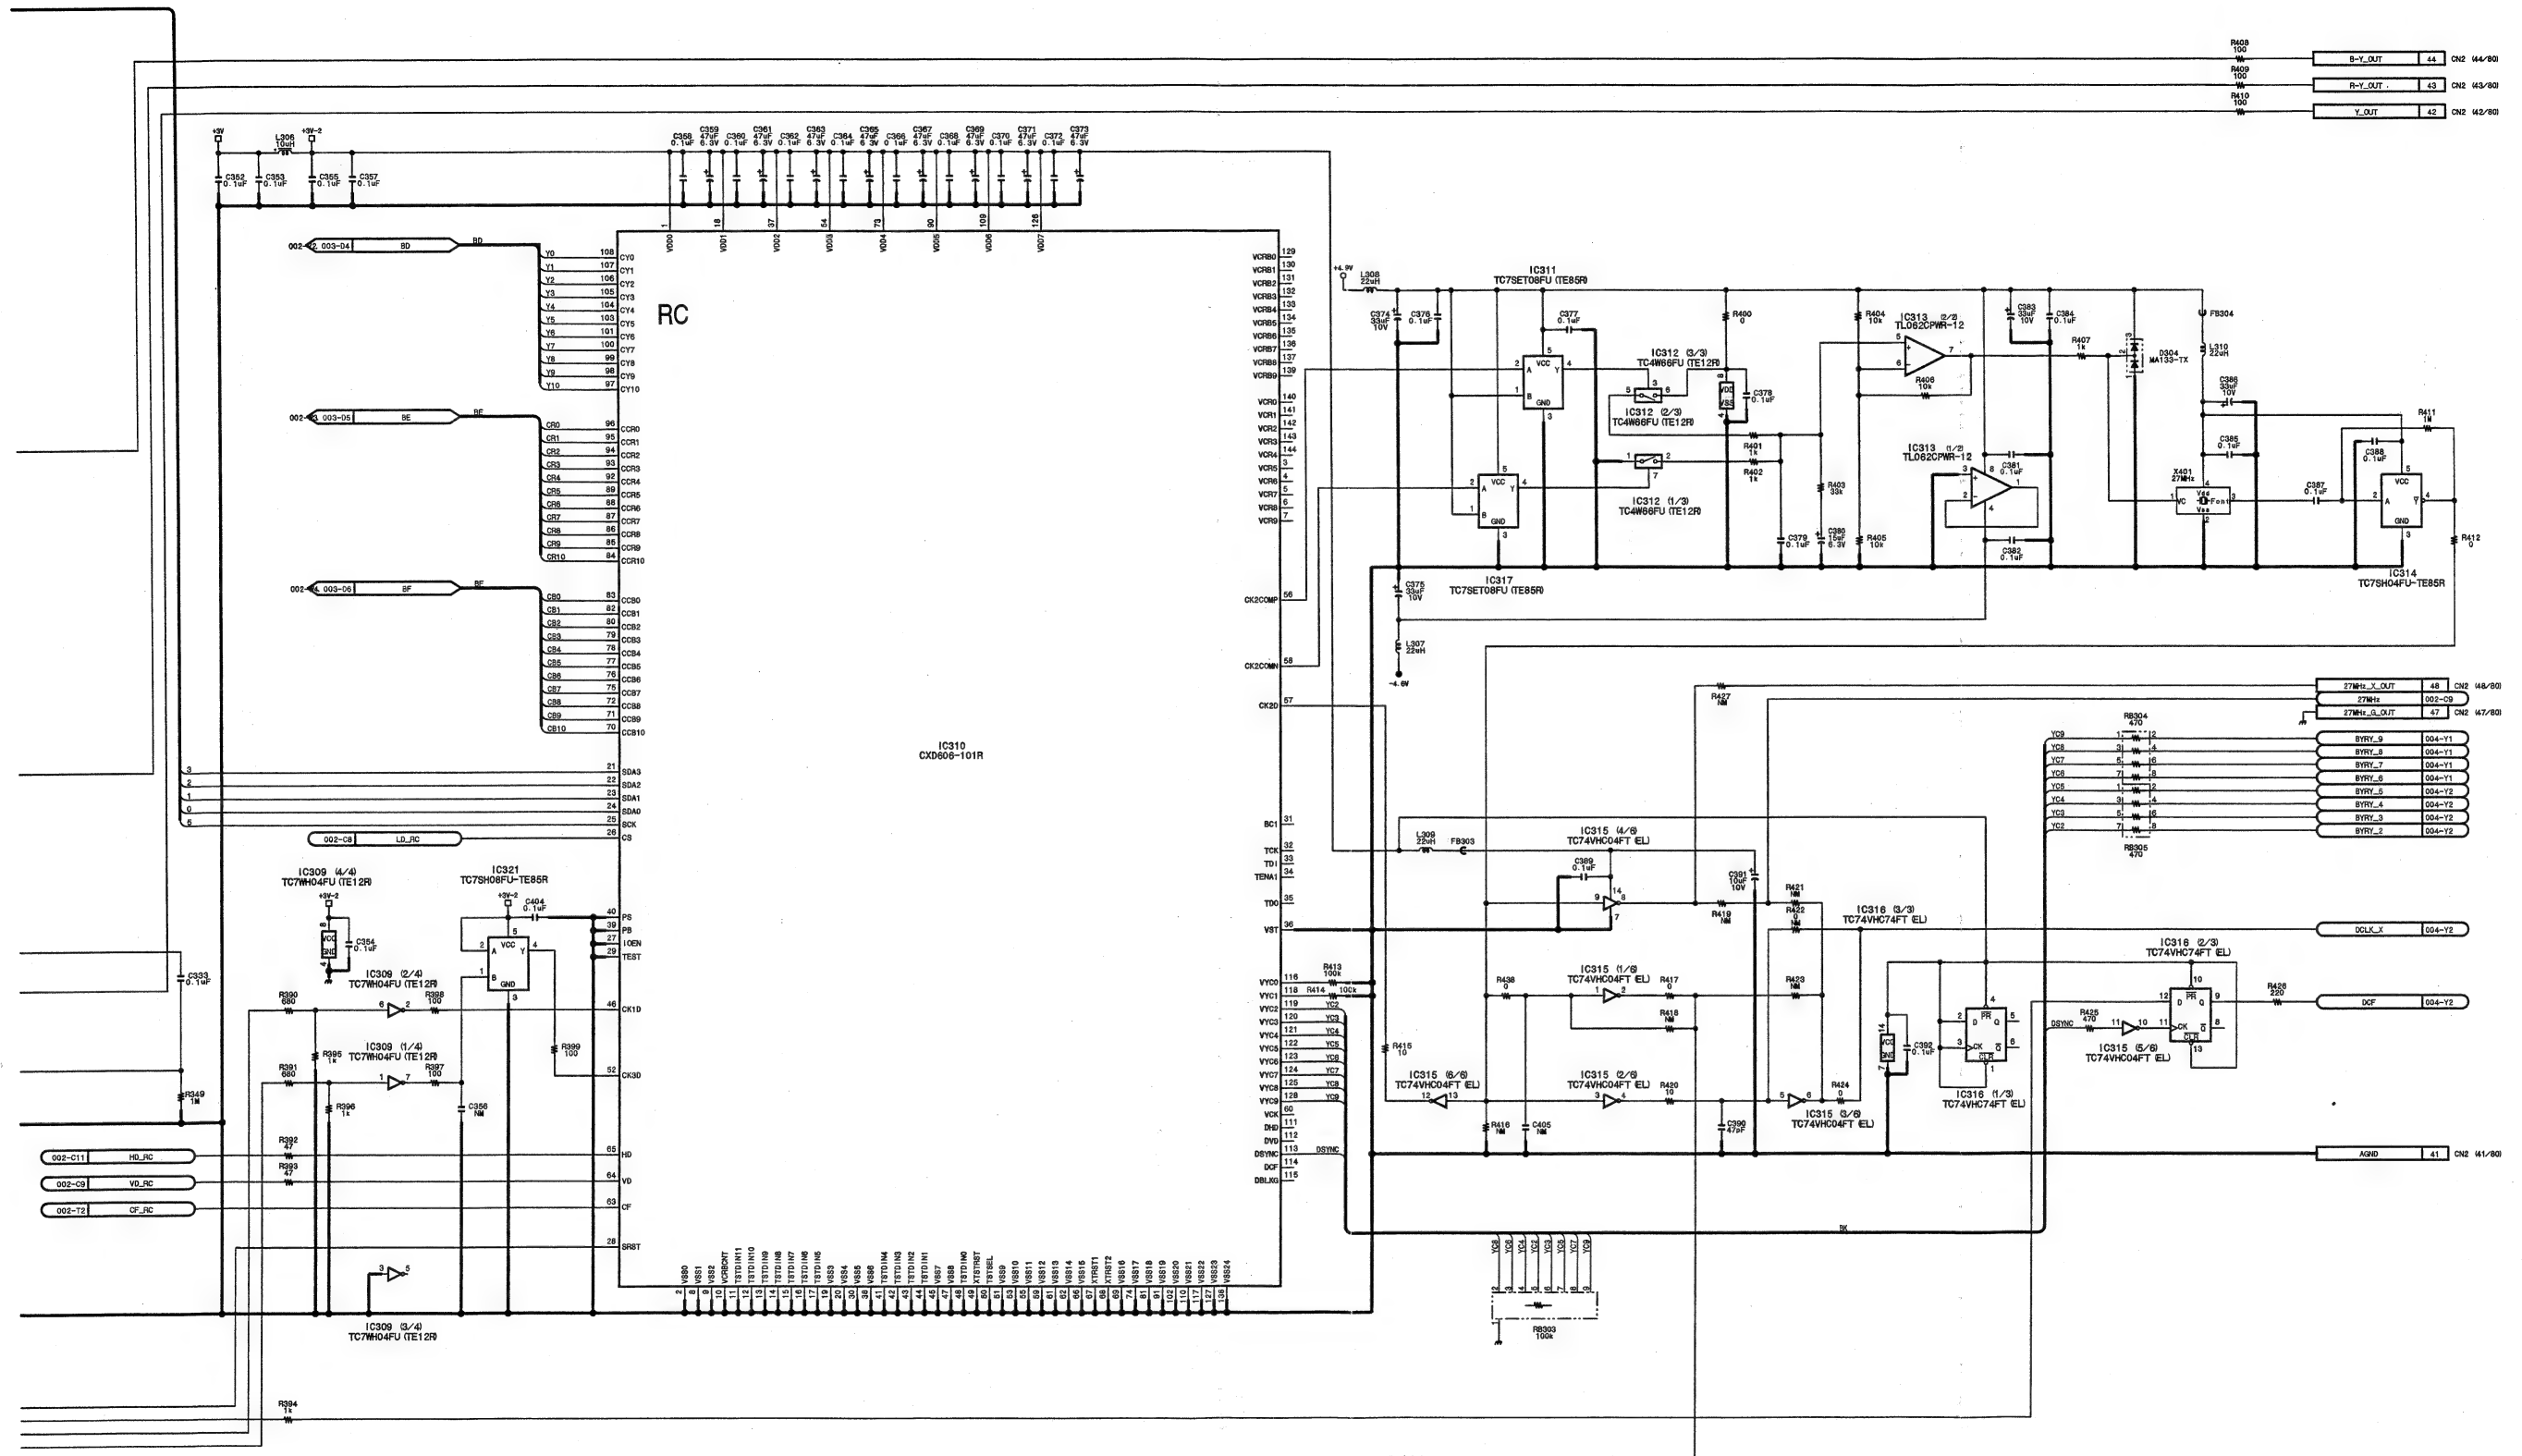



**DPR-141A (4/9)**  
**SUFFIX: -11**



## H

**DPR-141A (4/9)**  
**SUFFIX: -11**



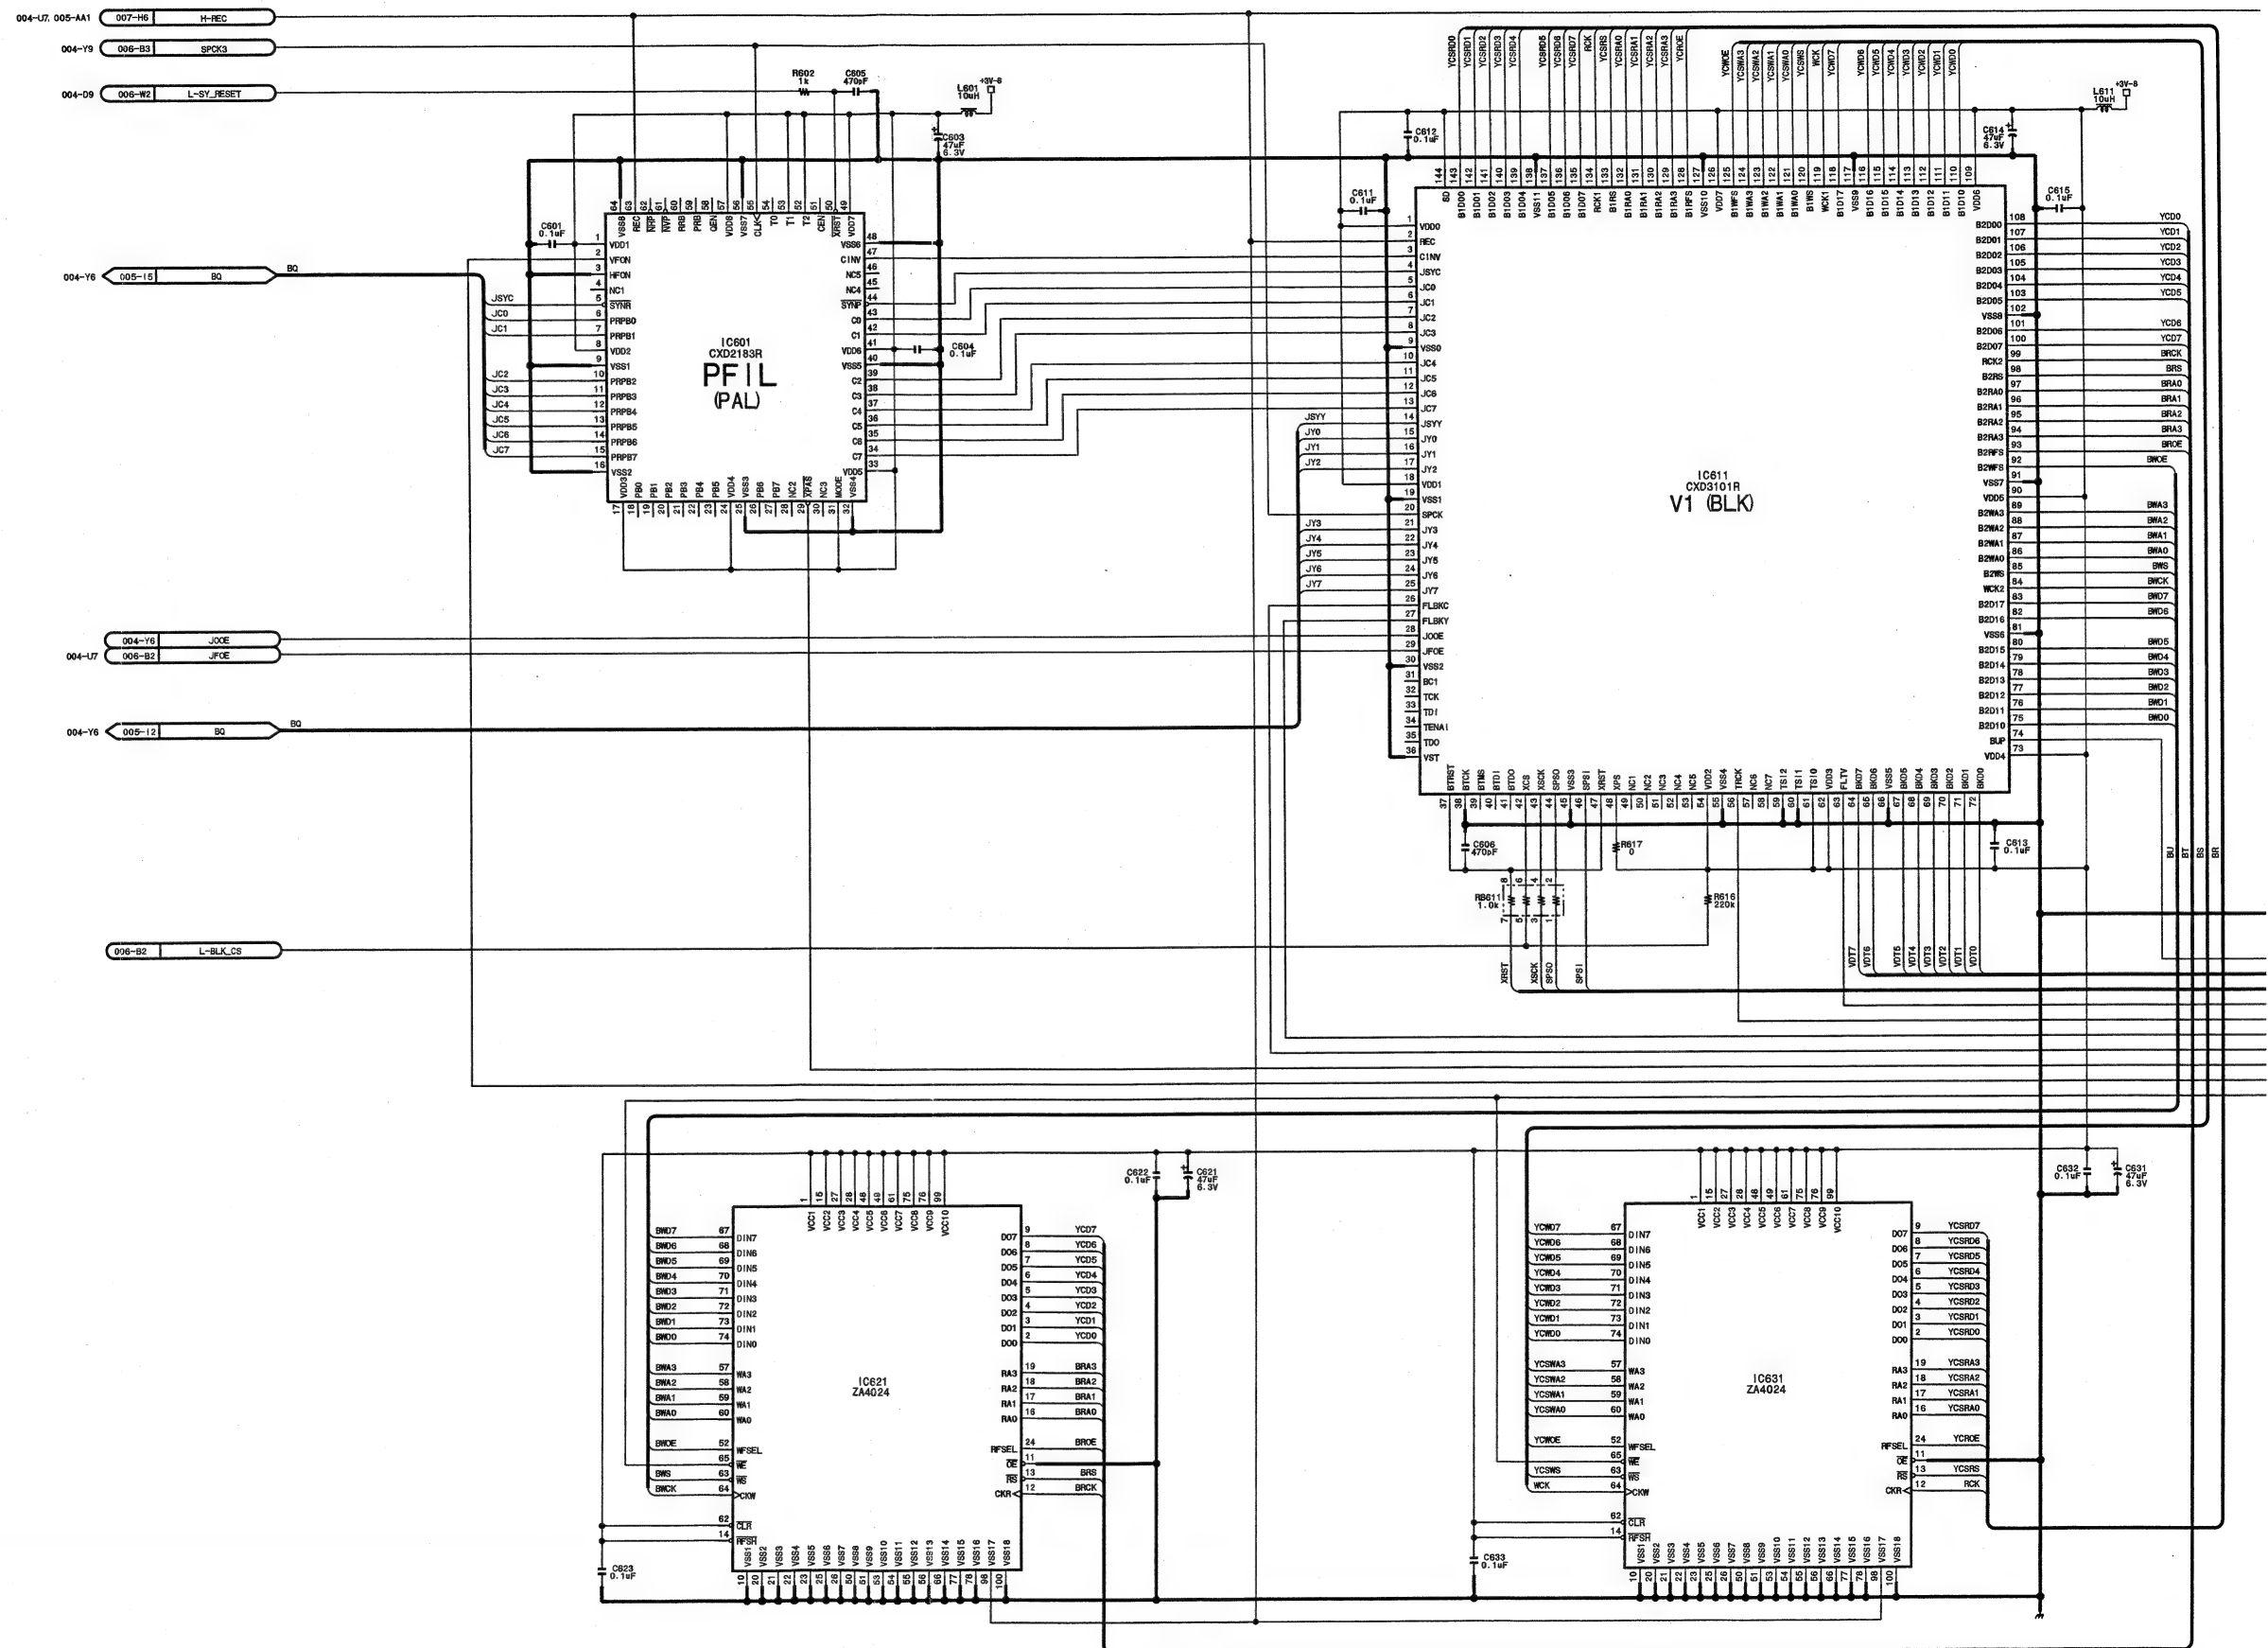

4-20 (a)

4-20 (a)


**DPR-141A (5/9)**  
**SUFFIX: -11**



5

DPR-141A (6/9)  
SUFFIX: -11

DPR-141A (6/9)  
SUFFIX: -11

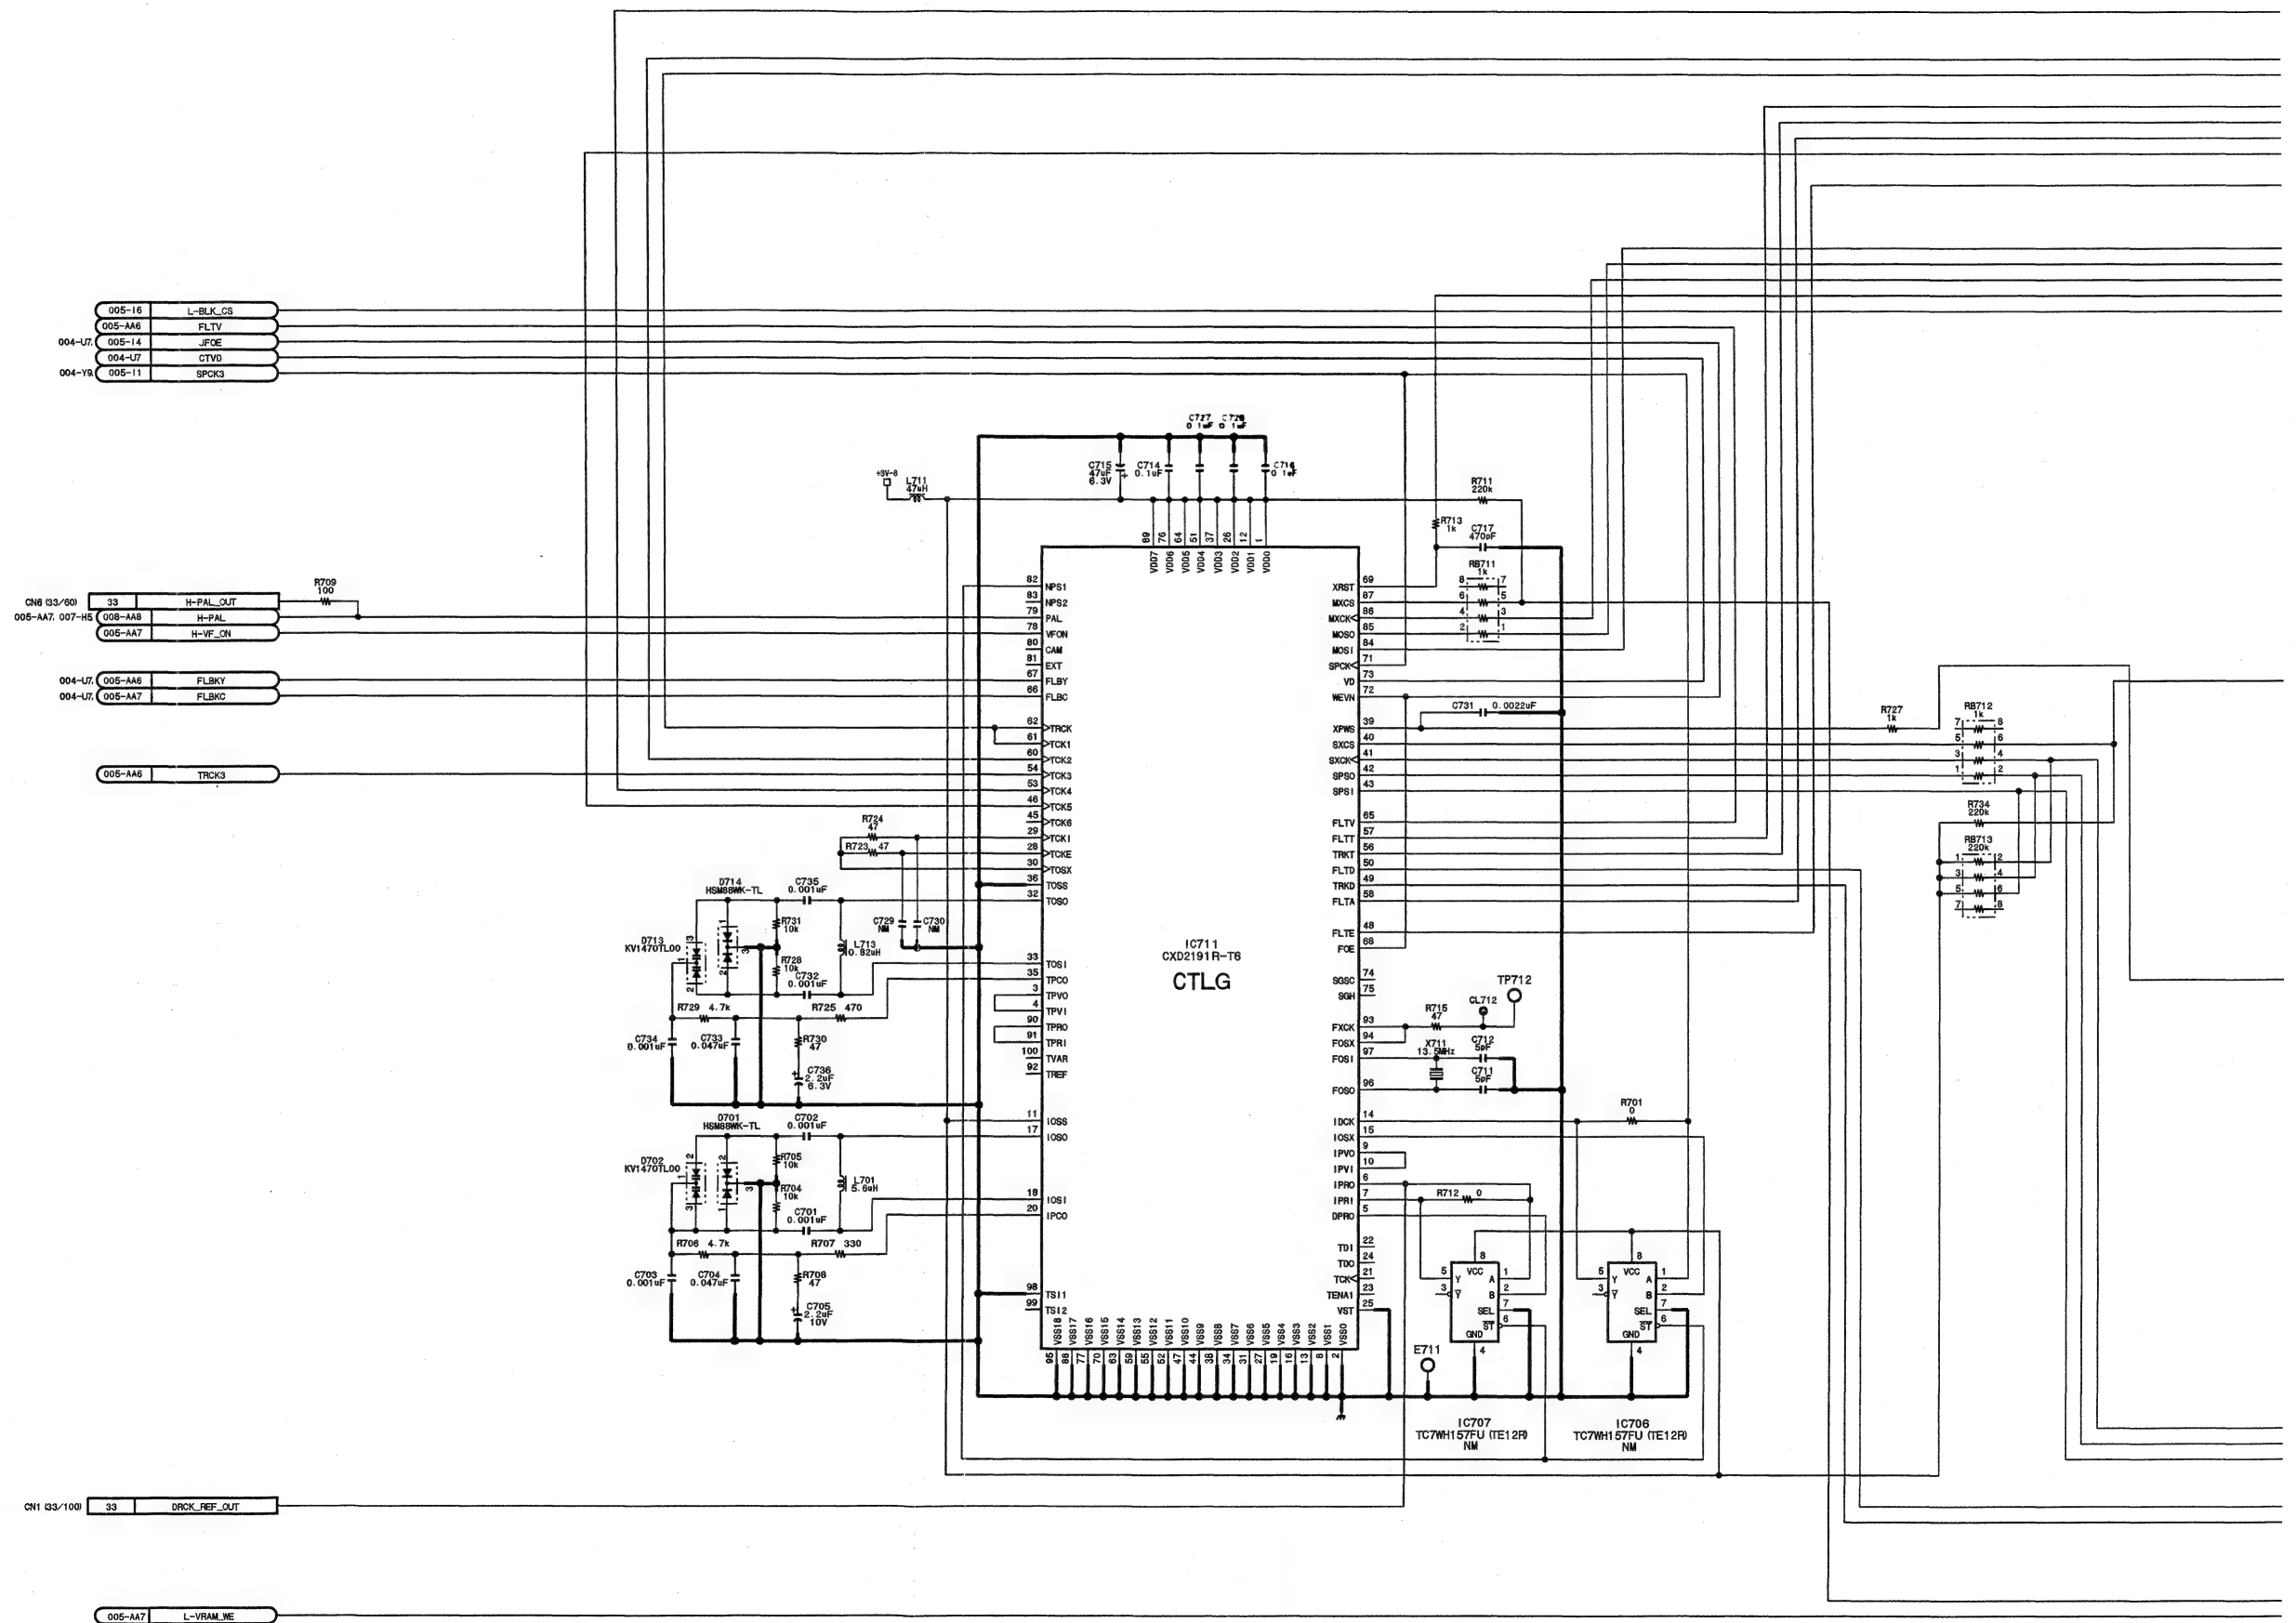


4-22 (a)

4-22 (a)



DPR-141A (6/9)  
SUFFIX: -11


DPR-141A (6/9)  
SUFFIX: -11

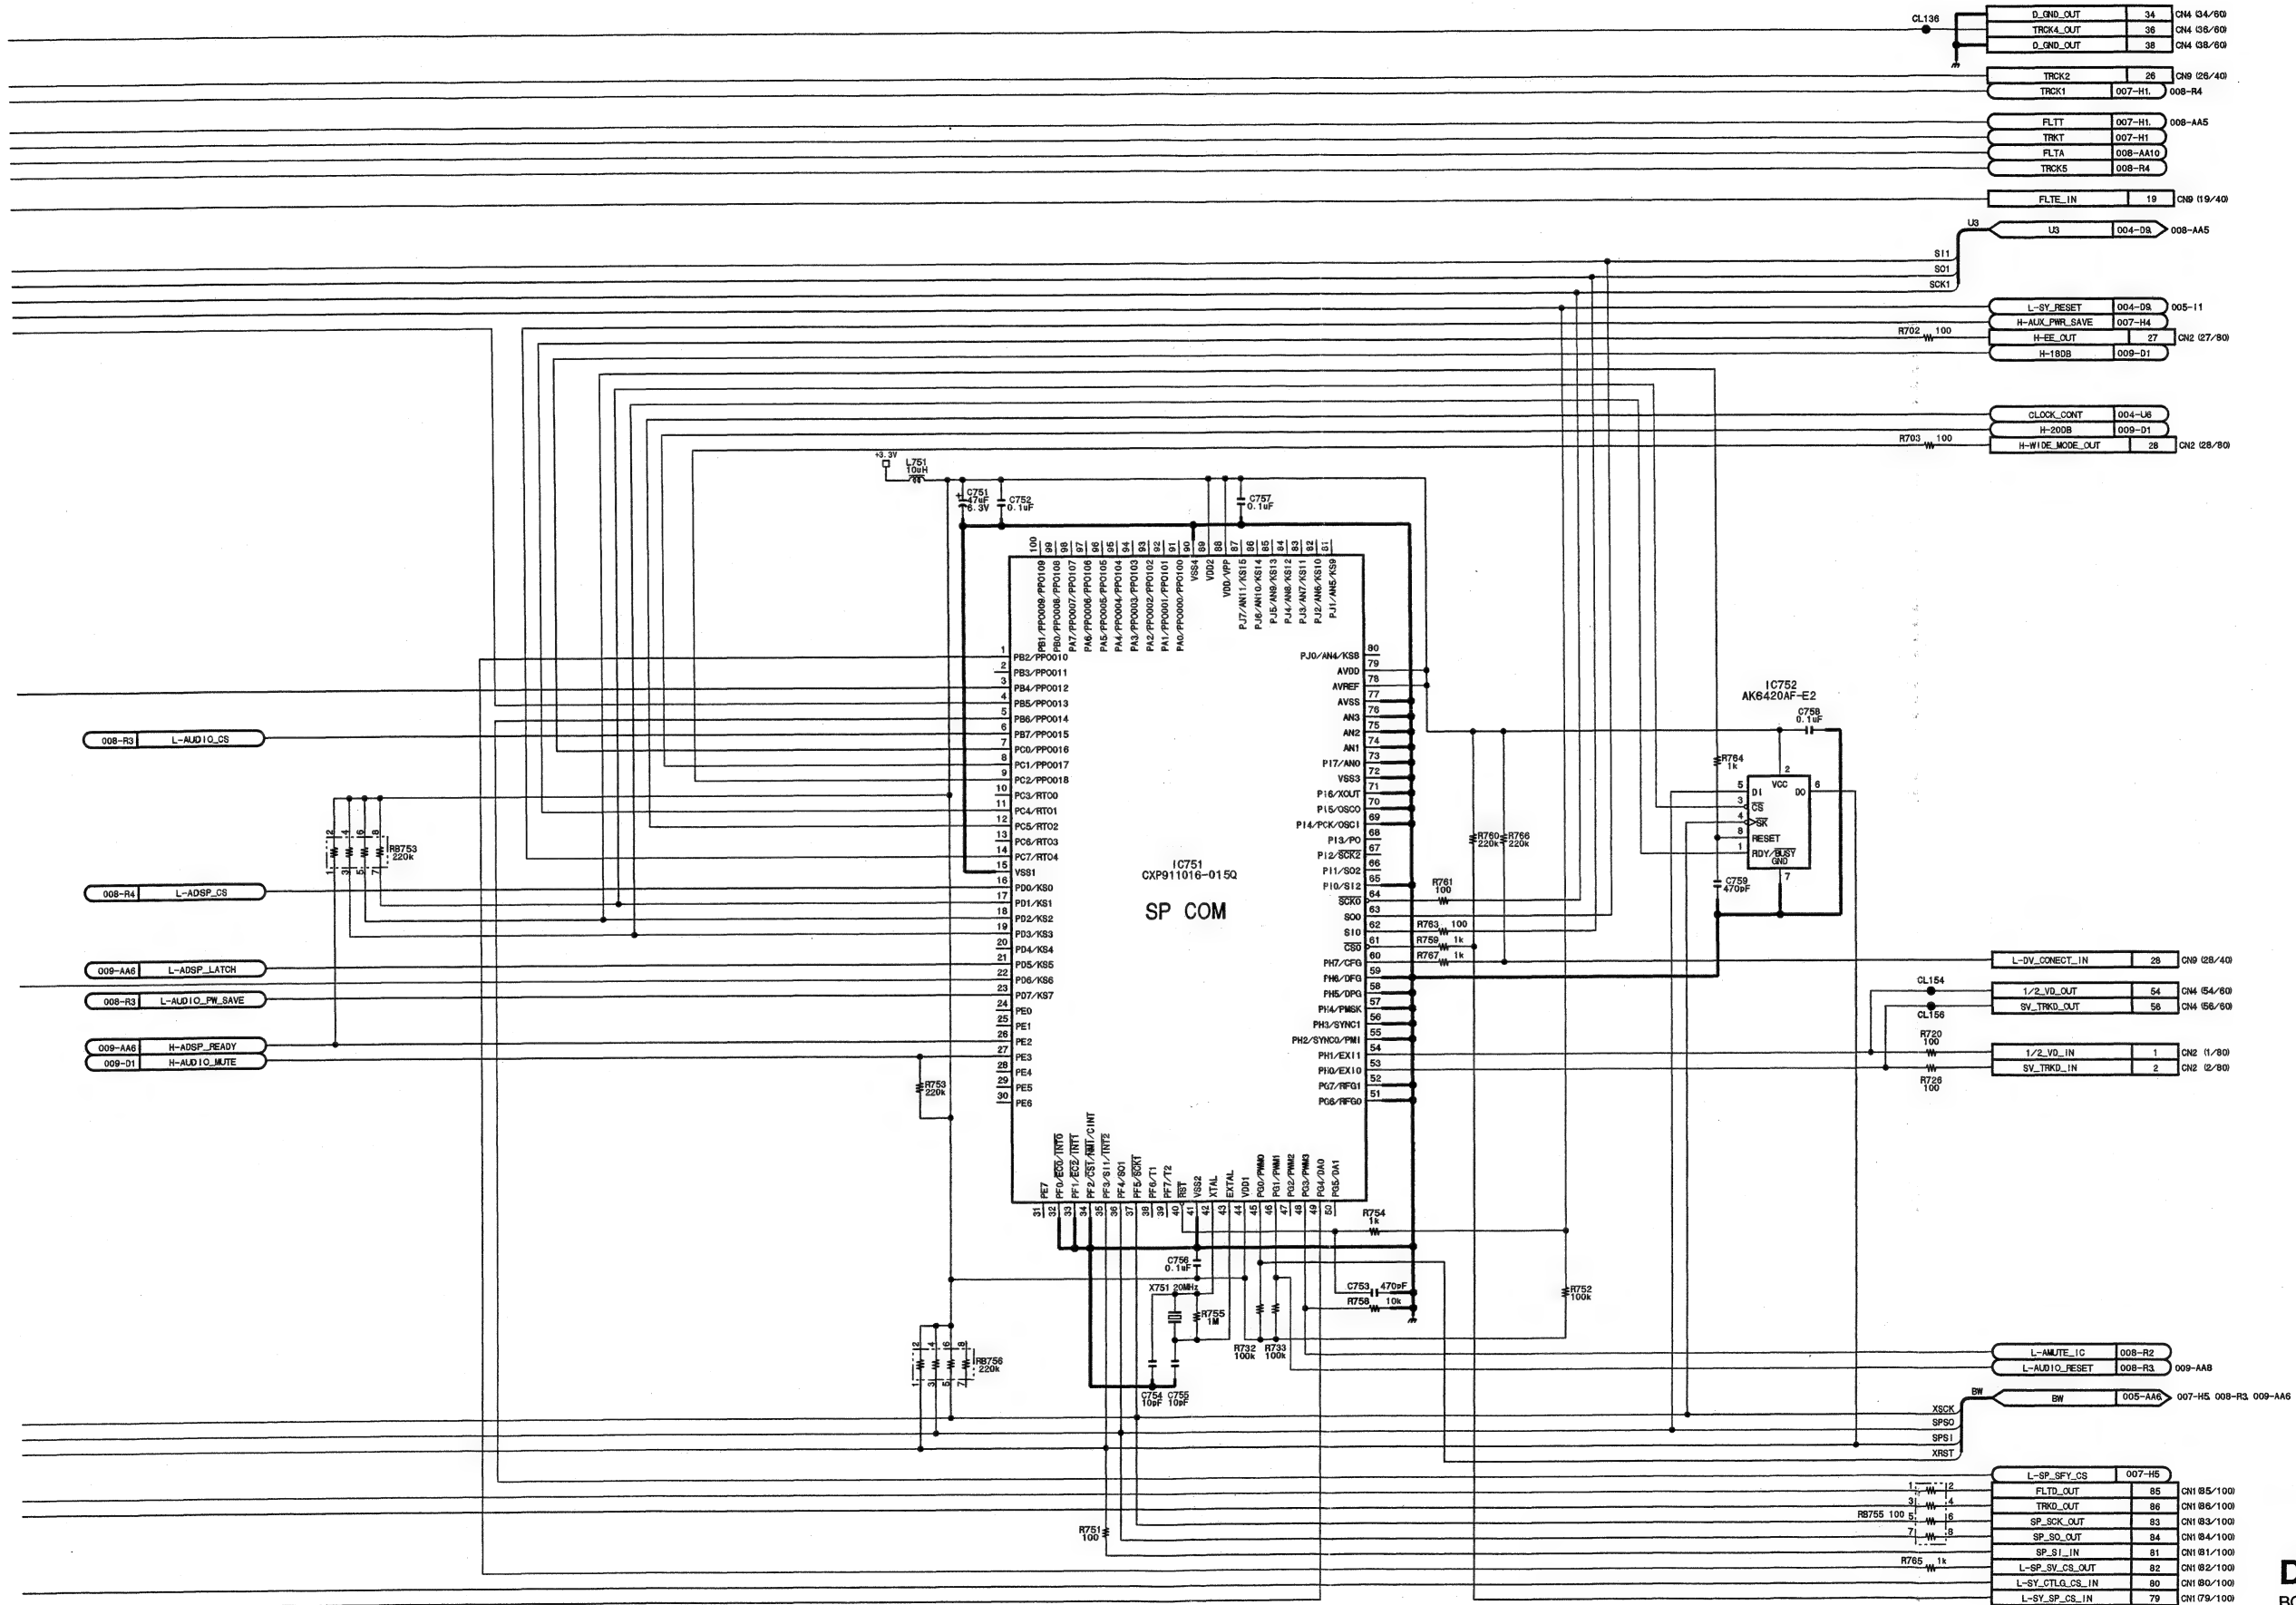

DPR-141A (6/9)  
BOARD NO. 1-673-975-11  
DSR-300A\_DPR-141\_002\_6


DPR-141A (7/9)  
SUFFIX: -11

DPR-141A (7/9)  
SUFFIX: -11

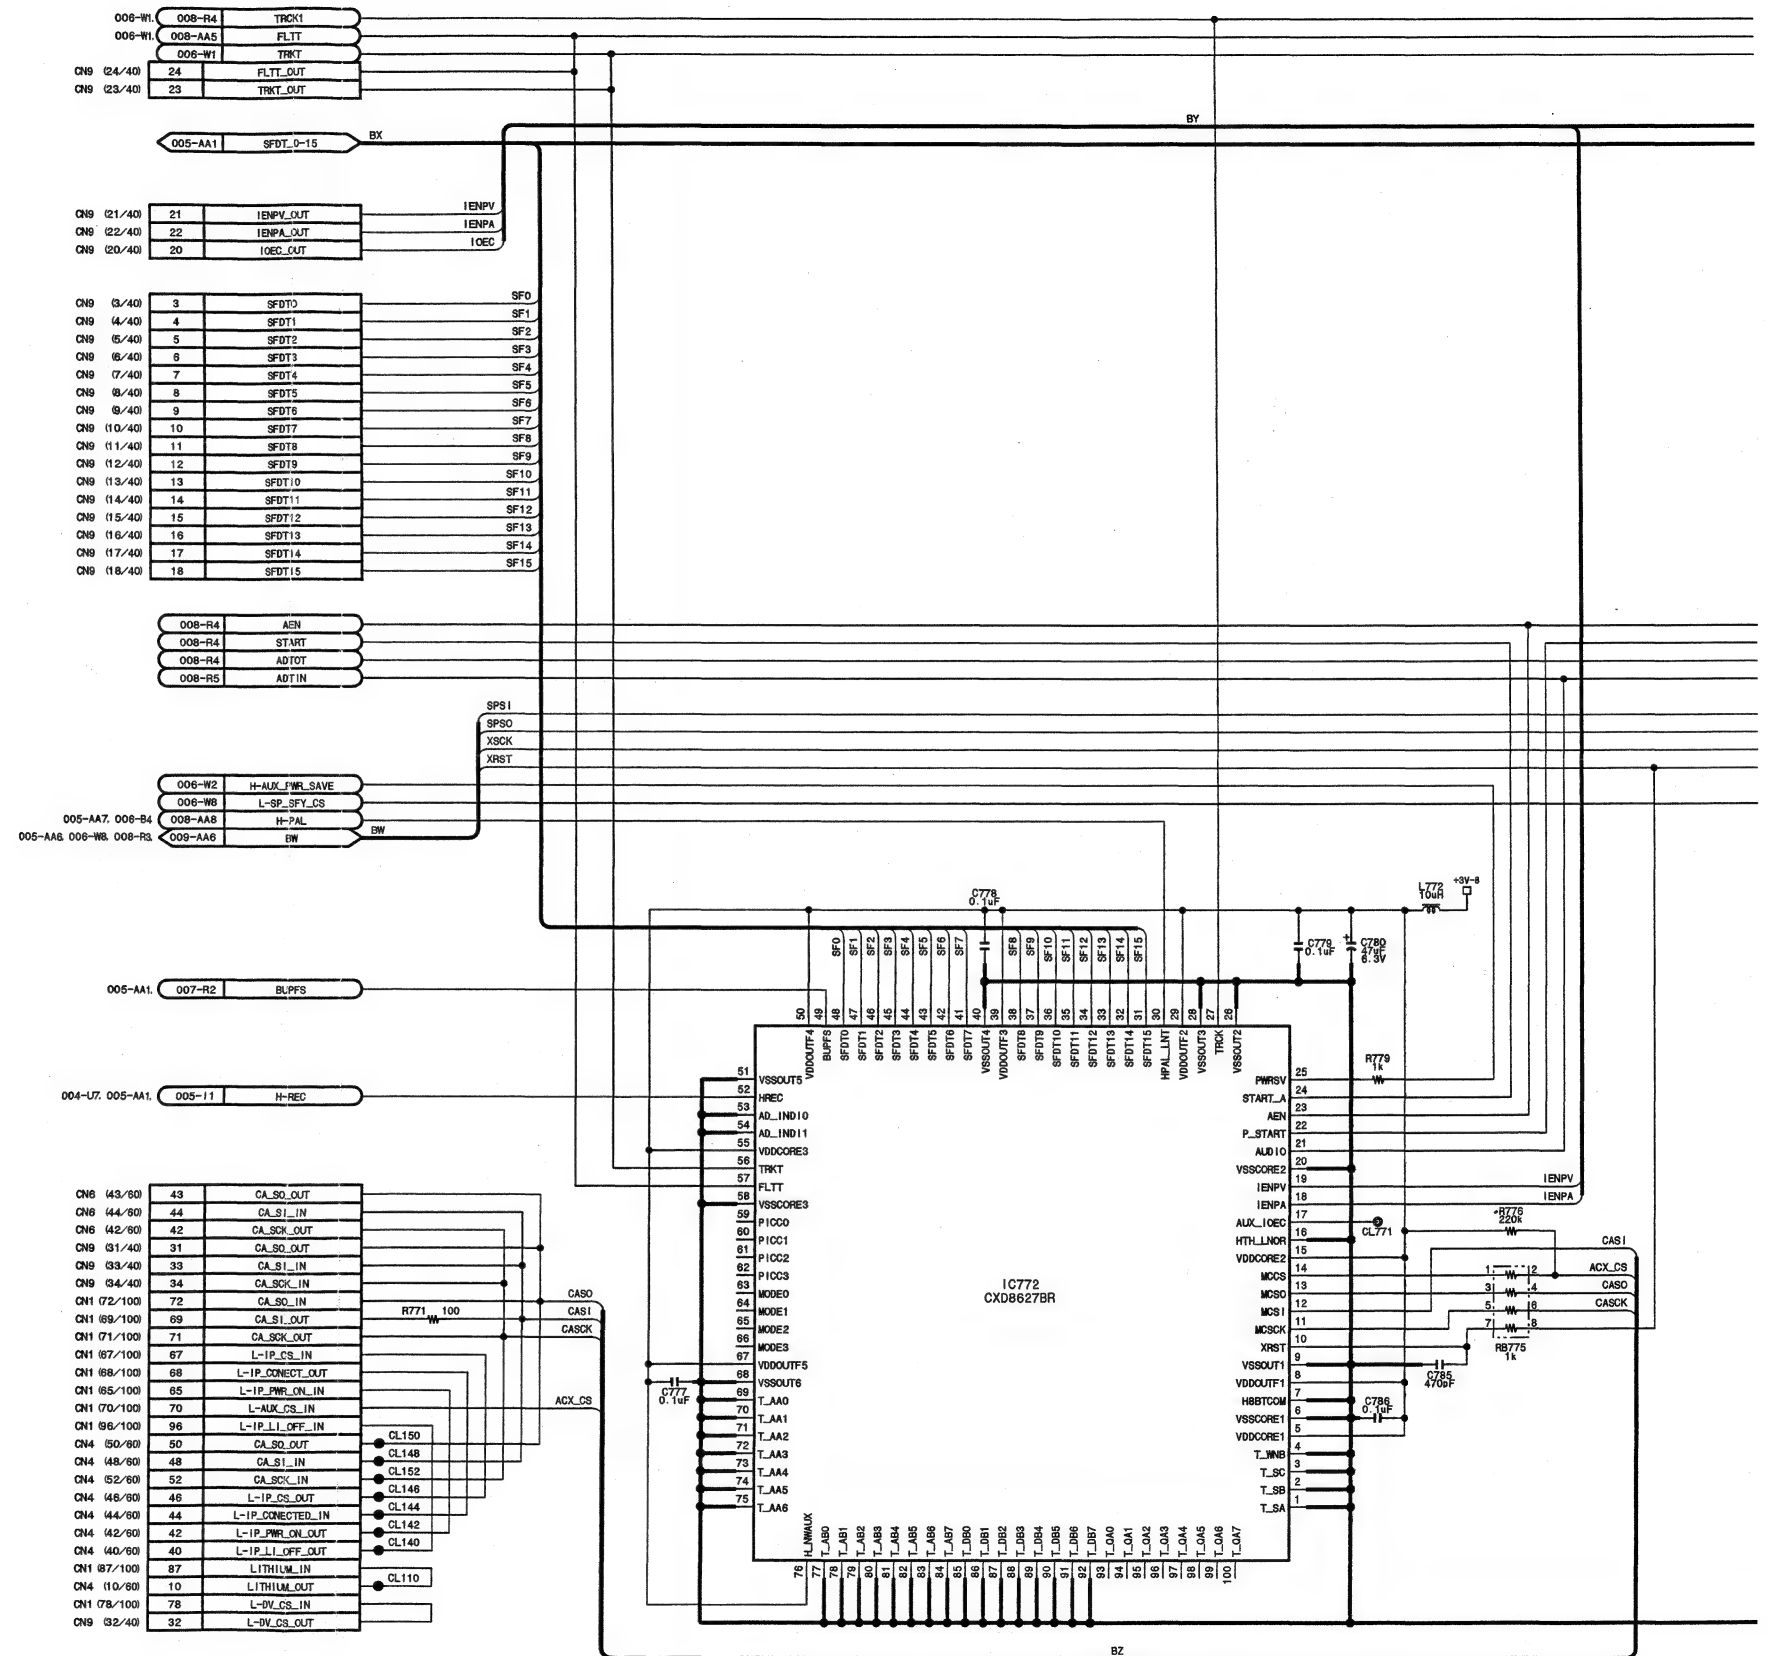

DPR-141A (7/9)  
SUFFIX: -11


DPR-141A (7/9)  
SUFFIX: -11

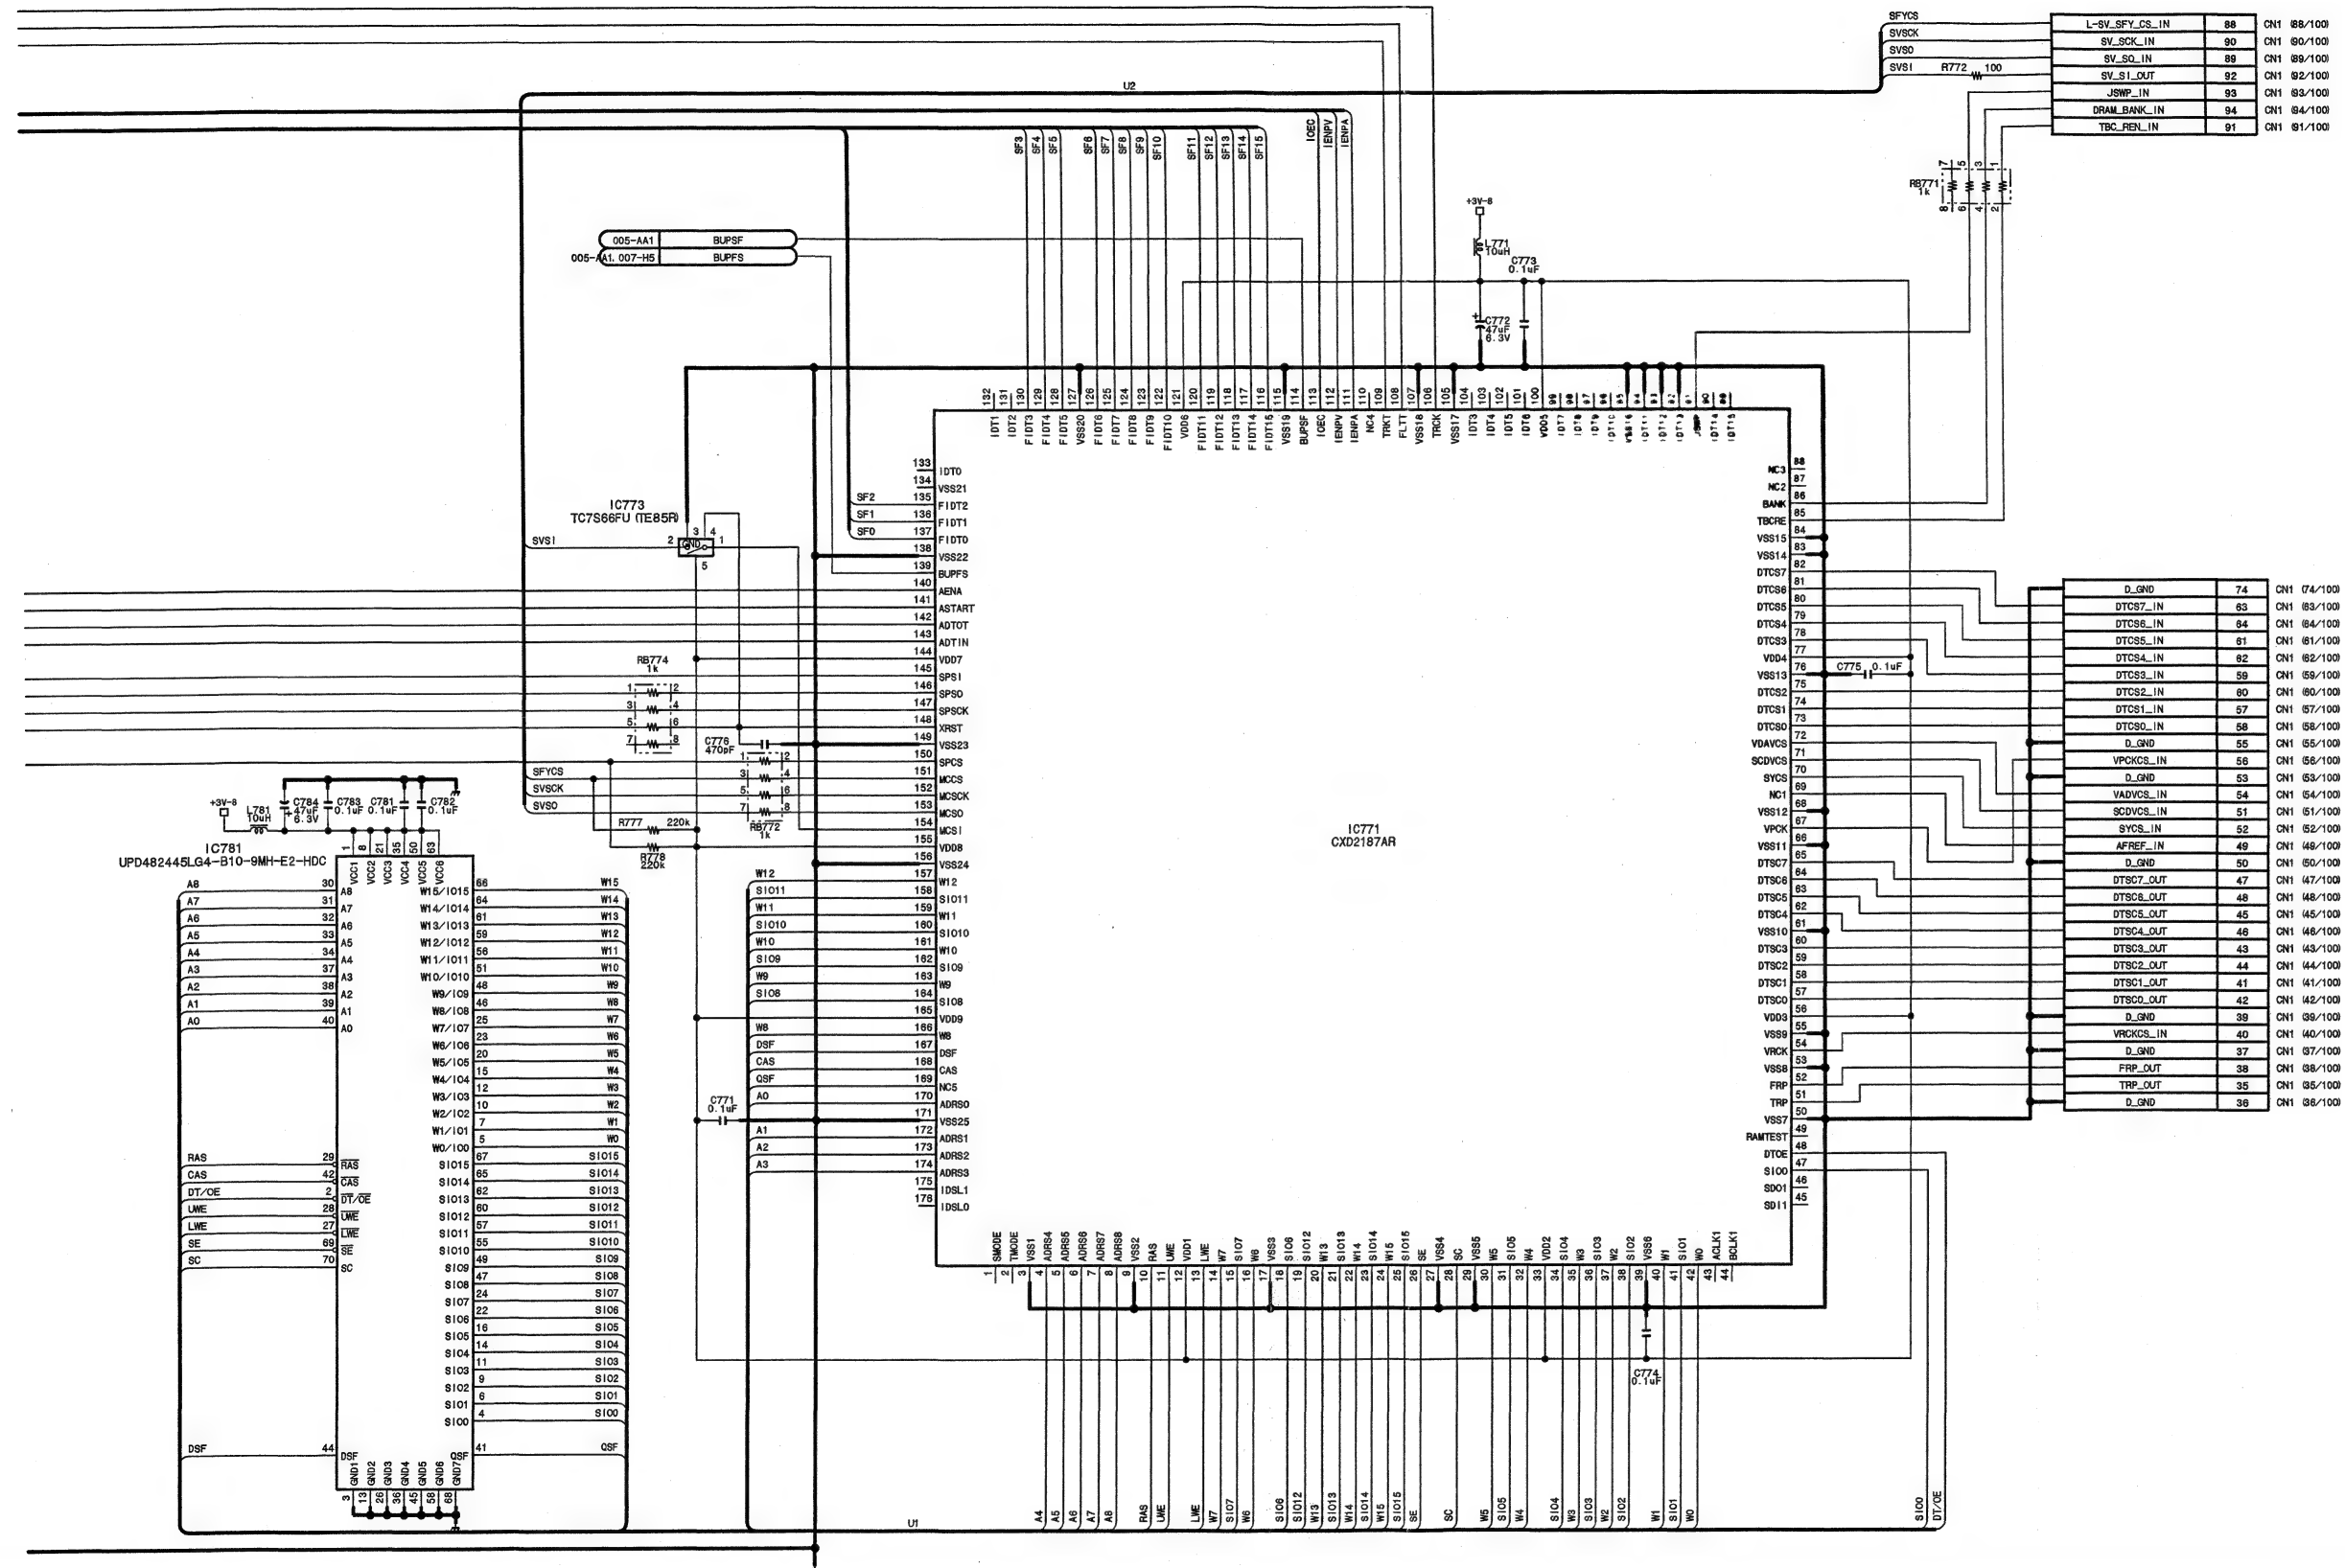

DPR-141A (7/9)  
BOARD NO. 1-673-975-11  
DSR-300A\_DPR-141\_002\_7




DPR-141A (8/9)  
SUFFIX: -11

DPR-141A (8/9)  
SUFFIX: -11

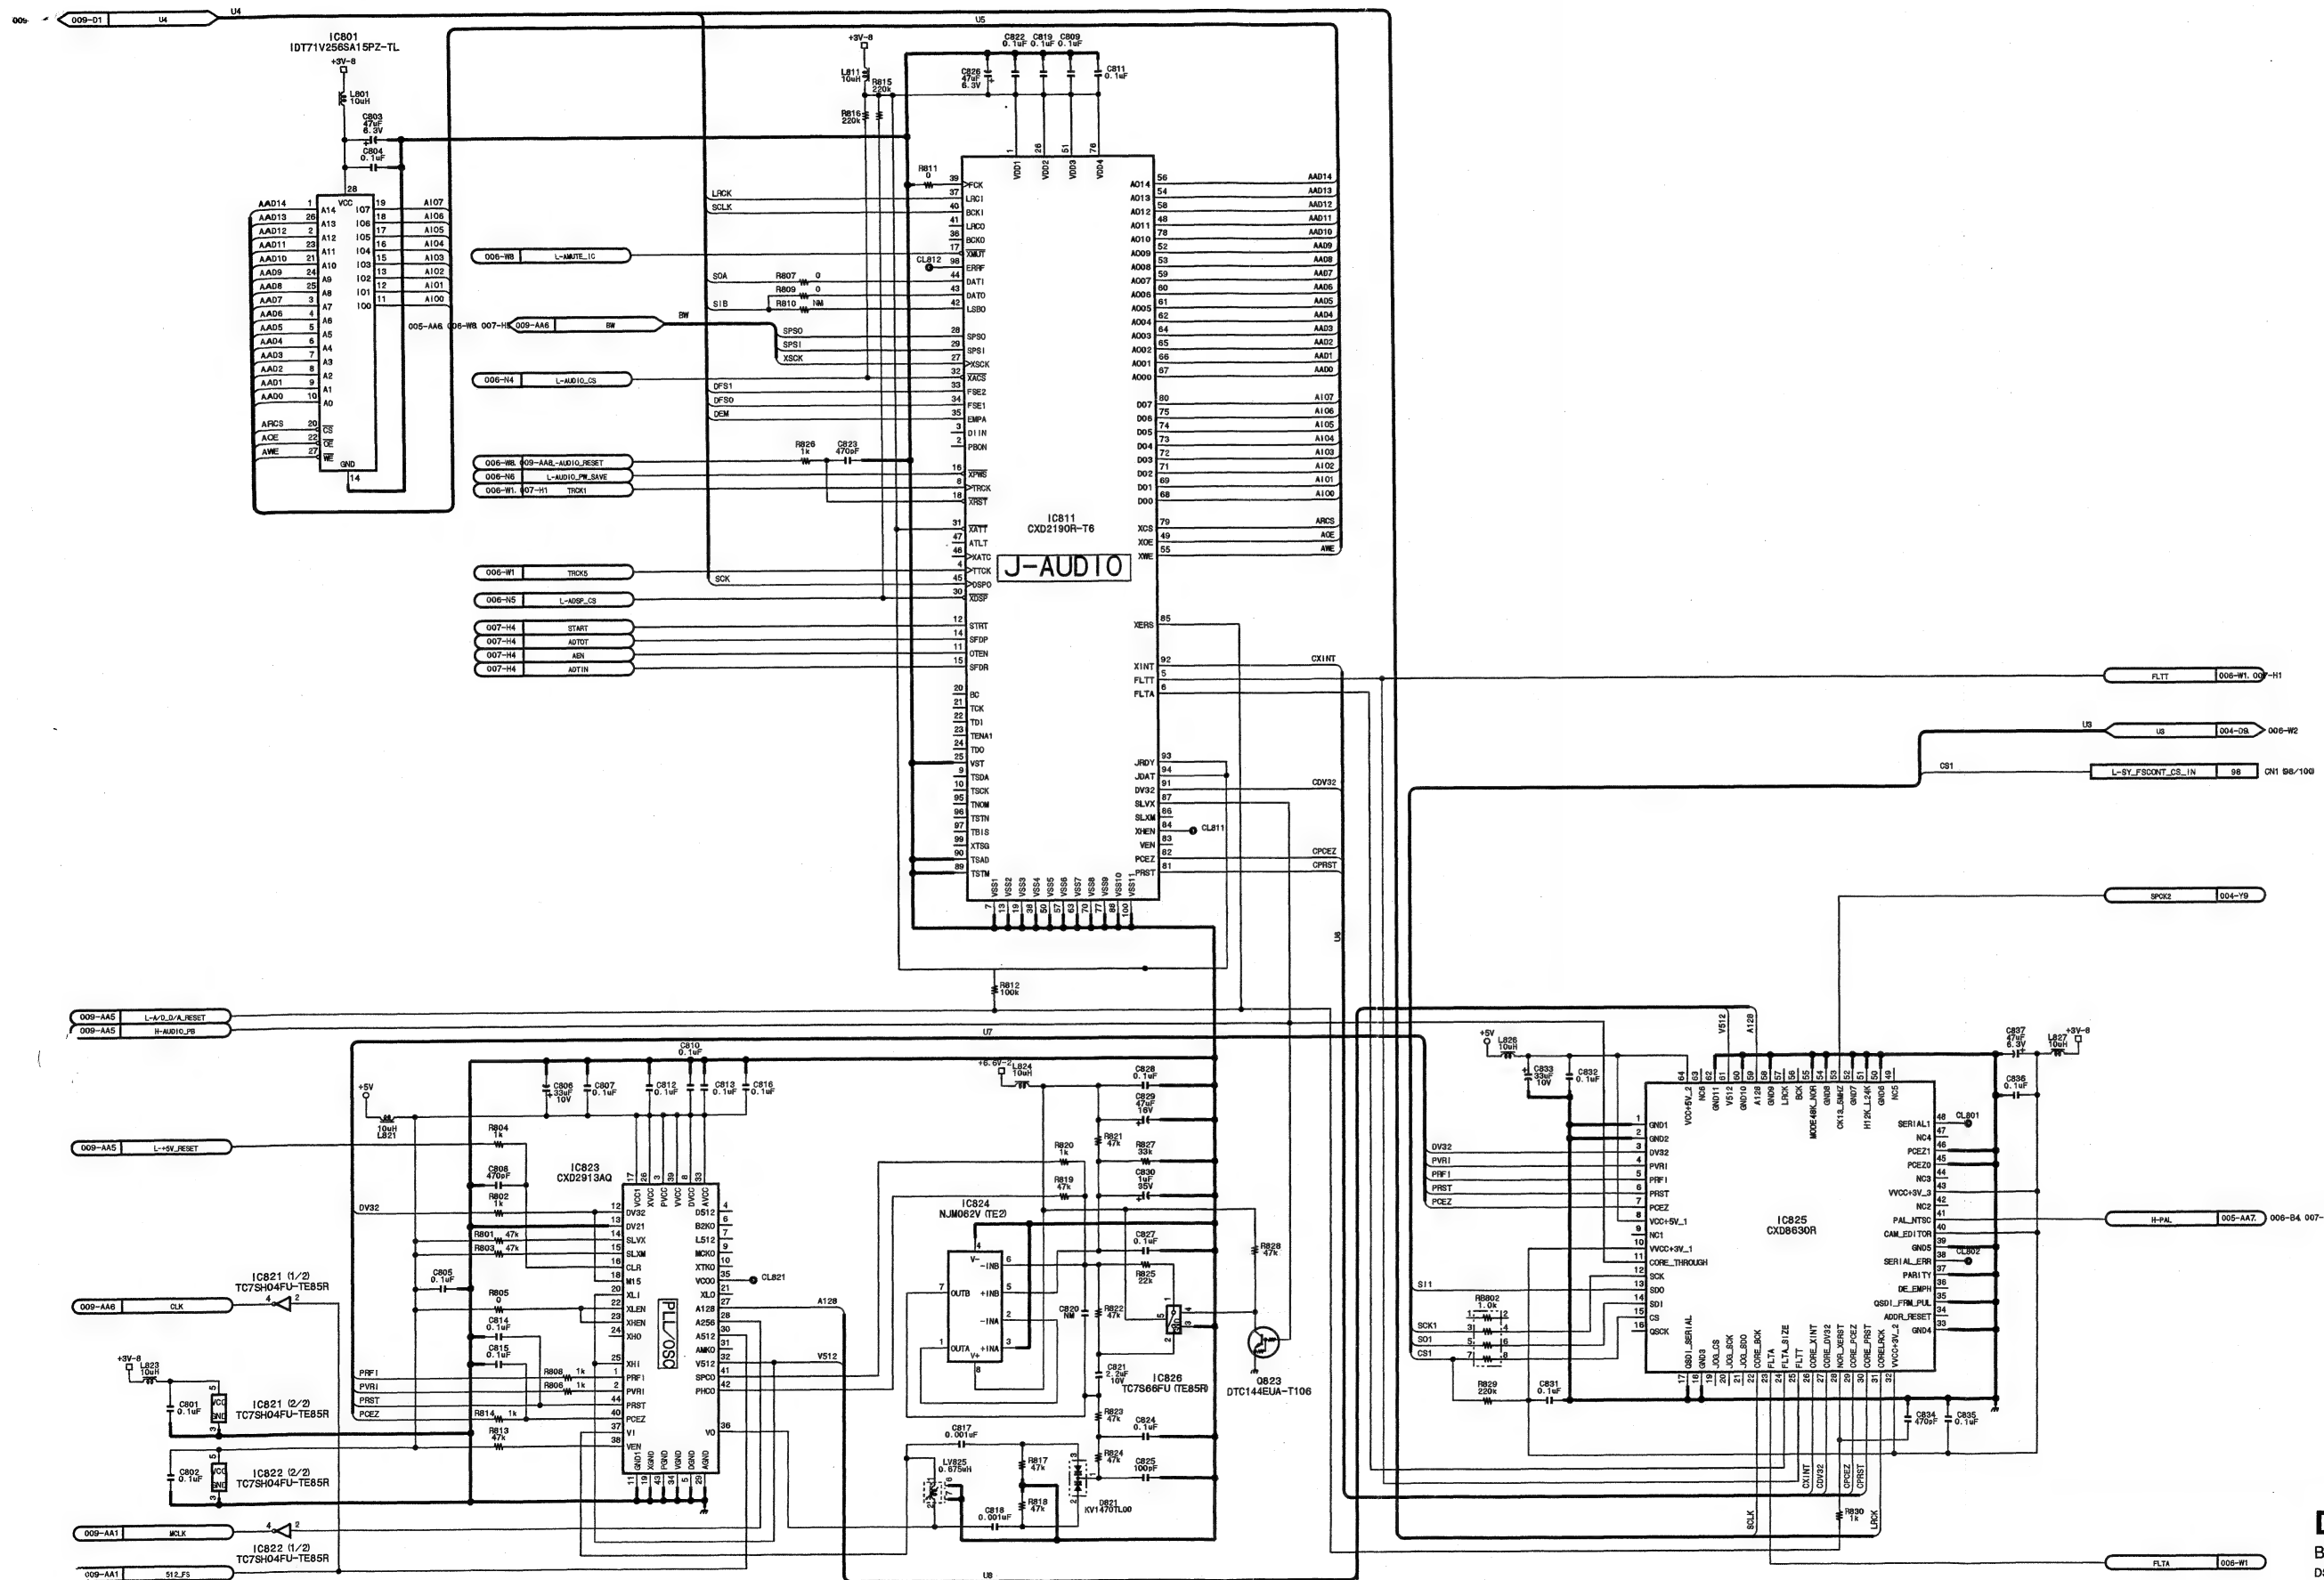

DPR-141A (9/9)  
SUFFIX: -11

DPR-141A (9/9)  
SUFFIX: -11

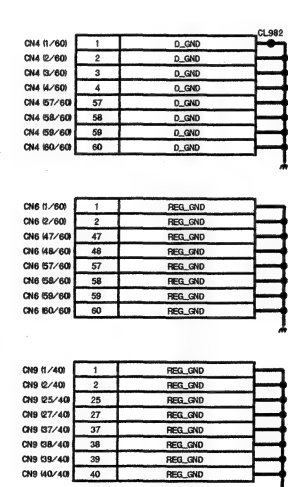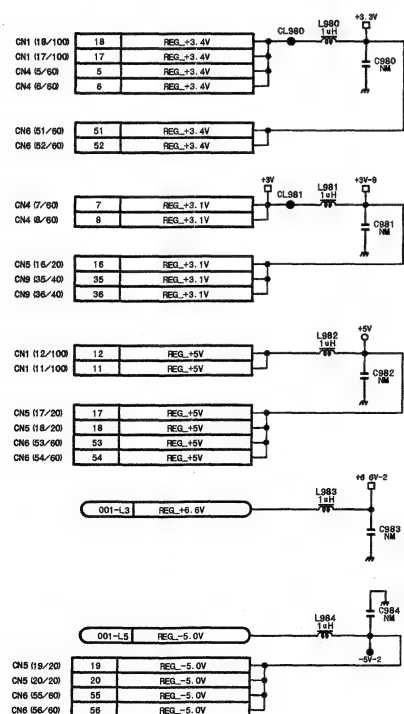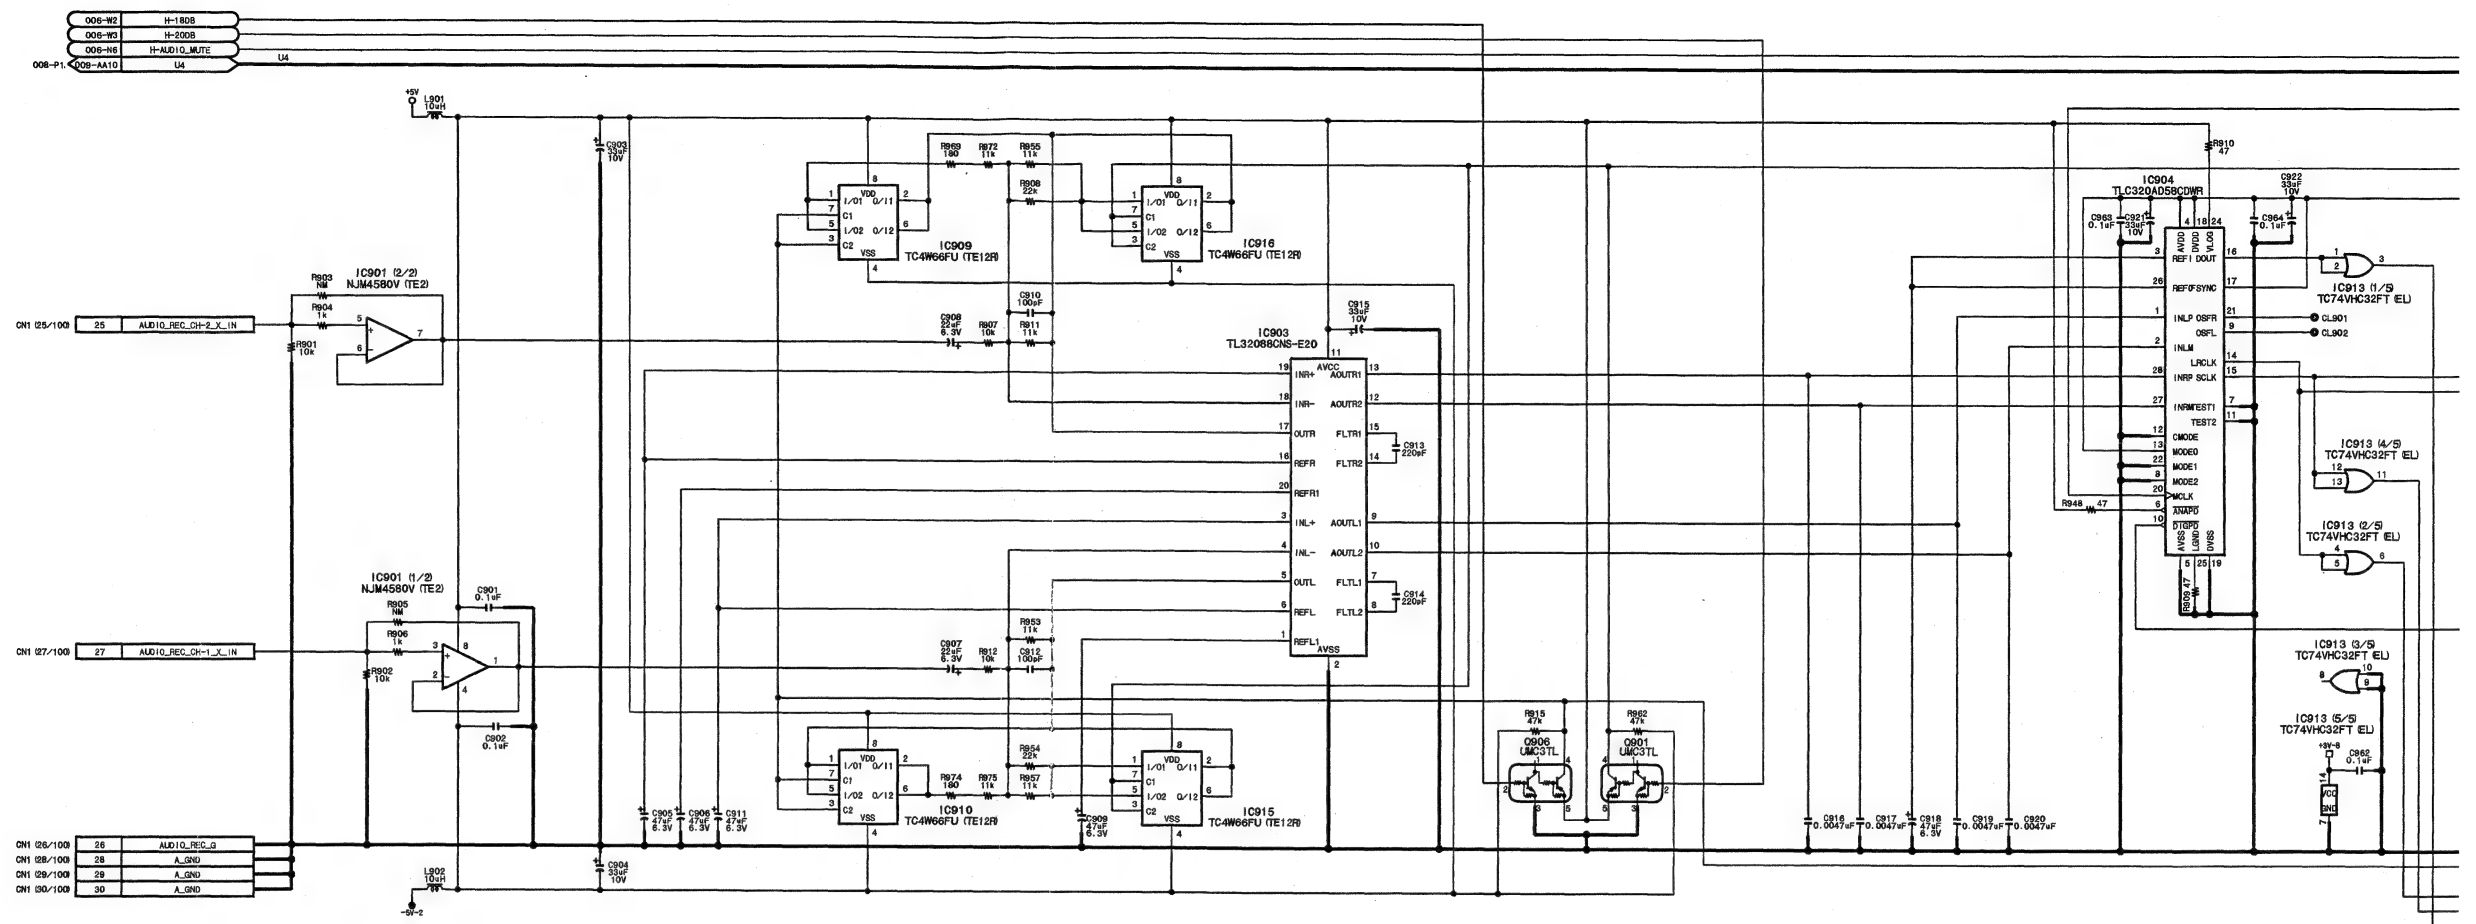


4-28 (a)

4-28 (a)

DPR-141A (9/9)  
SUFFIX: -11


DPR-141A (9/9)  
SUFFIX: -11

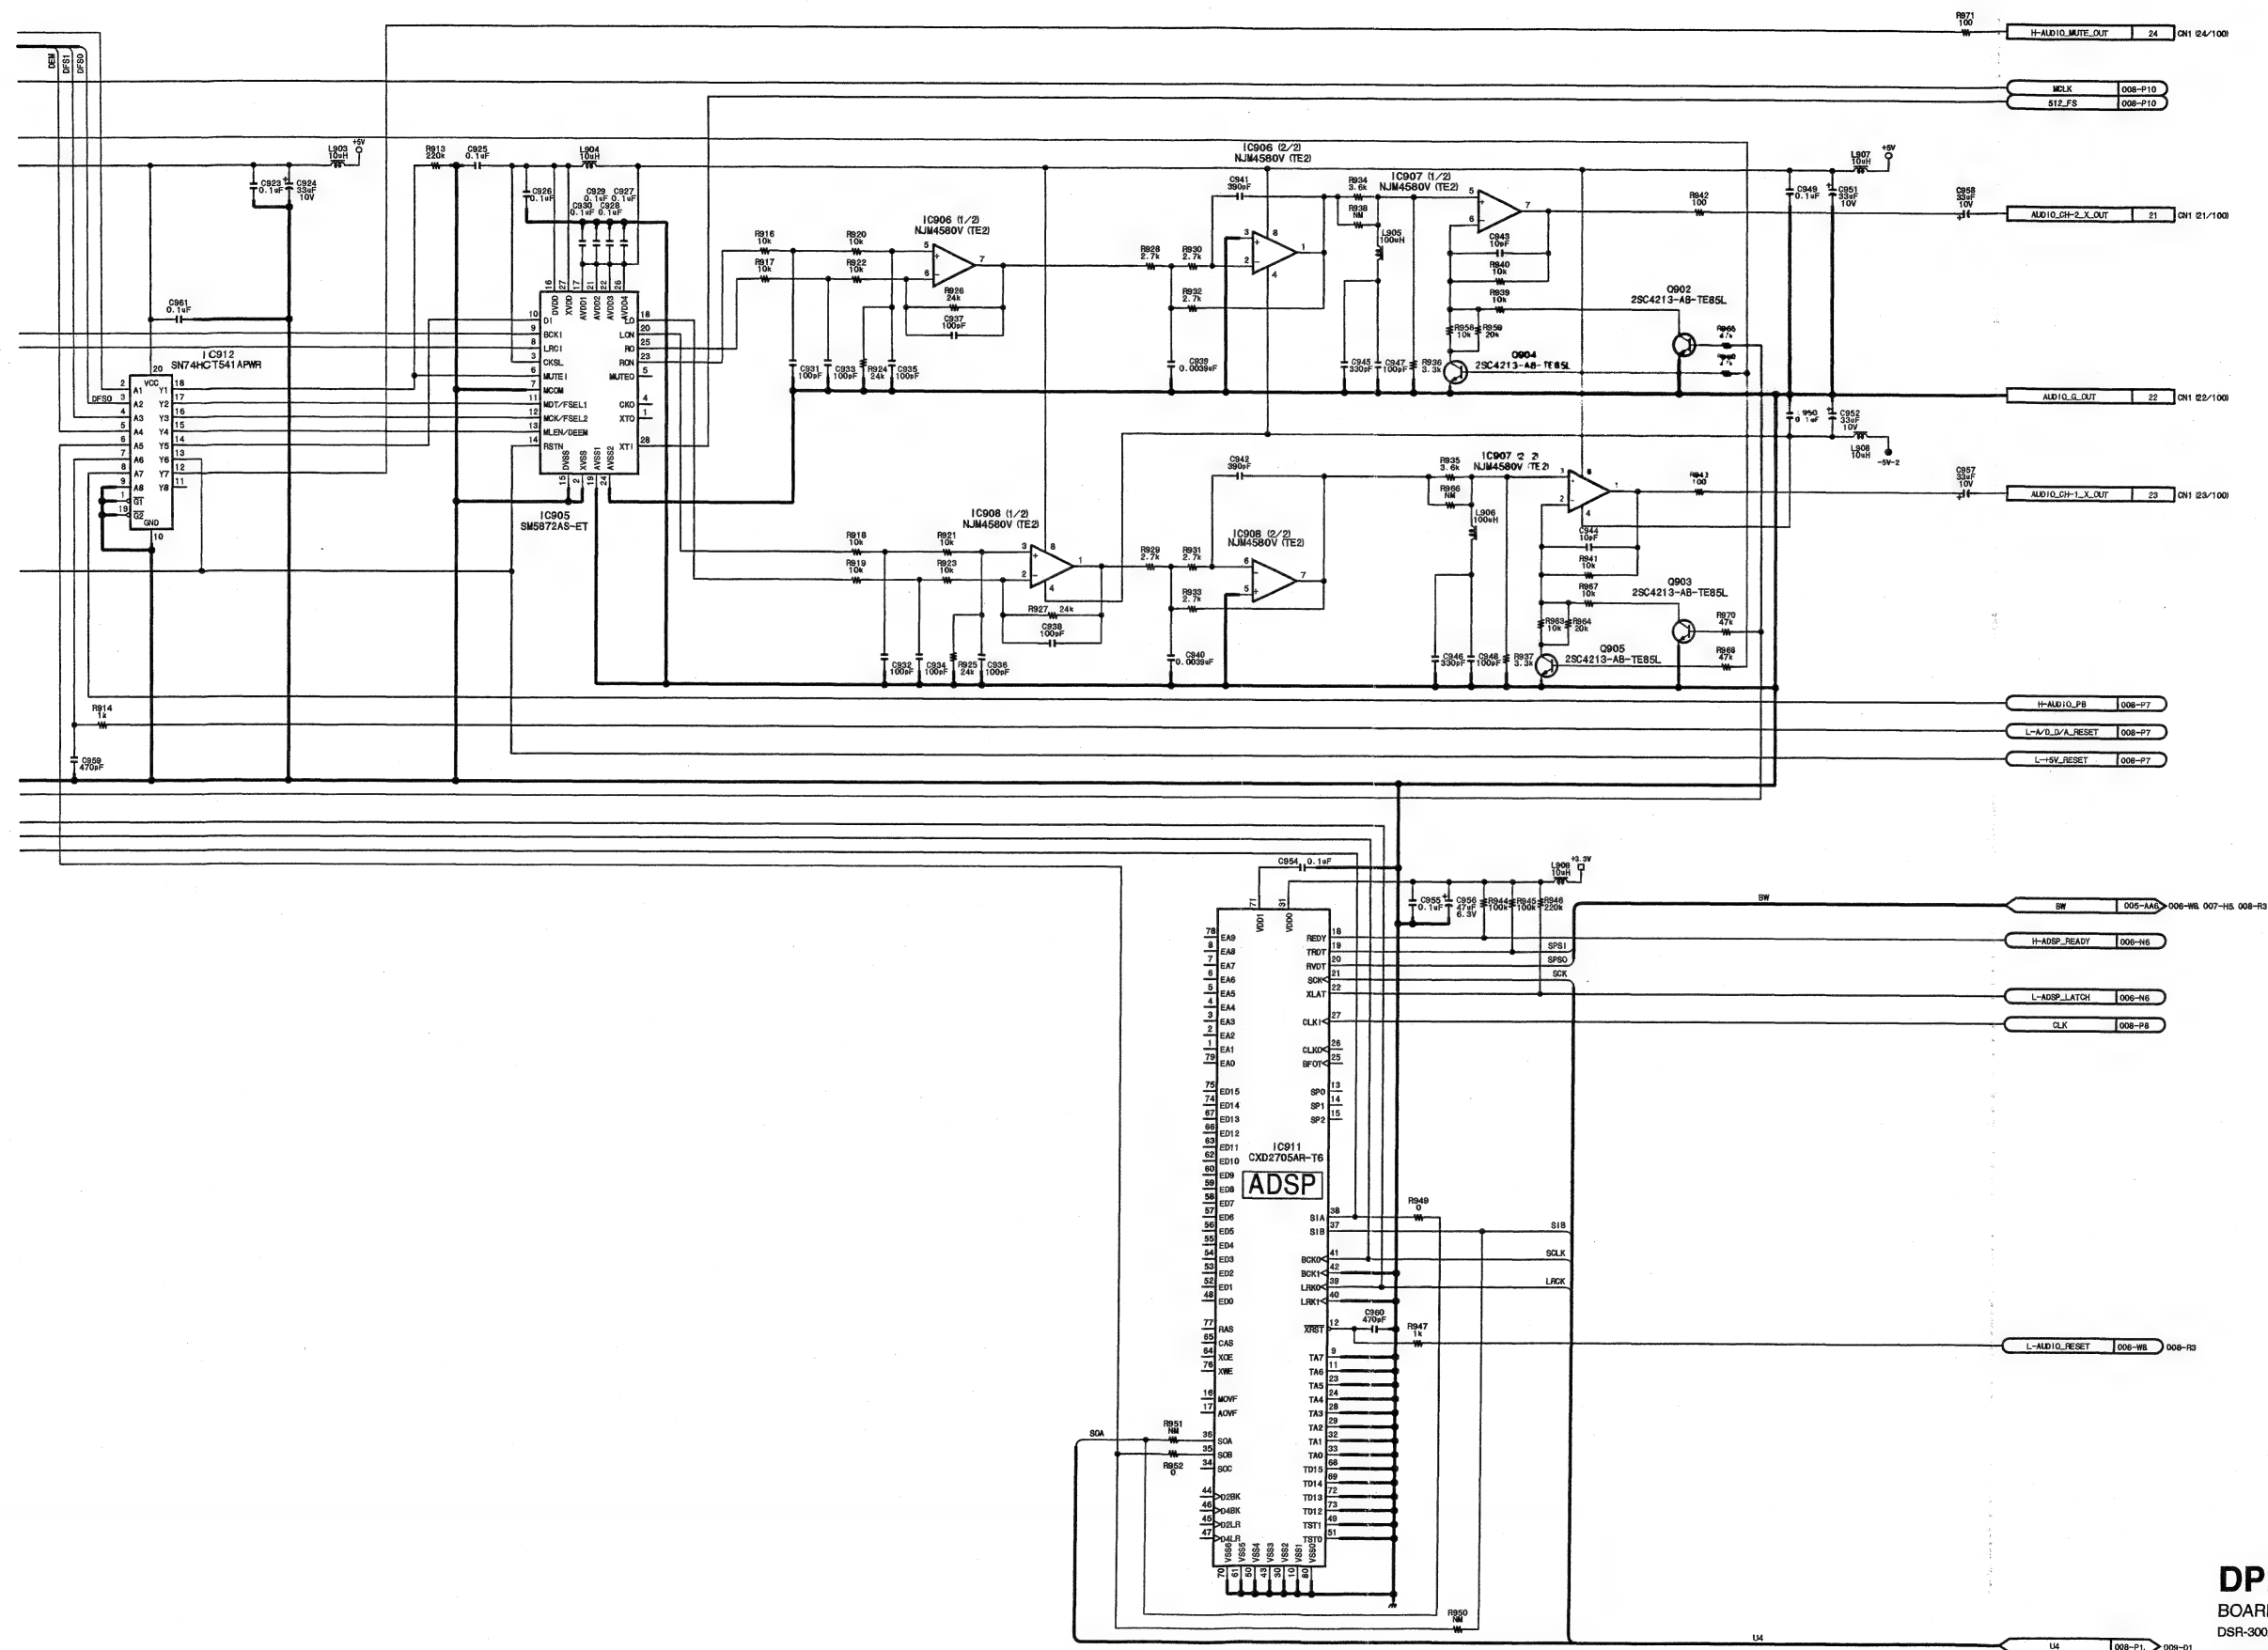


DPR-141A (9/9)  
BOARD NO. 1-673-975-11  
DSR-300A\_DPR-141\_002\_9



**ES-31/31P (1/4)**

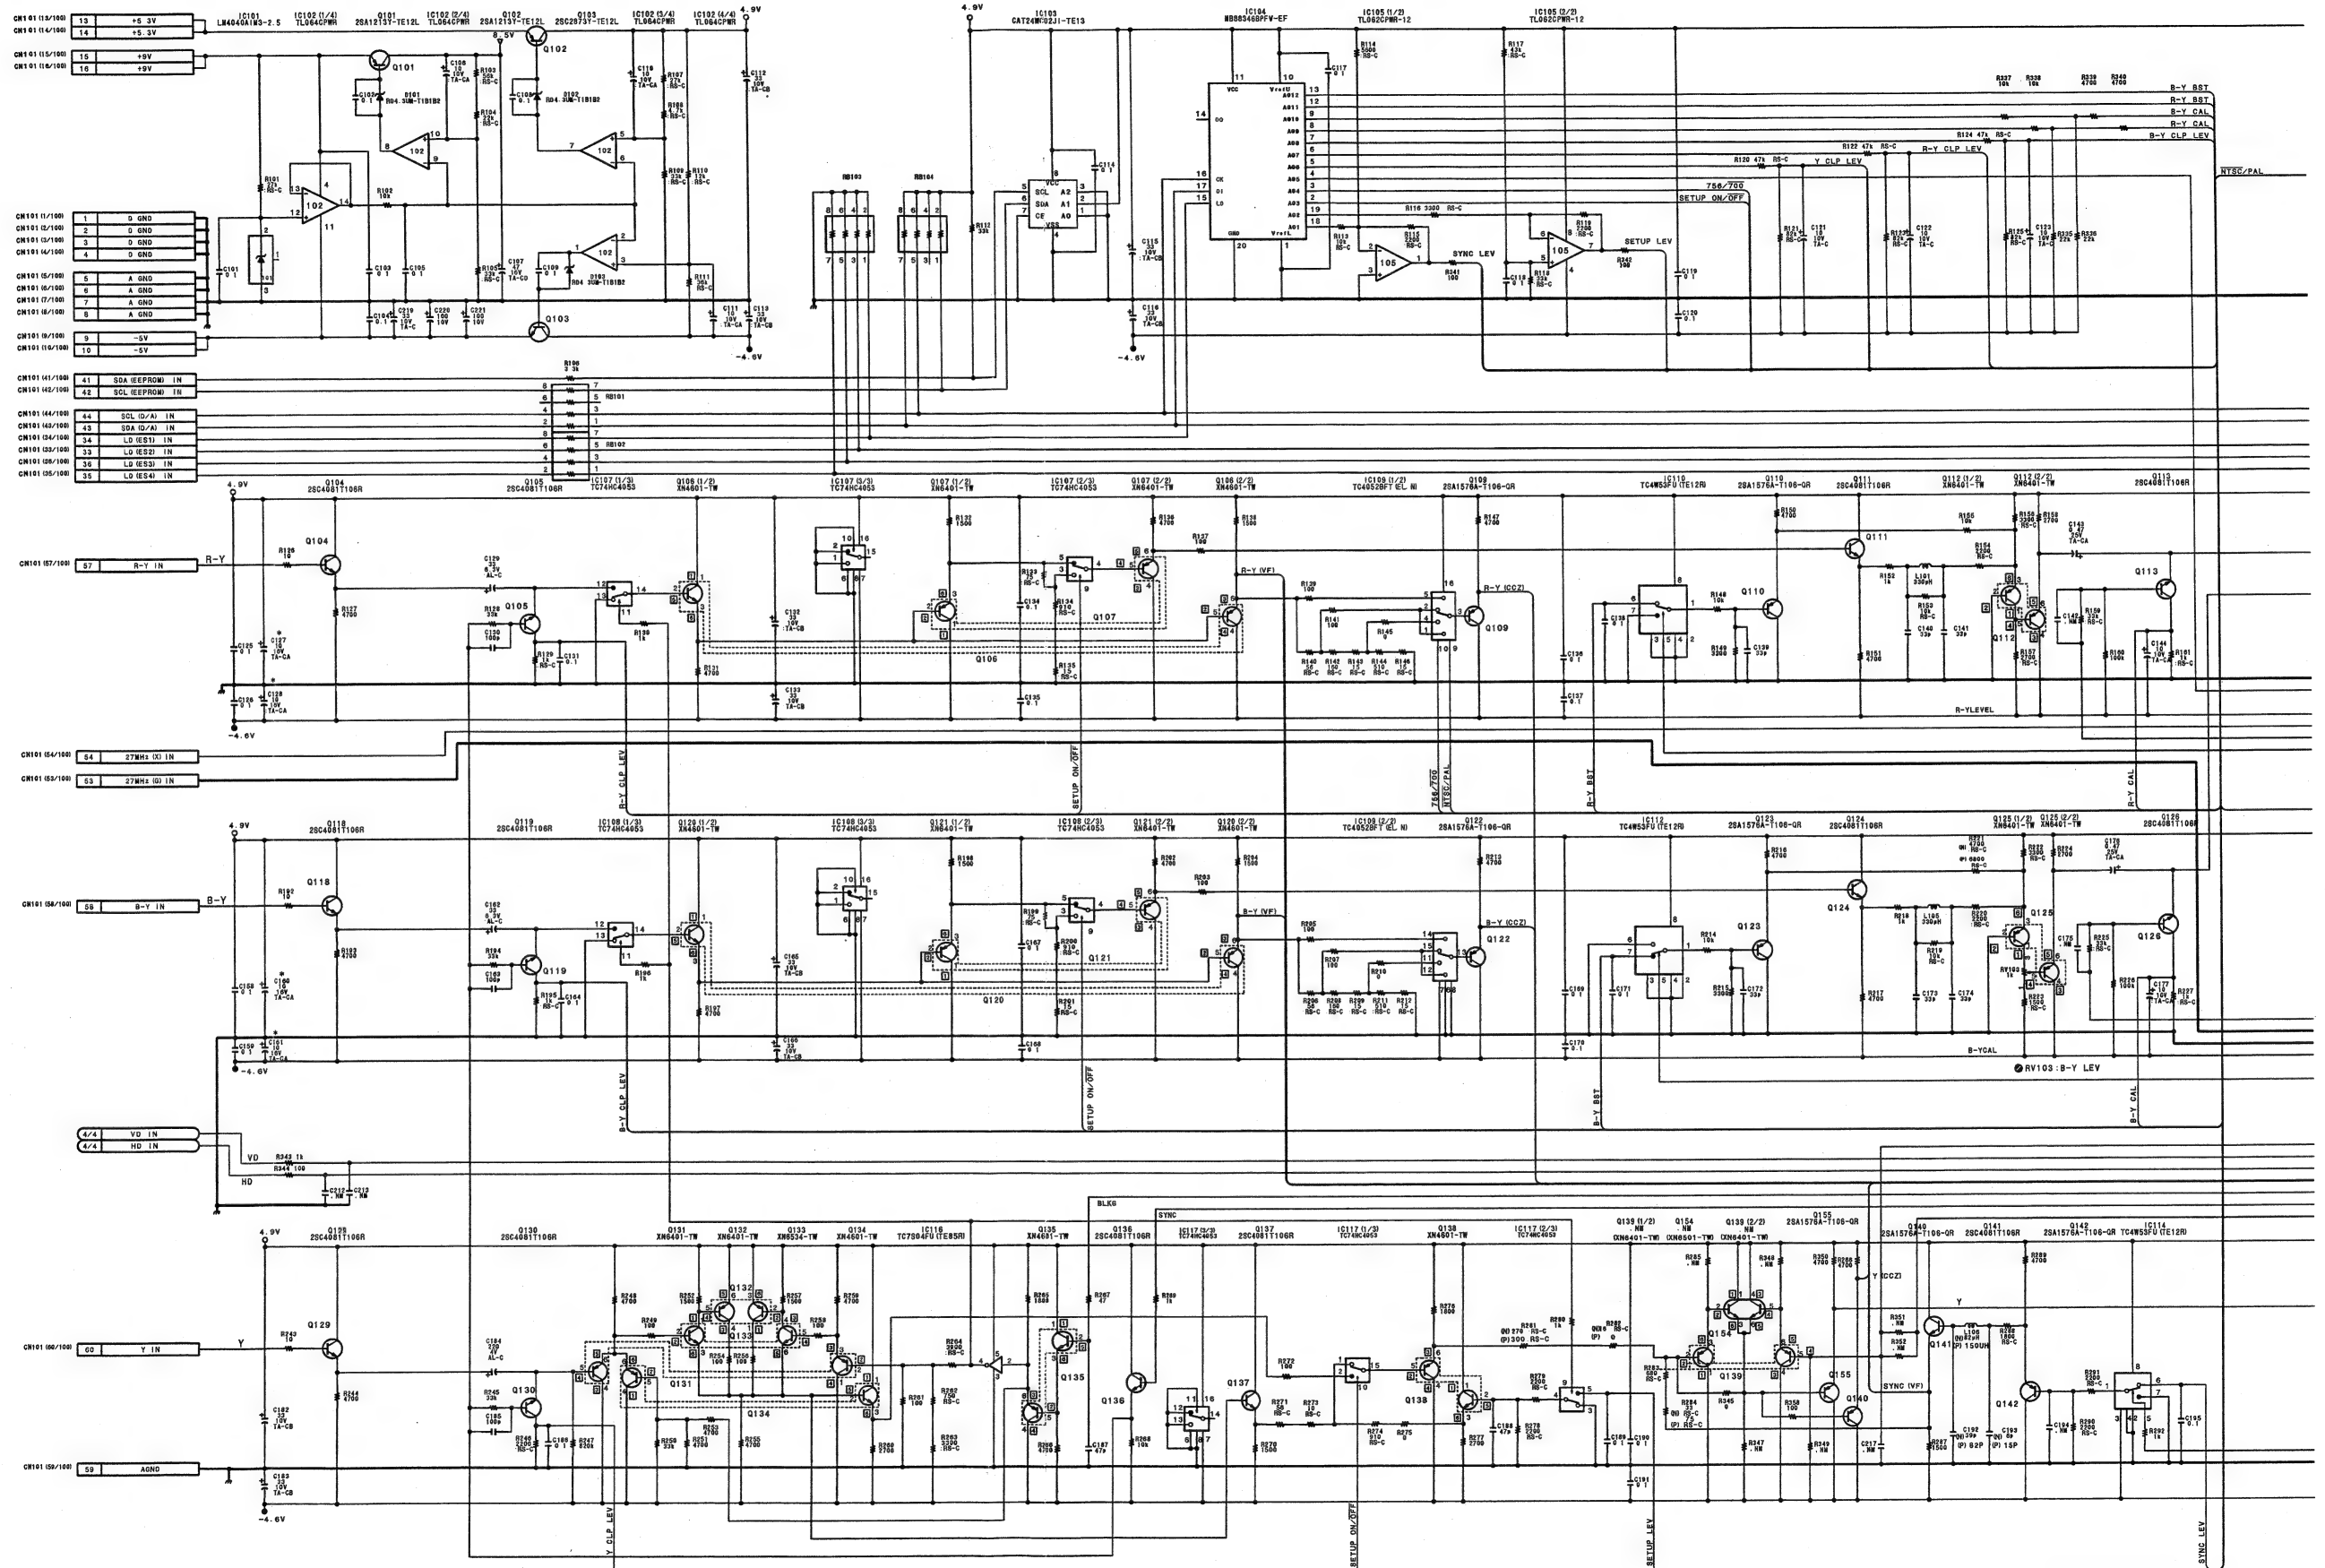




NOTE


1. NC : NO CONNECTION
2. . NM :NO MOUNT
3. (N) :NTSC only
4. (P) :PAL only

REF NO	CHANGE INFORMATION	LOT NO
C127 C128 C160 C161 C197	10V → 18V	221
RV104	500 → 1K	141

**ES-31/31P (1/4)**

BOARD NO. 1-677-371-11  
B-DSR300A-ES31-11

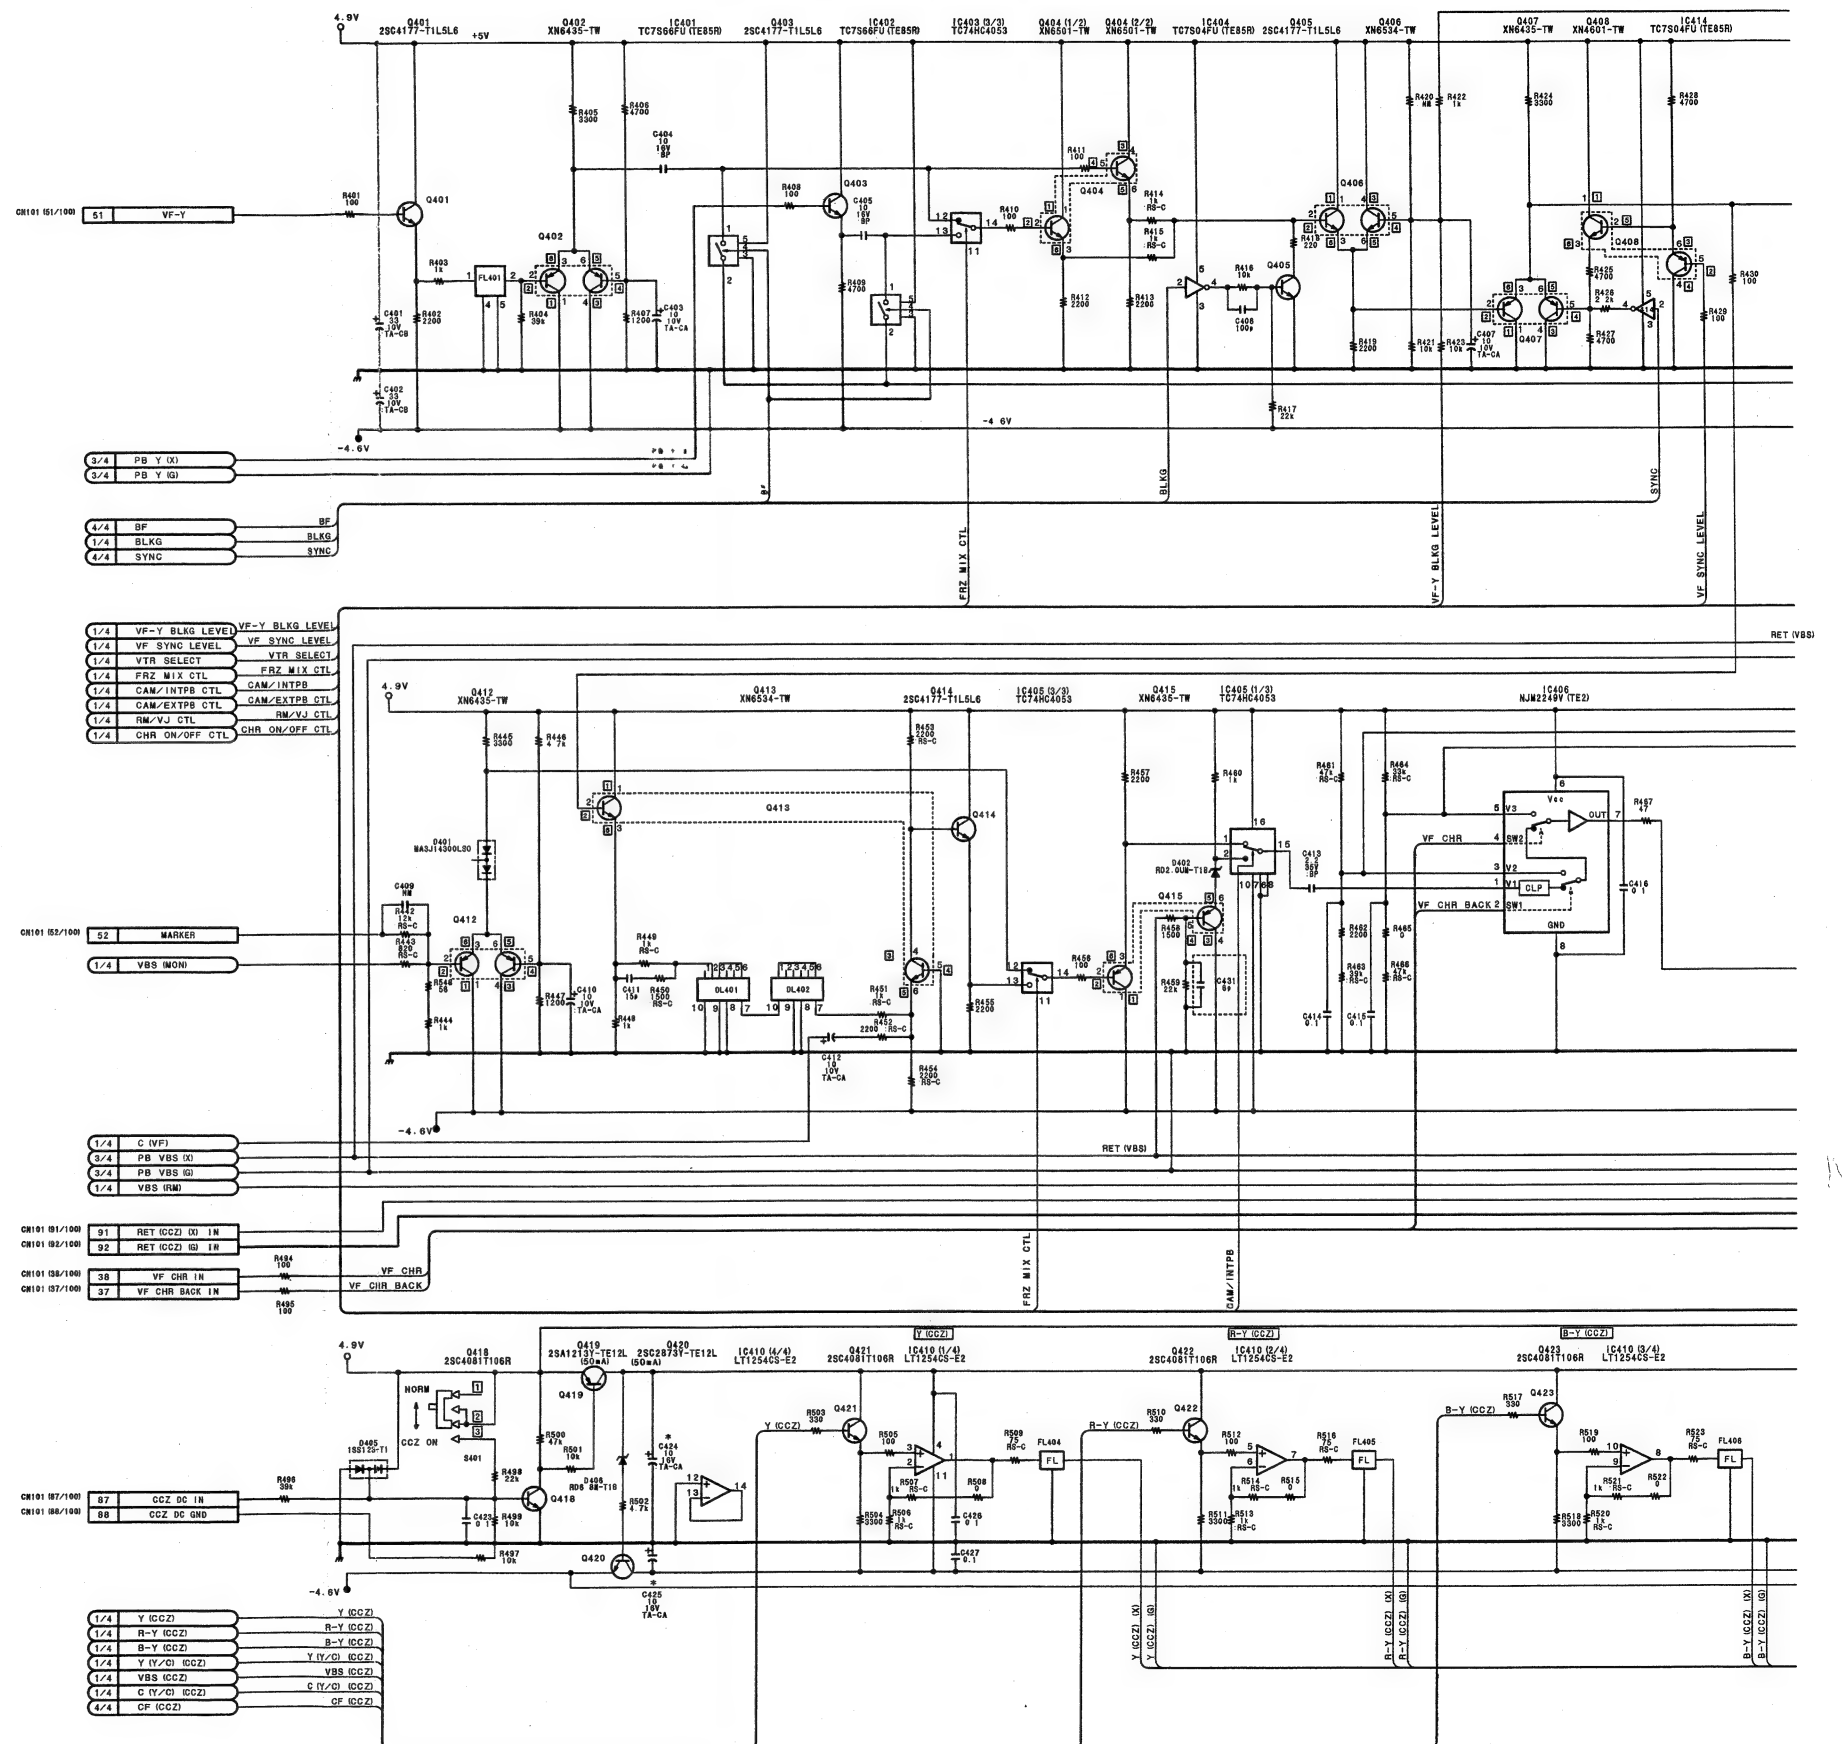




1

2

3

4

5

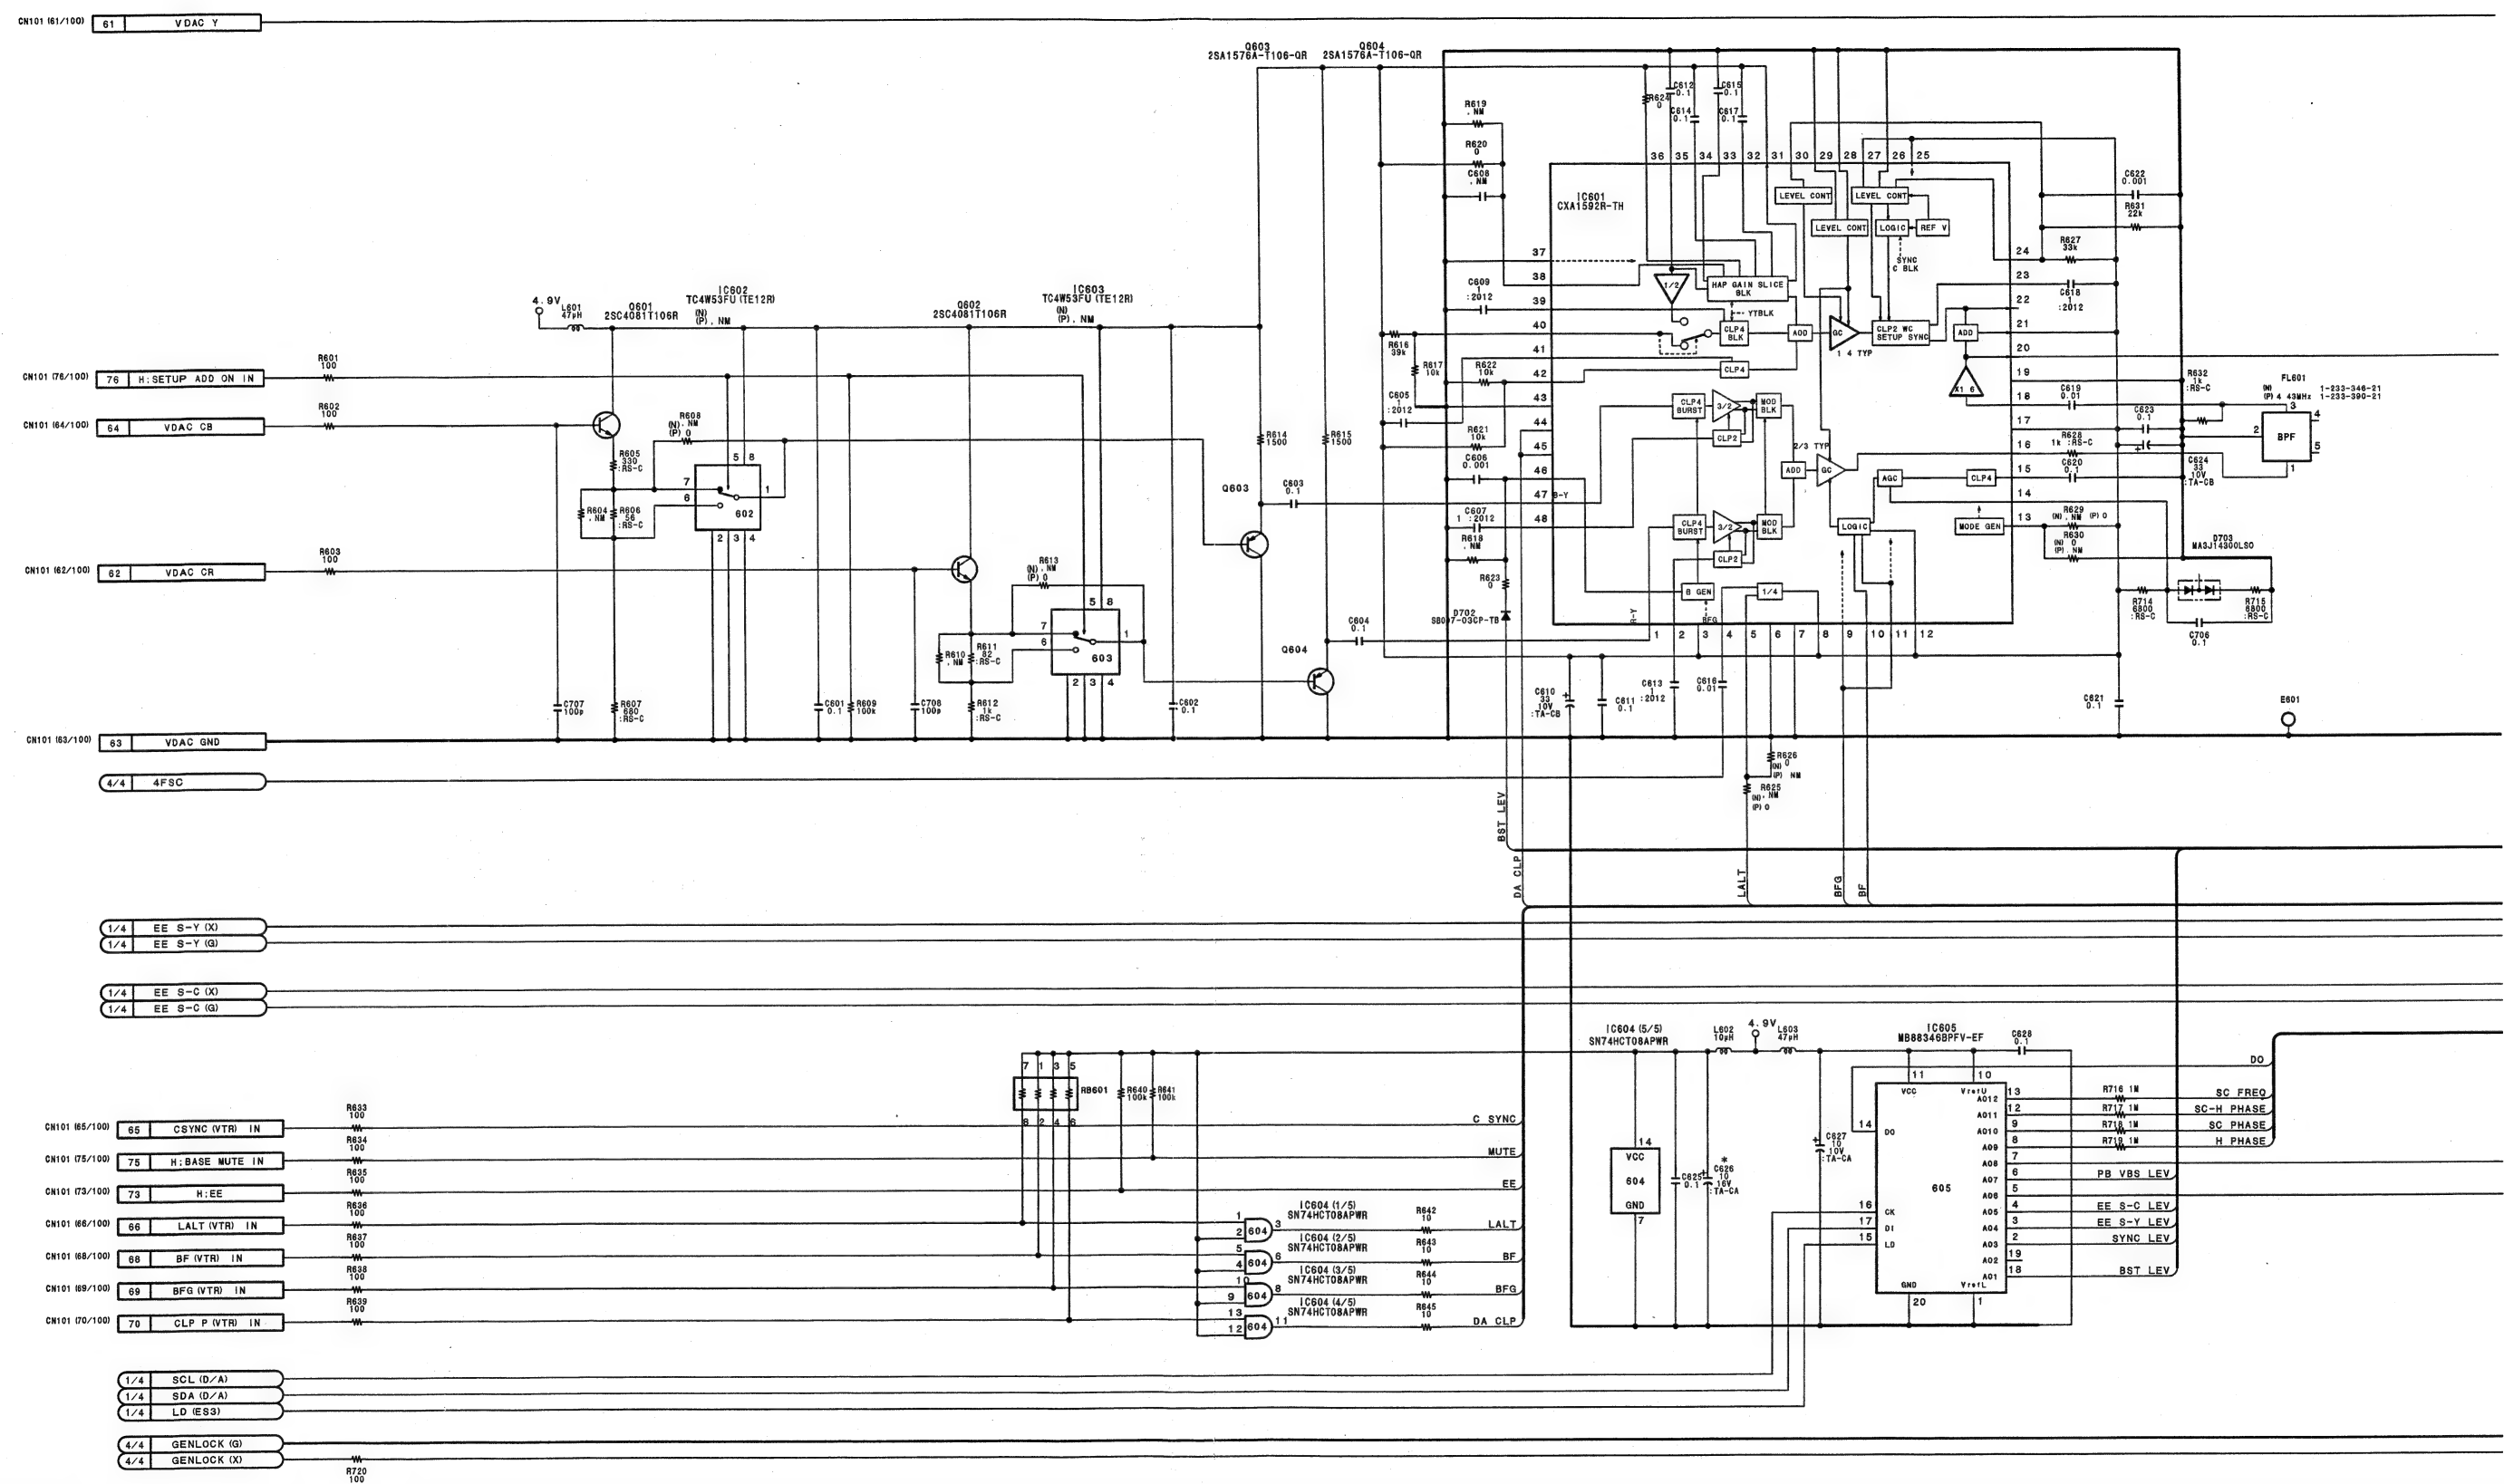



DSR-390/390P/370/370P/300A/300AP V2


4-35


4-35

5



# ES-31/31P (4/4) ES-31/31P (4/4)

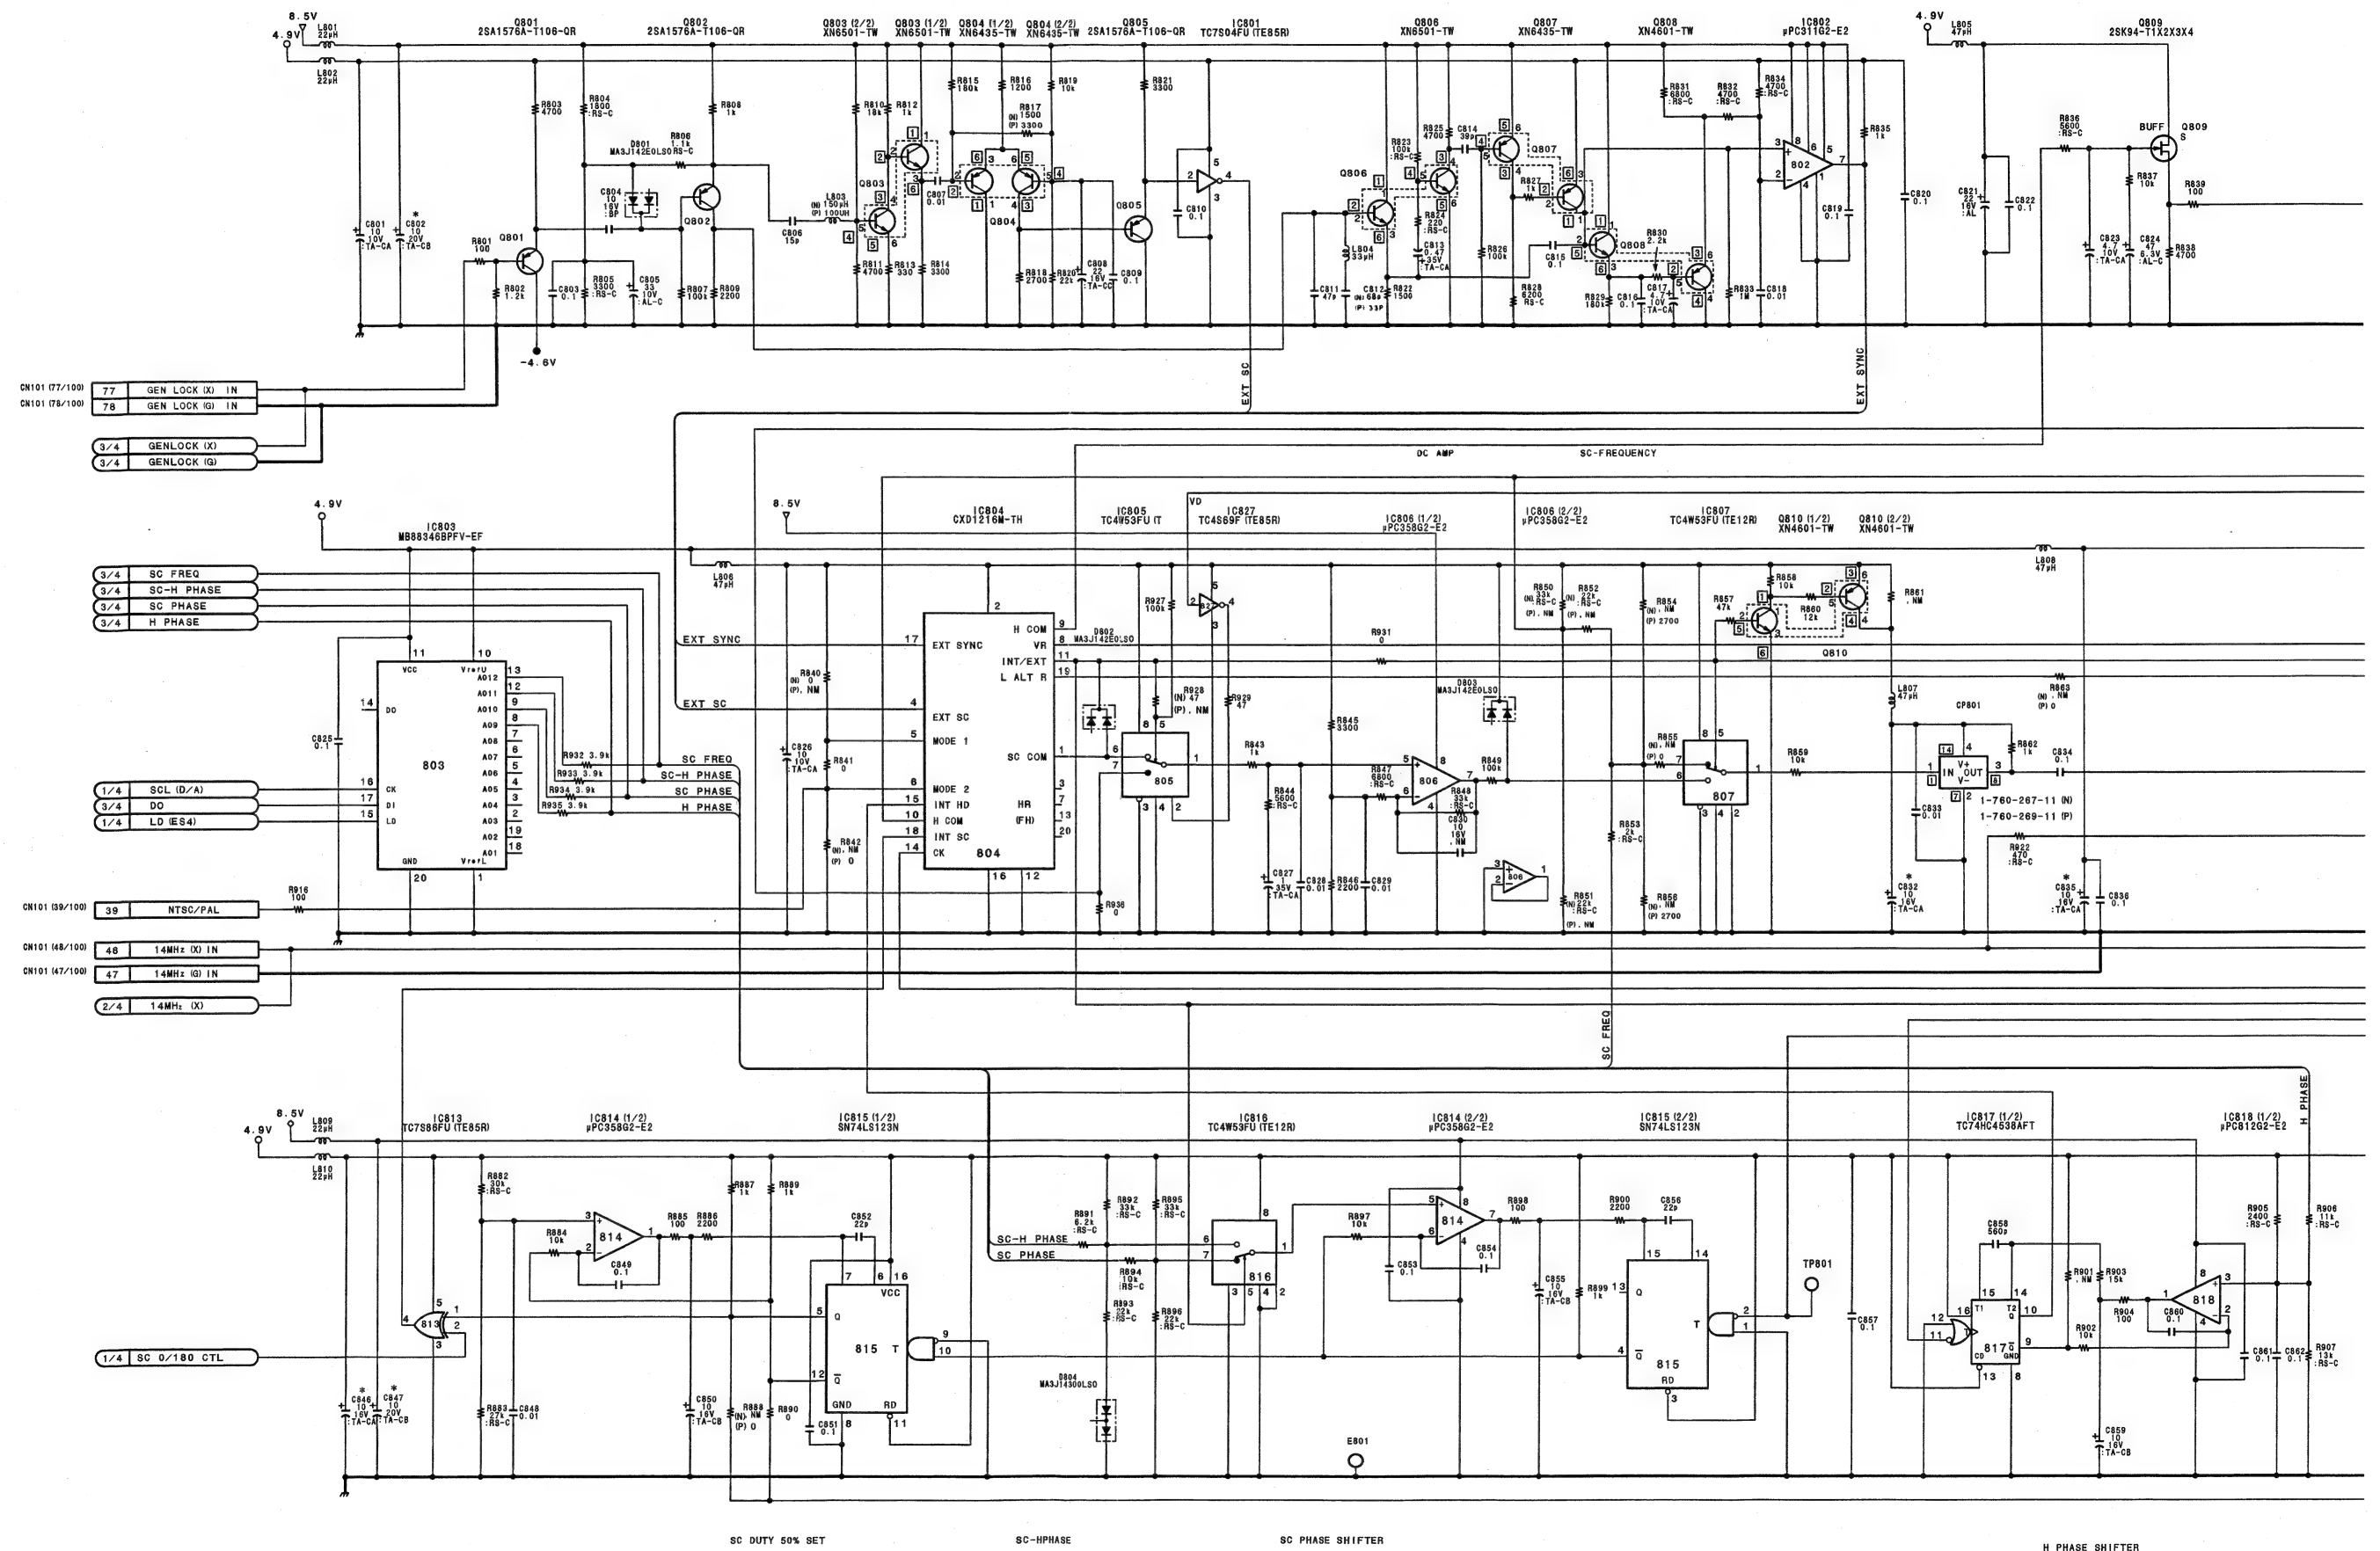

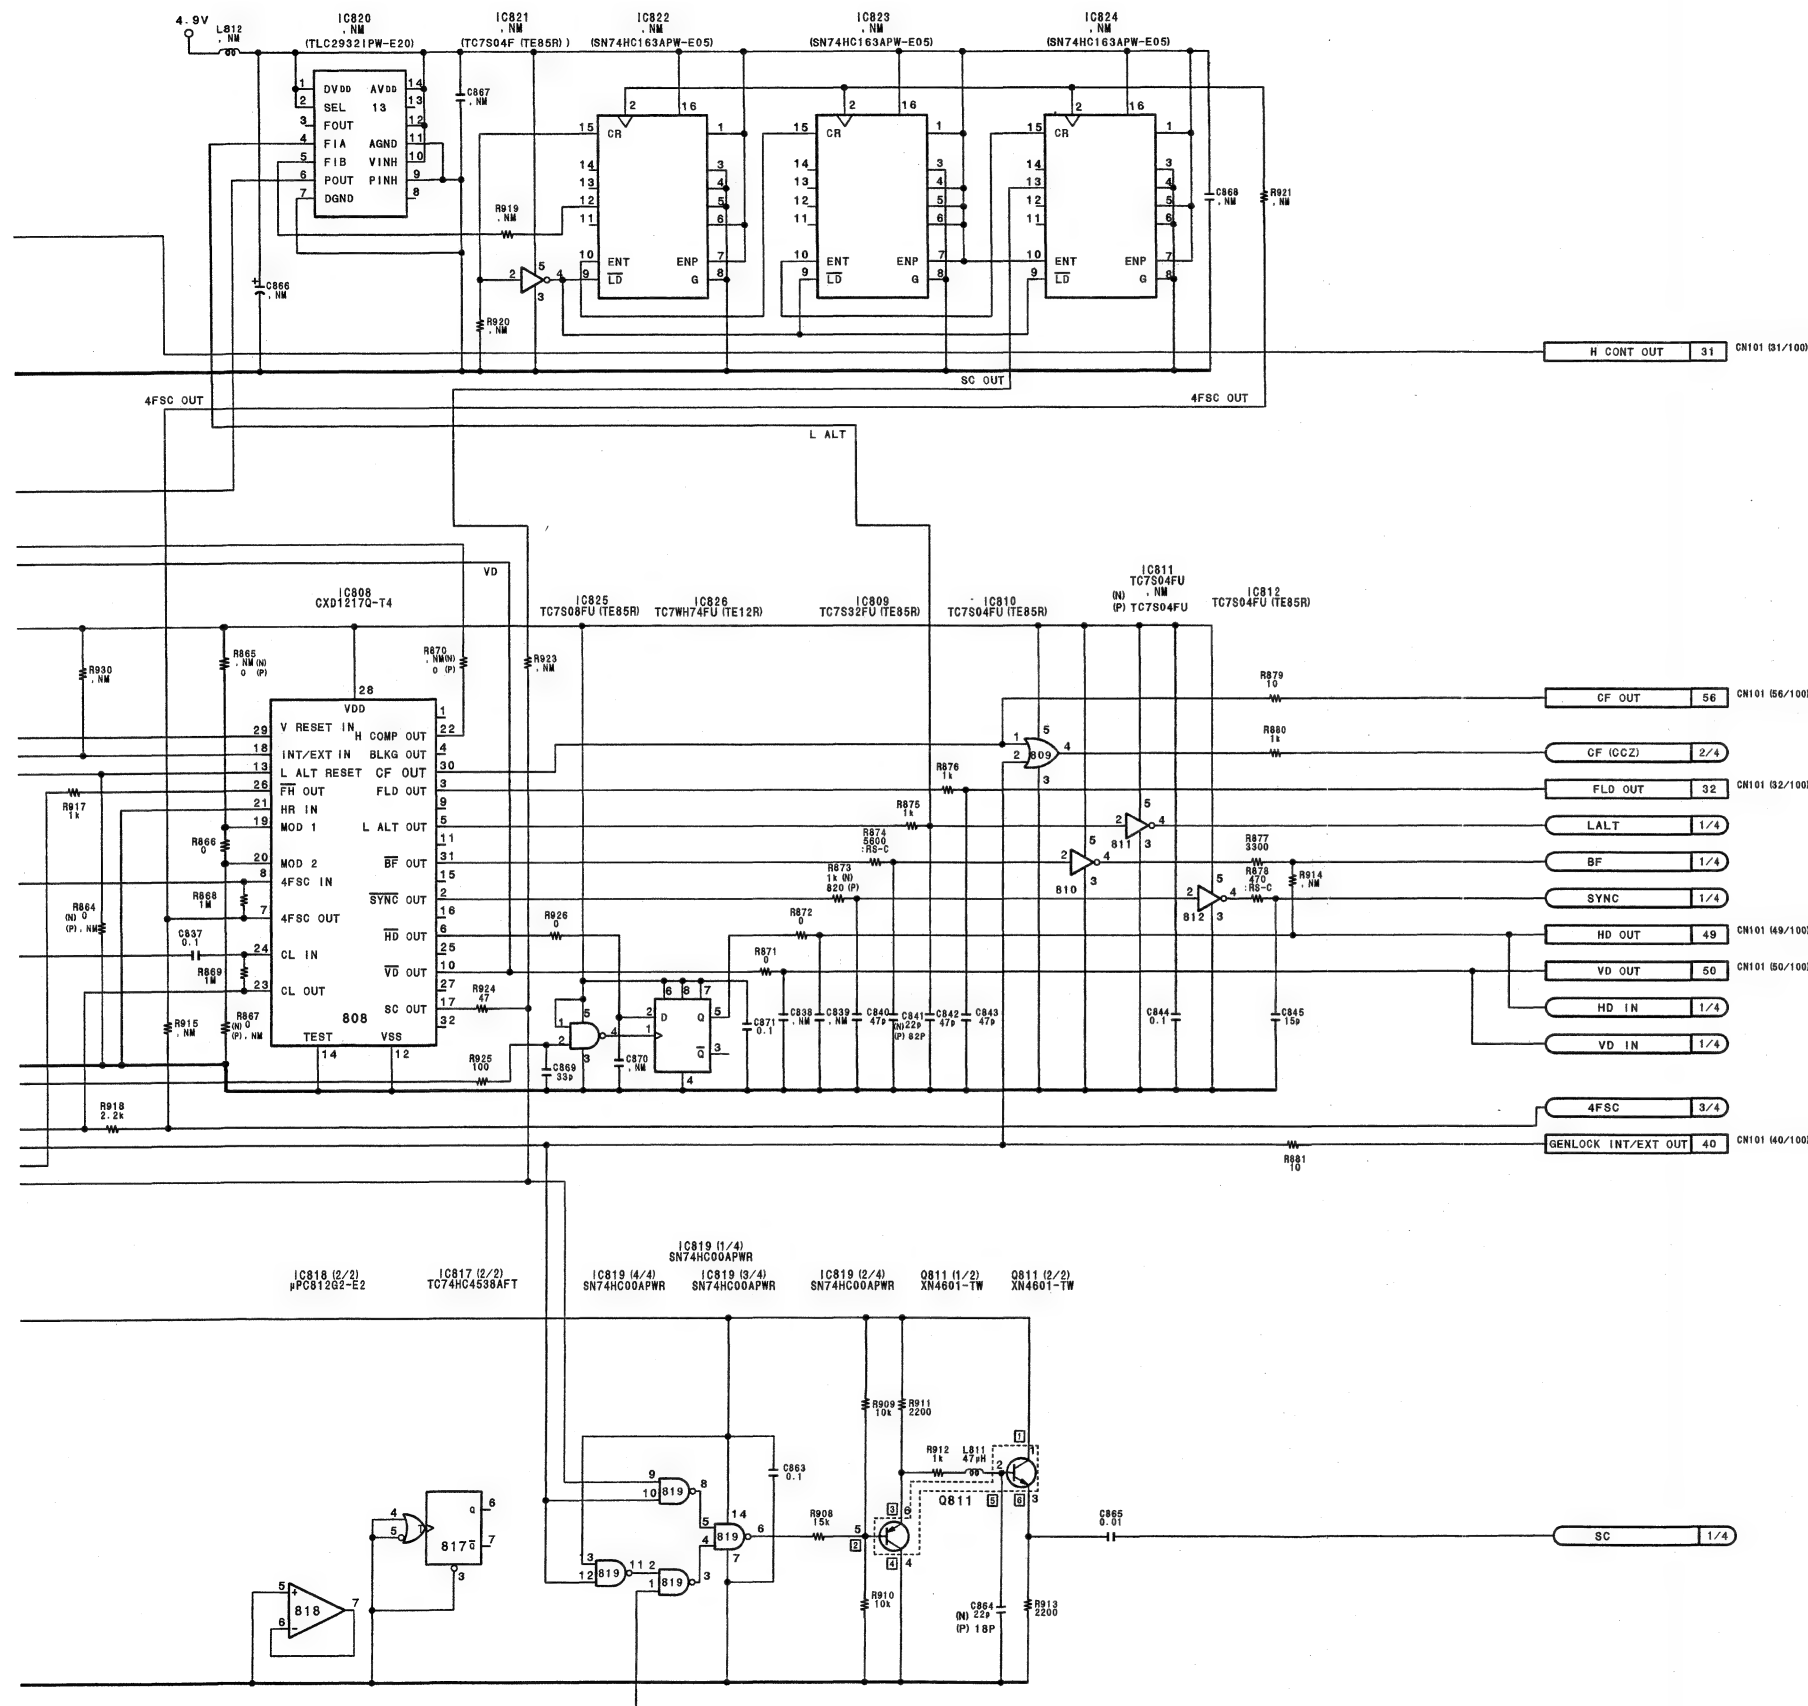


REF	NTSC	PAL
C812	68PF	33PF
C841	22PF	82PF
C864	22PF	18PF
CP801	1-760-267-11	1-760-269-11
IC811	NM	TC7S04FU (TE85R)
L803	150UH	100UH
R817	1500	3300
R840	0	NM
R842	NM	0
R850	33K : RS-C	NM
R851	22K : RS-C	NM
R852	22K : RS-C	NM
R854	NM	2700
R855	NM	0
R856	NM	2700
R863	NM	0
R864	0	NM
R865	NM	0
R867	0	NM
R870	NM	0
R873	1K	820
R888	NM	0
R928	47	NM

LAST NO
R936 L812
C971 D804
Q811 IC827
TP801 CP801
E801

NOTE


1. NC : NO CONNECTION
2. NM : NO MOUNT
3. (N) : NTSC only
4. (P) : PAL only

REF NO	CHANGE INFORMATION	LOT NO
C892	10V → 20V	221
C847		
C832	10V → 10V	
C895		
C846		

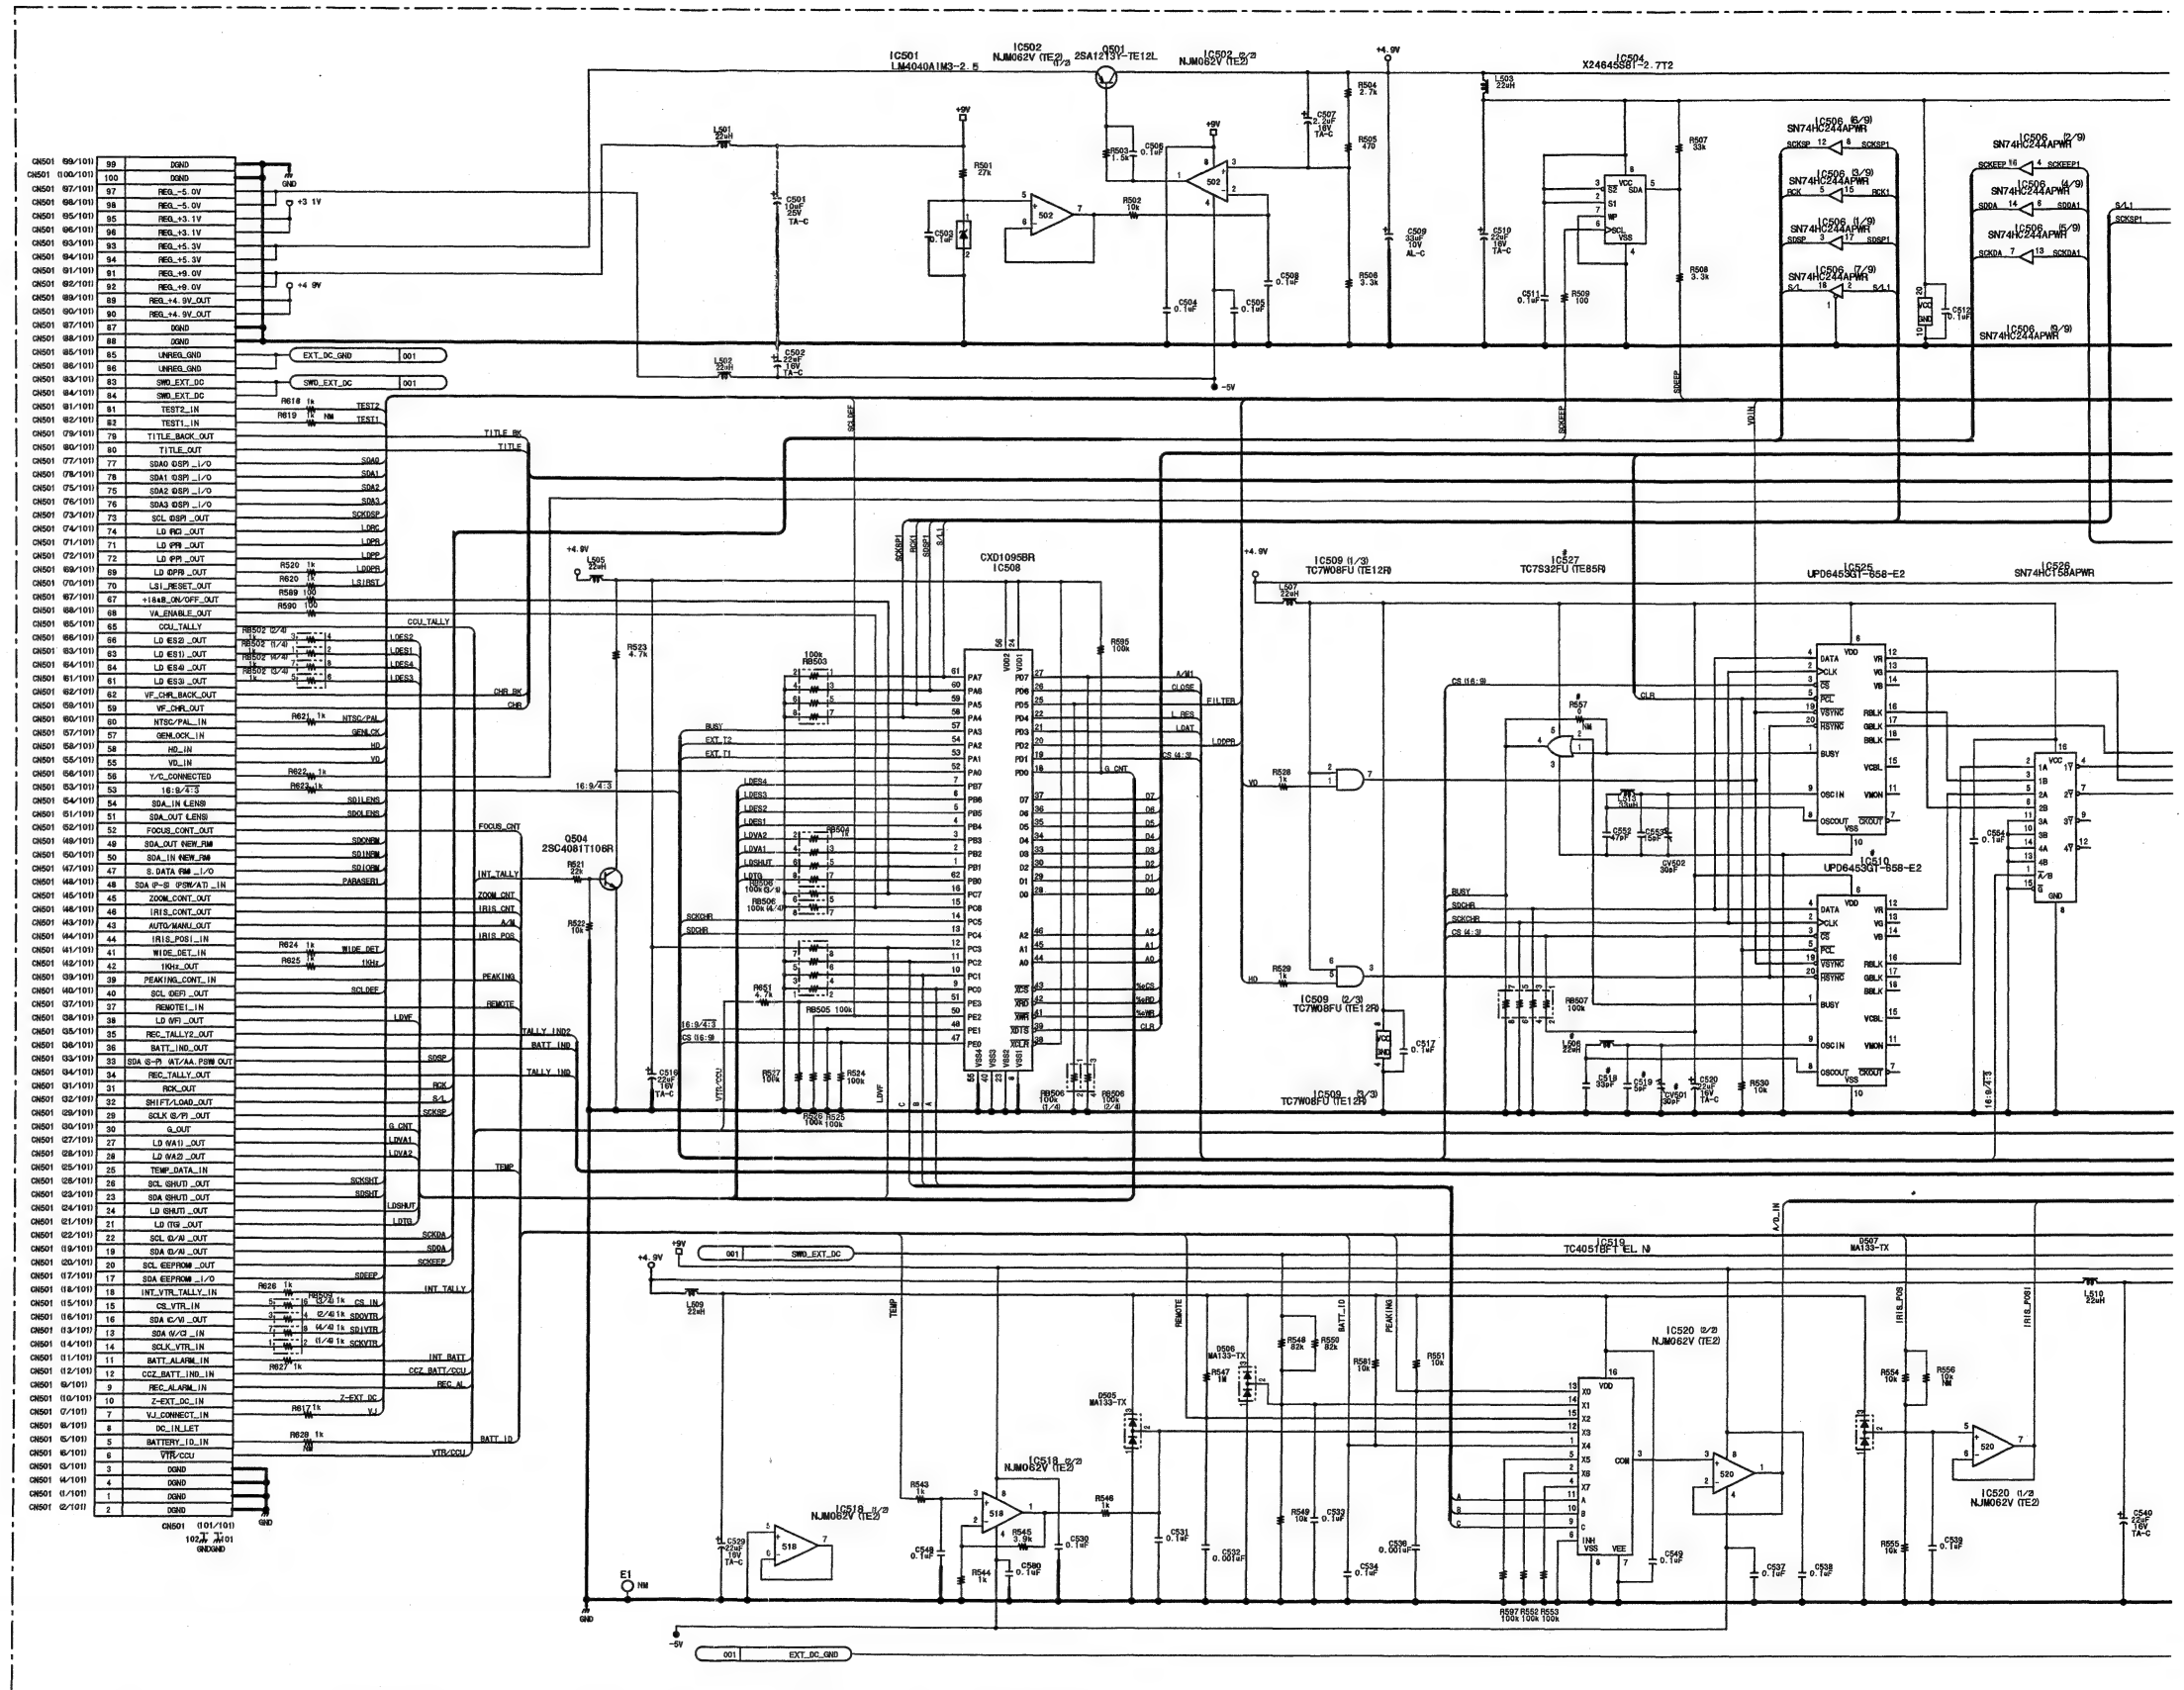


This circuit diagram is common to  
DSR-370WS/370WSP.

NOTE	DSR-370WS/370WSP	DSR-370WS/370WSP	DSR-370WS/370WSP	DSR-370WS/370WSP
C518	0.001uF	0.001uF	0.001uF	0.001uF
C519	0.001uF	0.001uF	0.001uF	0.001uF
C558	0.001uF	0.001uF	0.001uF	0.001uF
C557	0.001uF	0.001uF	0.001uF	0.001uF
C558	0.001uF	0.001uF	0.001uF	0.001uF
CY501	30uF	30uF	30uF	30uF
D511	0.001uF	0.001uF	0.001uF	0.001uF
IC510	UPO6403ST	UPO6403ST	UPO6403ST	UPO6403ST
IC527	TC733FU (T)	TC733FU (T)	TC733FU (T)	TC733FU (T)
IC529	0.001uF	0.001uF	0.001uF	0.001uF
L506	22uH	22uH	22uH	22uH
Q513	0.001uF	0.001uF	0.001uF	0.001uF
Q517	0.001uF	0.001uF	0.001uF	0.001uF
Q518	0.001uF	0.001uF	0.001uF	0.001uF
Q519	0.001uF	0.001uF	0.001uF	0.001uF
Q520	0.001uF	0.001uF	0.001uF	0.001uF
Q521	0.001uF	0.001uF	0.001uF	0.001uF
Q522	0.001uF	0.001uF	0.001uF	0.001uF
Q523	0.001uF	0.001uF	0.001uF	0.001uF
Q524	0.001uF	0.001uF	0.001uF	0.001uF
Q525	0.001uF	0.001uF	0.001uF	0.001uF
Q526	0.001uF	0.001uF	0.001uF	0.001uF
Q527	0.001uF	0.001uF	0.001uF	0.001uF
Q528	0.001uF	0.001uF	0.001uF	0.001uF
Q529	0.001uF	0.001uF	0.001uF	0.001uF
Q530	0.001uF	0.001uF	0.001uF	0.001uF

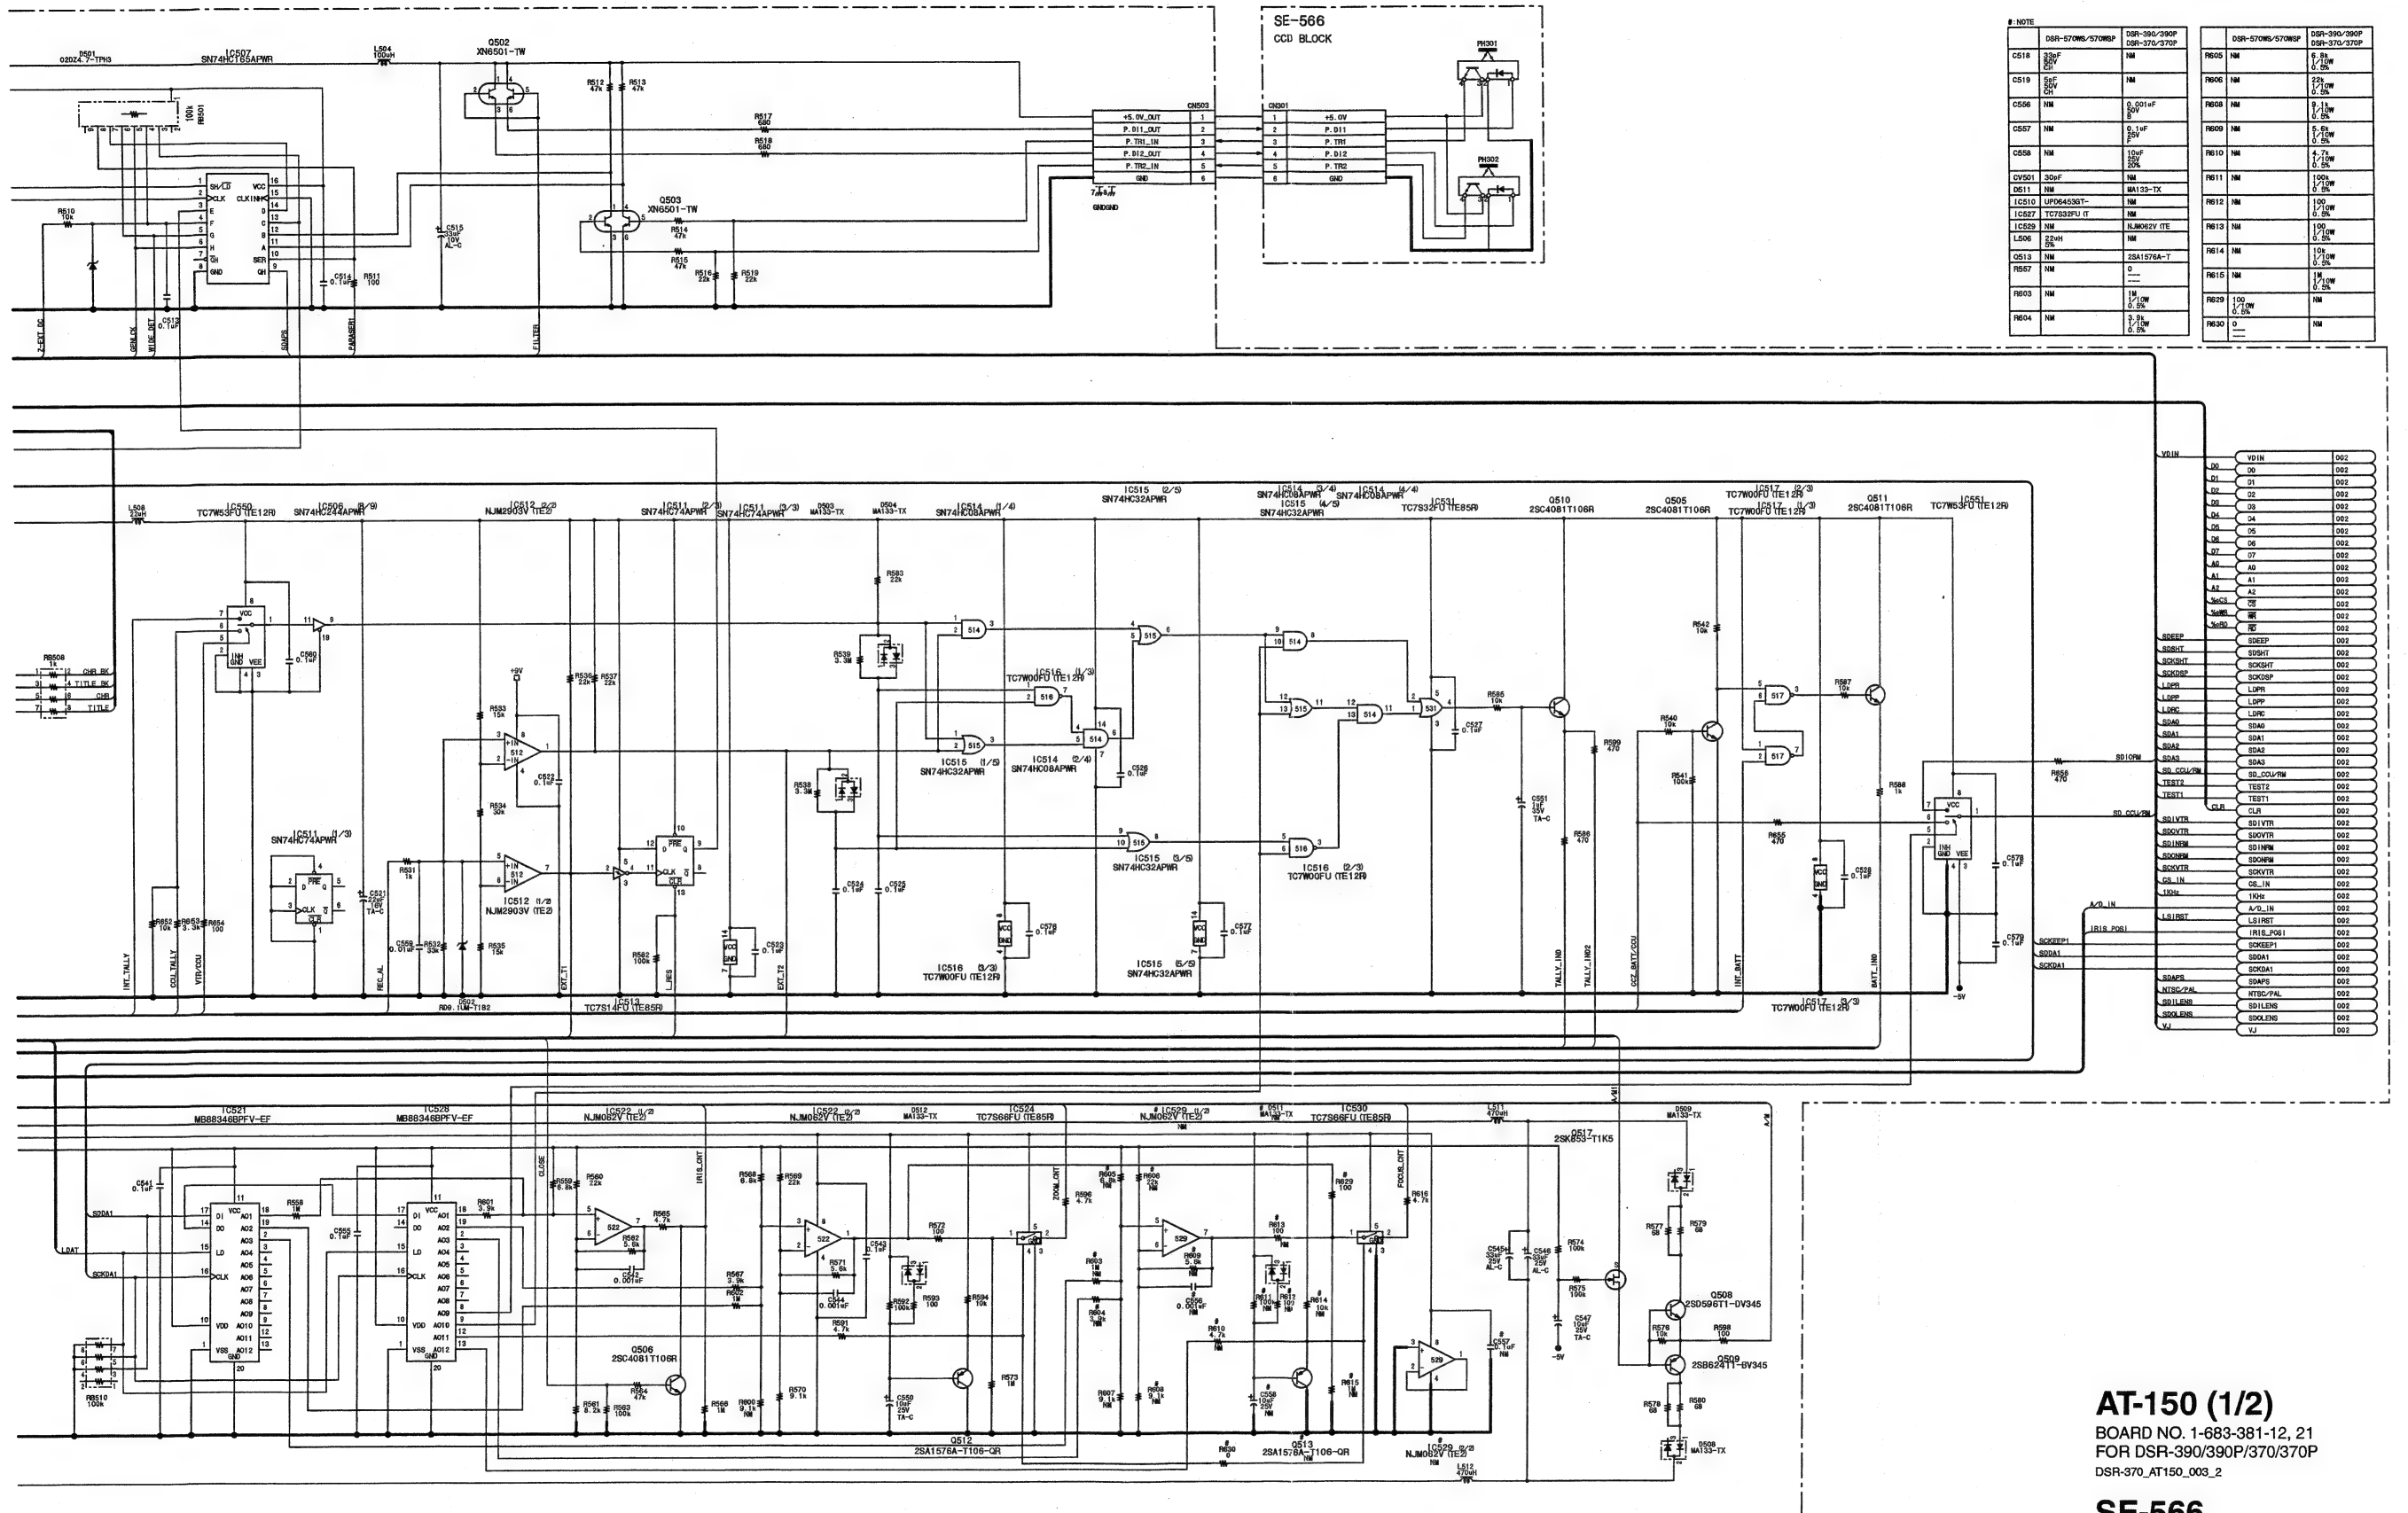

## AT-150 (2/2)

This circuit diagram is common to  
DSR-570WS/570WSP.




001	YDIN	YDIN
001	SDOEK	SDOEK
001	SDOIKT	SDOIKT
001	SDOIKH	SDOIKH
001	SDOOLVW	SDOOLVW
001	TESTE	TESTE
001	TESTI	TESTI
001	CLR	CLR
001	SDIVYR	SDIVYR
001	SDOYVR	SDOYVR
001	SDOYVR	SDOYVR
001	CS_LIN	CS_LIN
001	19R6	19R6
001	AQ-LIN	AQ-LIN
001	LSIRST	LSIRST
001	RIE_POSI	RIE_POSI
001	SDOEKFI	SDOEKFI
001	SDOAI	SDOAI
001	SDOAI	SDOAI
001	SDOAI	SDOAI
001	SDOAI	SDOAI
001	NTSC/PAL	NTSC/PAL
001	VJ	VJ

#	NOTE	DOE-ETONG-ETONG	DOE-392-392P DOE-370-372P
C740	0.1 $\mu$ F 50V	—	—
C741	0.1 $\mu$ F 50V	—	—
C742	0.1 $\mu$ F 50V	—	—
C743	22 $\mu$ F 25V 20%	—	—
C744	0.1 $\mu$ F 50V	—	—
C745	0.1 $\mu$ F 50V	—	—
D705	H8688MK—TL	—	—
IC718	TC7632PU U	—	—
IC719	TC7634PU U	—	—
IC720	TC7634PU U	—	—
IC721	TL16C050P	—	—
IC722	TC7674PU U	—	—
L707	22 $\mu$ H	—	—
R709	10 $\Omega$ 1/10W 0.5%	—	—
R734	—	—	—
R734	10 $\Omega$ 1/10W 0.5%	—	—
R755	1 $\Omega$ 1/10W 0.5%	—	—
R758	10 $\Omega$ 1/10W 0.5%	—	—
R759	10 $\Omega$ 1/10W 0.5%	—	—
R769	—	—	—
R772	47 $\Omega$ 1/10W 0.5%	—	—
R763	10 $\Omega$ 1/10W 0.5%	—	—
R764	47 $\Omega$ 1/10W 0.5%	—	—
R765	—	10 $\Omega$ 1/10W 0.5%	—

**AT-150 (2/2)**


BOARD NO. 1-683-381-12, 21  
FOR DSR-390/390P/370/370P  
DSR-370\_AT150\_003\_2



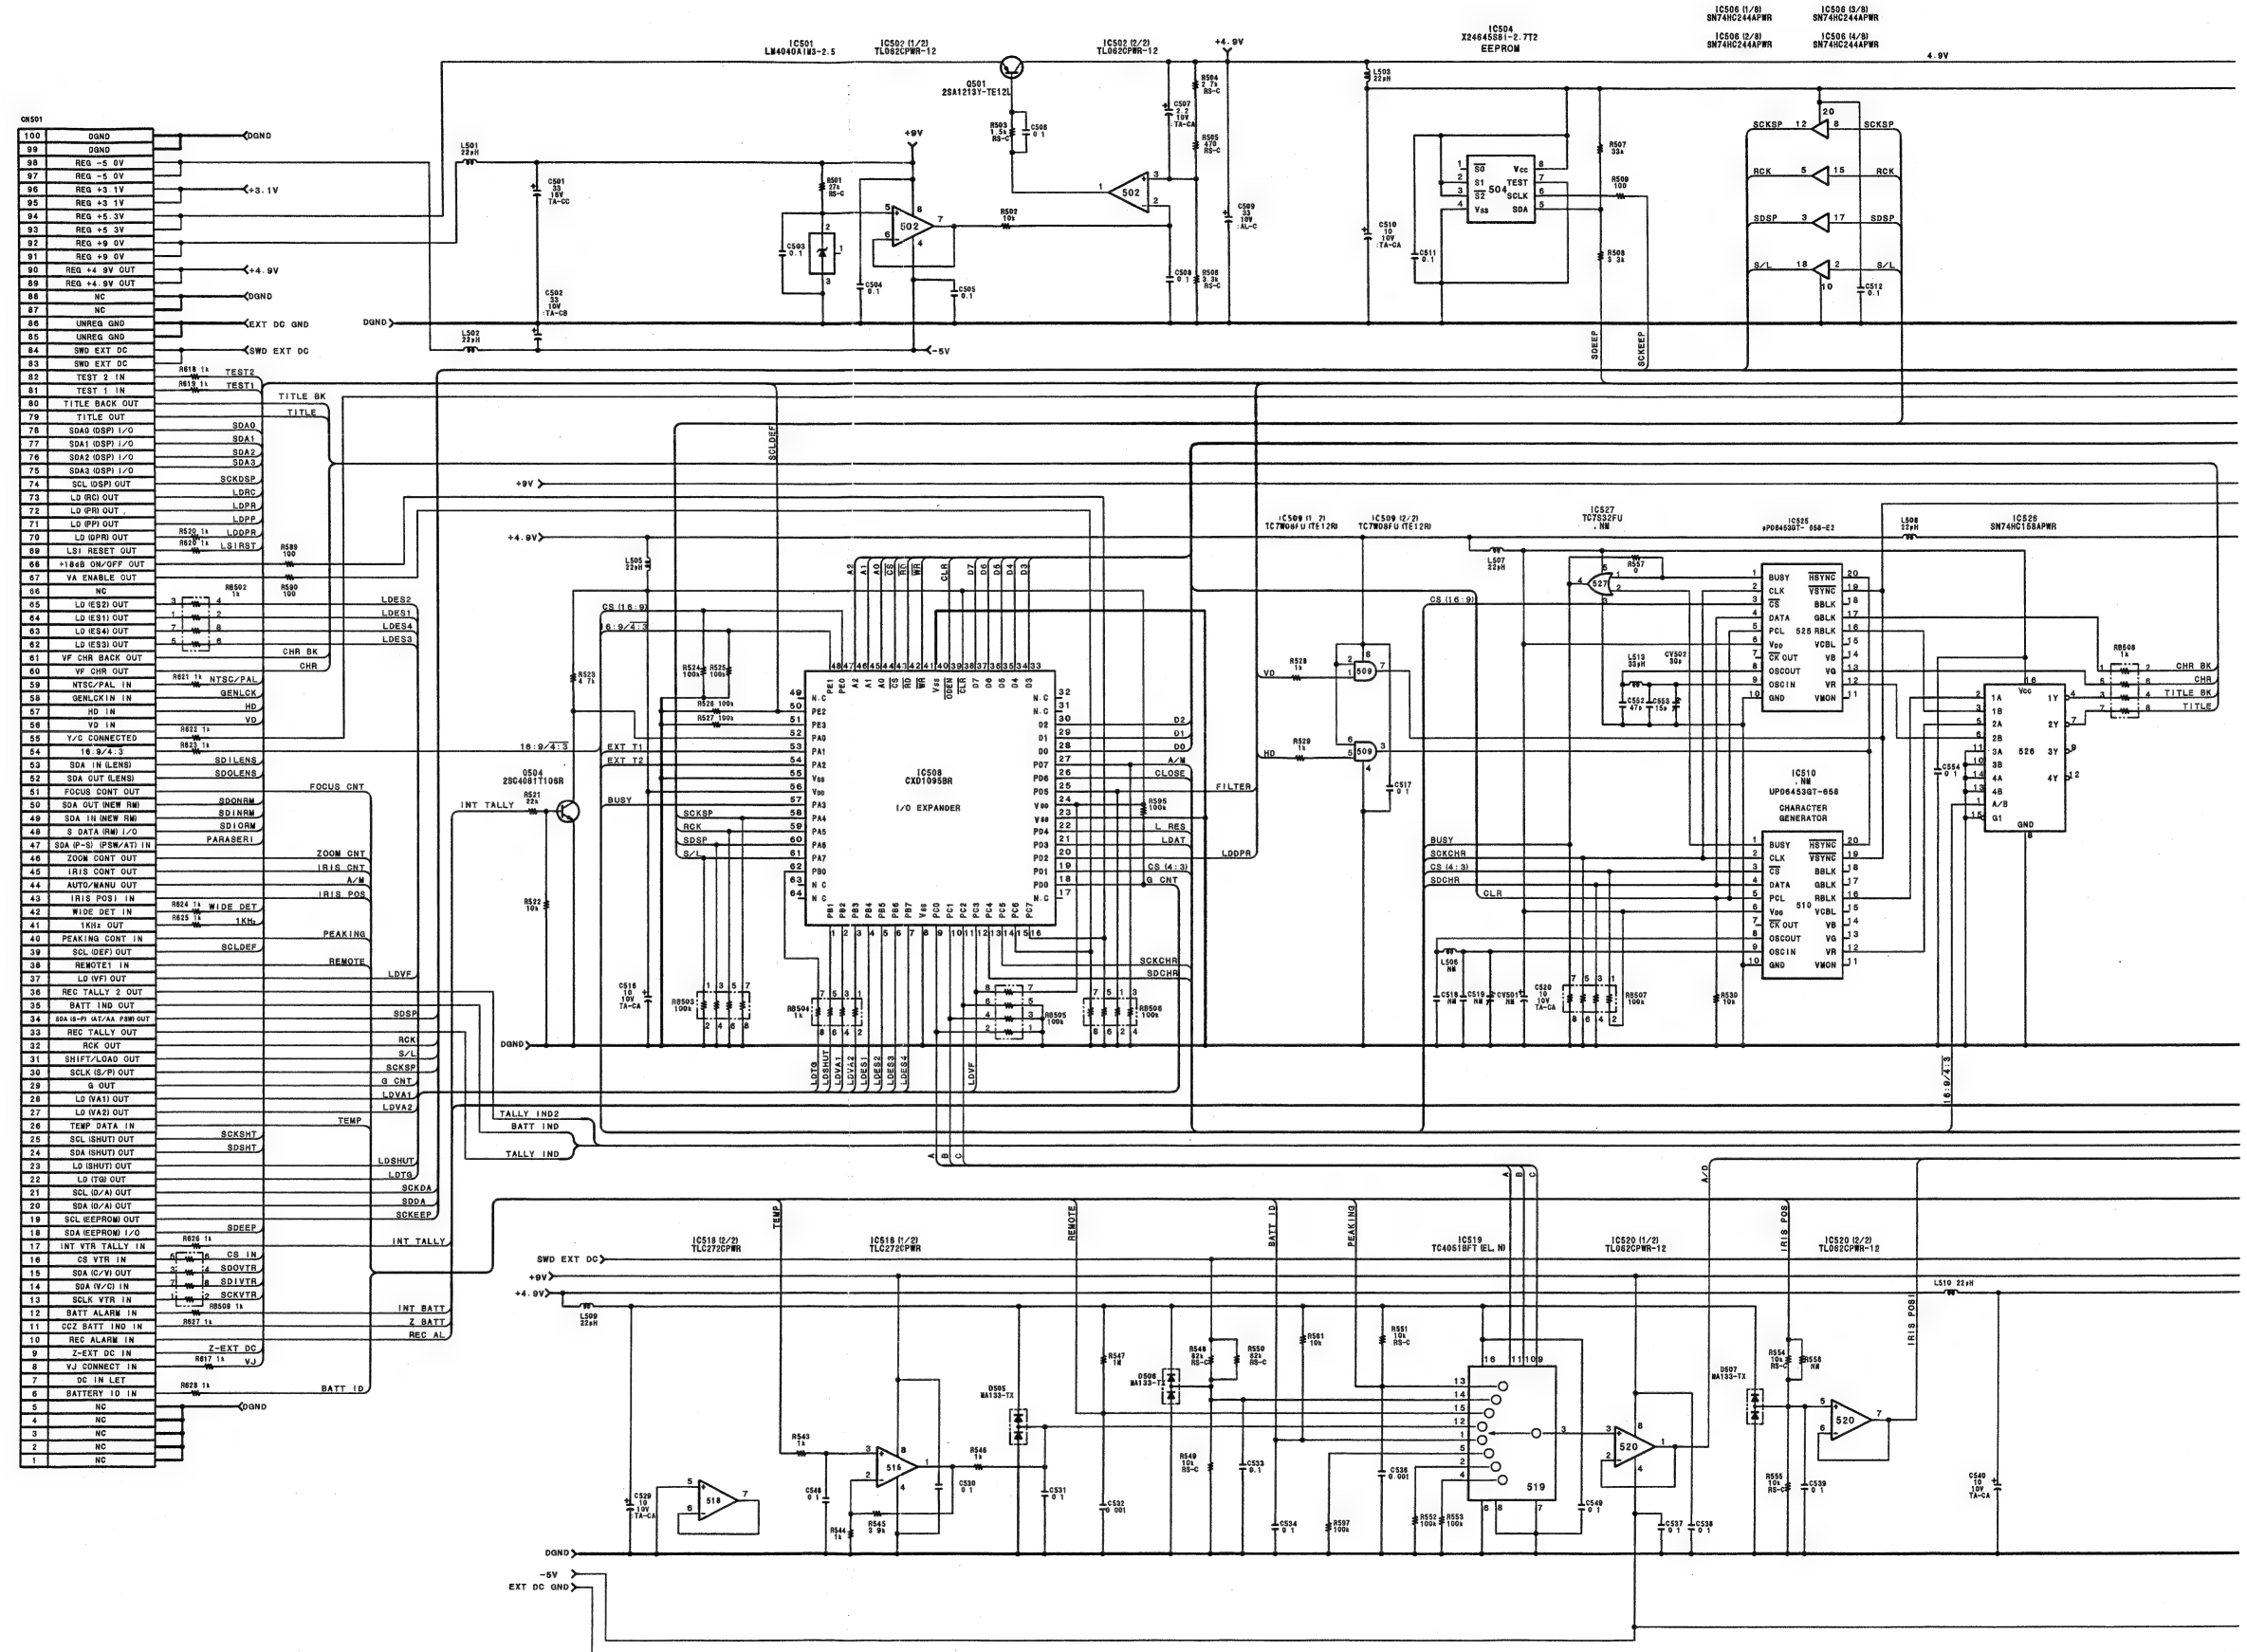







DSR-390/390P/370/370P/300A/300AP V2

CN-1811 CN-1811


CN1 (MB)		CN2 (AT)	
1	2	2	1
3	4	7	6
5	6	9	8
7	8	9	7
9	10	91	8
11	12	21	11
13	14	14	13
15	16	15	15
17	18	16	17
19	20	20	19
21	22	22	21
23	24	23	23
25	26	25	25
27	28	27	27
29	30	30	29
31	32	31	31
33	34	33	33
35	36	35	35
37	38	37	37
39	40	39	39
41	42	41	41
43	44	43	43
45	46	45	45
47	48	47	47
49	50	49	49
51	52	51	51
53	54	53	53
55	56	55	55
57	58	57	57
59	60	59	59
61	62	61	61
63	64	63	63
65	66	65	65
67	68	67	67
69	70	69	69
71	72	71	71
73	74	73	73
75	76	75	75
77	78	77	77
79	80	79	79
81	82	81	81
83	84	83	83
85	86	85	85
87	88	87	87
89	90	89	89
91	92	91	91
93	94	93	93
95	96	95	95
97	98	97	97
99	100	101	99

CN-1811

BOARD NO. 1-673-966-11  
B-DSR500WS-CN1811-SM

**KY-405, FP-118A (1/6)**



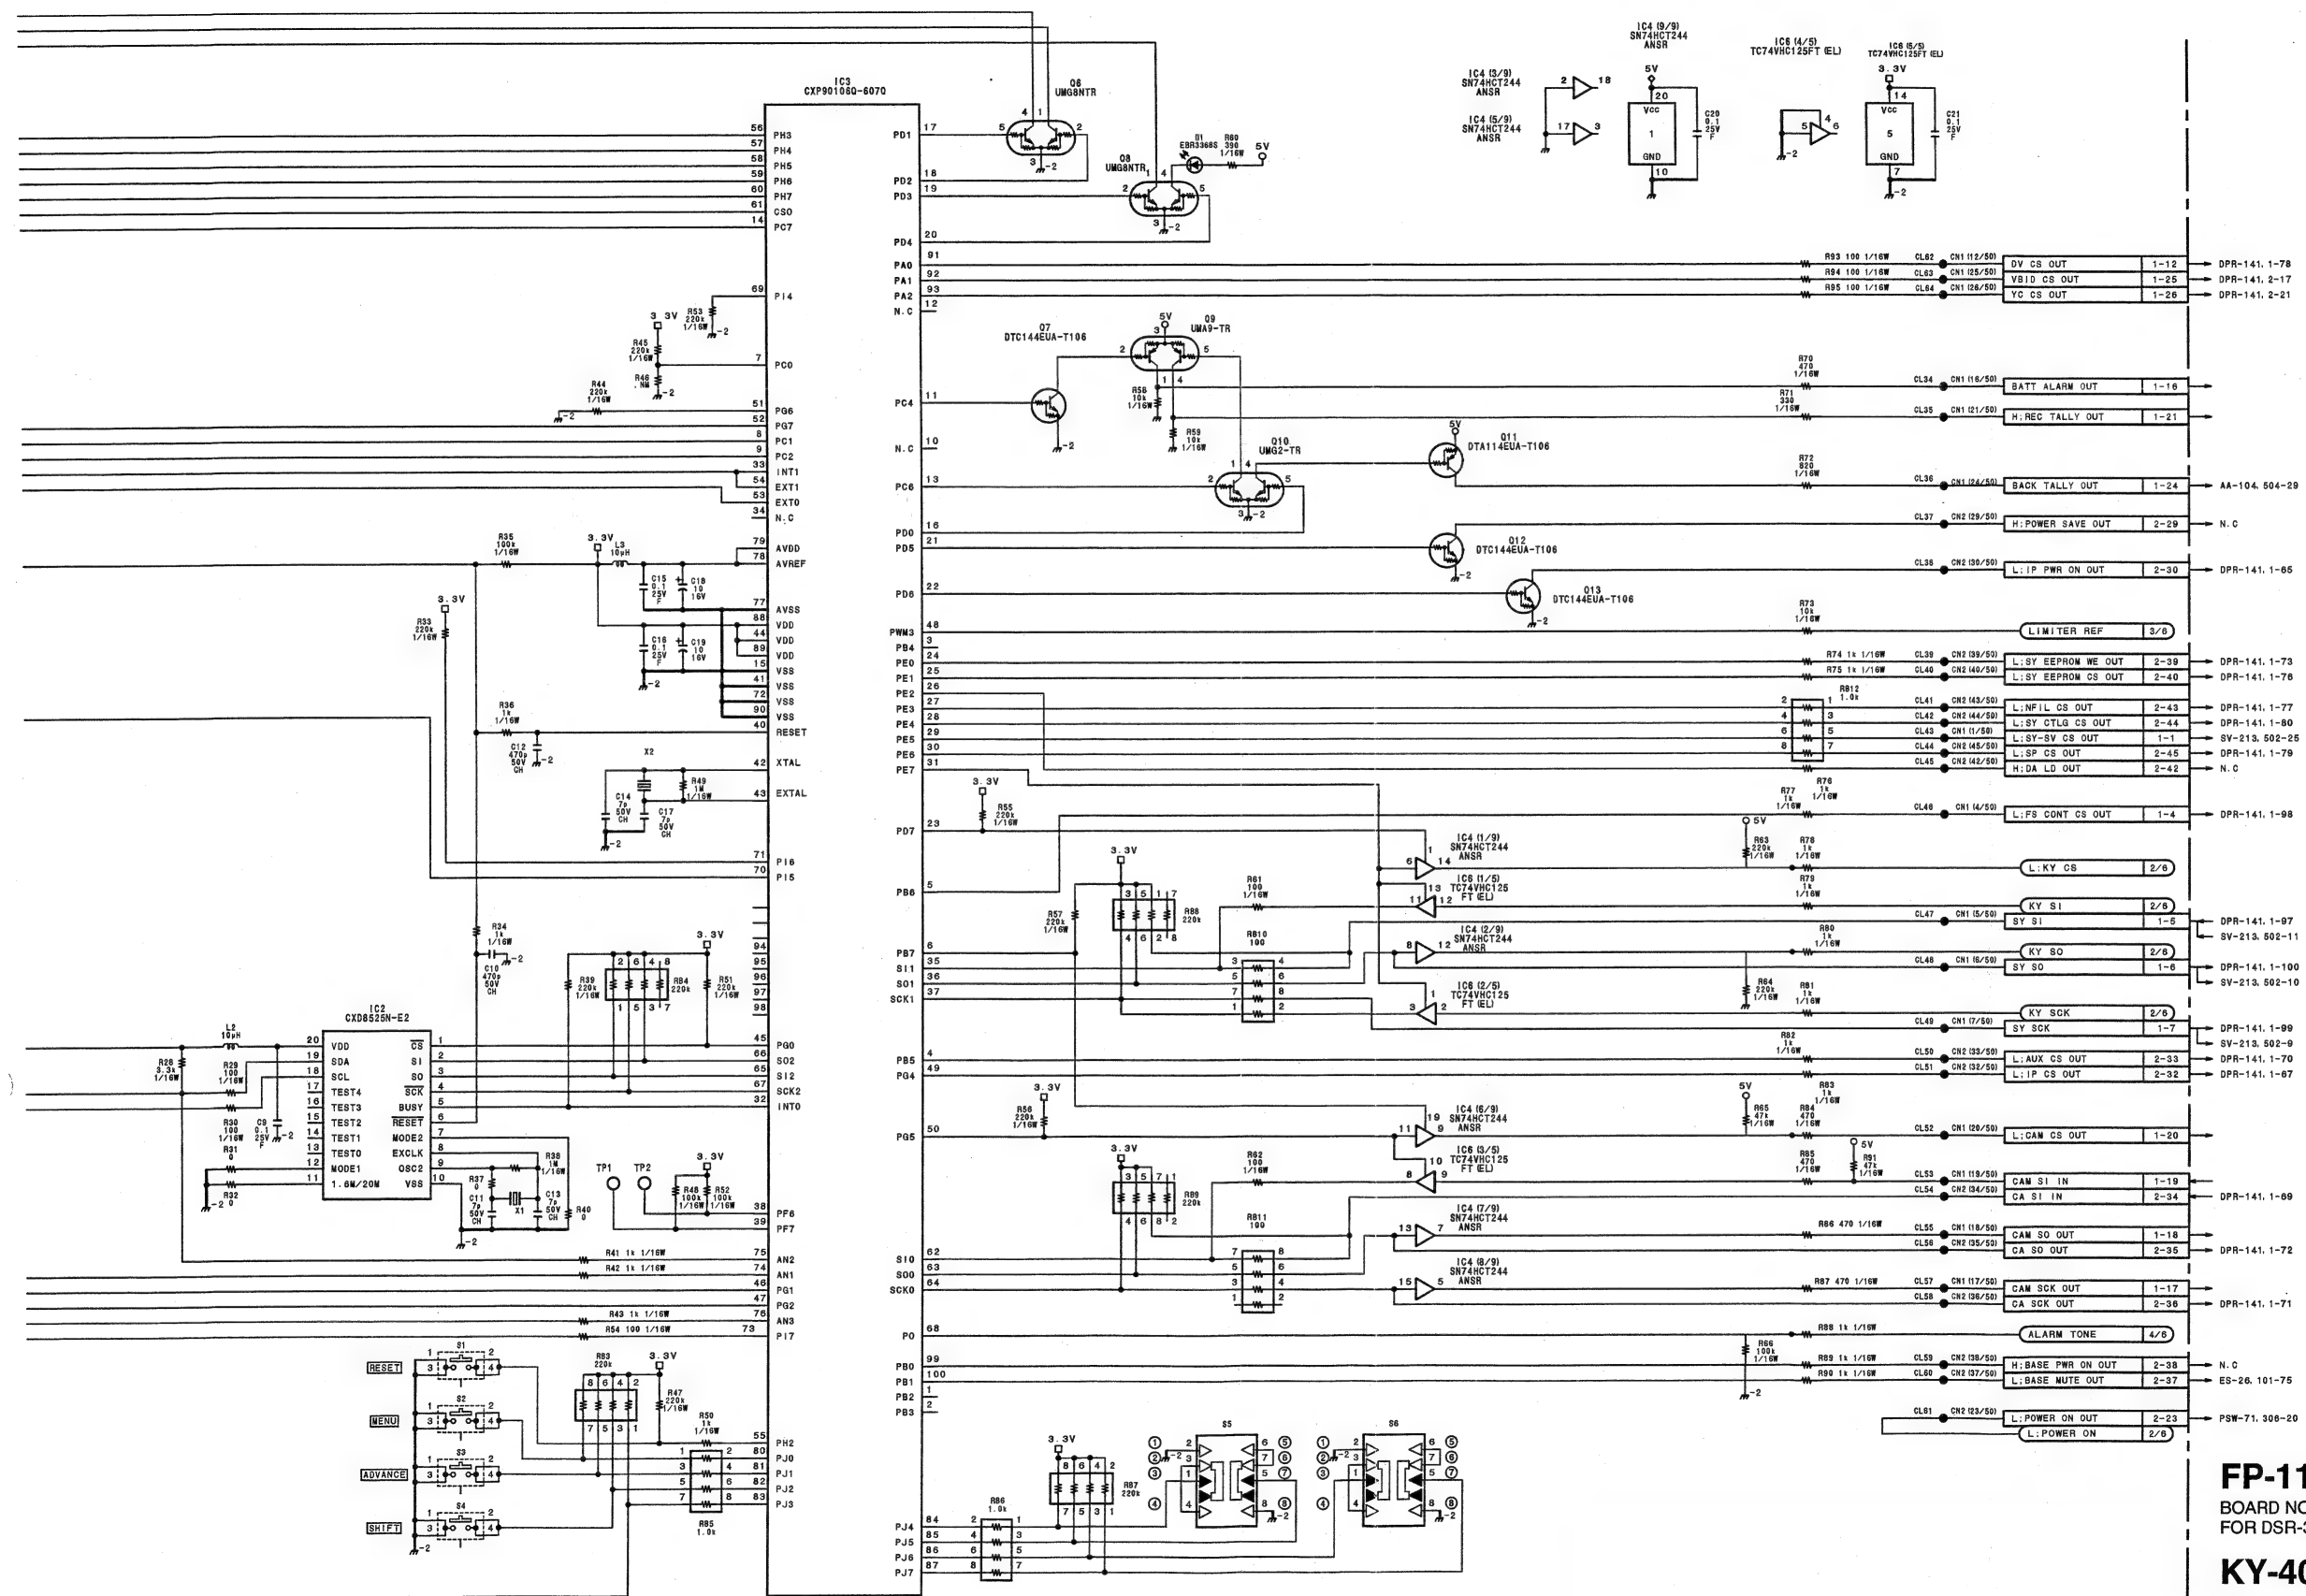


**FP-118A (2/6)**



REF NO.	DSR-390/390P DSR-370/370P	DSR-300A/300AP
IC200	μPD78064GF-201-3BA	μPD78064GF-146-3BA





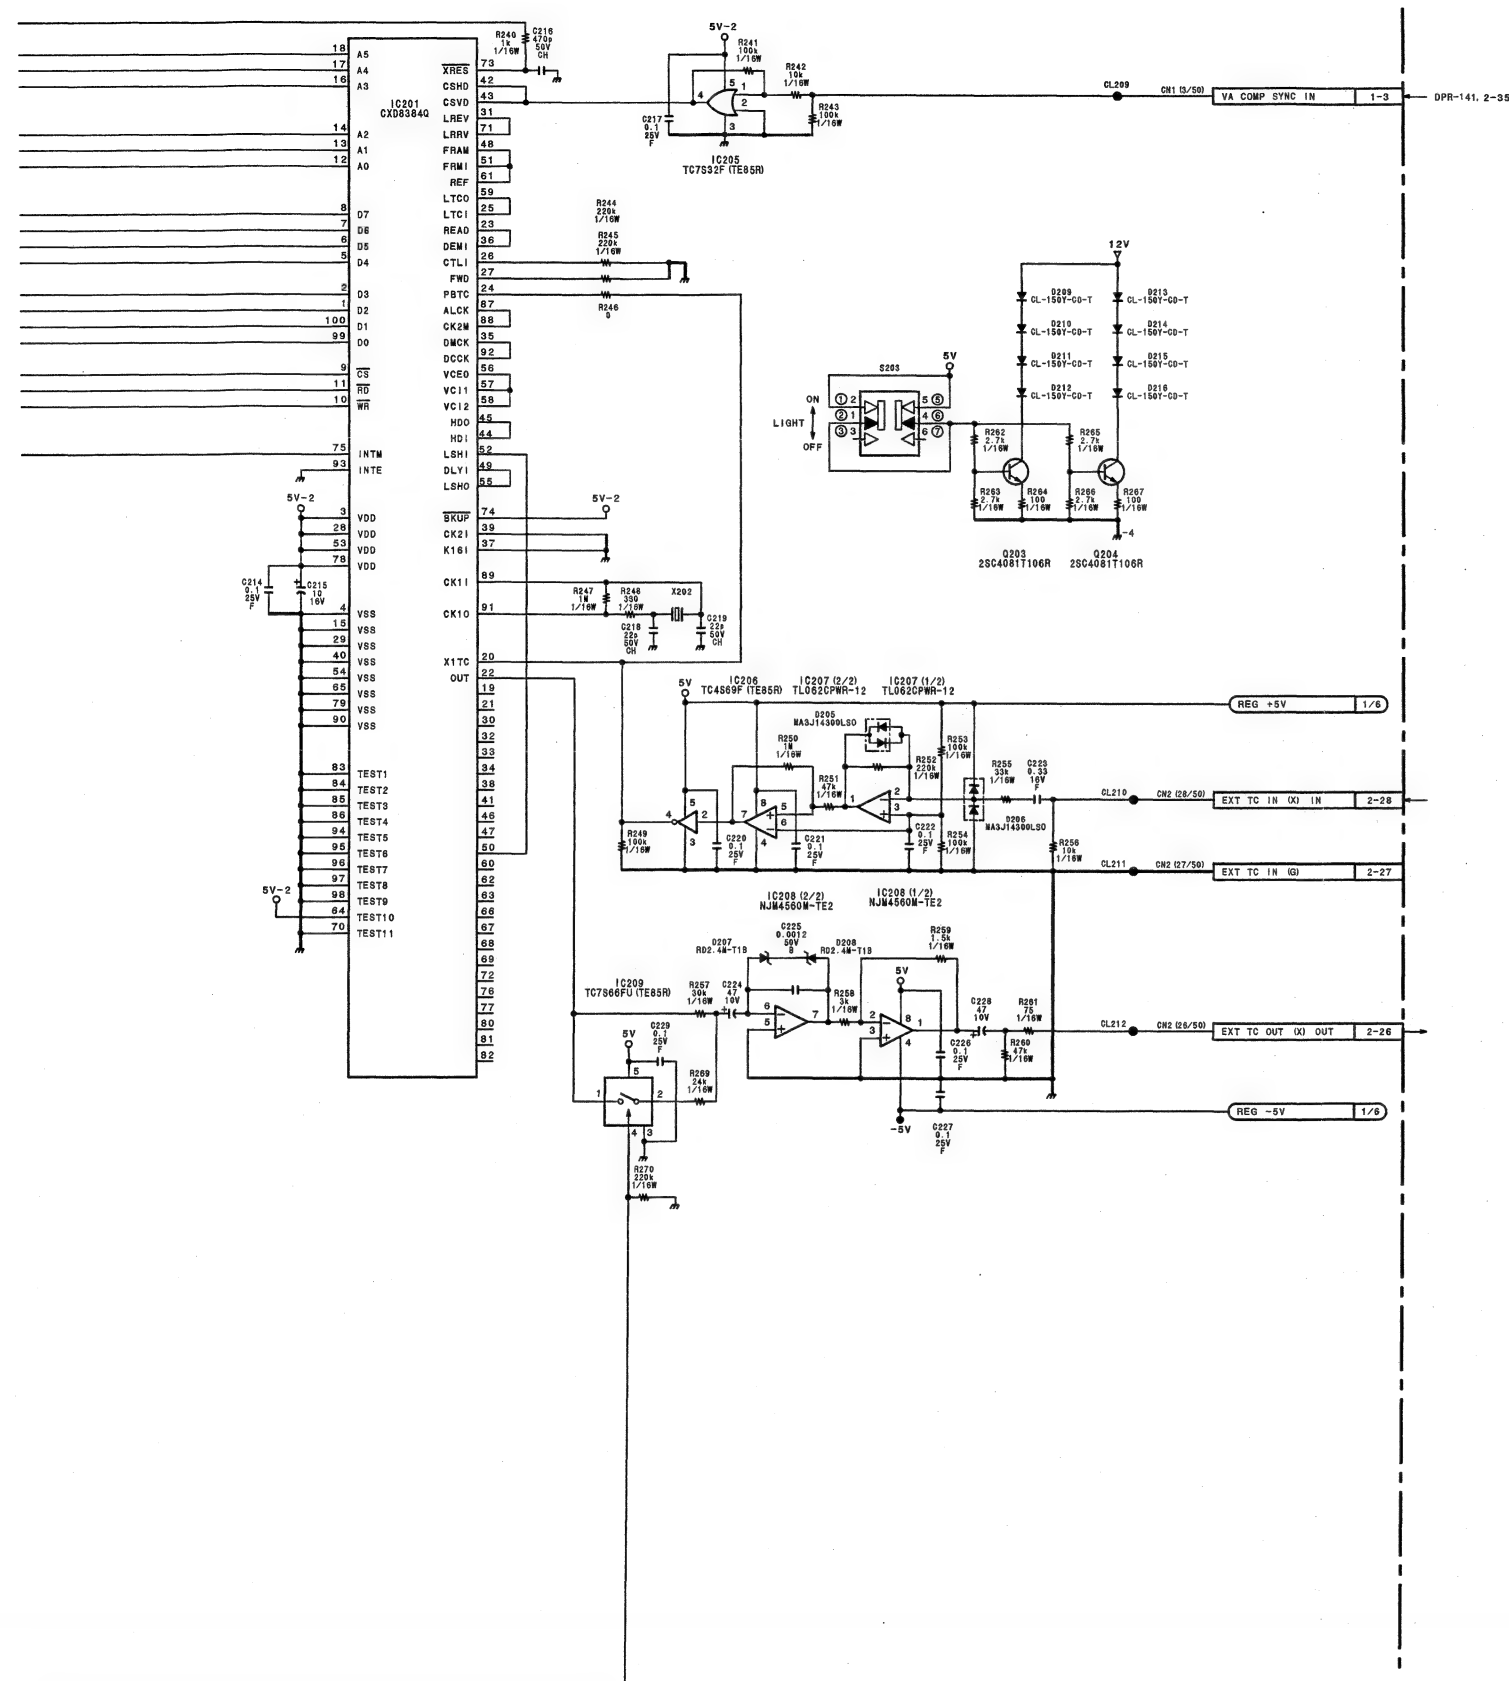


**FP-118A (2/6)**  
BOARD NO. 1-673-967-13  
FOR DSR-390/390P/370/370P  
B-DSR500WS-FP118-SM

#NOTE


REF NO.	DSR-390/390P DSR-370/370P	DSR-300A/300AP
D403	MA3J143	1SS119

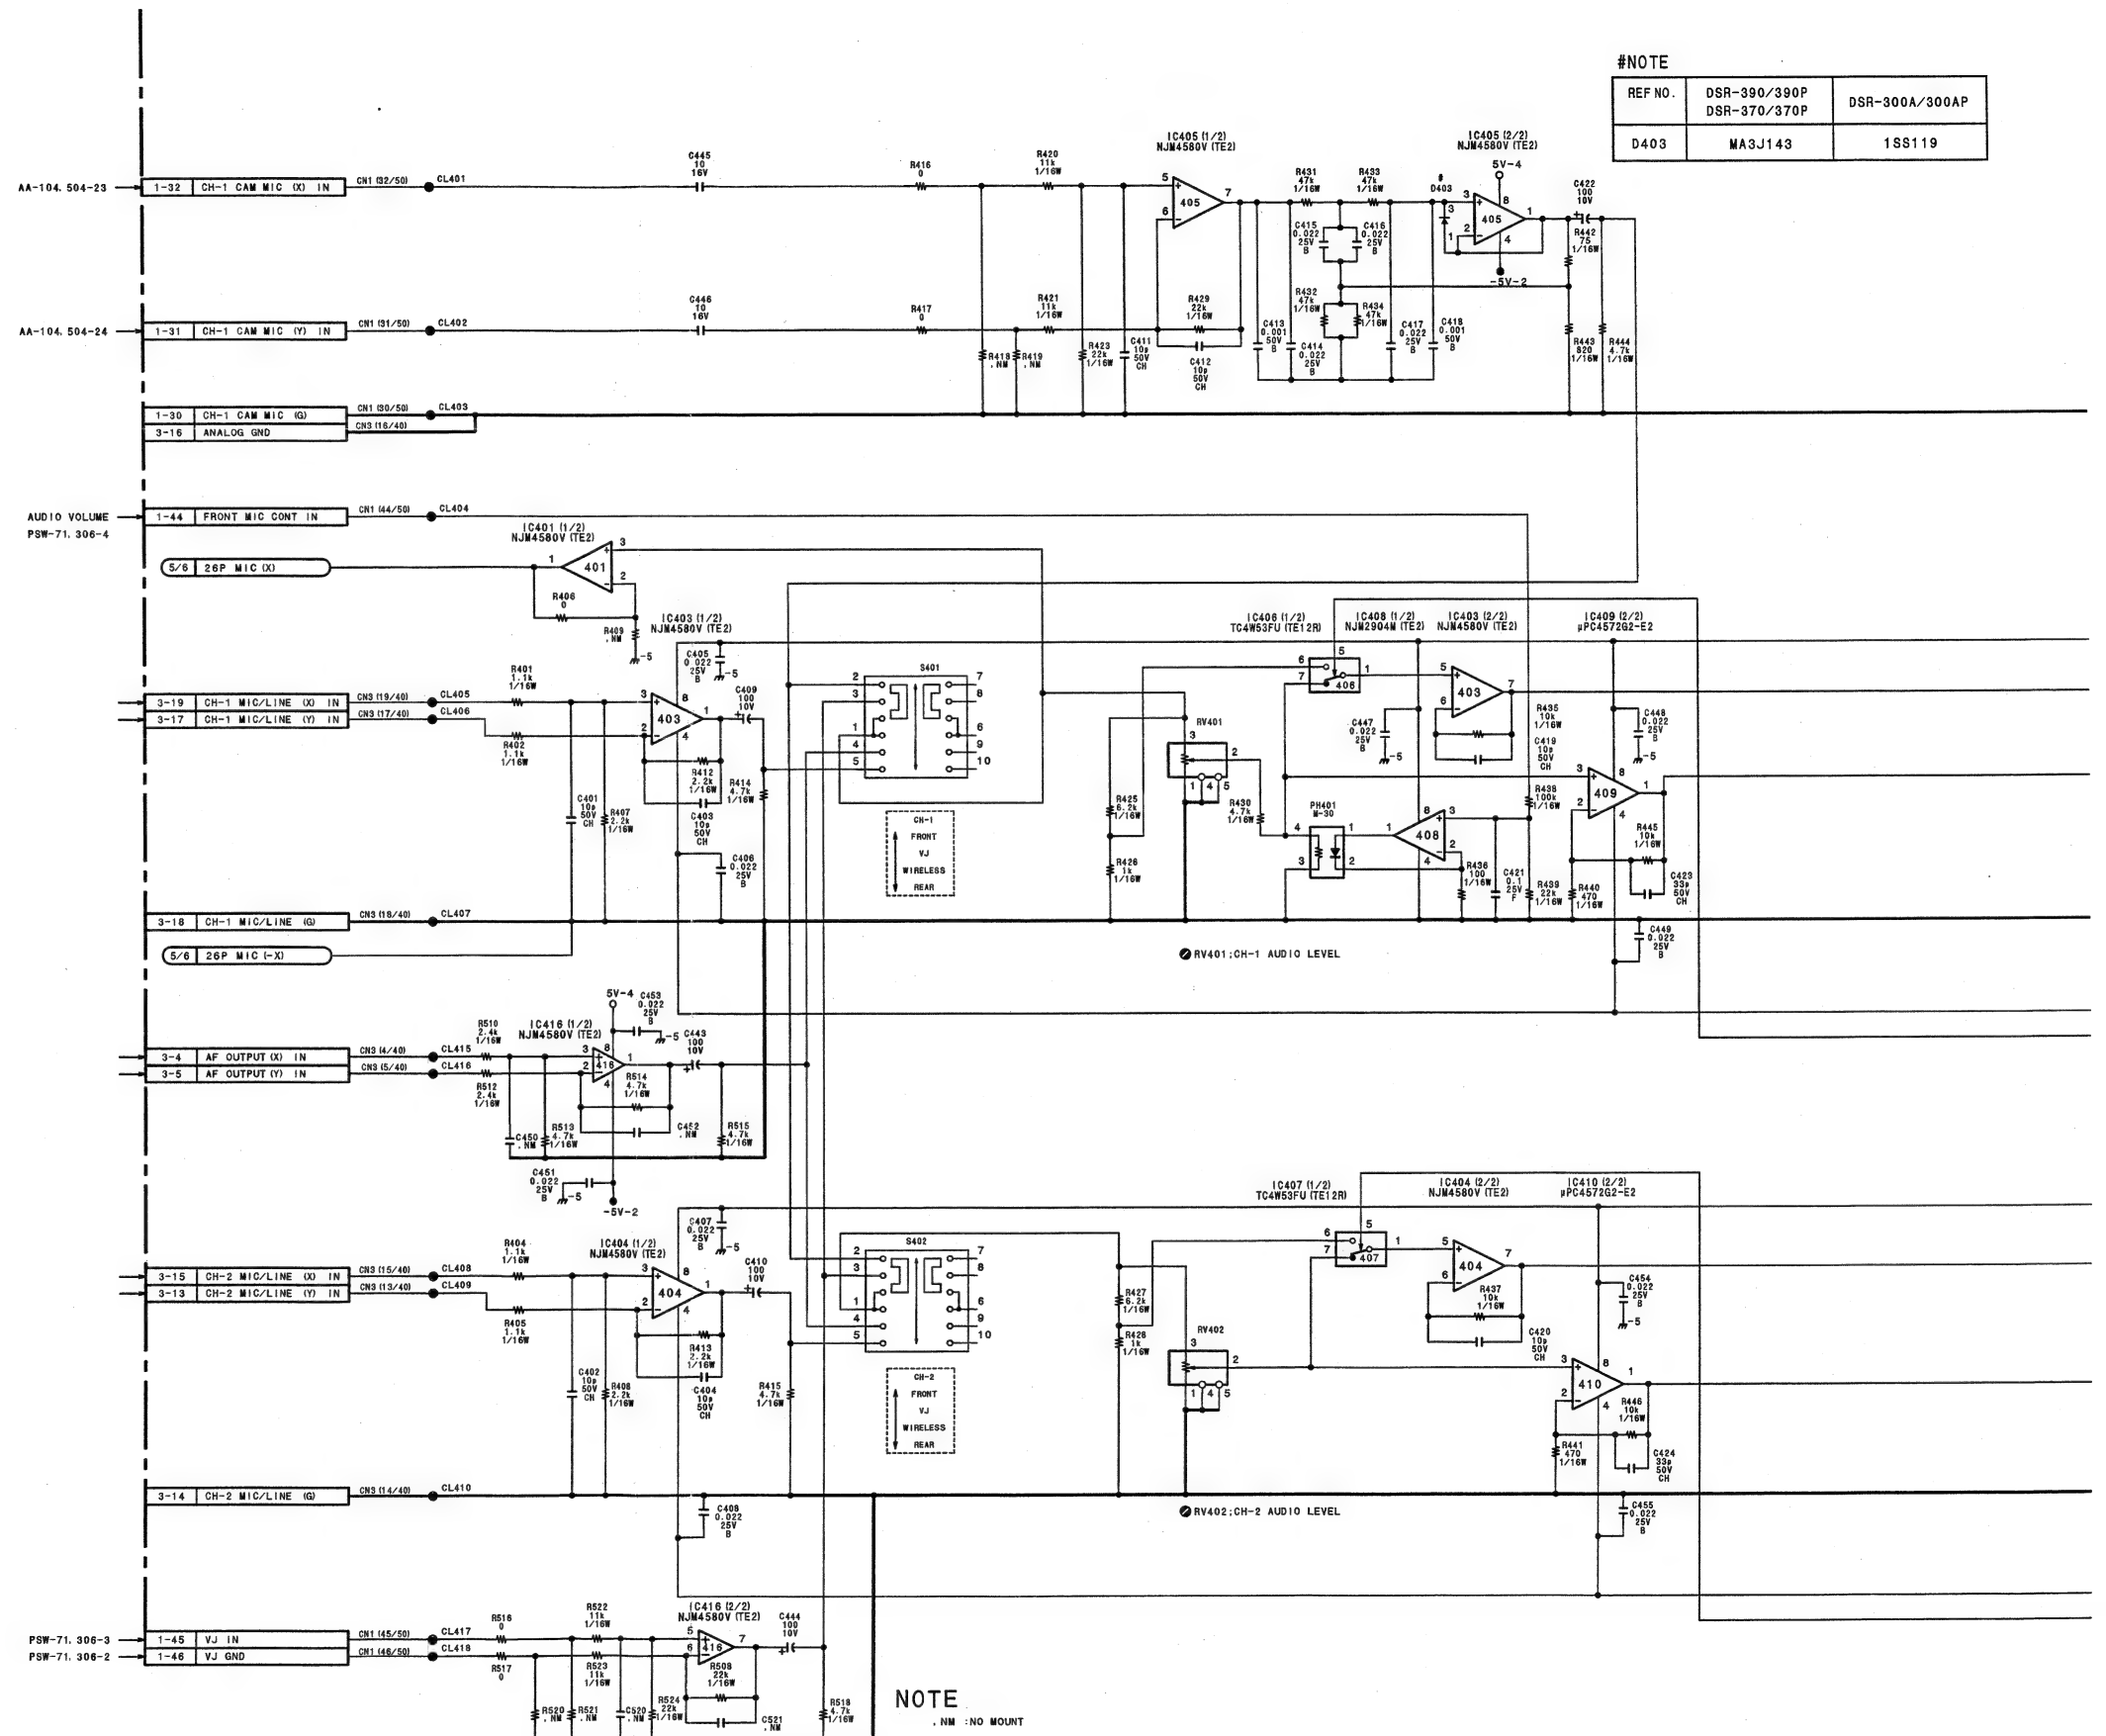


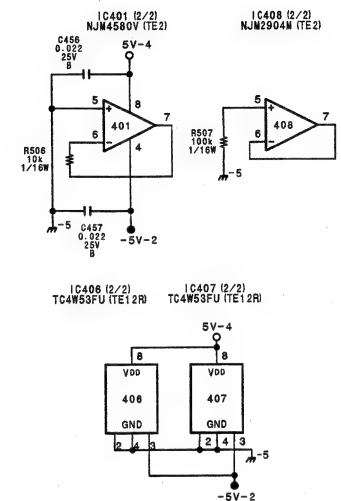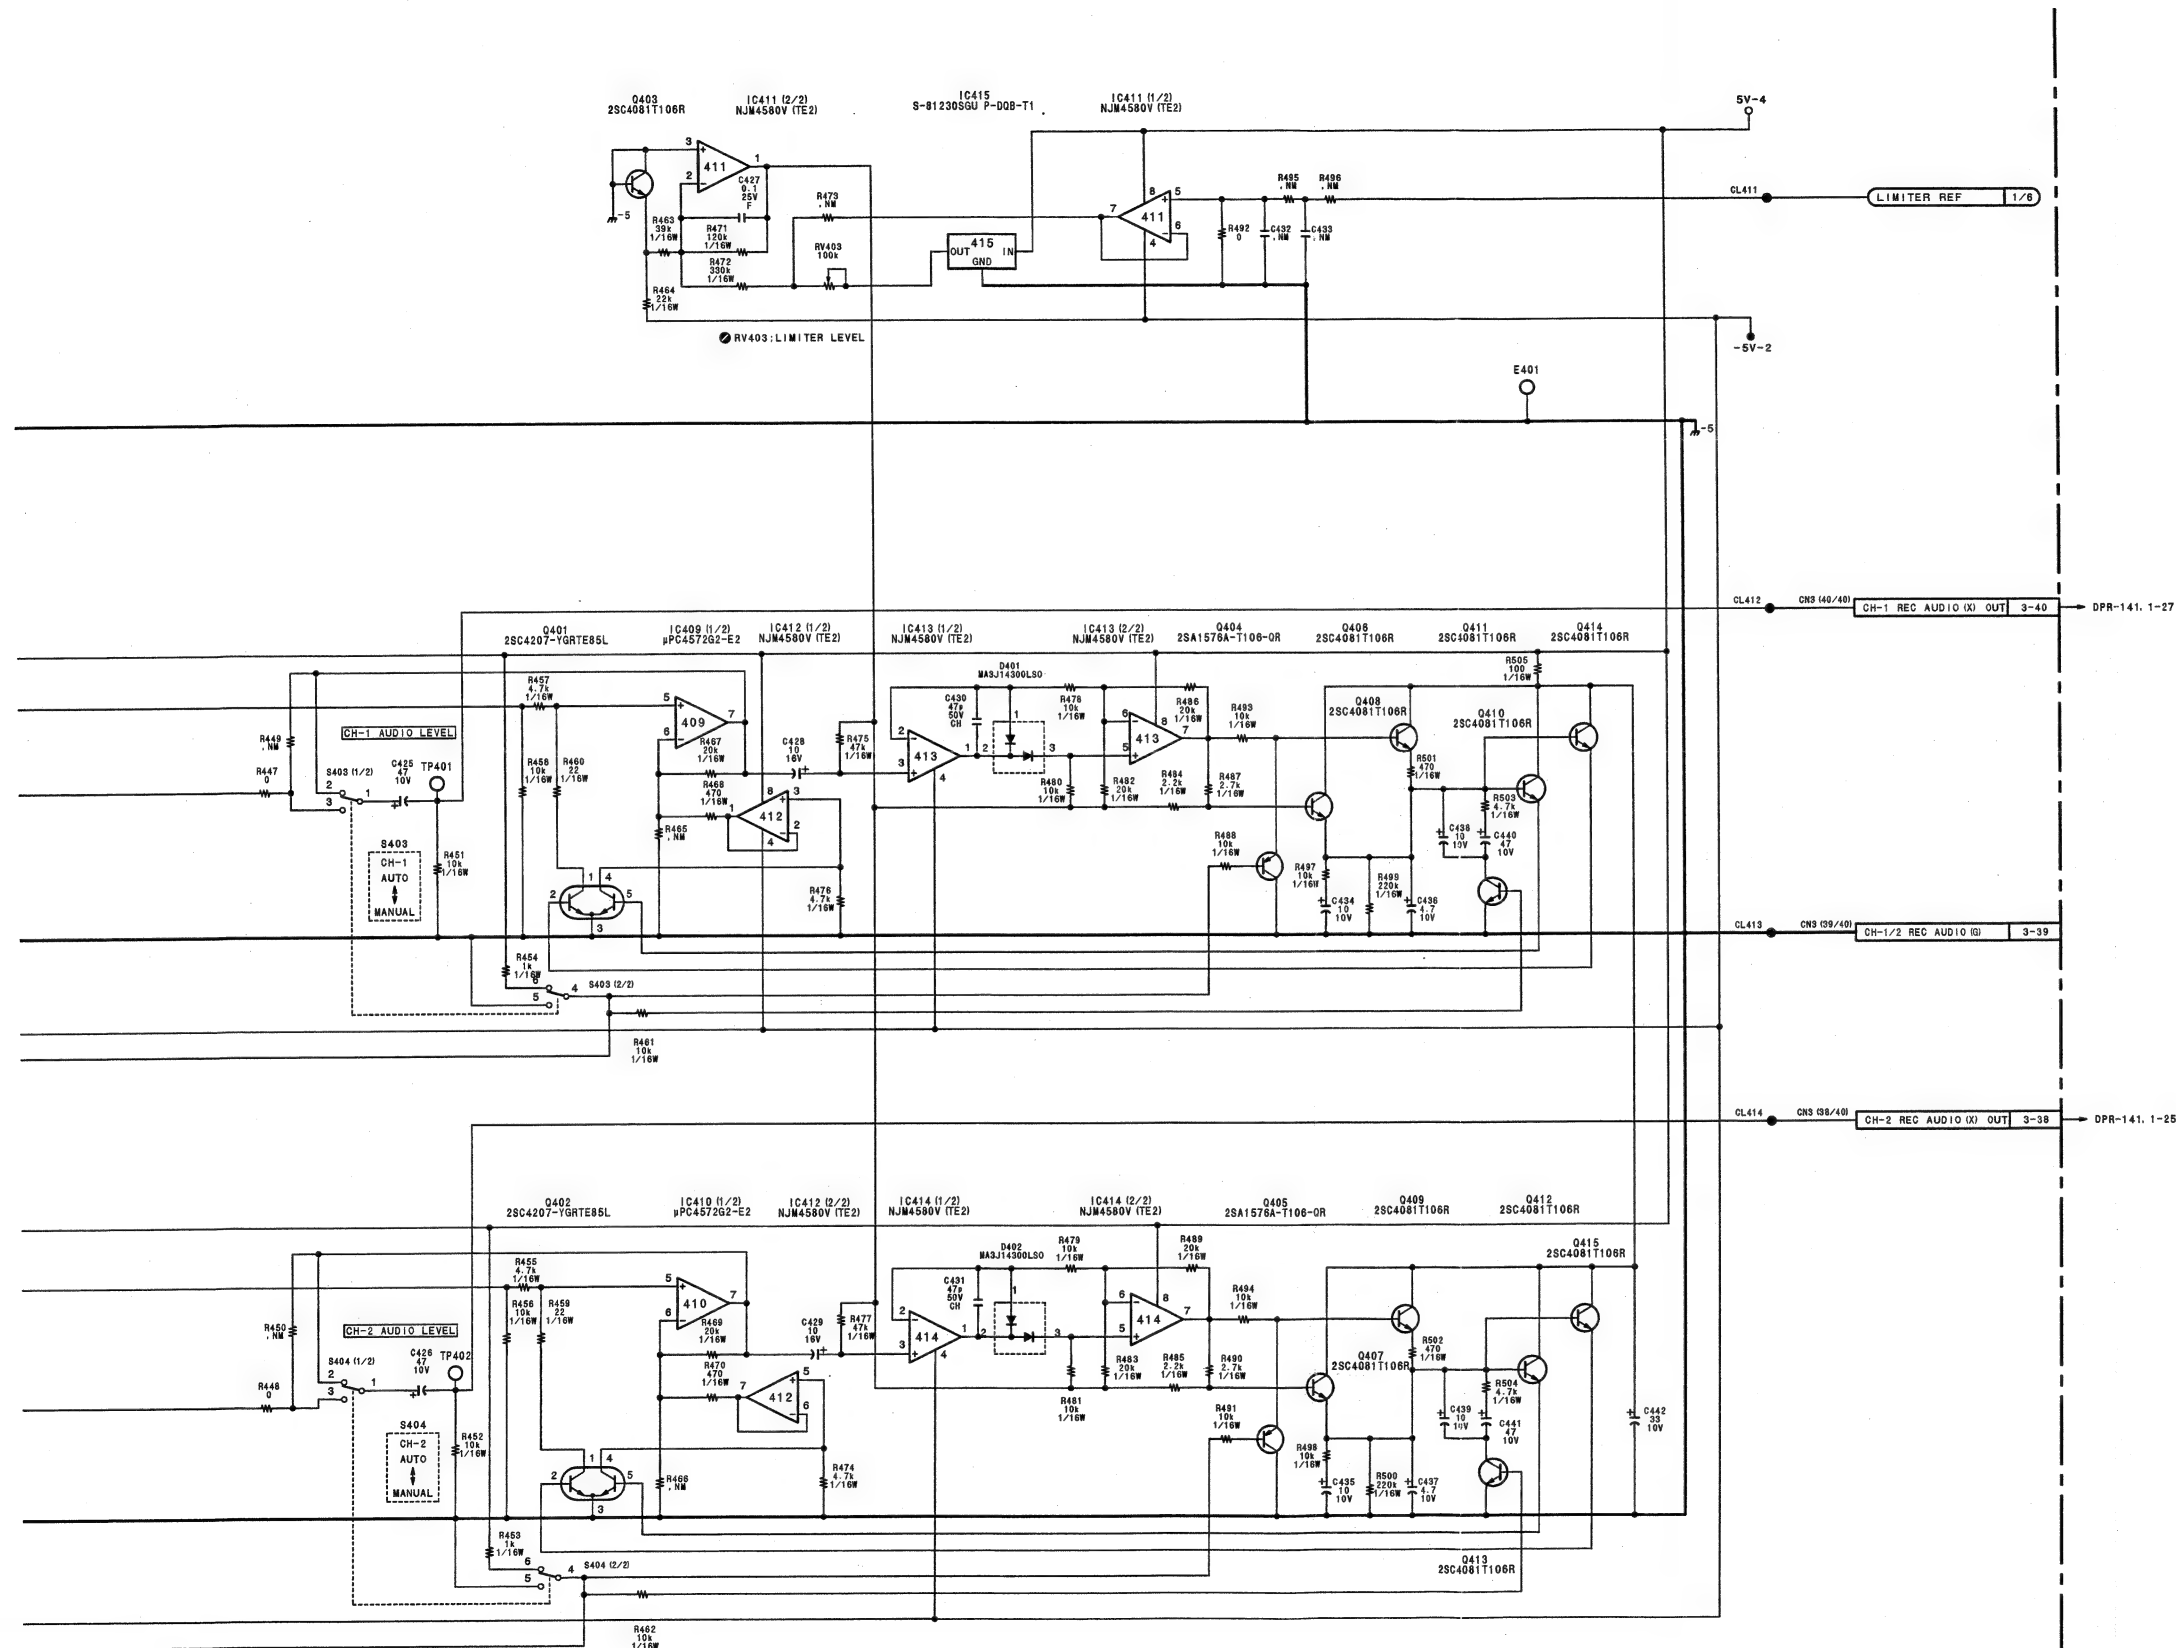


**FP-118A (3/6)**  
BOARD NO. 1-673-967-13  
FOR DSR-390/390P/370/370P  
B-DSR500WS-FP118-SM

**FP-118A (4/6)**






BOARD NO. 1-673-967-13  
FOR DSR-390/390P/370/370P  
B-DSR500WS-FP118-SM

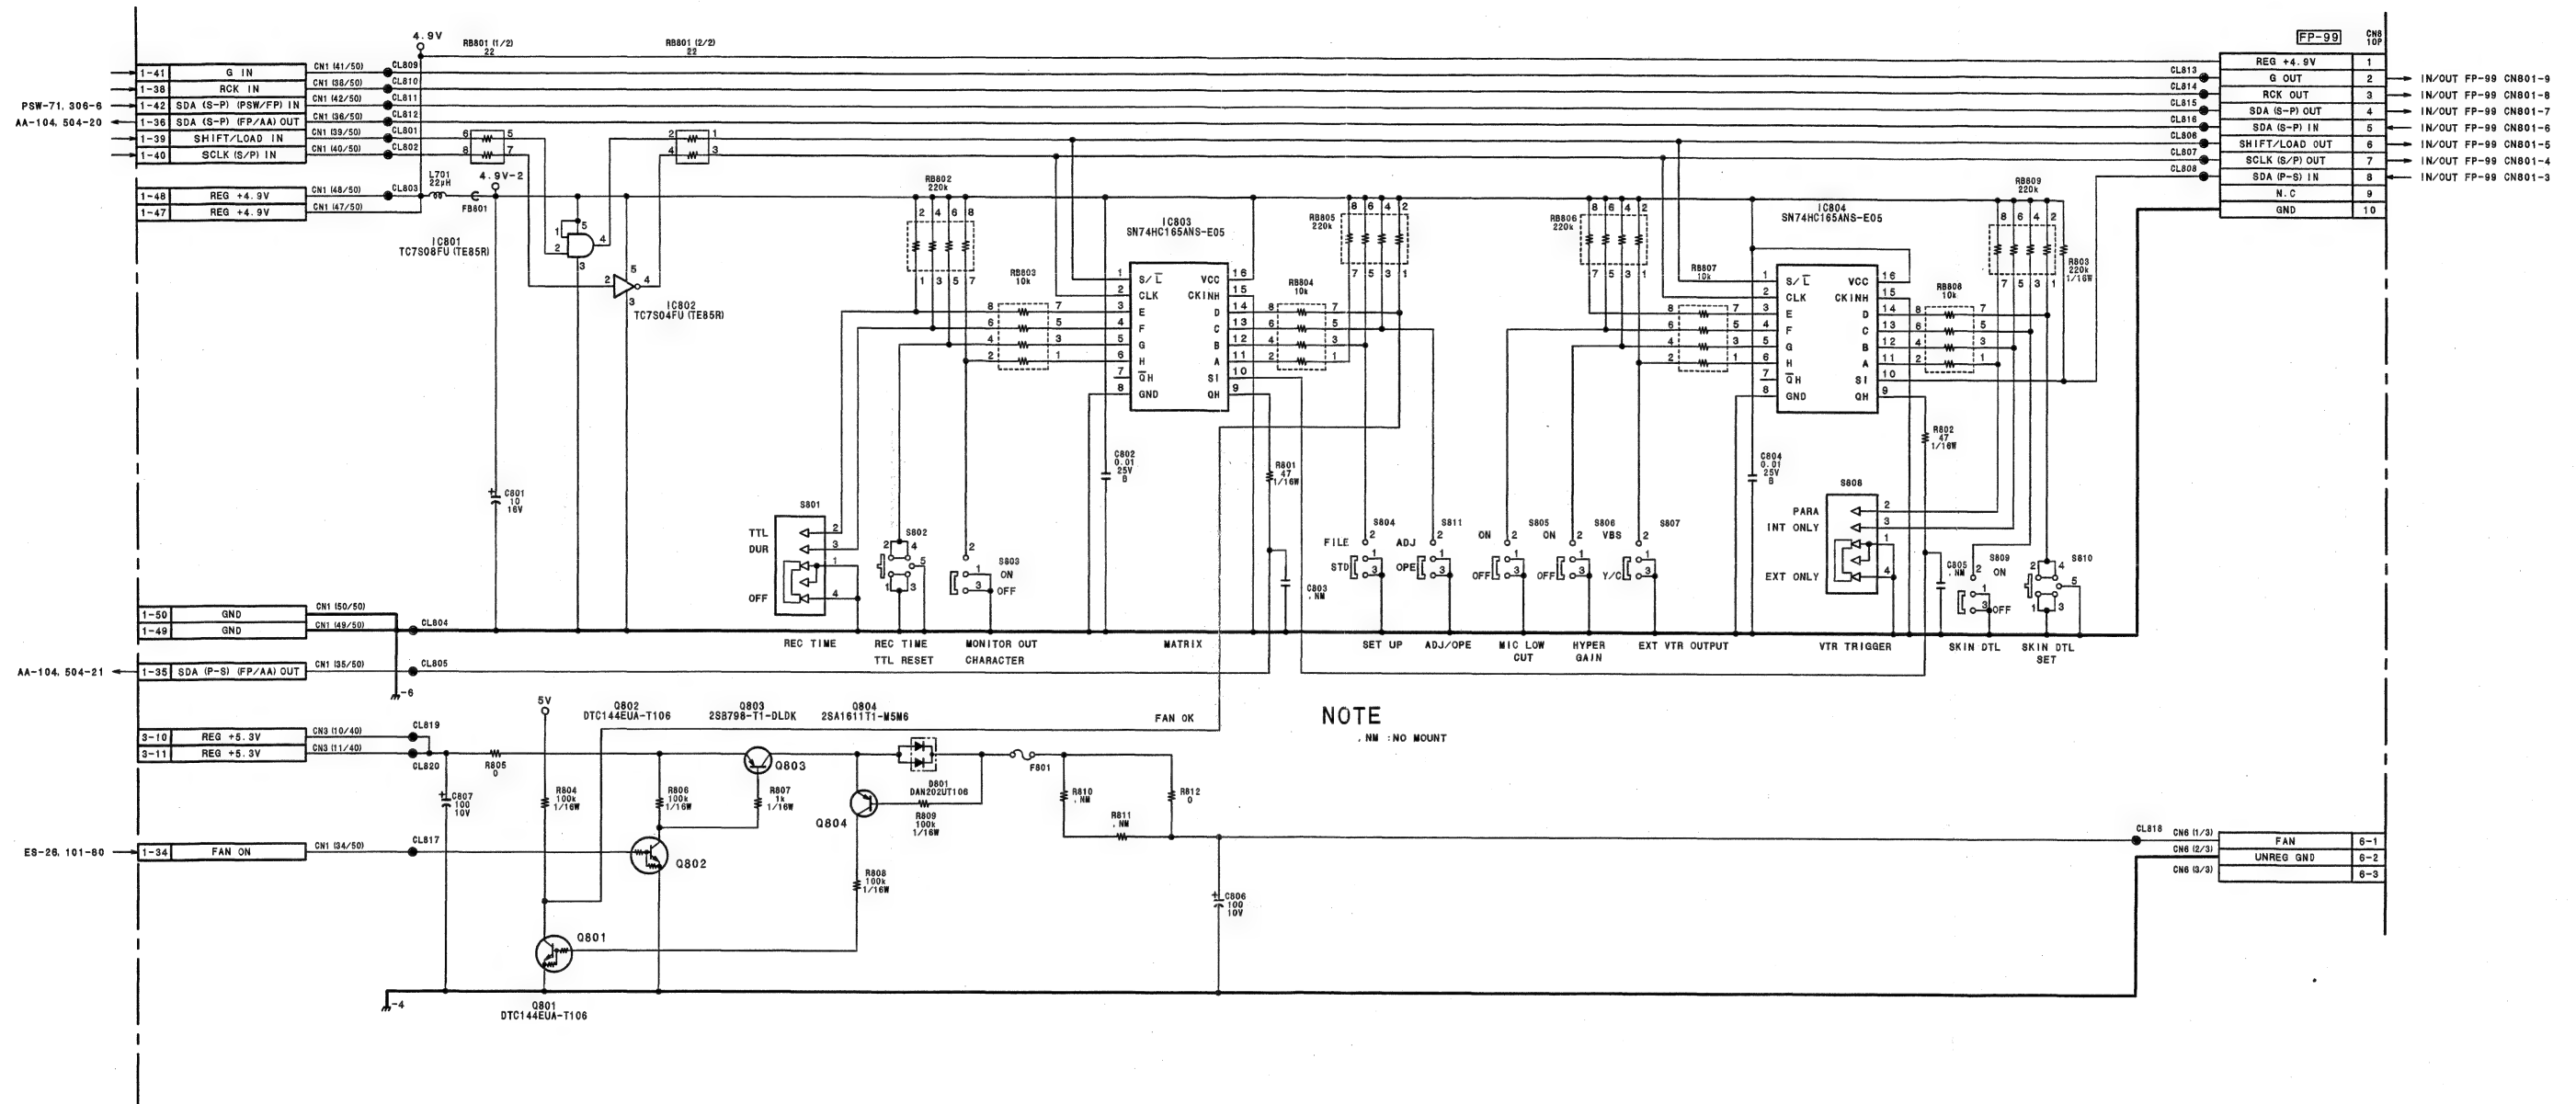

**FP-118A (6/6)**  
 BOARD NO. 1-673-967-13  
 FOR DSR-390/390P/370/370P  
 B-DSR500WS-FP118-SM



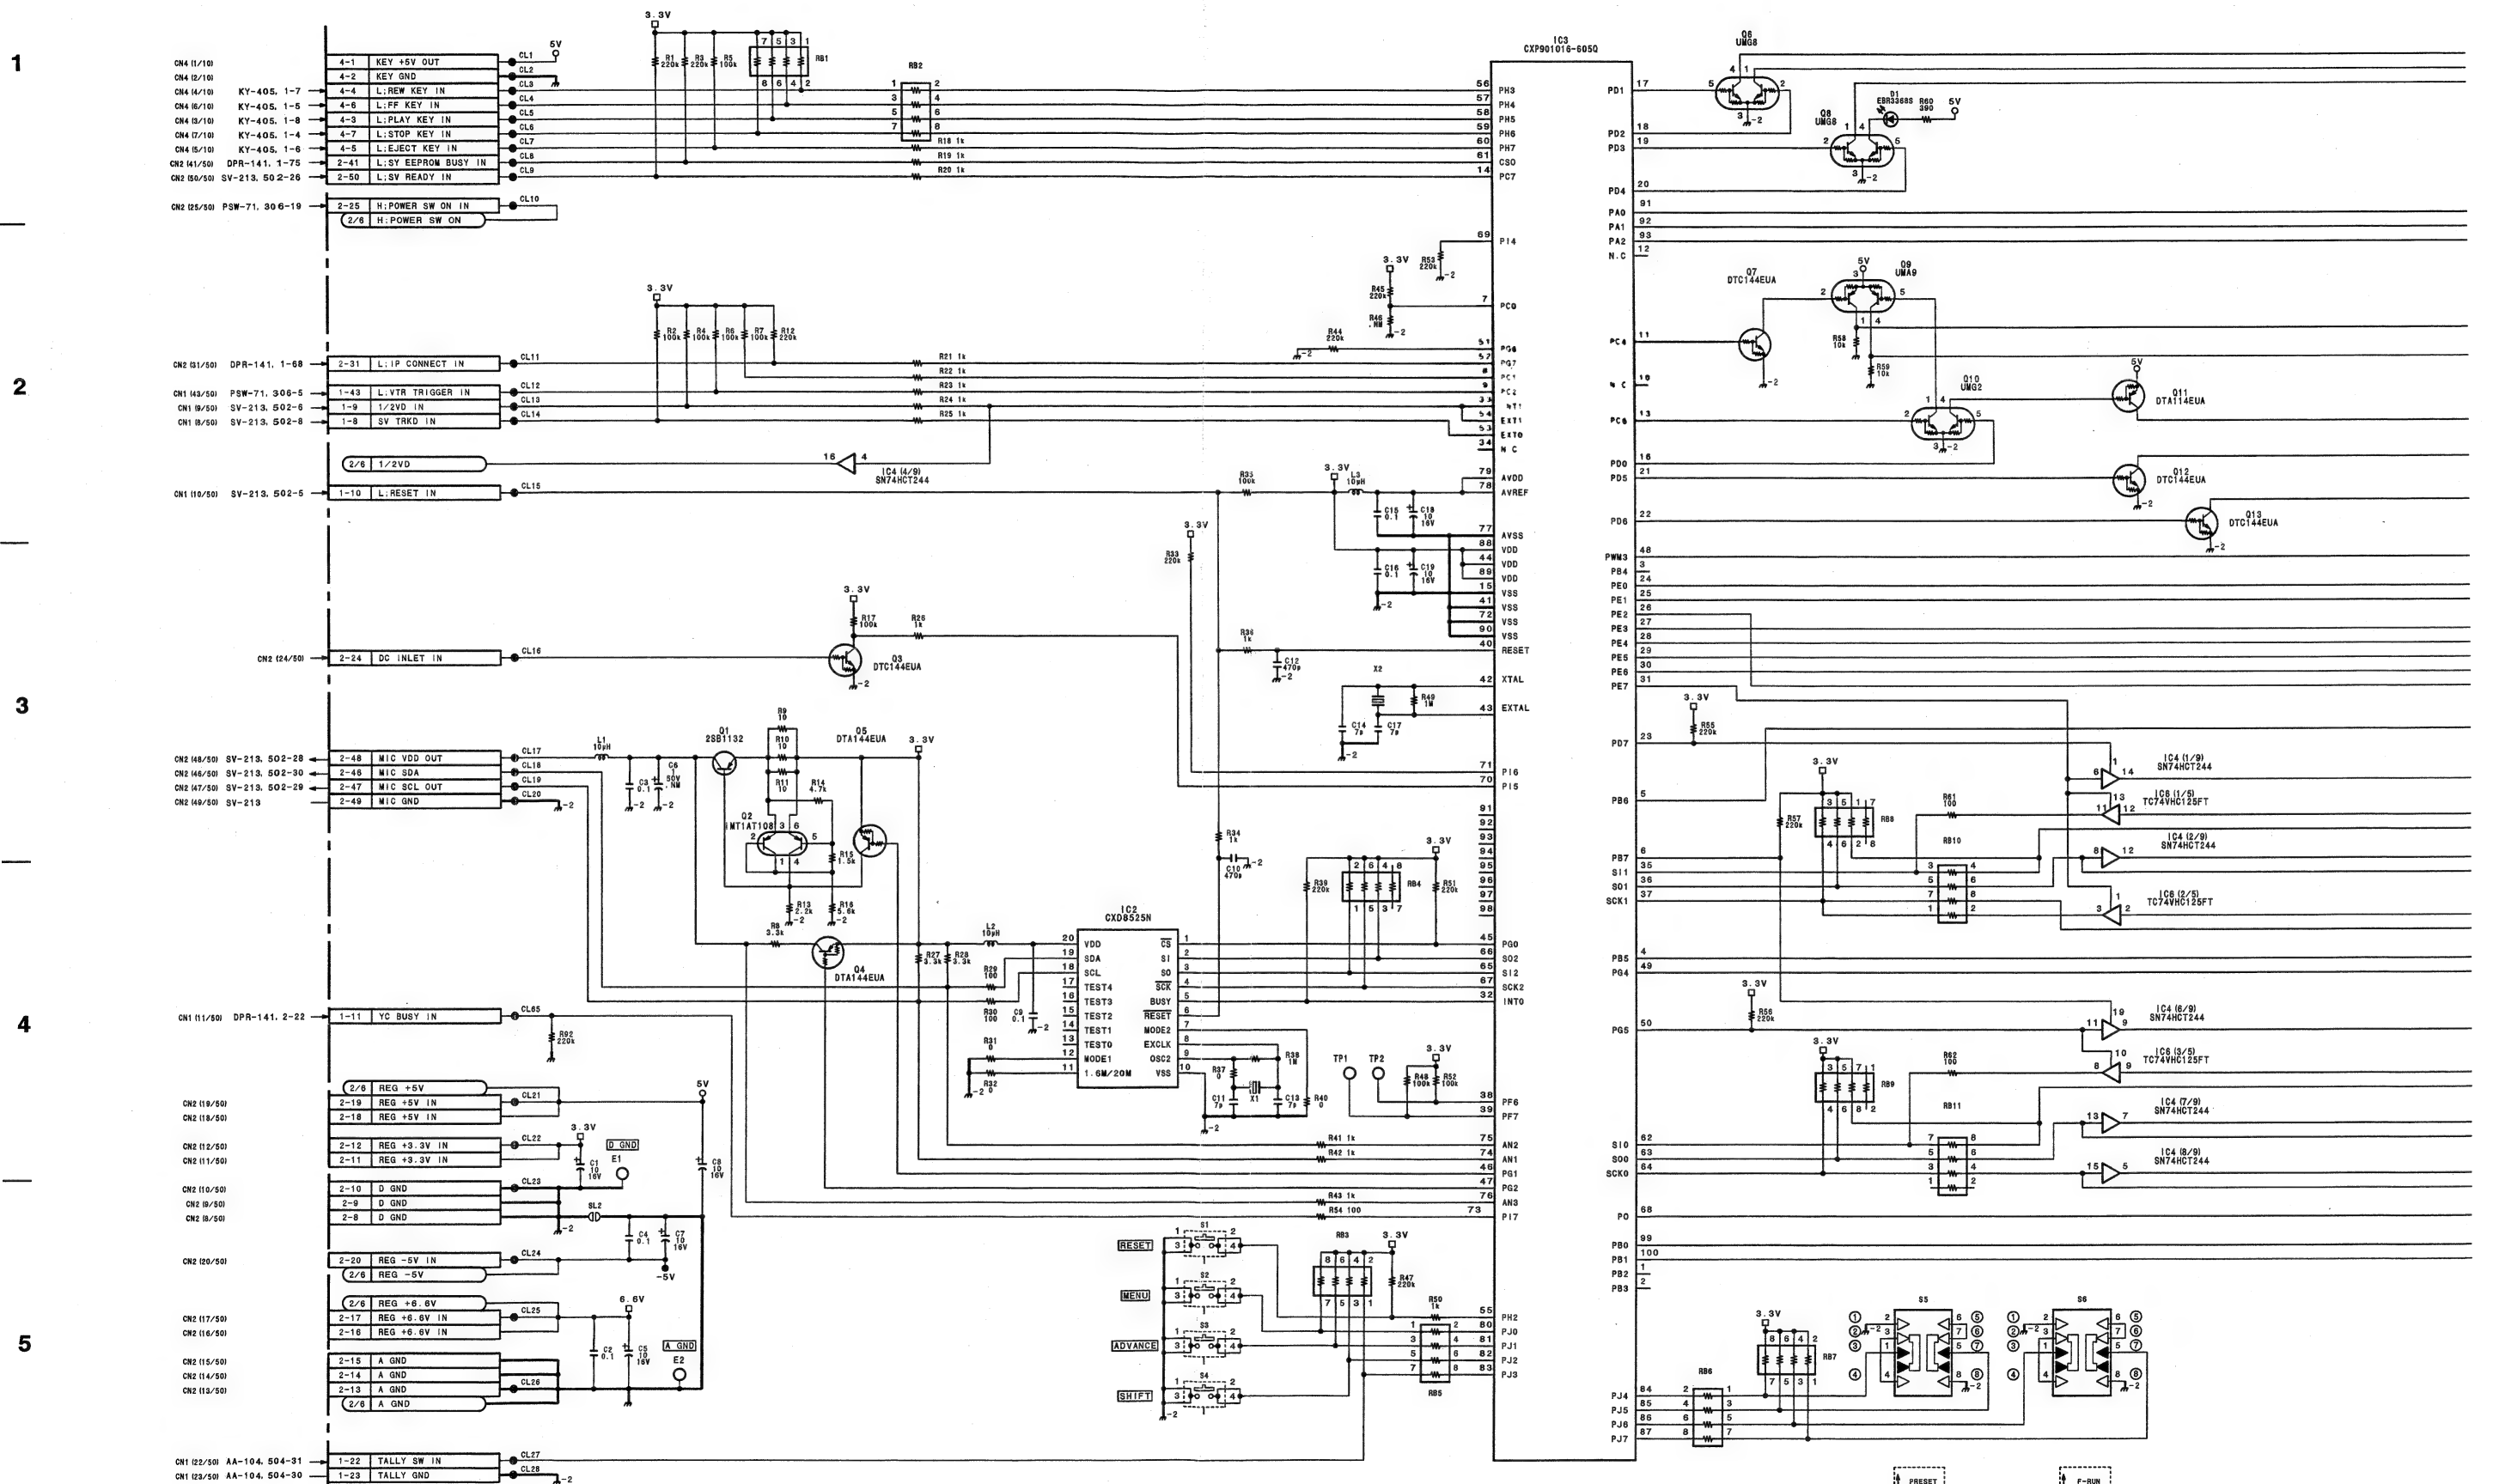




1


2

3




4

5

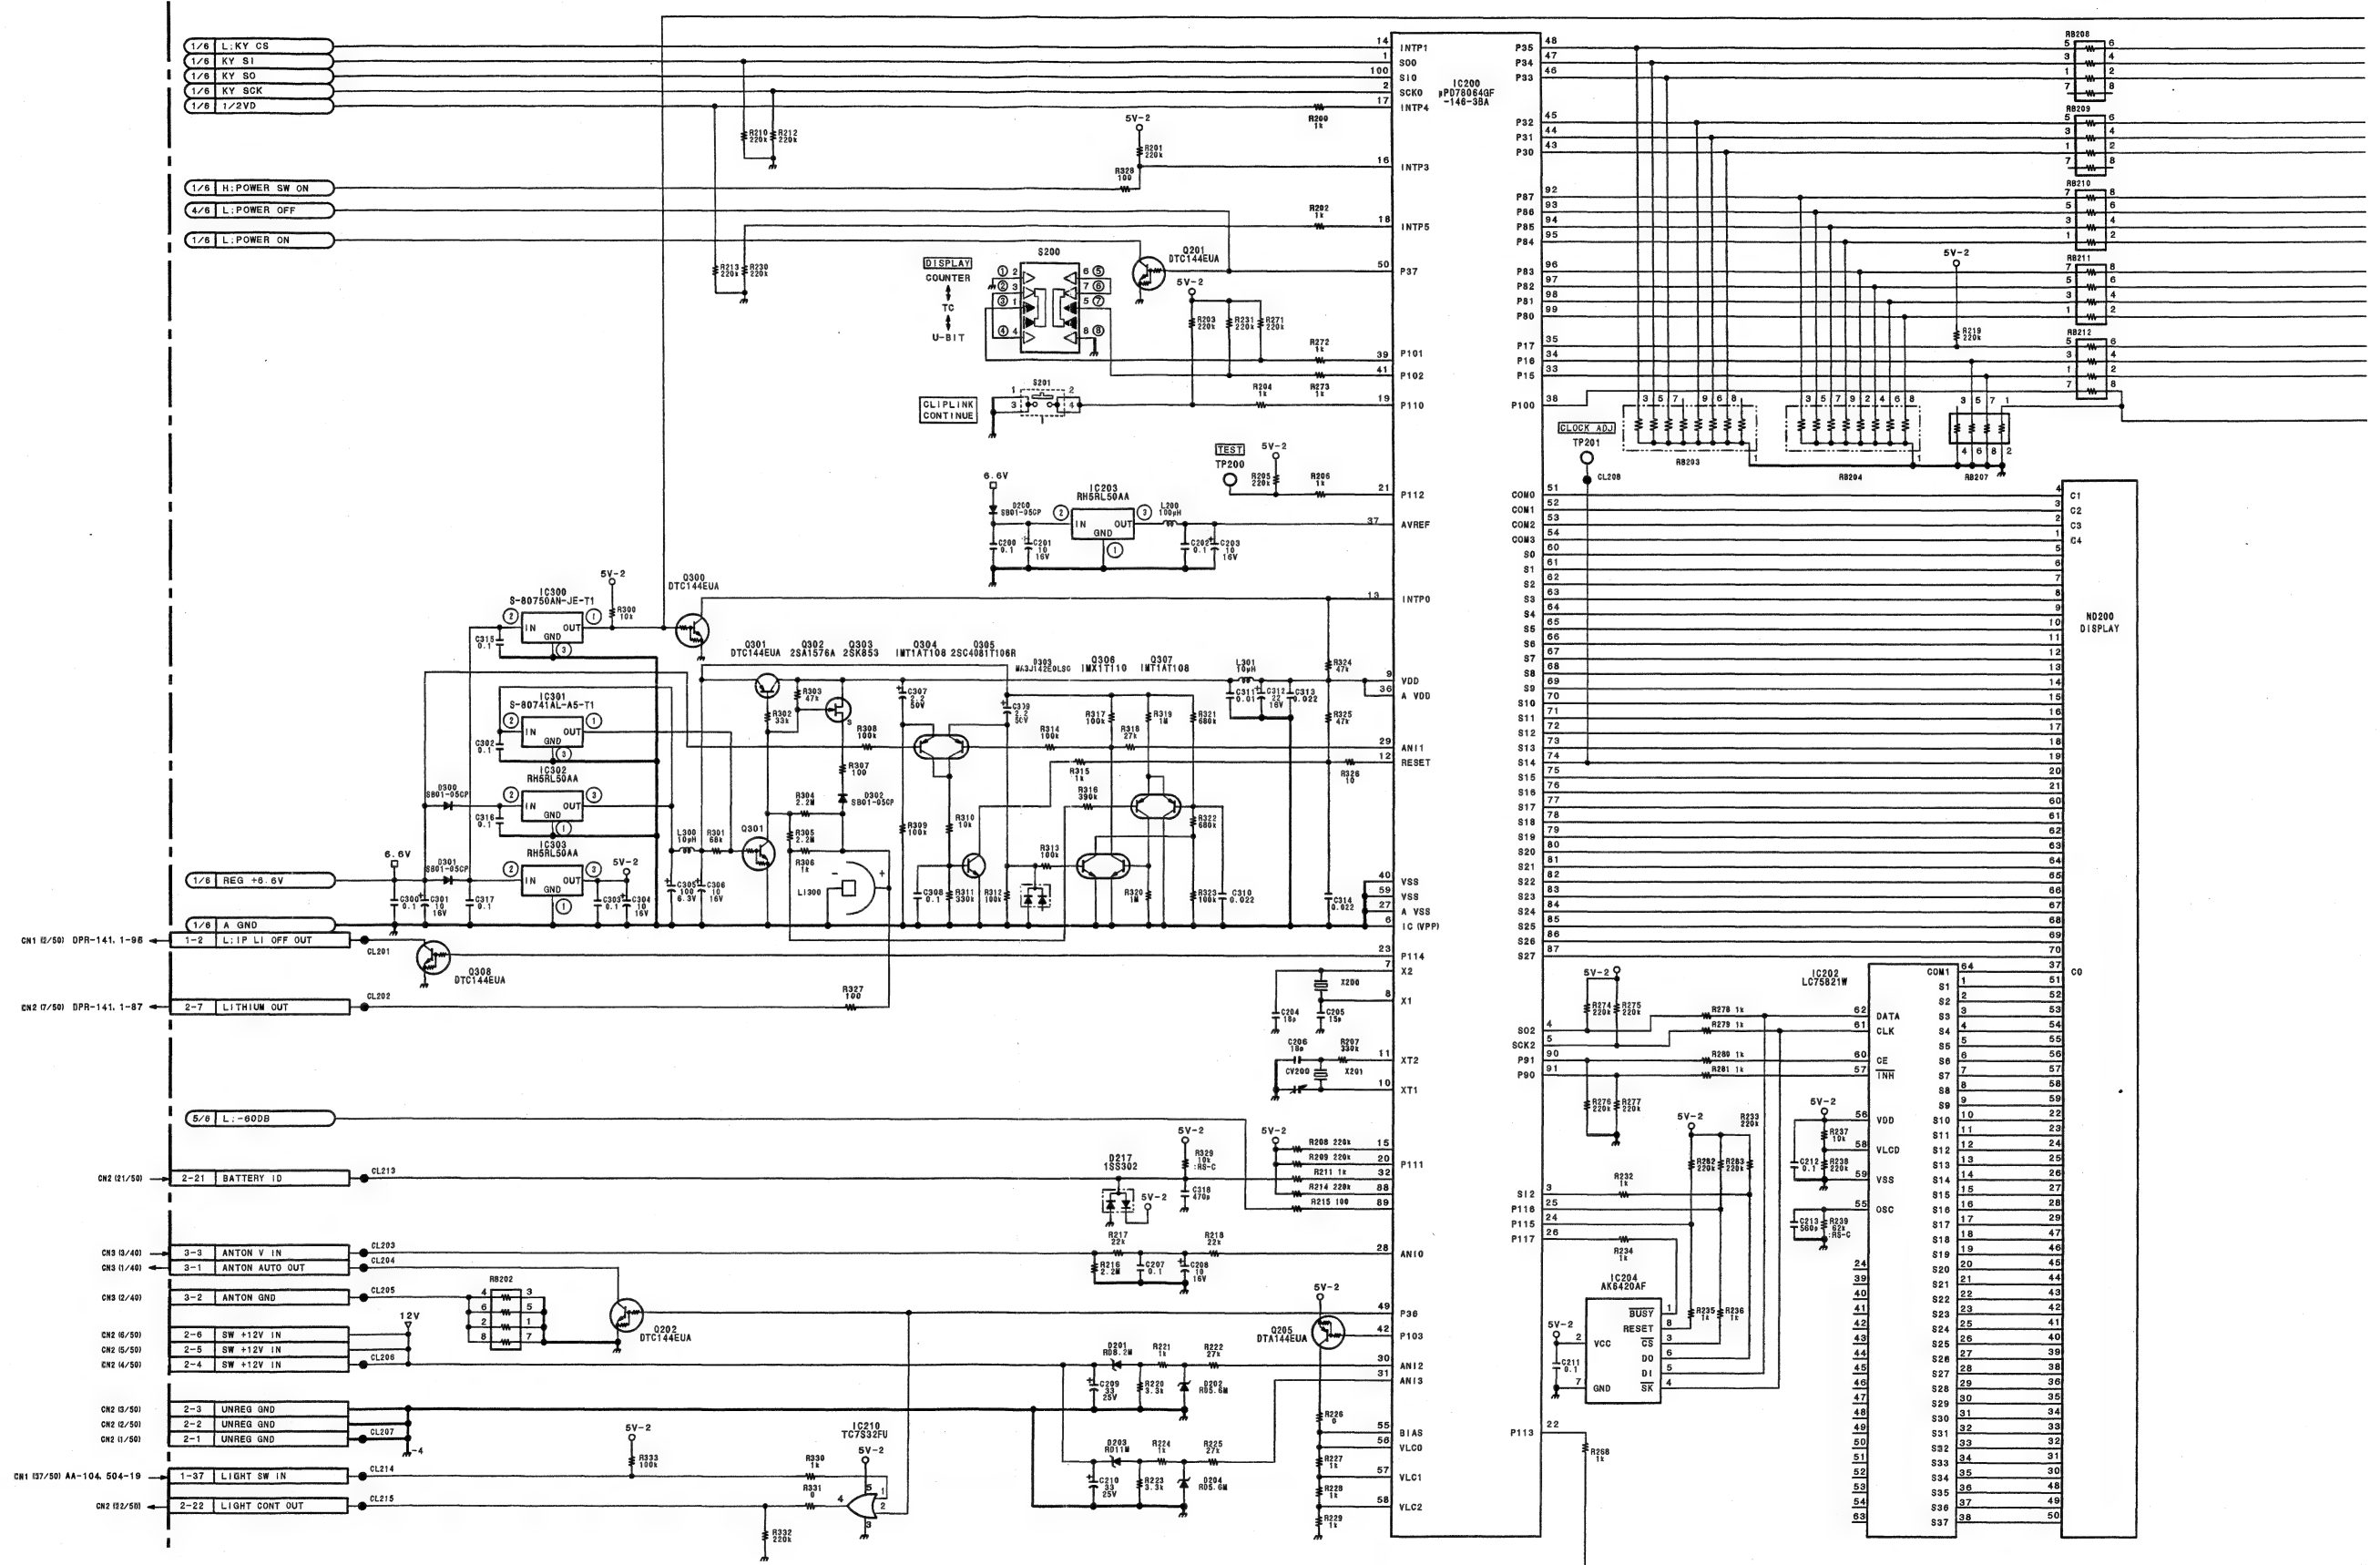







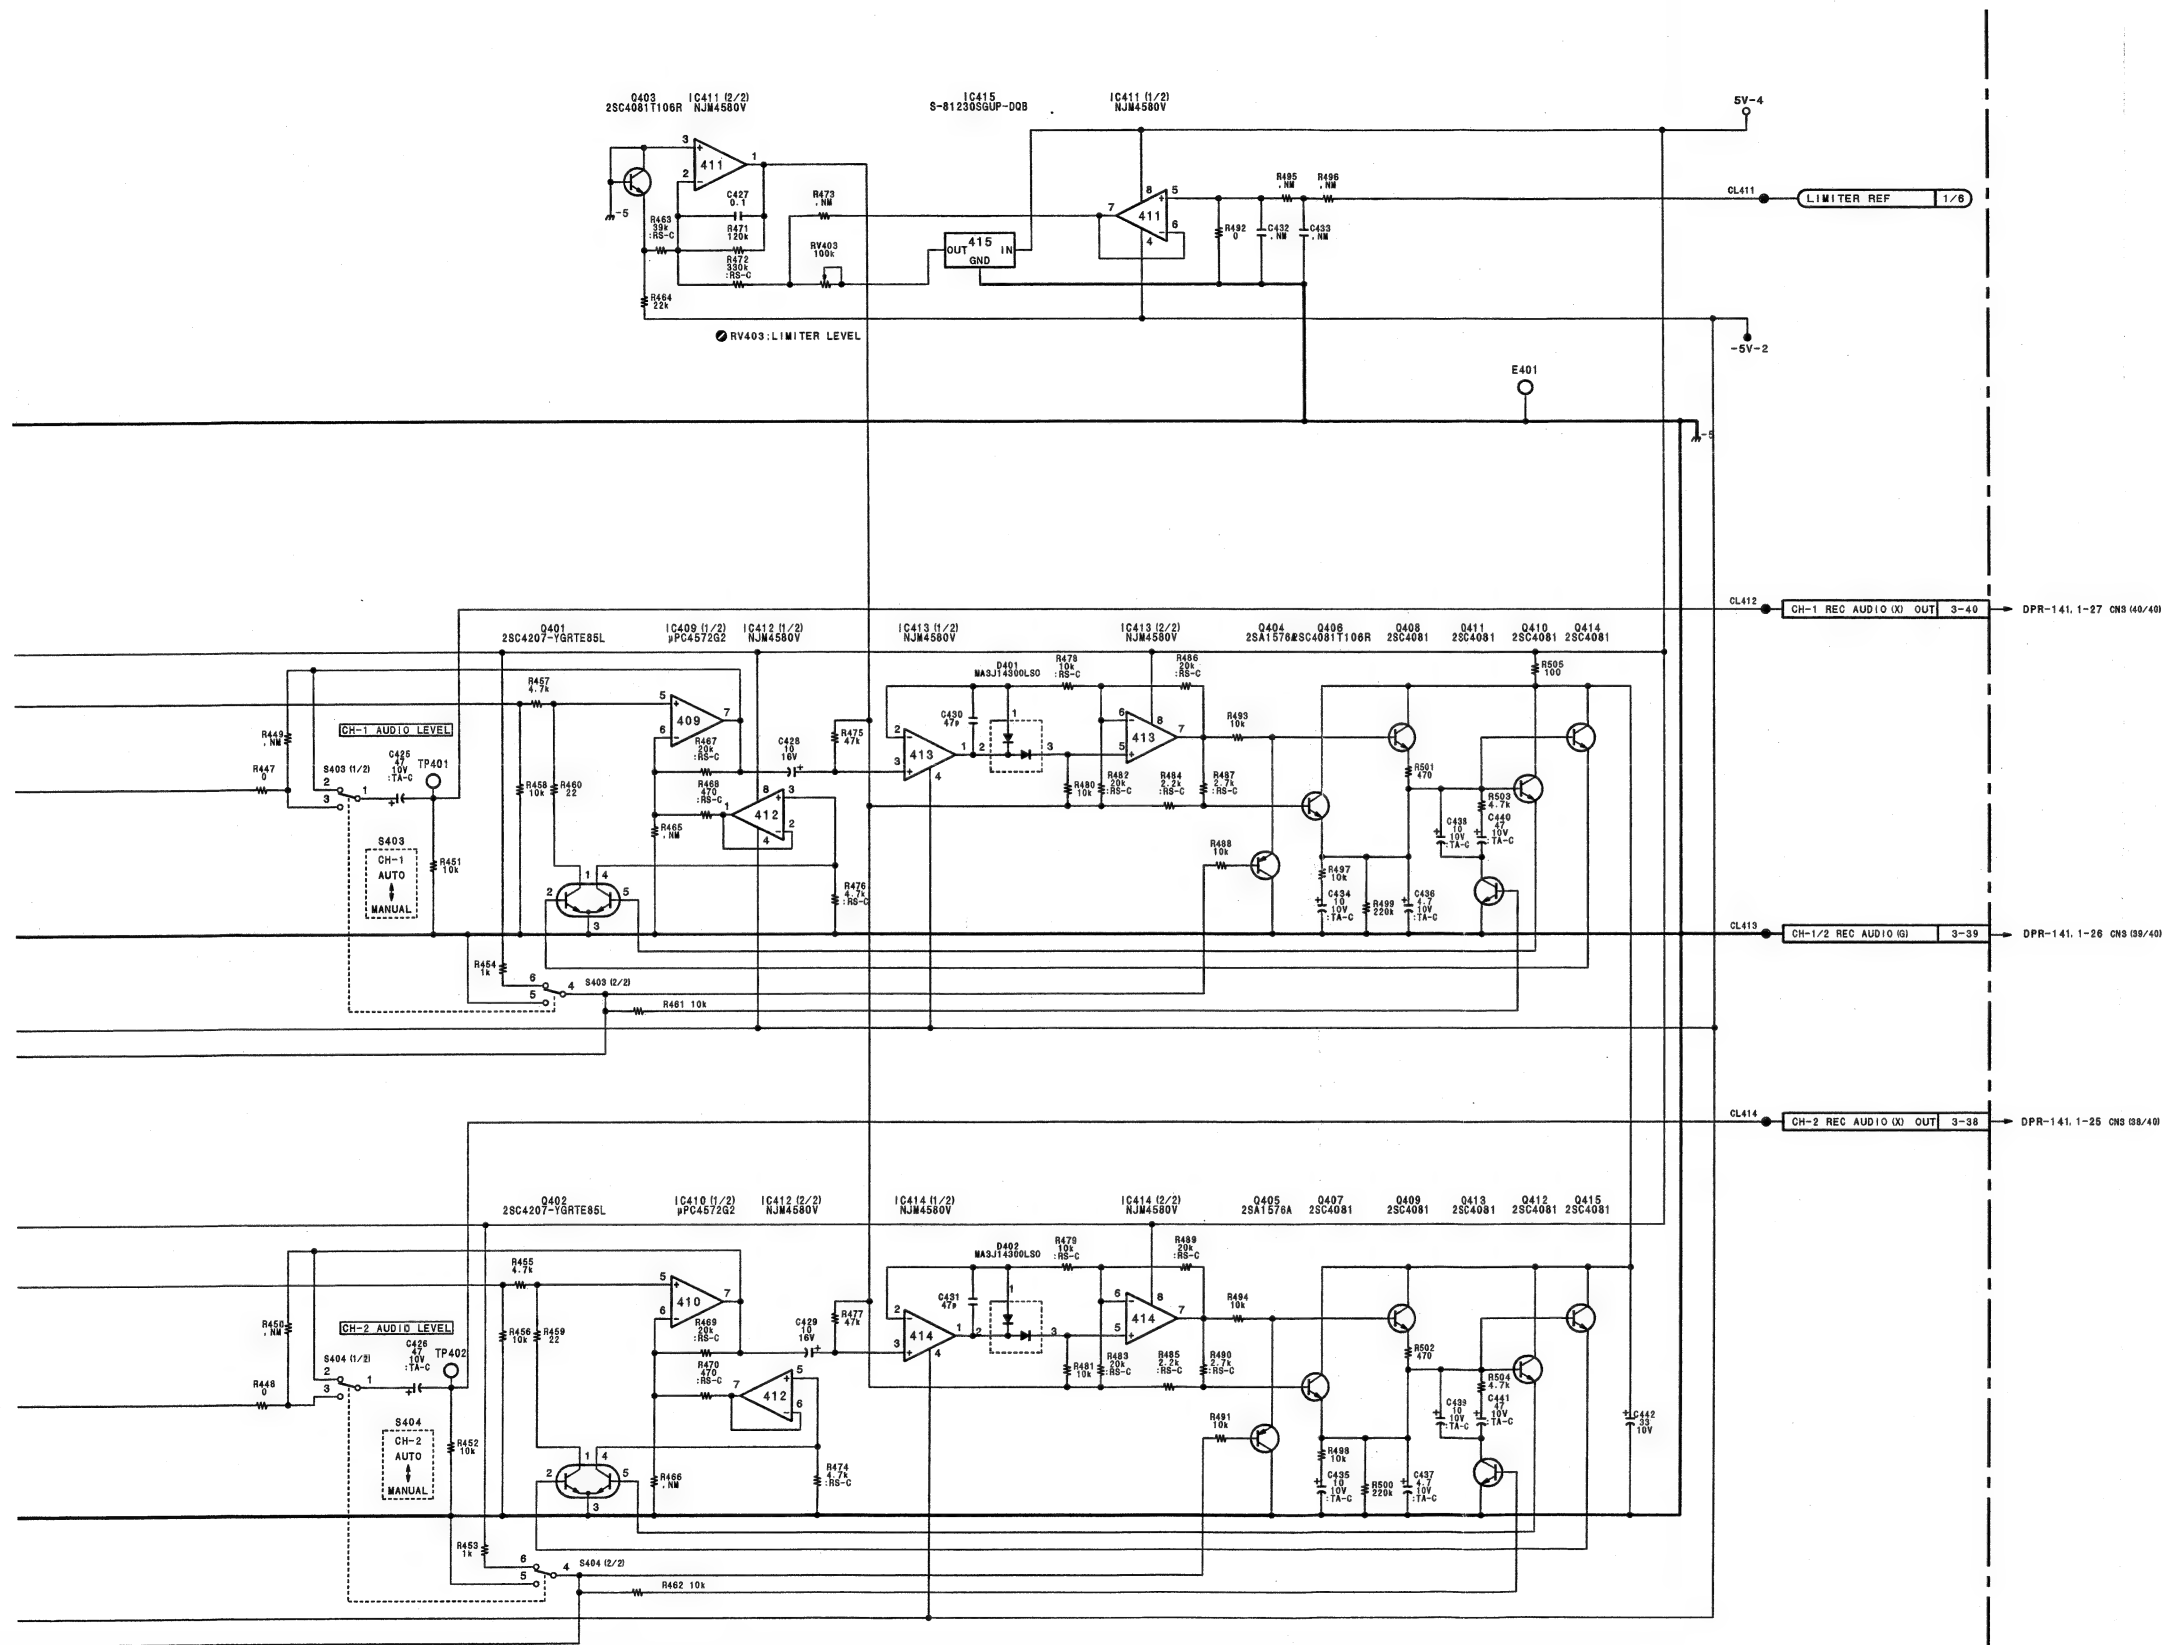

**FP-122 (3/6)**  
BOARD NO. 1-677-372-11  
FOR DSR-300A/300AP  
B-DSR300A-FP122-11

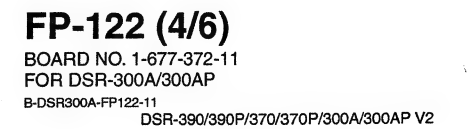

**FP-122 (4/6)**

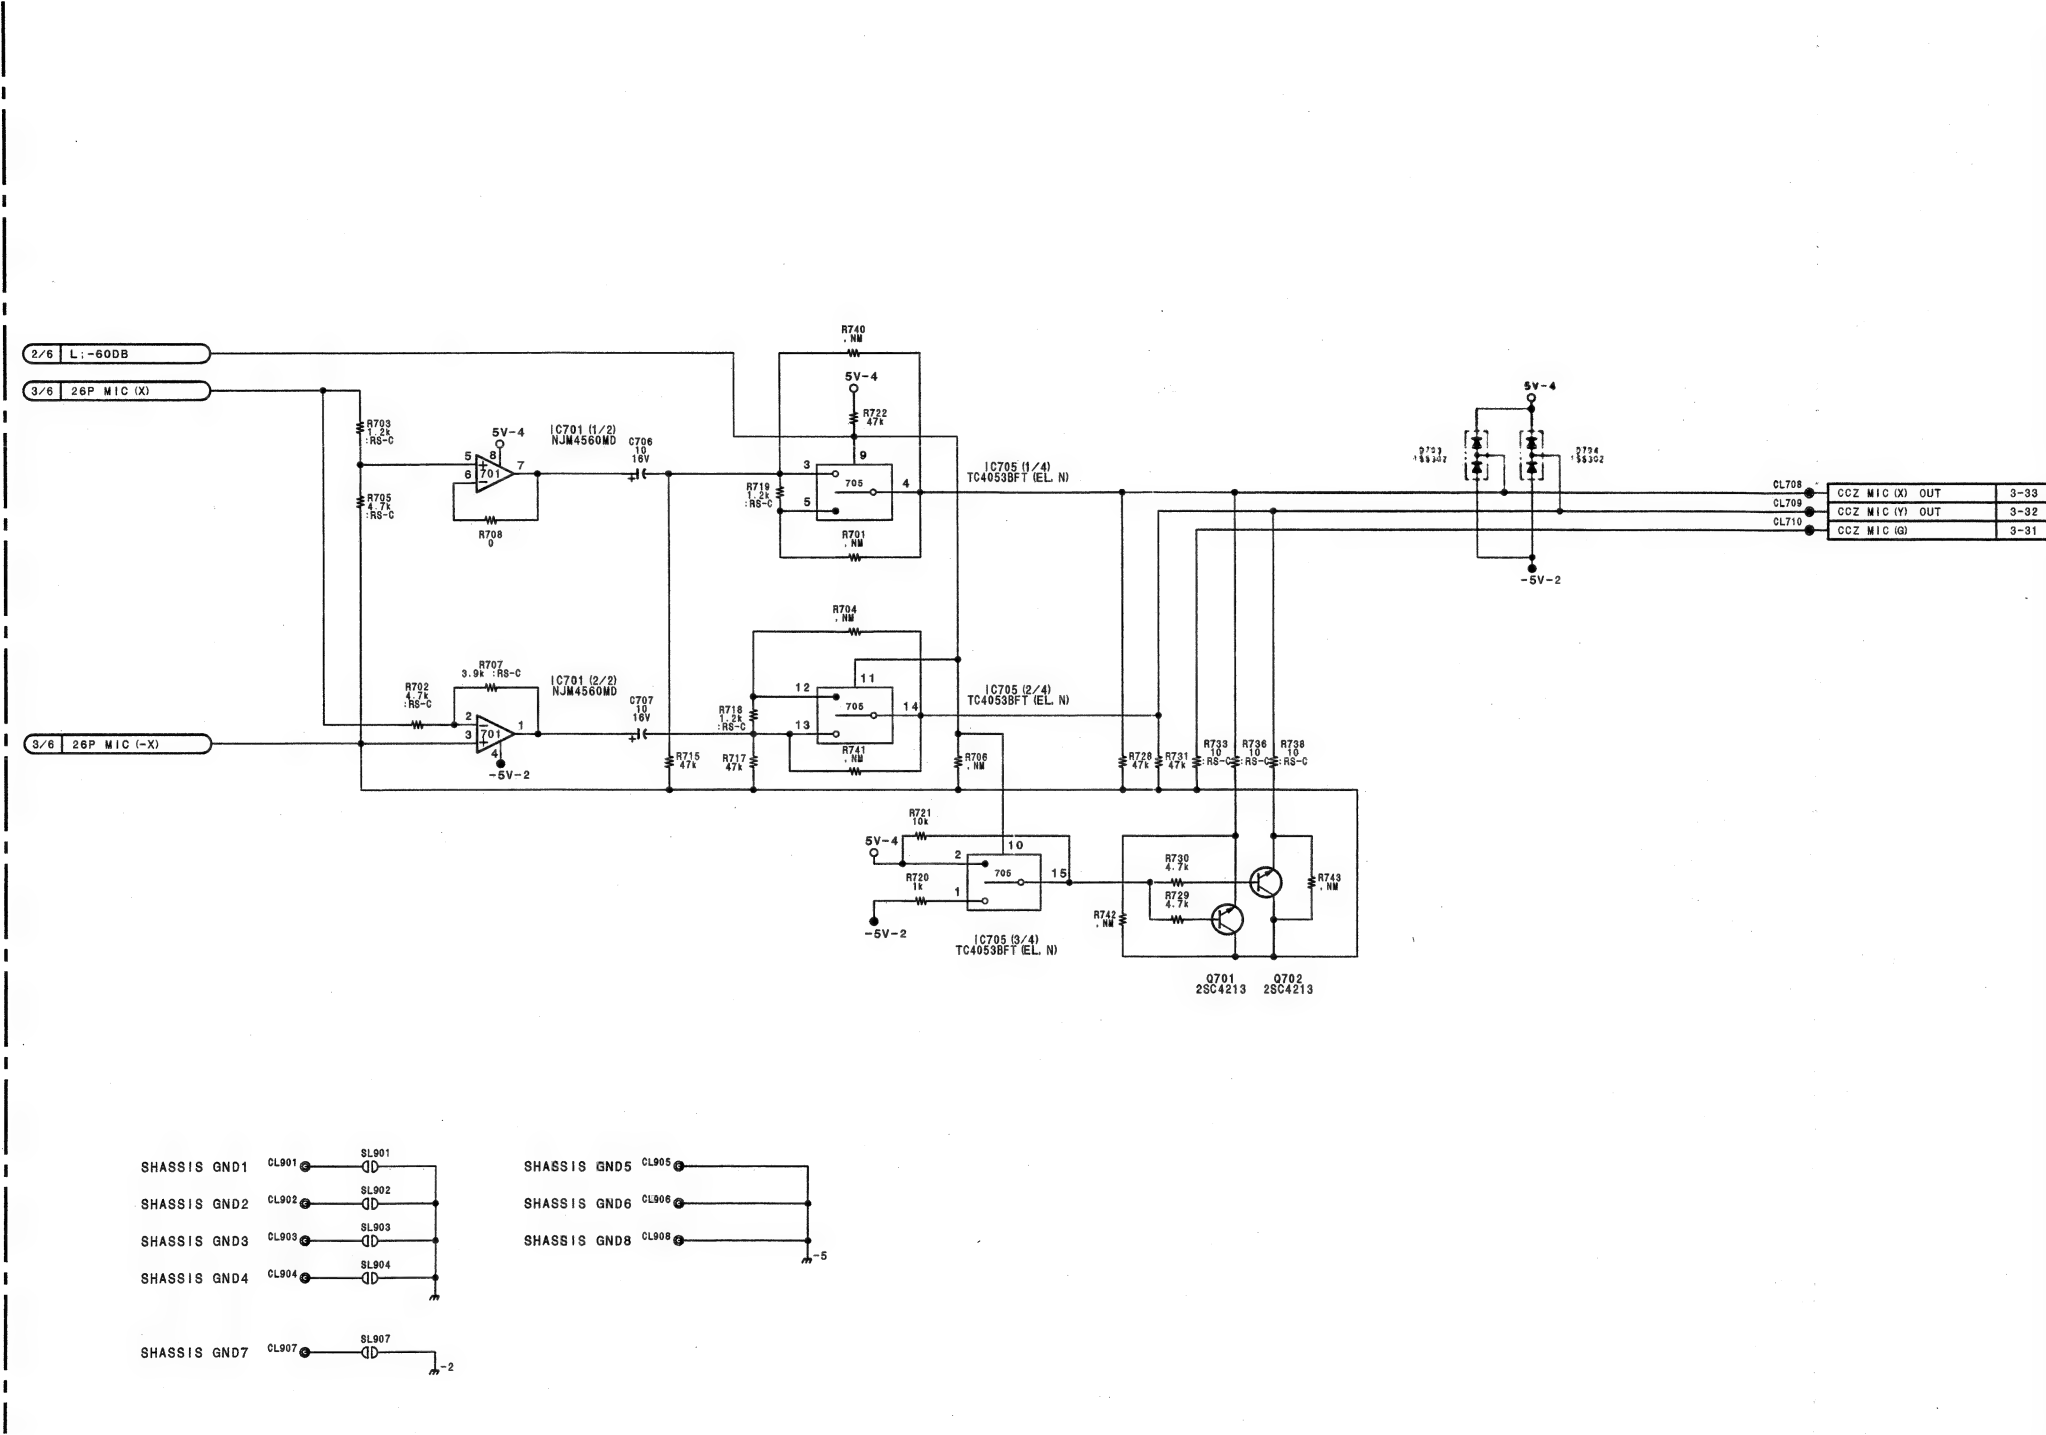

**FP-122 (5/6)**  
BOARD NO. 1-677-372-11  
FOR DSR-300A/300AP  
B-DSR300A-FP122-11


1

2

3


4


5

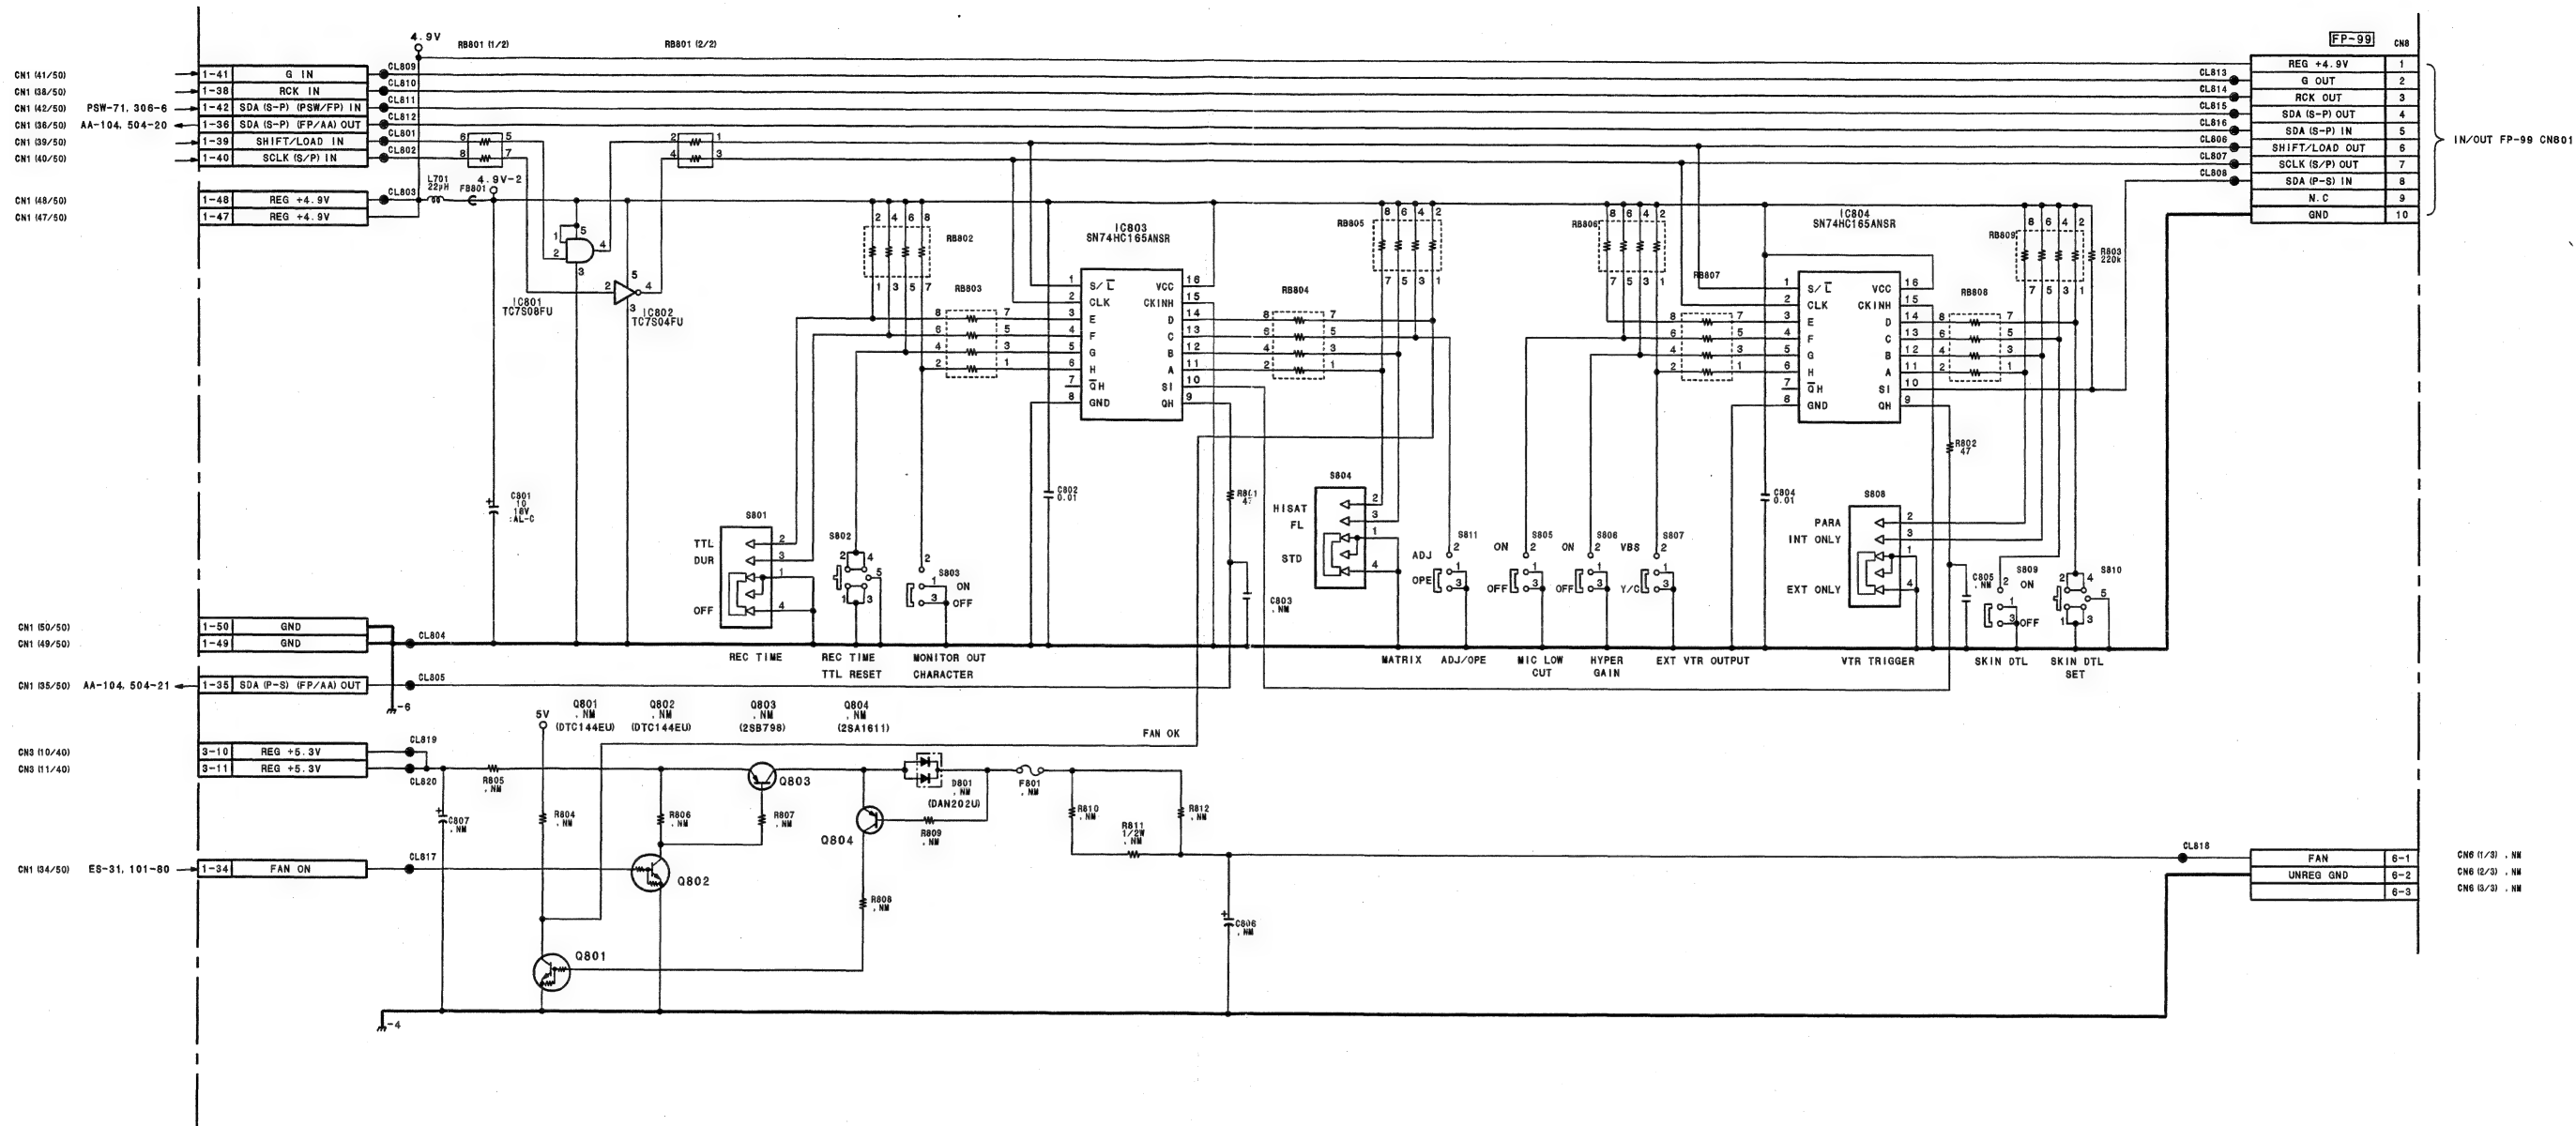


**FP-122 (6/6)**

BOARD NO. 1-677-372-11  
FOR DSR-300A/300AP  
B-DSR300A-FP122-11

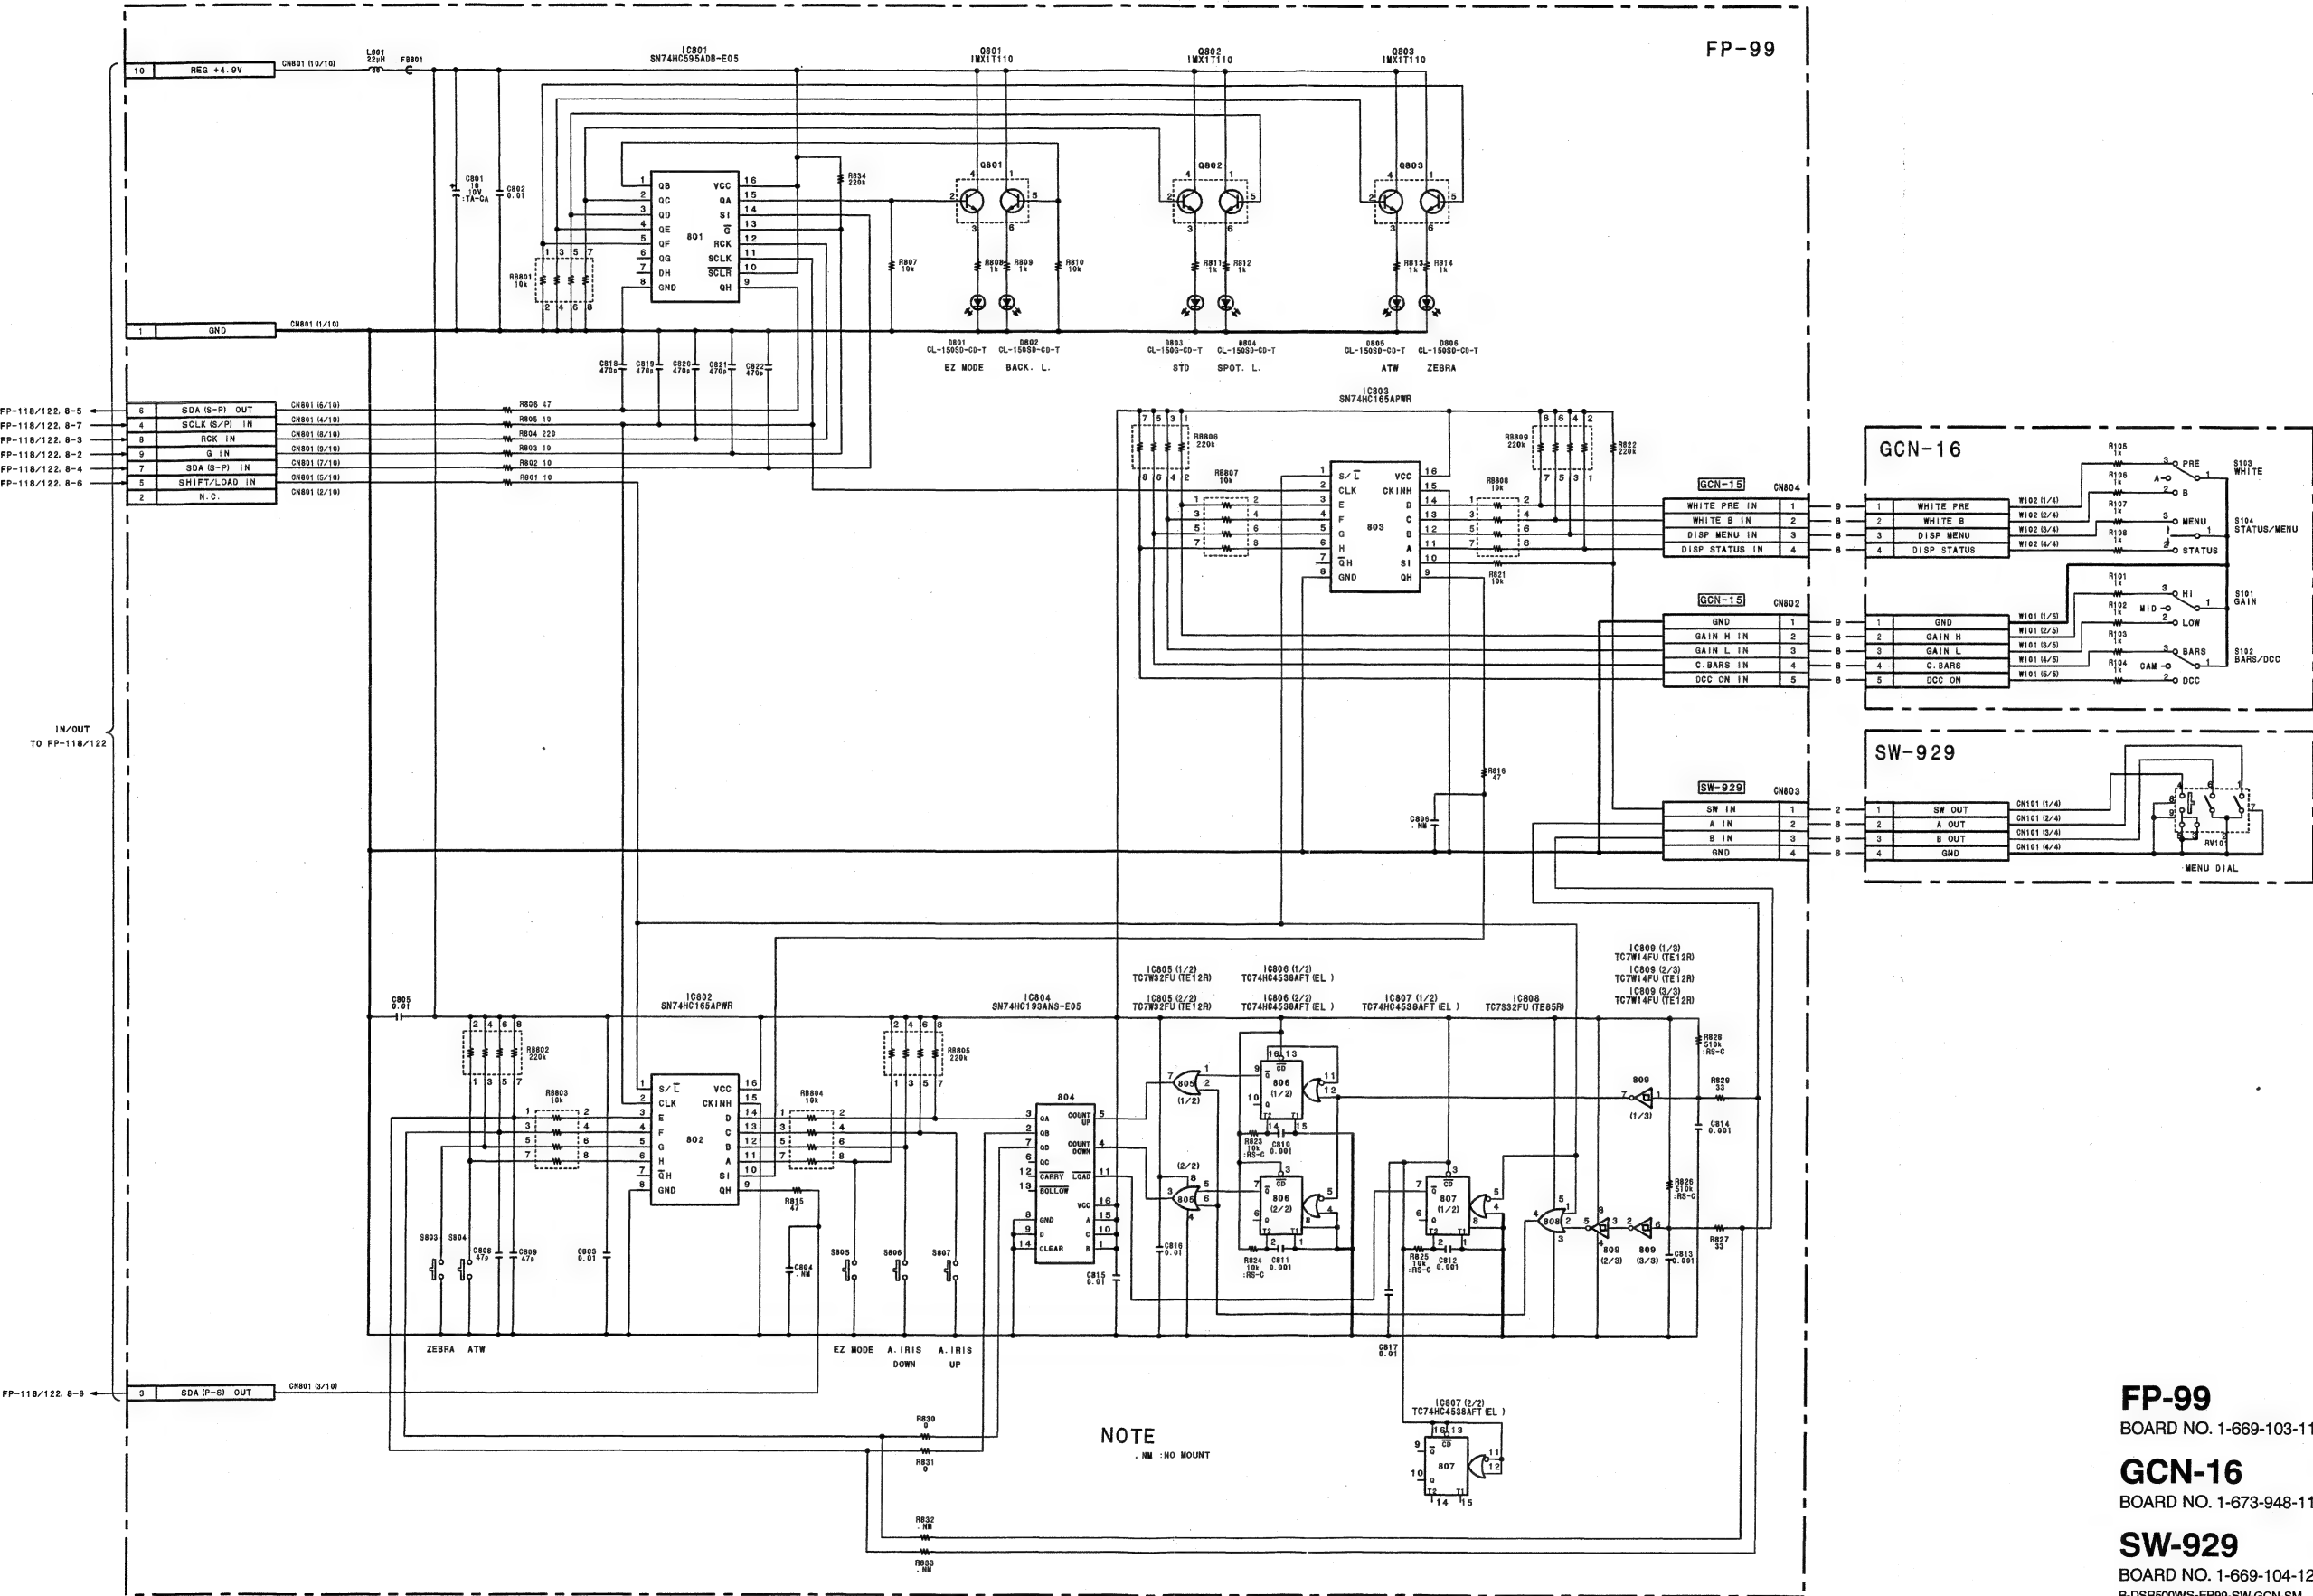

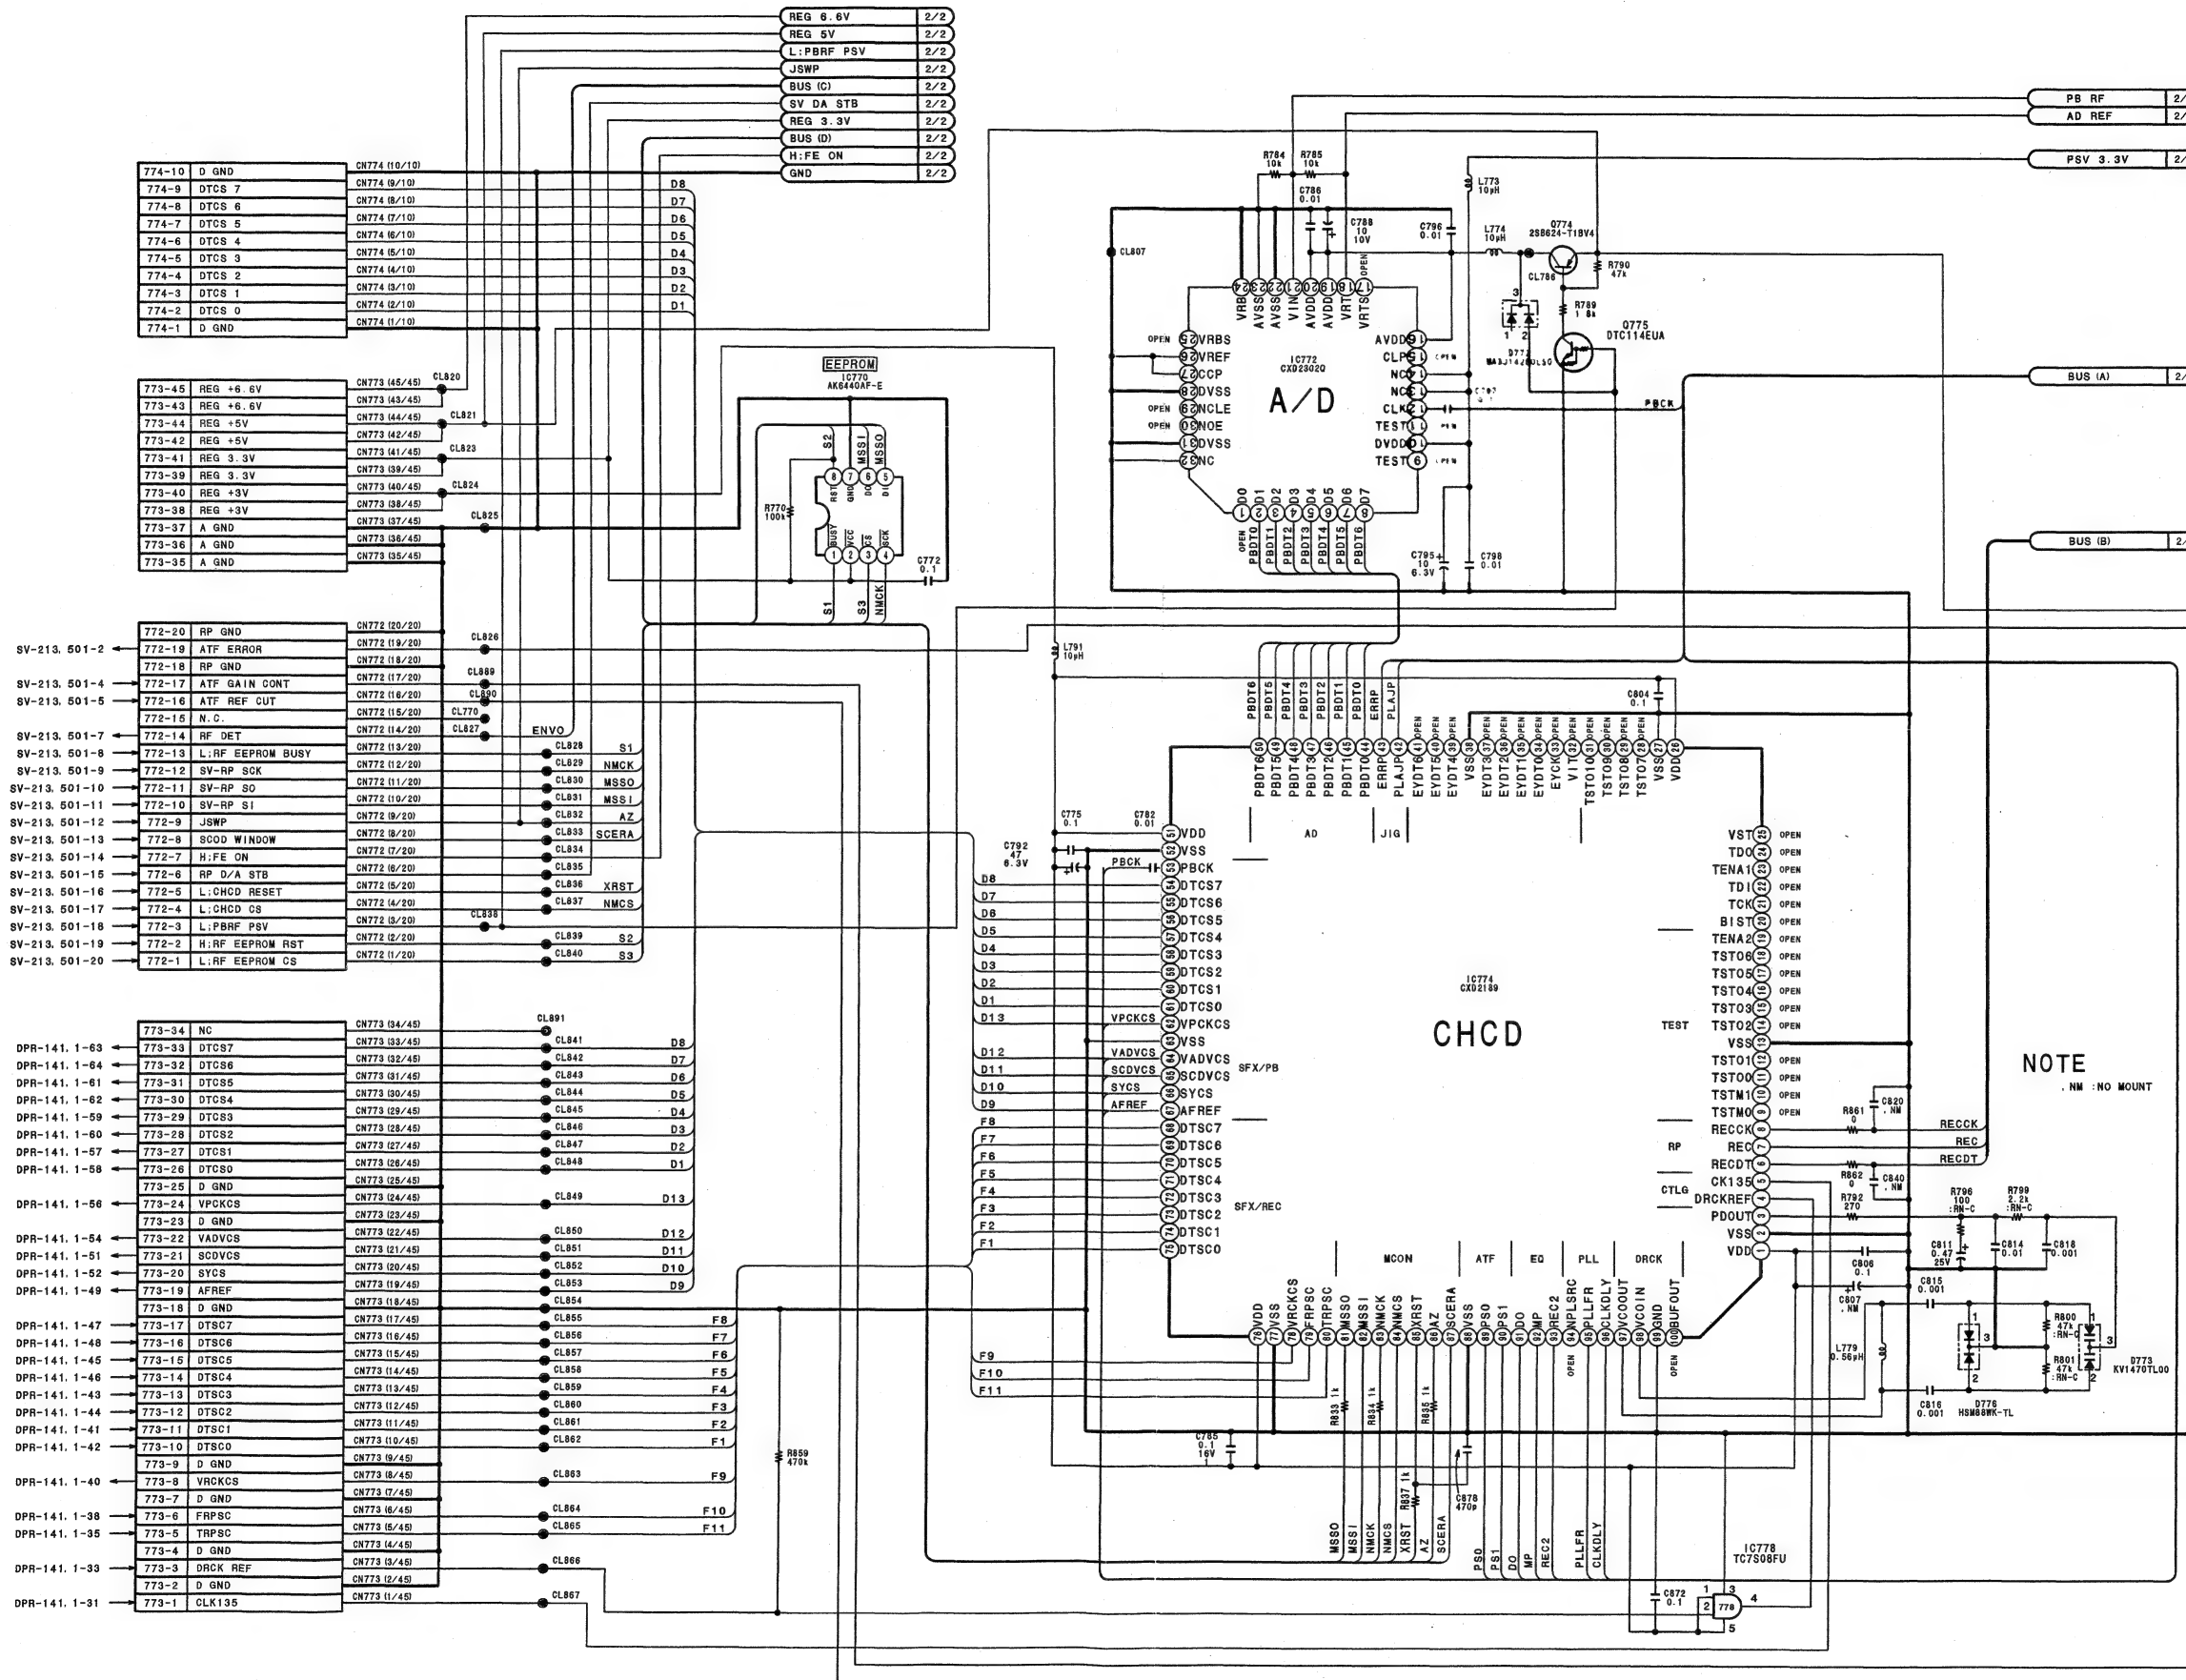

**RP-91 (1/2)**



**PR-91 (1/2)**  
BOARD NO. 1-662-878-12  
B-DSR500WS-RP91-SM


DSR-390/390P/370/370P/300A/300AP V2


4-67


4-67


P



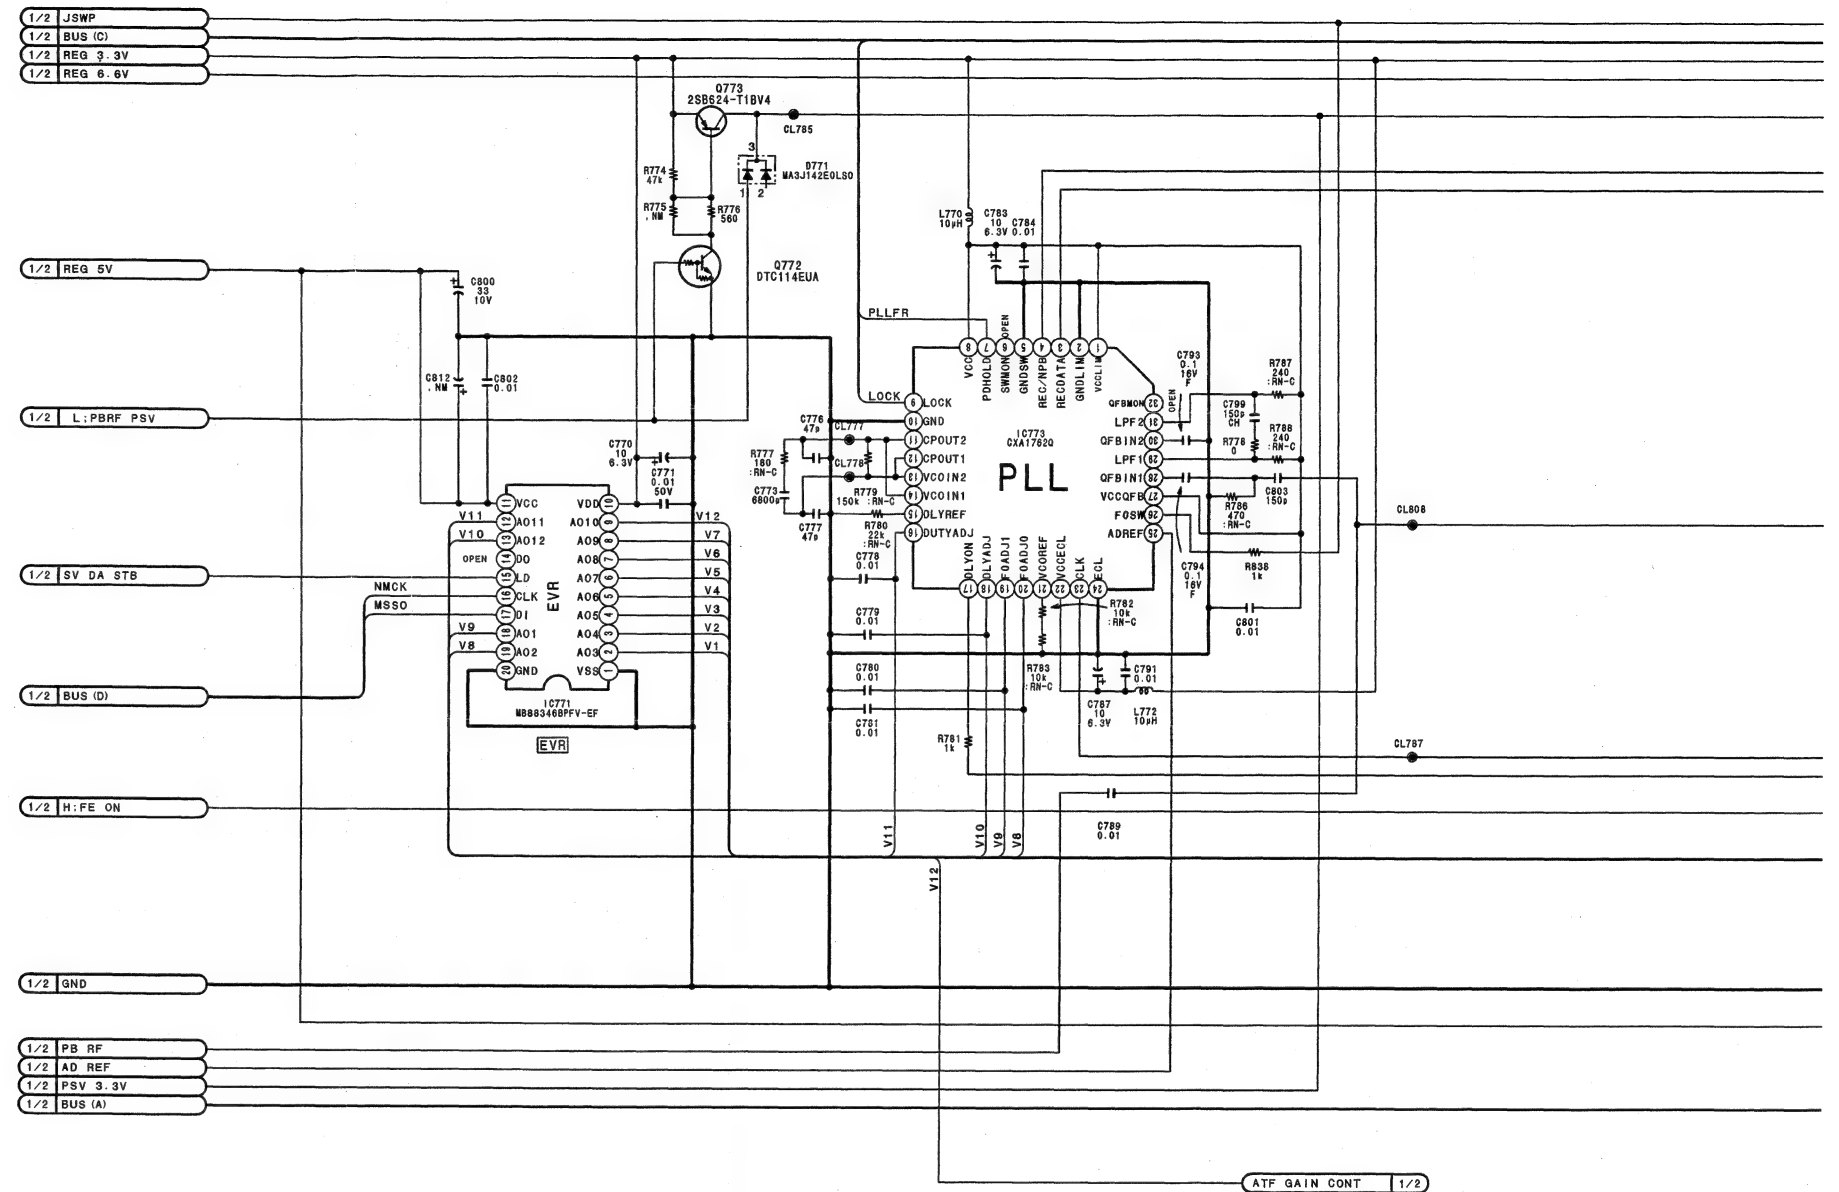

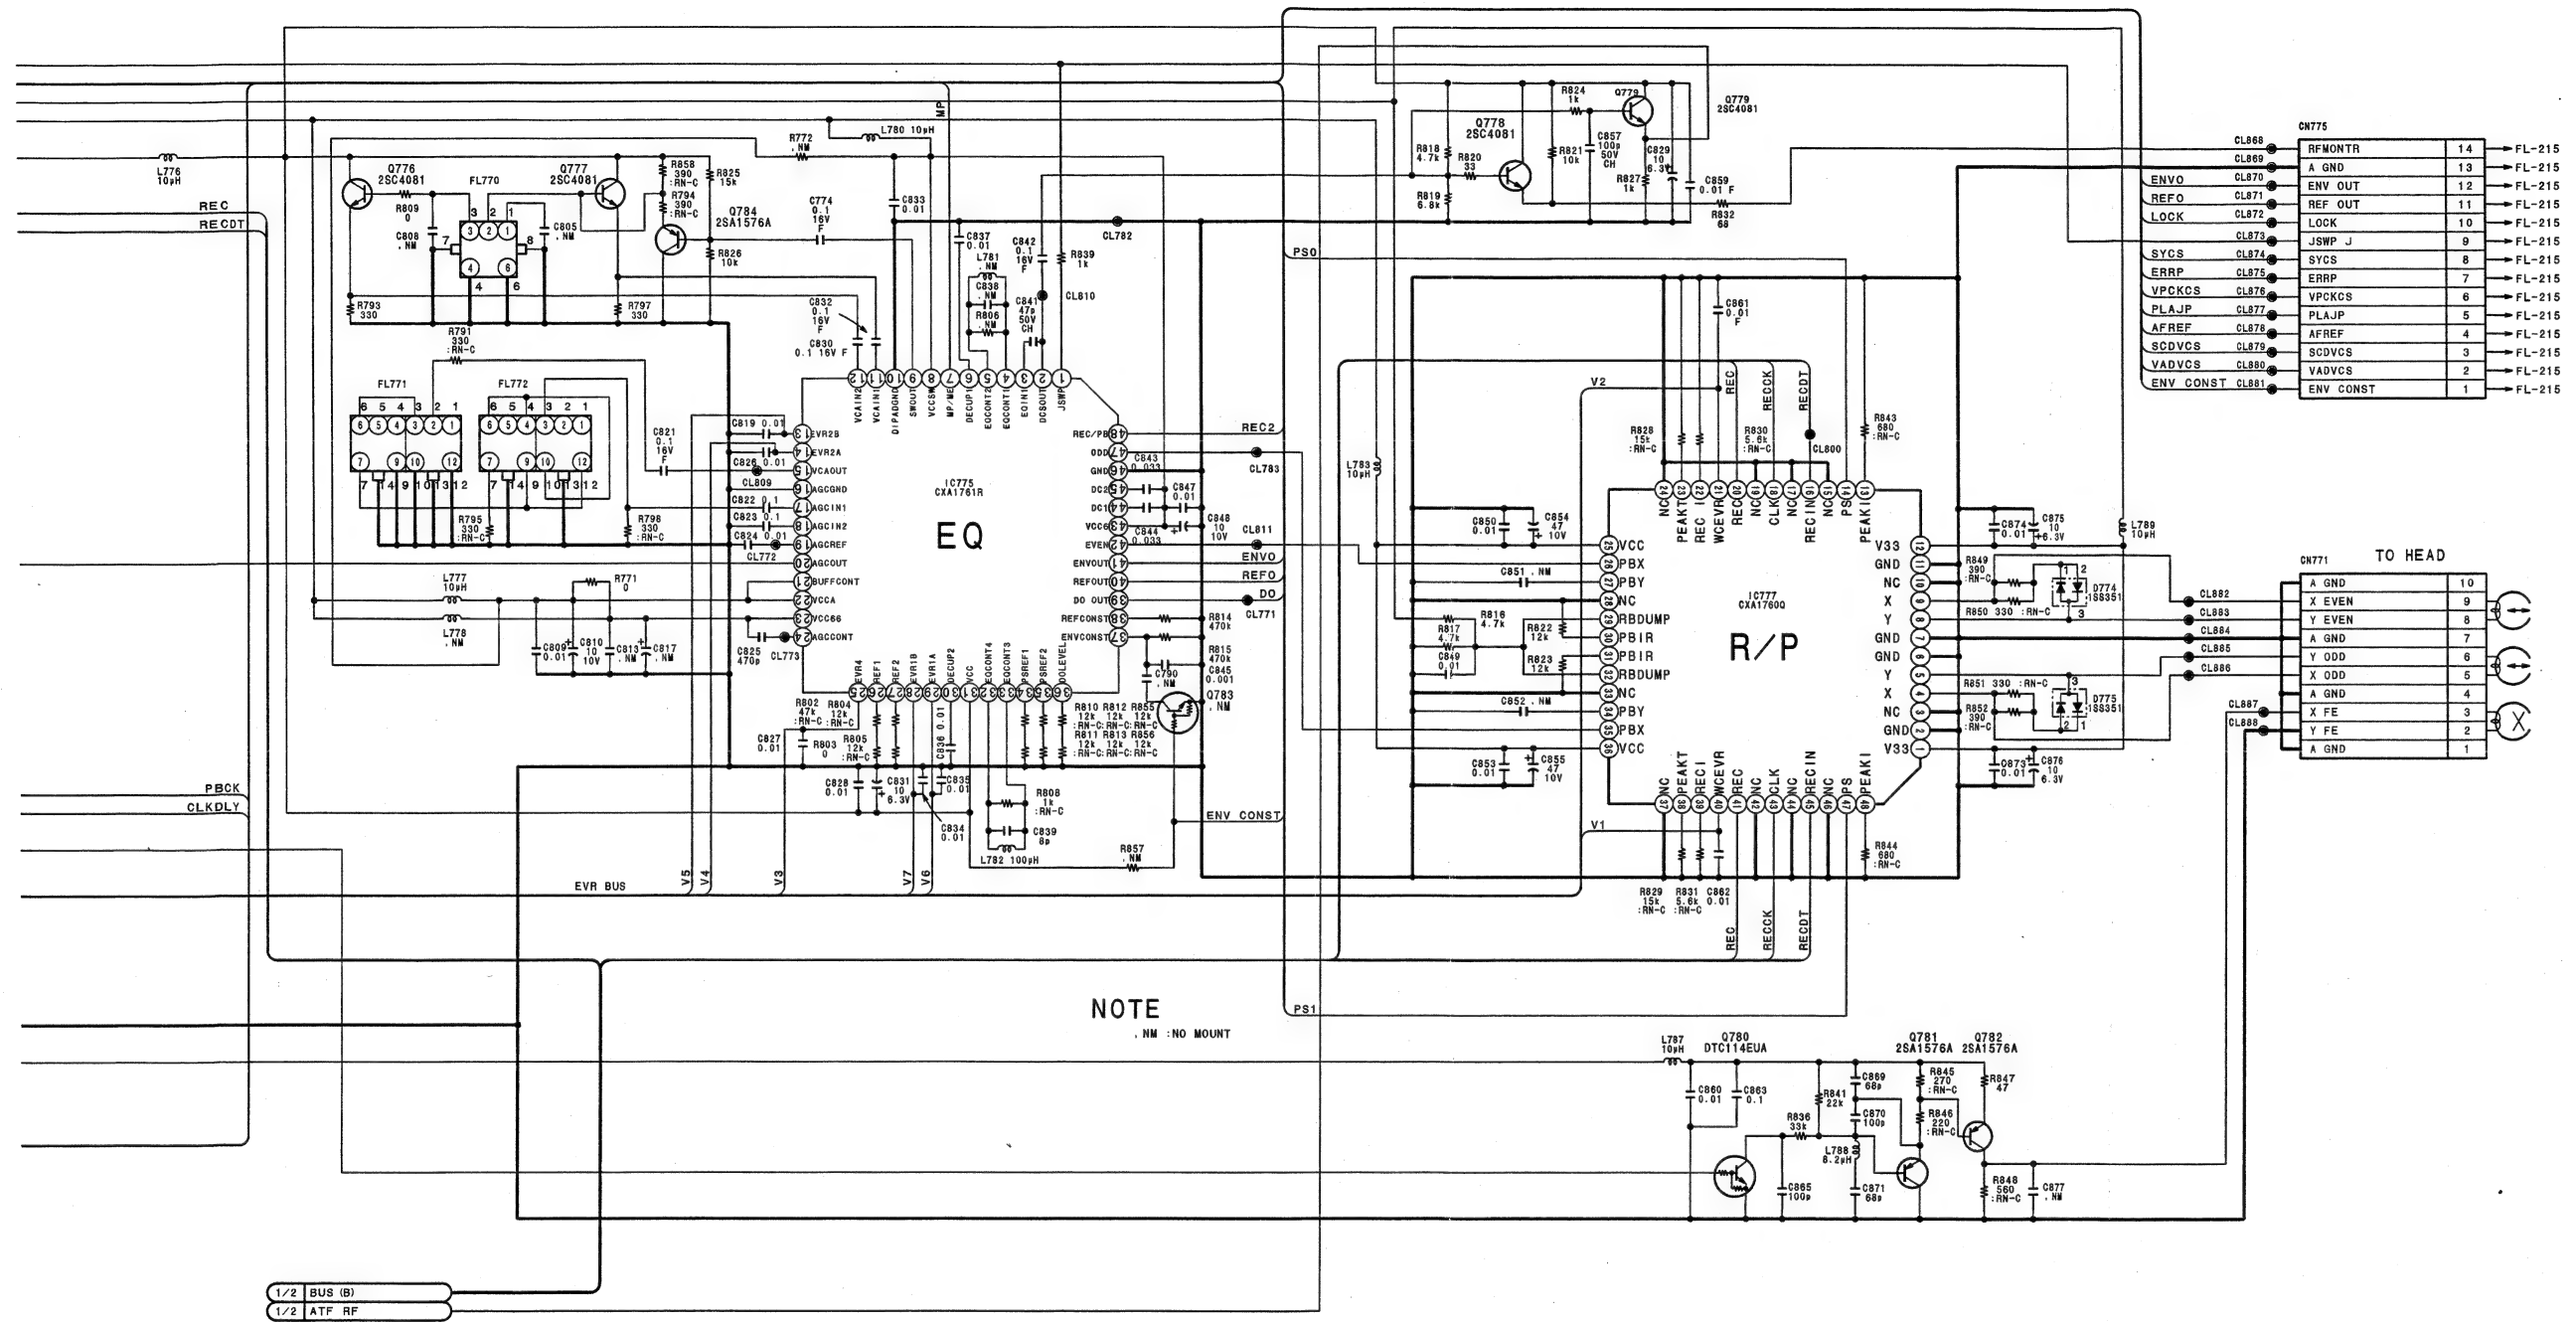

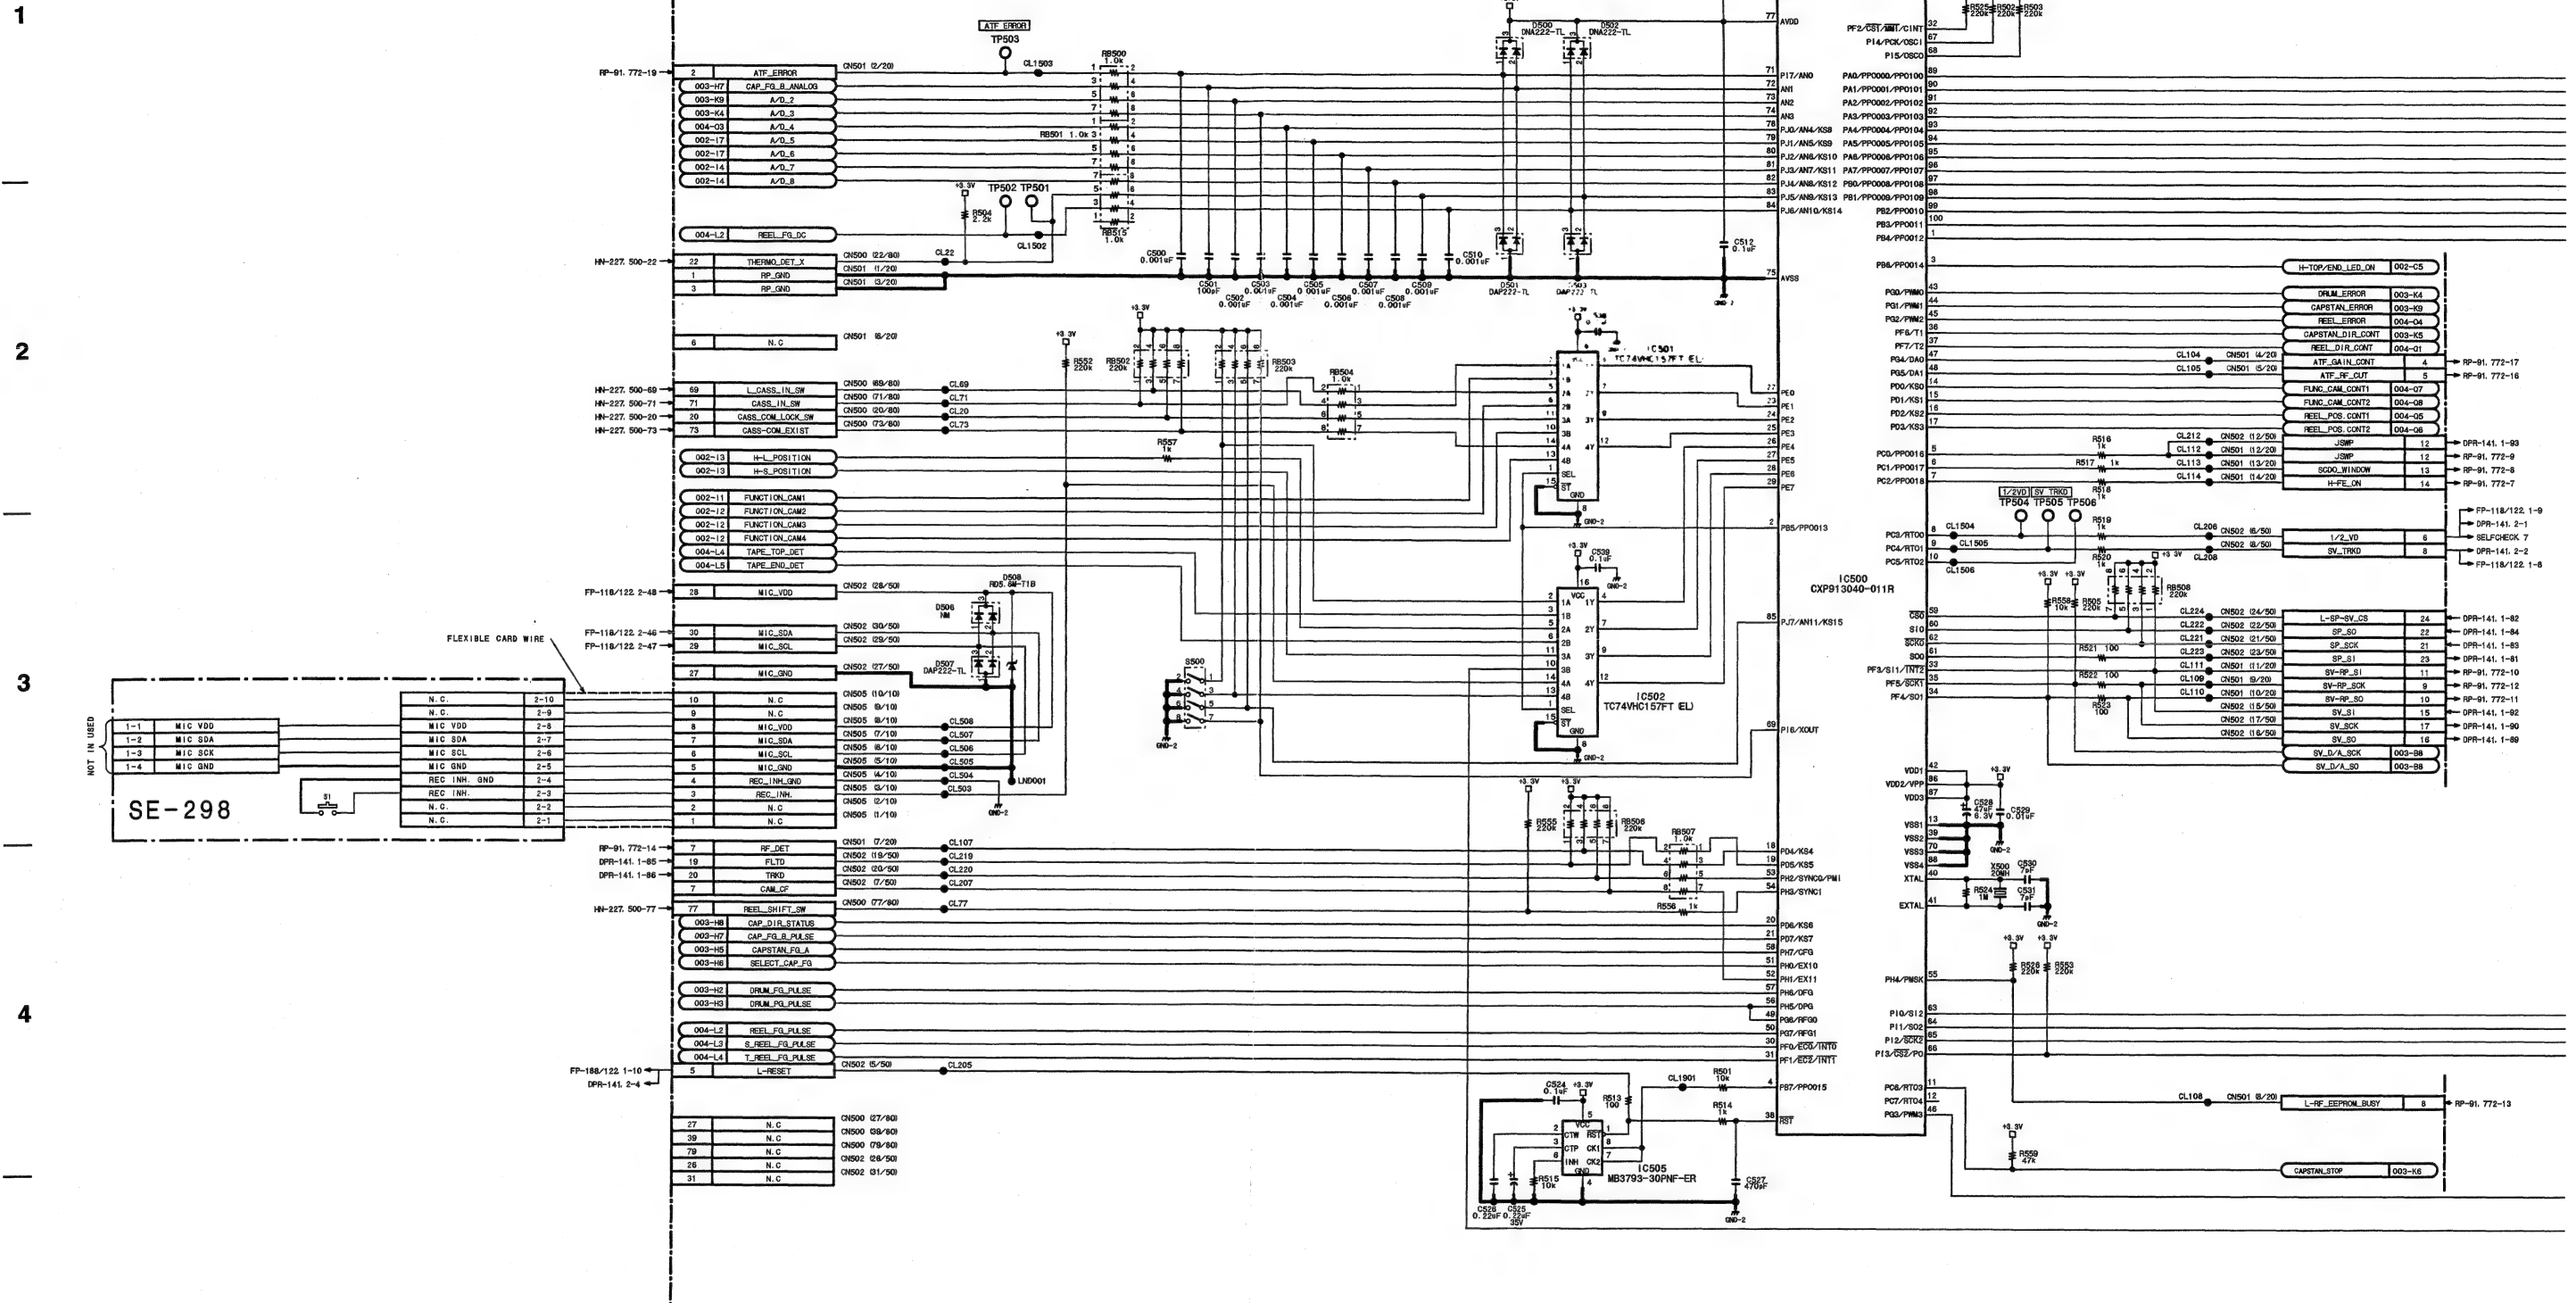

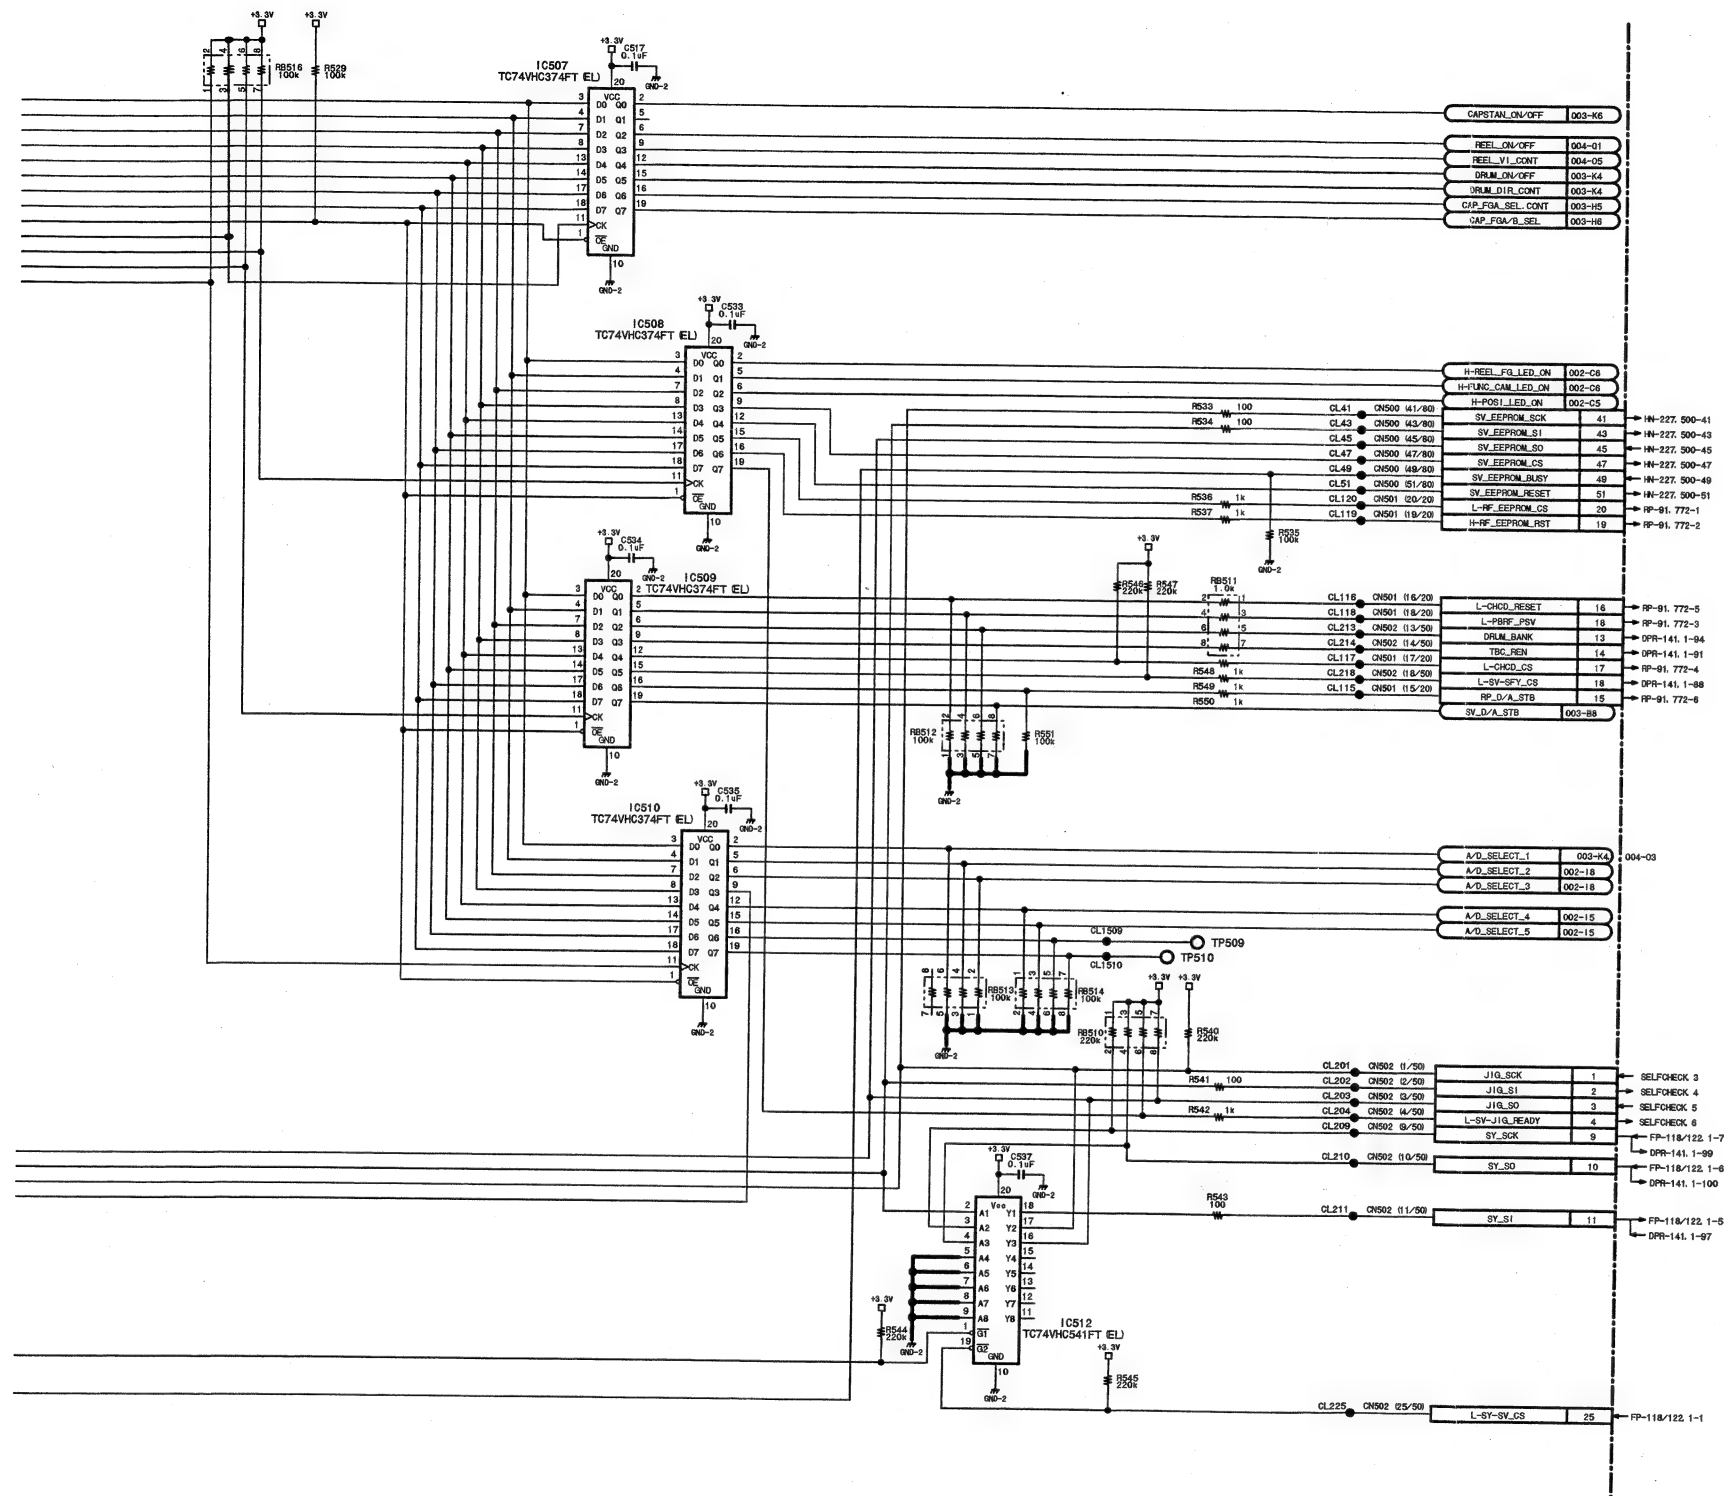

SE-298

BOARD NO. 1-662-986-11


SV-213 (1/4)

BOARD NO. 1-673-983-12

DSR-500WSL\_SV-213\_001




## SV-213 (2/4)








## SV-213 (3/4)

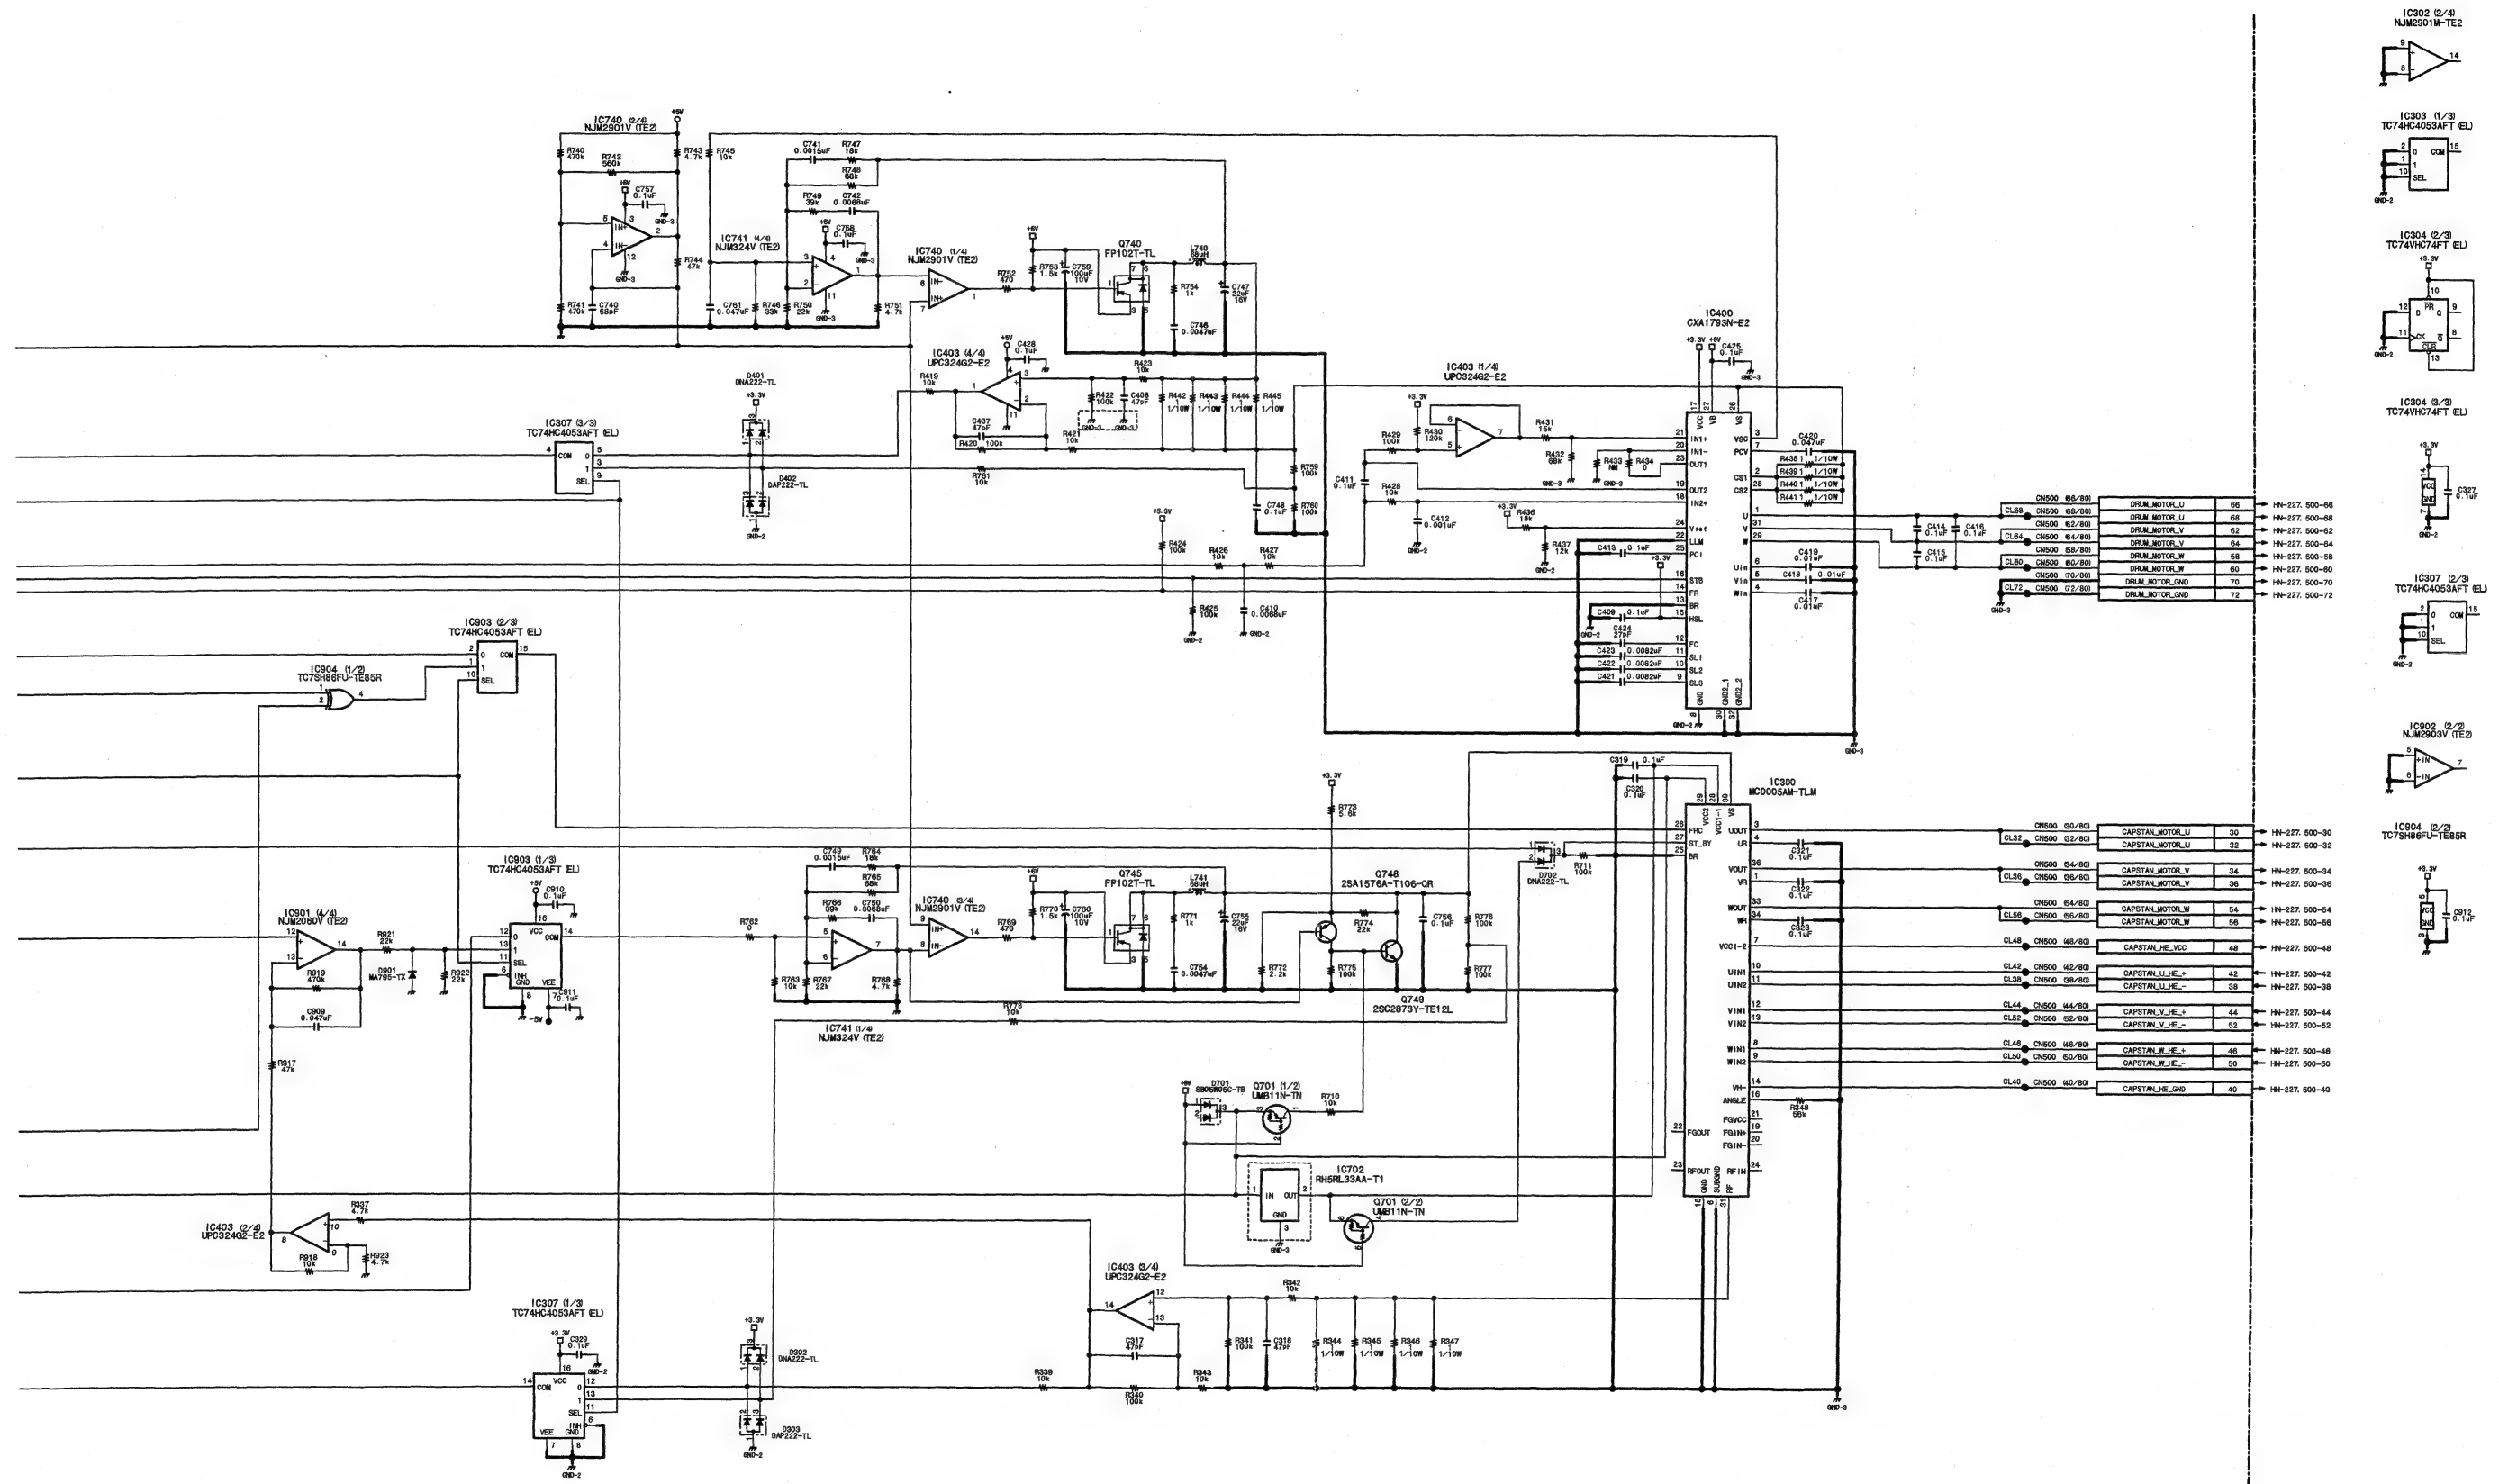

**SV-213 (3/4)**  
BOARD NO. 1-673-983-12  
DSR-500WSL\_SV-213\_001

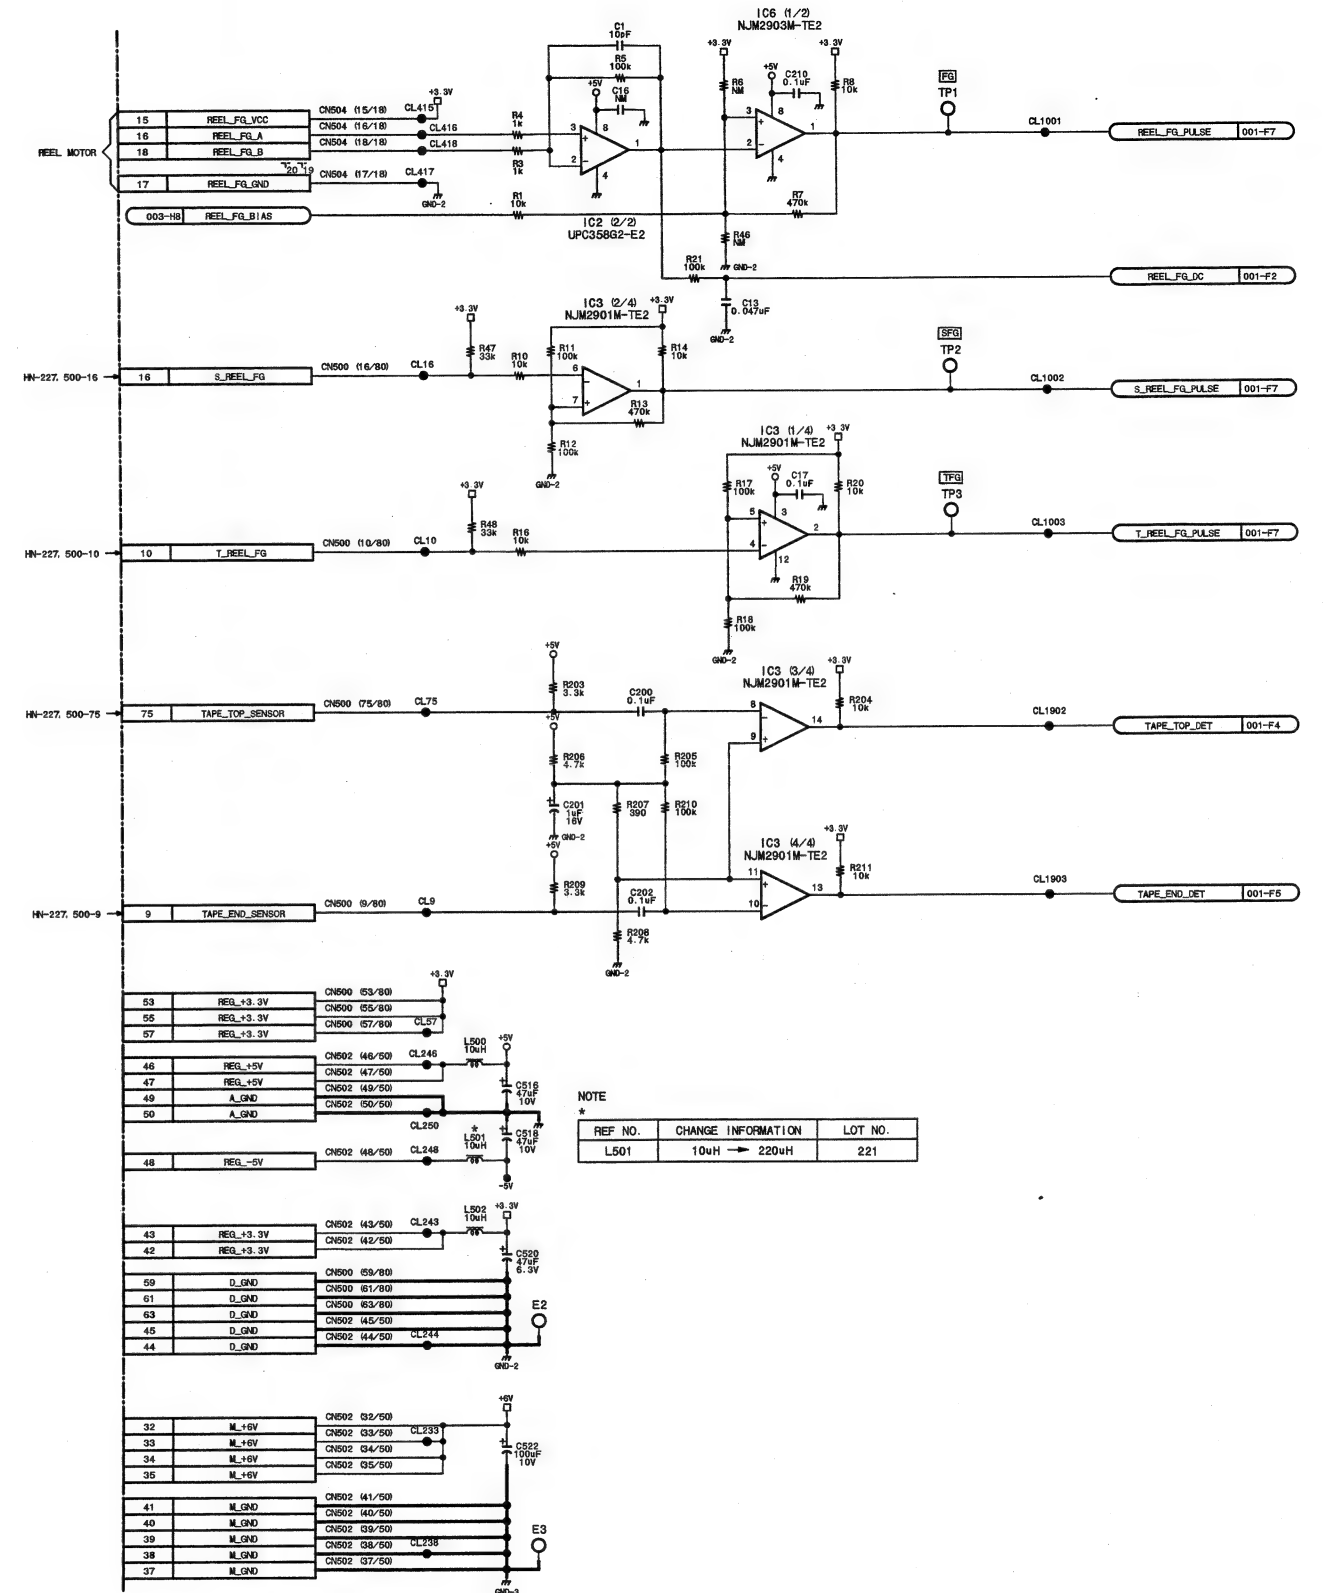


## SV-213 (4/4)



( M

BOARD NO. 1-673-983-12  
DSR-500WSL\_SV-213\_001

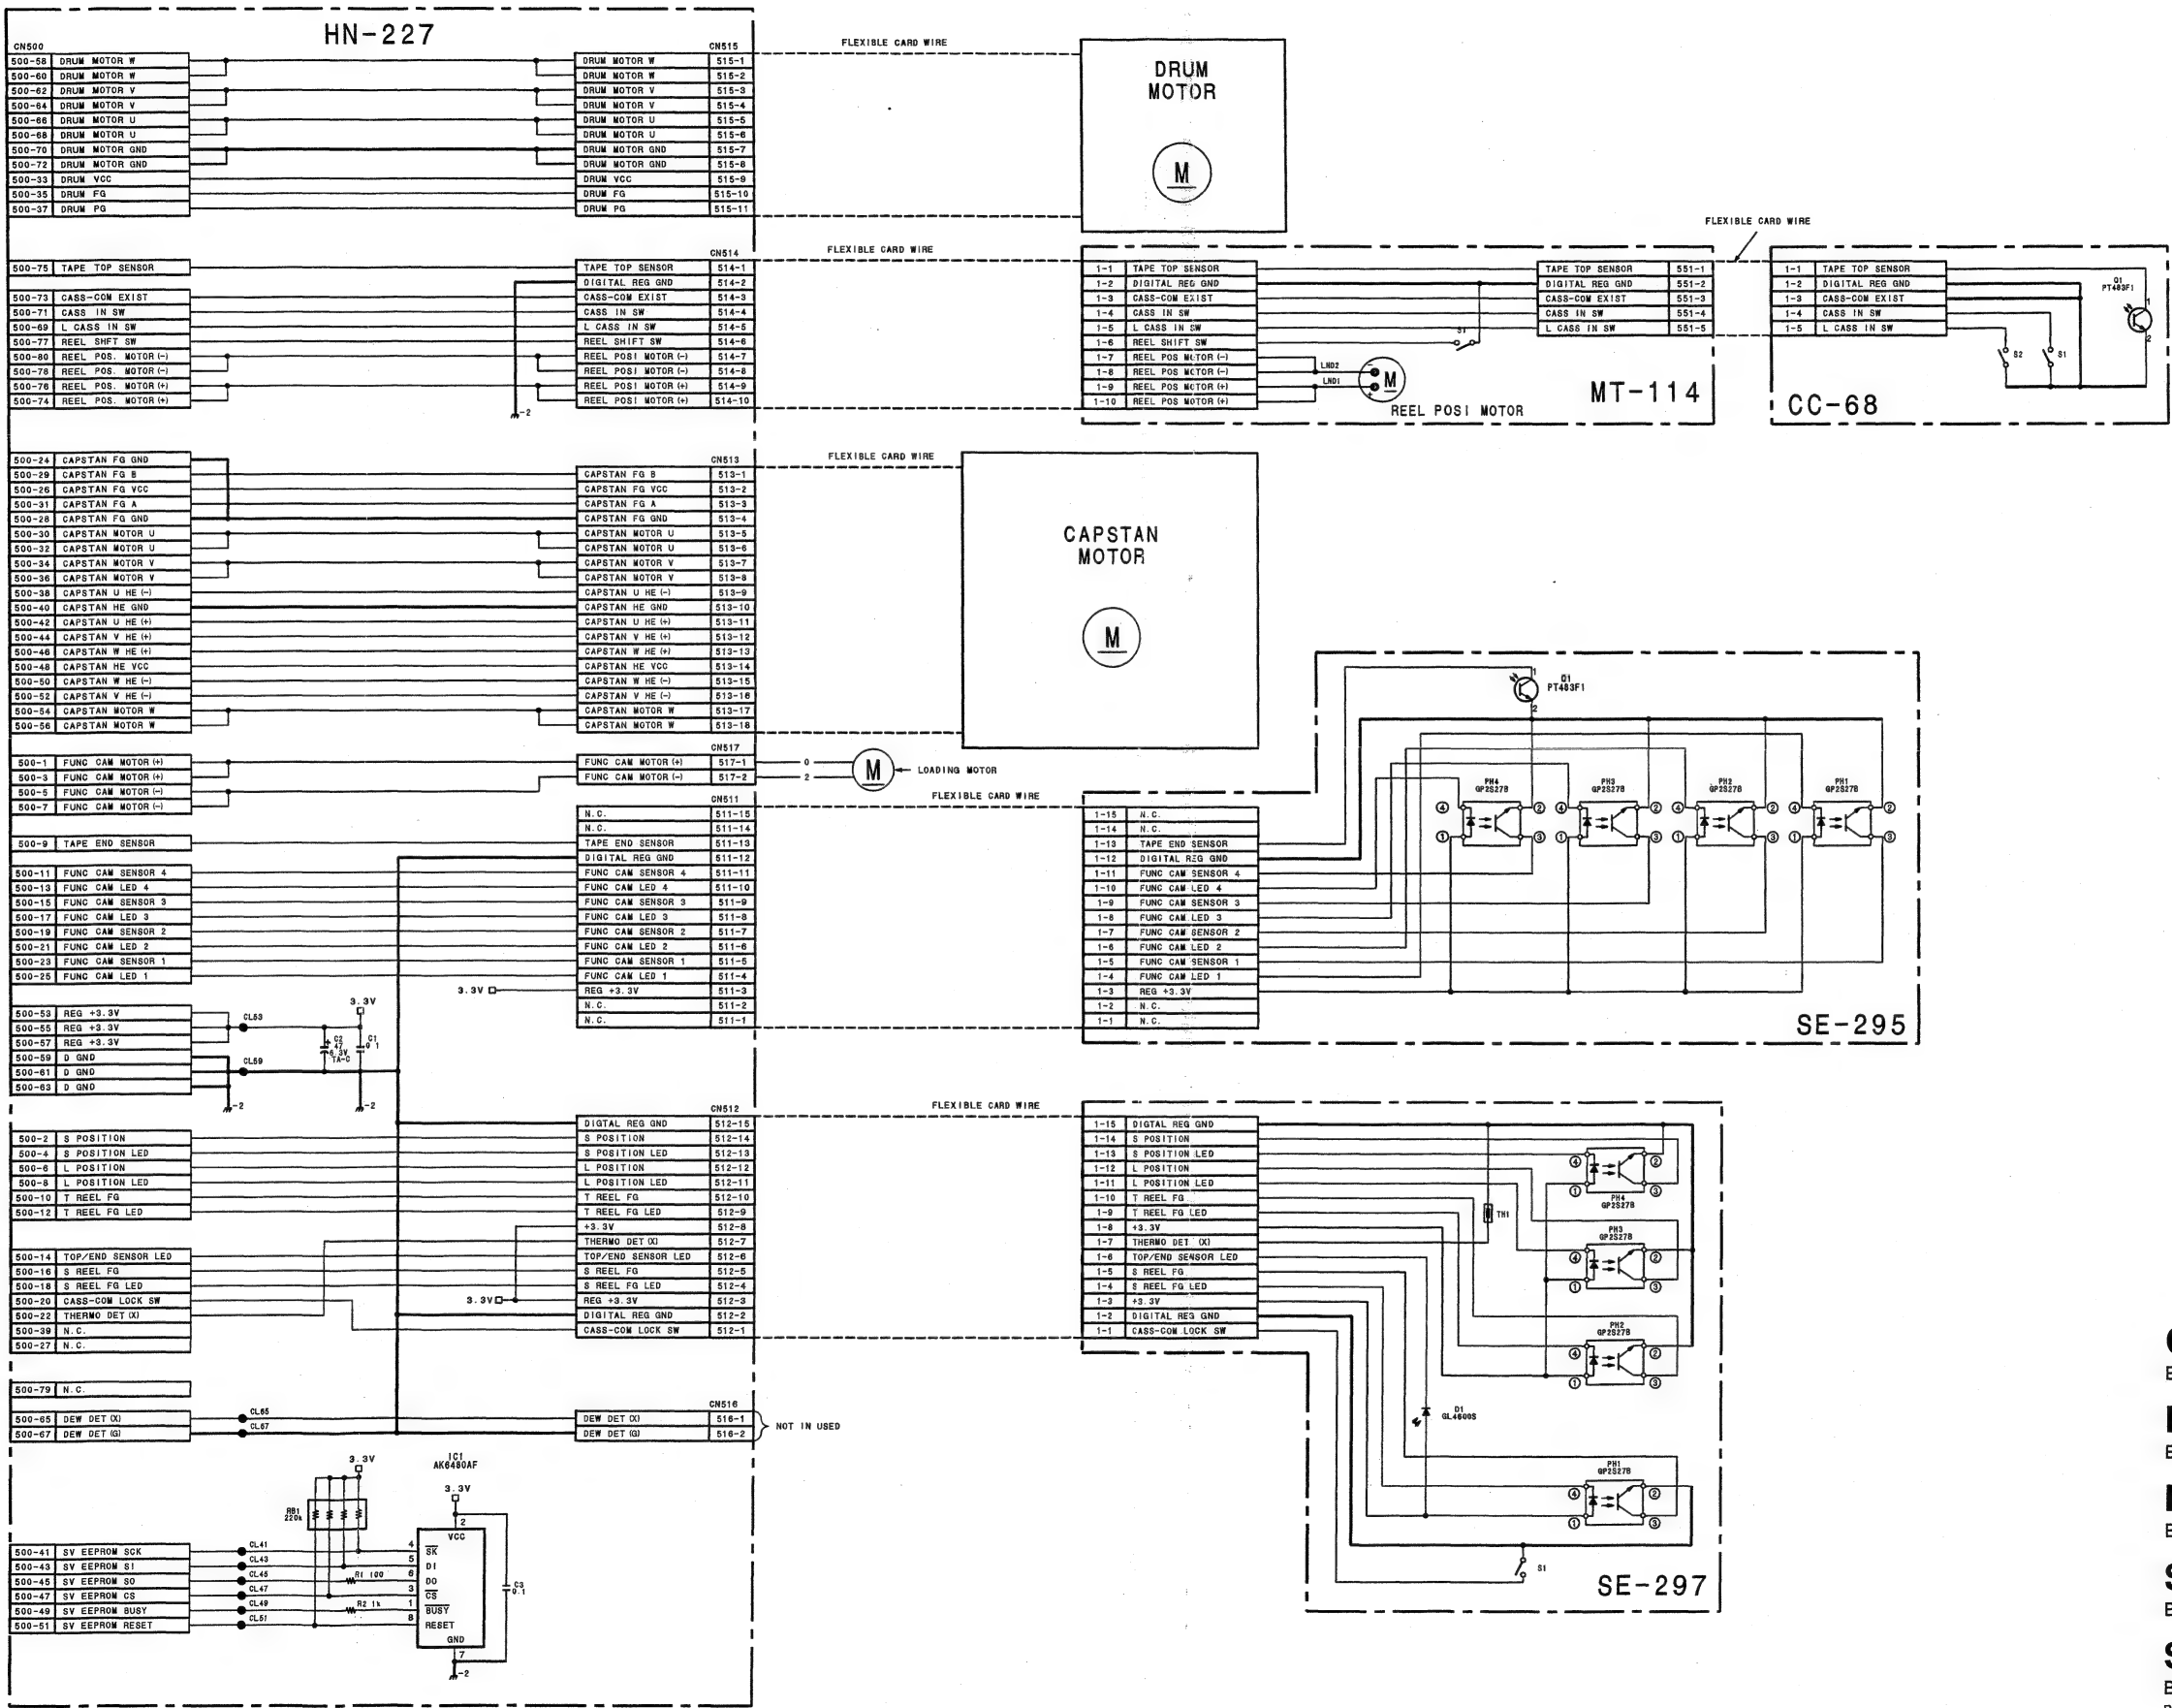

**CC-68**

BOARD NO. 1-662-883-12

**HN-227**

BOARD NO. 1-662-879-12

**MT-114**

BOARD NO. 1-662-884-12


**SE-295**

BOARD NO. 1-662-881-13, 14


**SE-297**

BOARD NO. 1-662-882-13

B-DSR500WS-HN-SE-SM

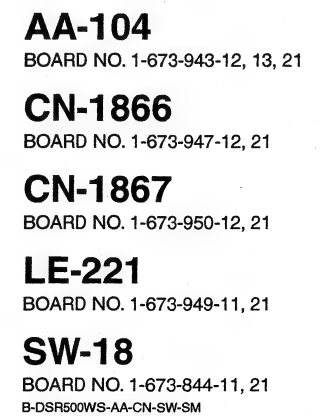








2

3

4

5

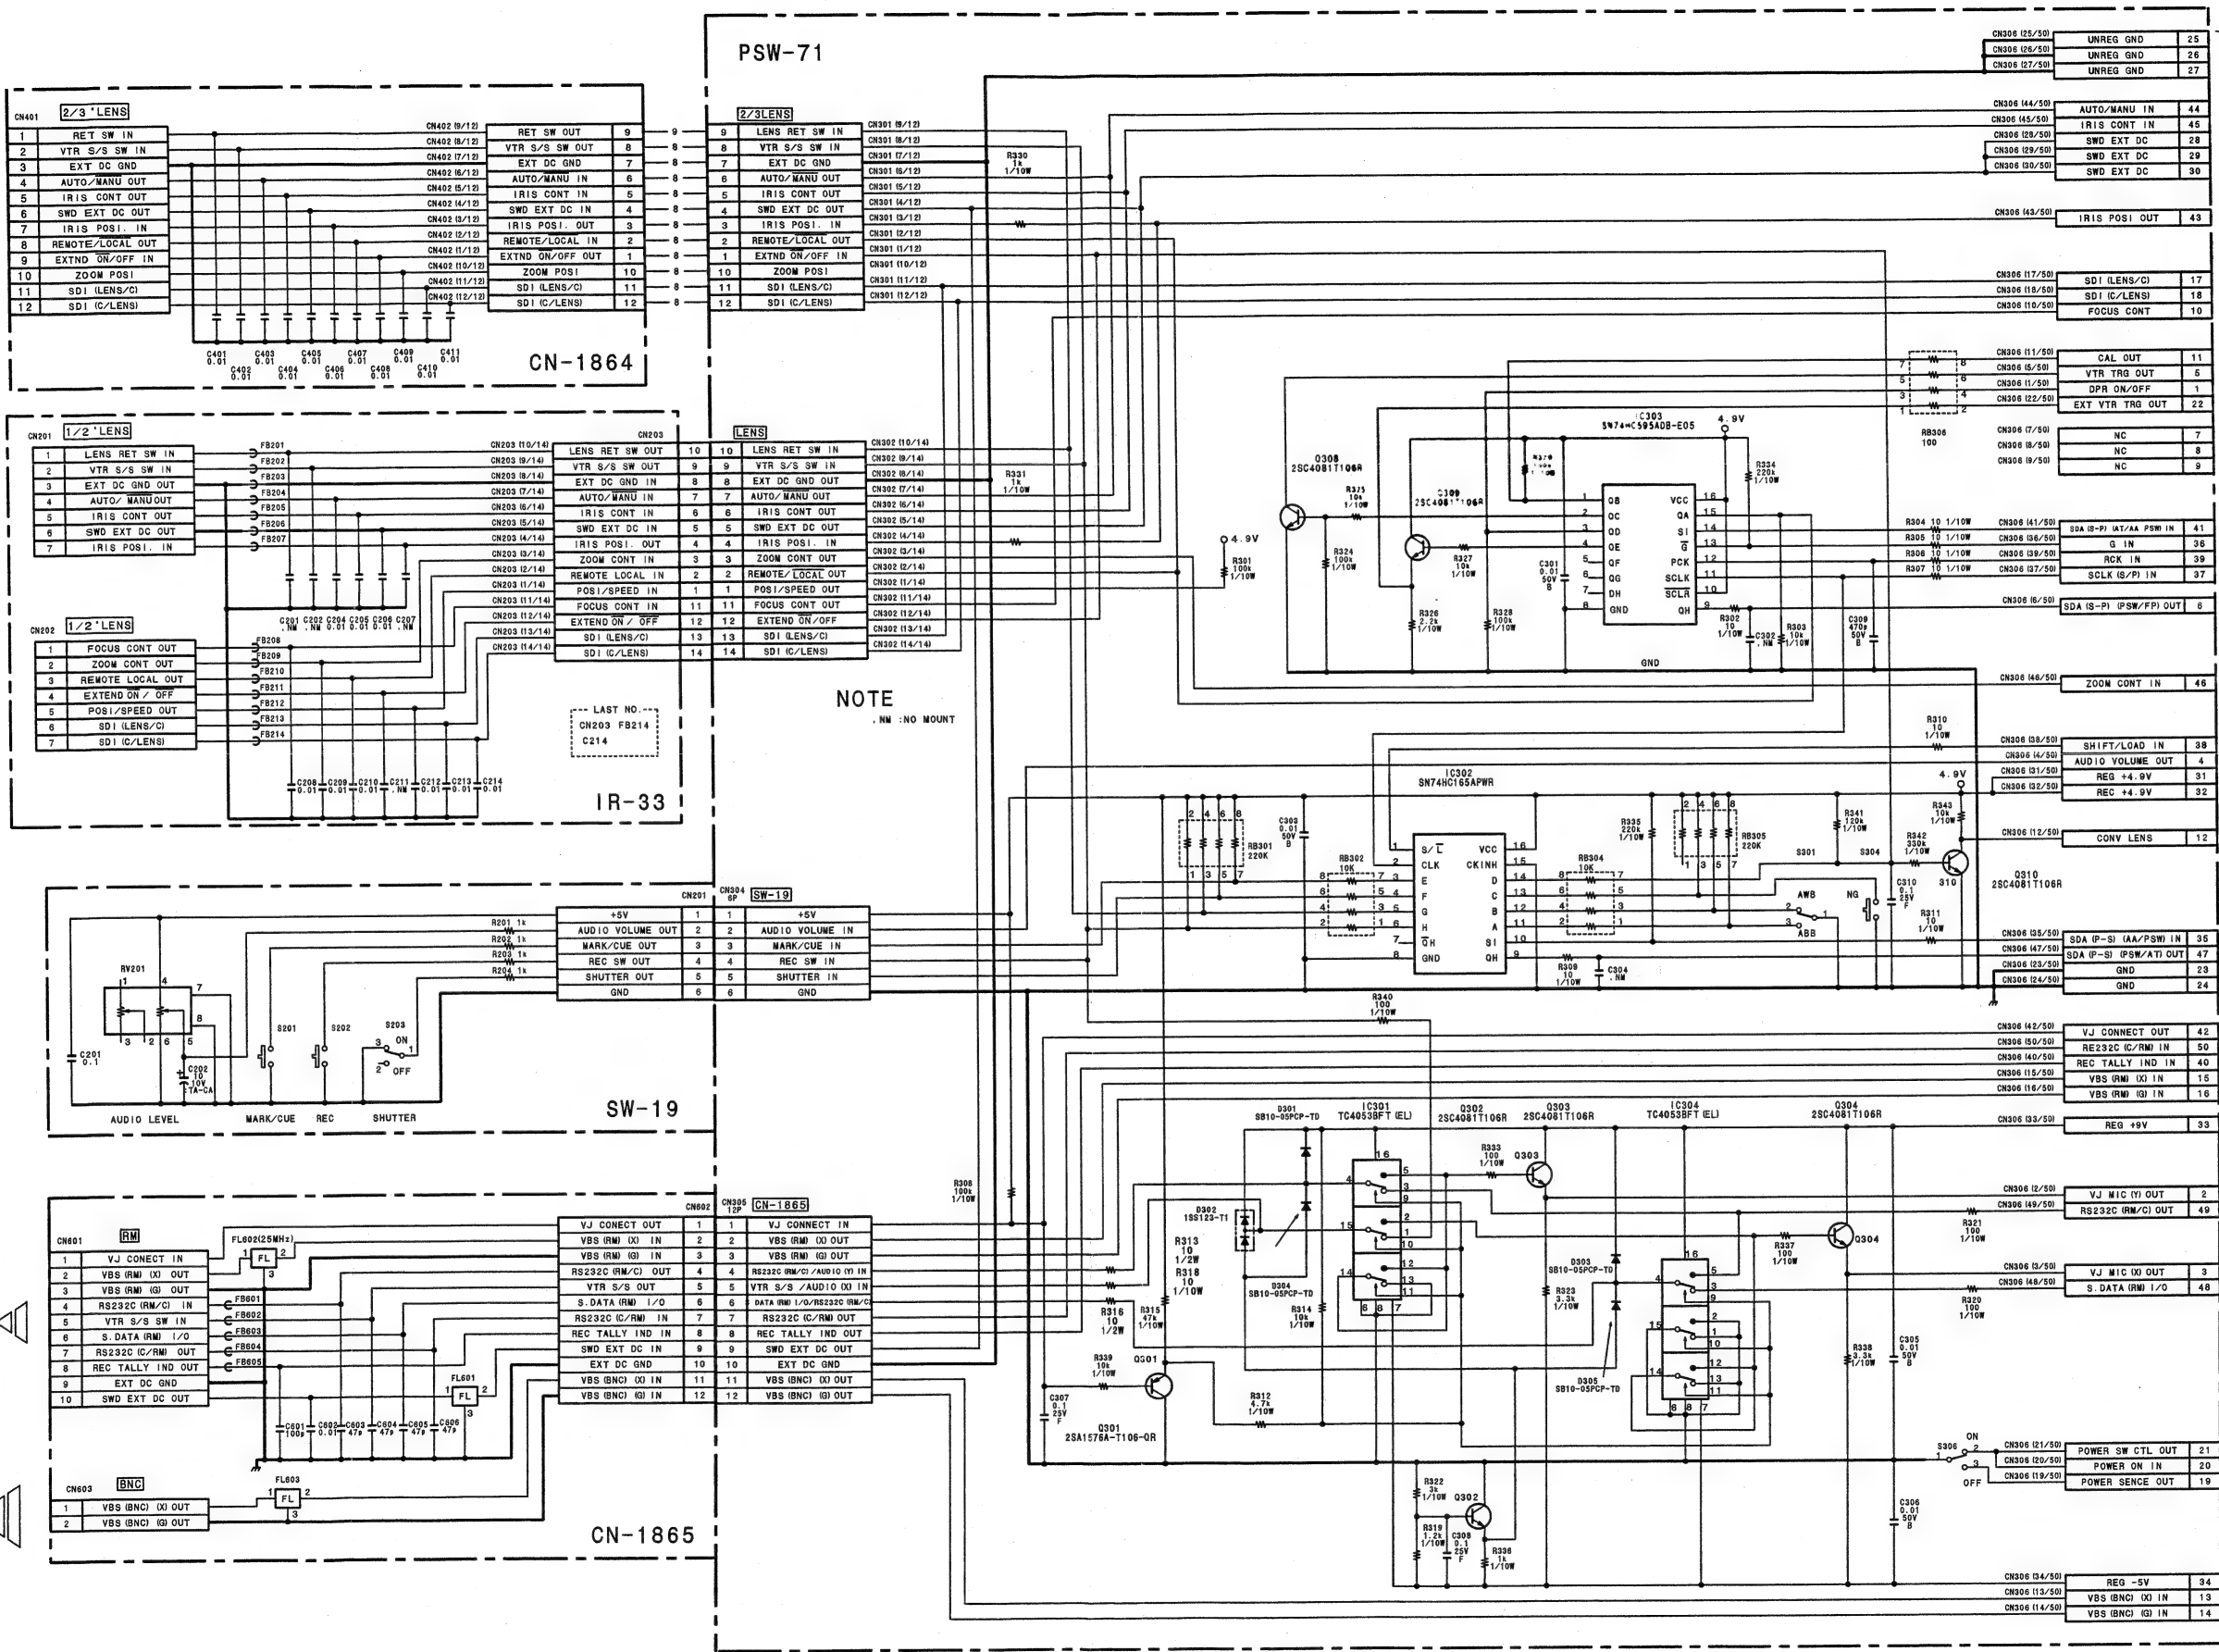

**CN-1864**  
BOARD NO. 1-673-945-11, 21

**CN-1865**  
BOARD NO. 1-673-946-11, 21


**IR-33**  
BOARD NO. 1-677-376-11, 12, 21  
B-DSR300A-IR33-11

**PSW-71**  
BOARD NO. 1-673-951-11, 21

**SW-19**  
BOARD NO. 1-673-953-11, 21  
B-DSR500WS-PSW-CN-SW-SM



## CP-373 (1/5)



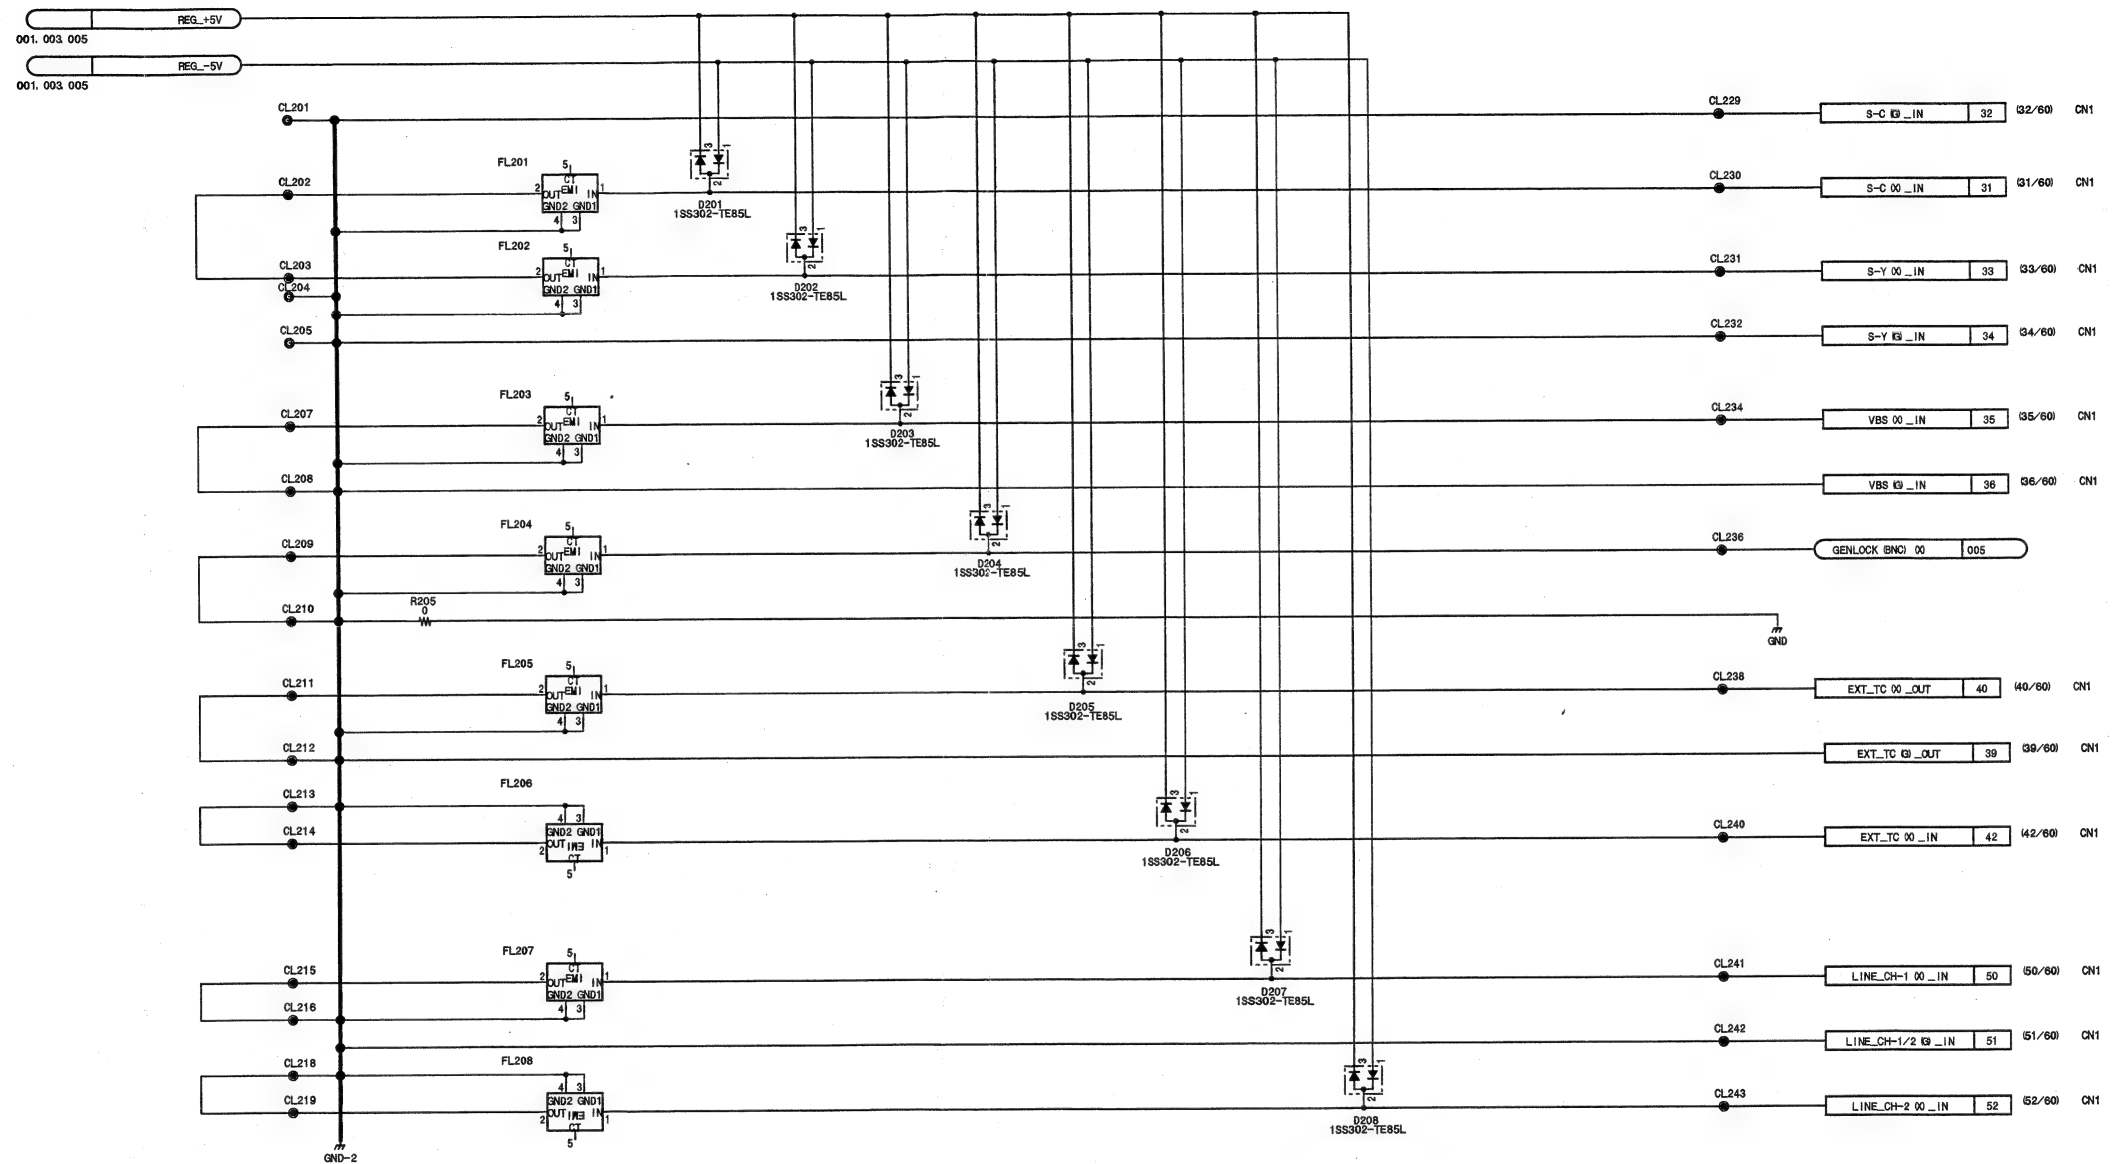


**CP-373 (2/5)**  
 BOARD NO. 1-683-382-11, 12  
 FOR DSR-390/390P/370/370P  
 DSR-370\_CP-373\_005\_2

**CP-373 (3/5)**      **CP-373 (3/5)**

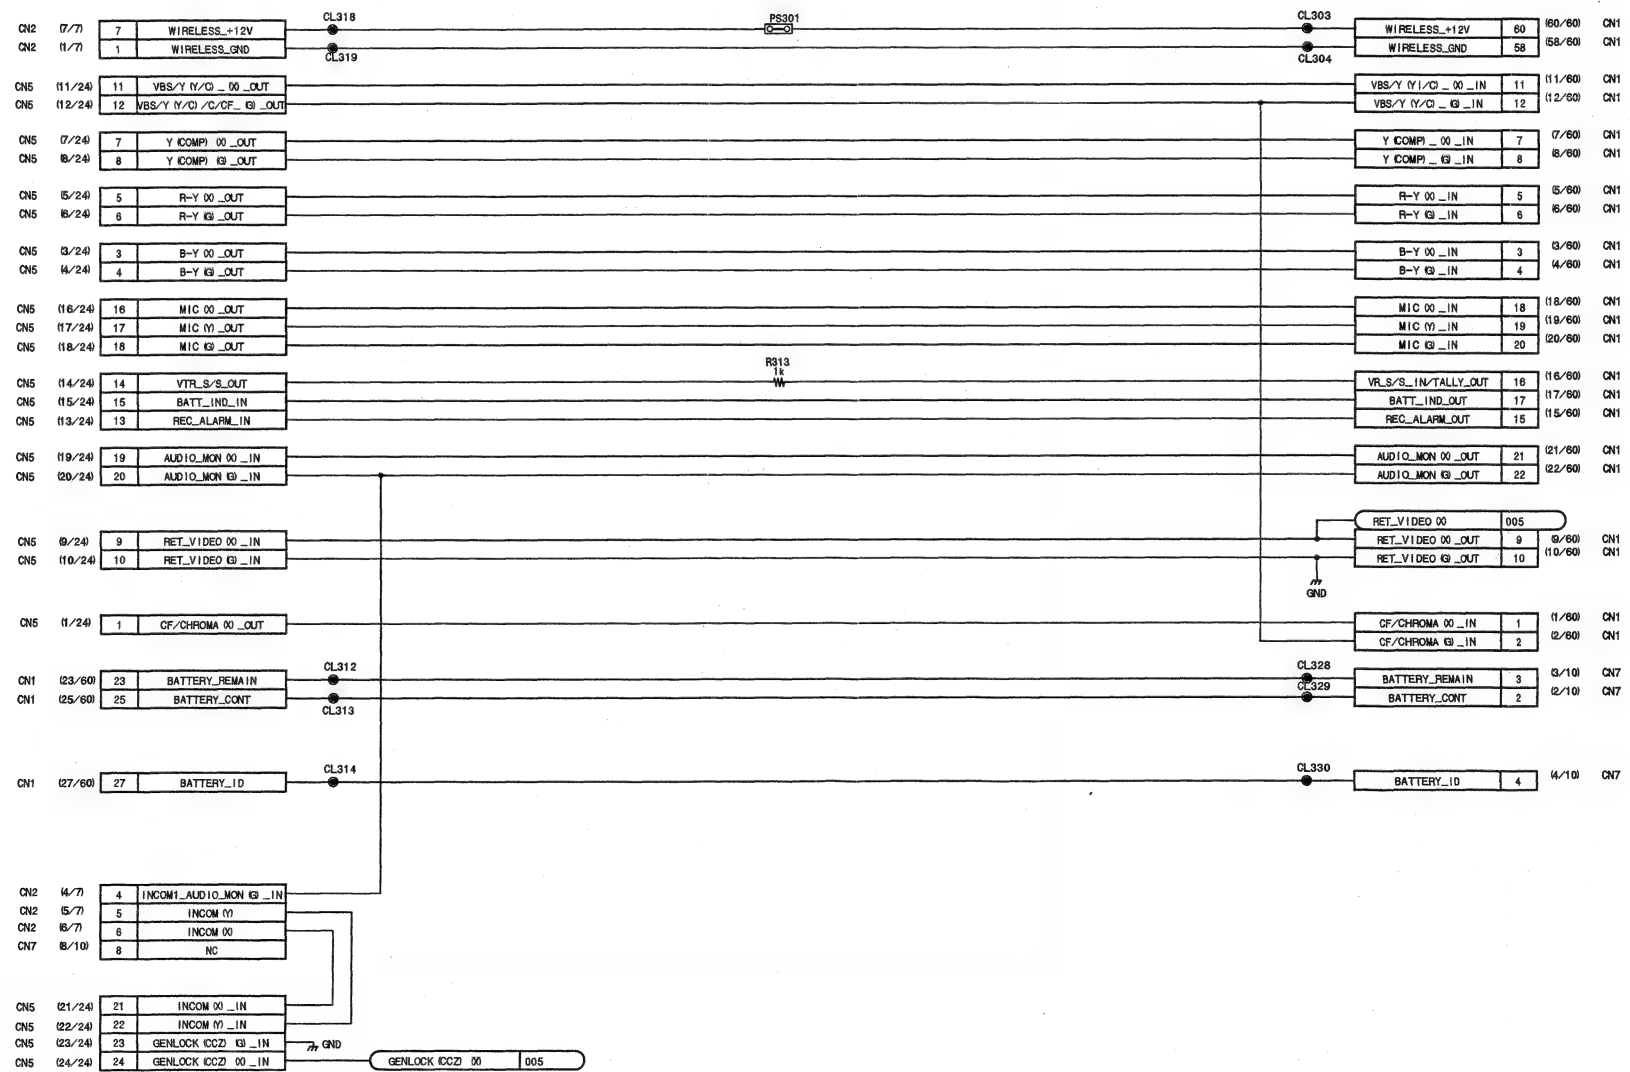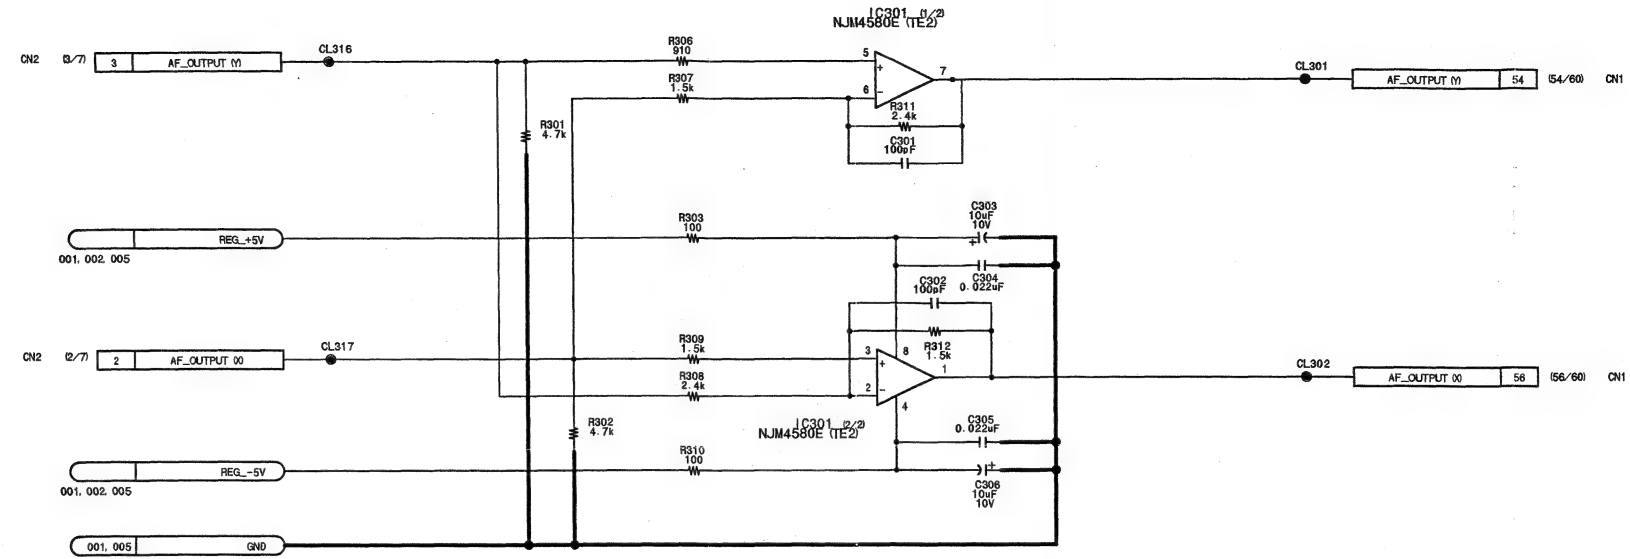


**CP-373 (3/5)**  
BOARD NO. 1-683-382-11, 12  
FOR DSR-390/390P/370/370P  
DSR-370\_CP-373\_005\_3

CP-373 (4/5) CP-373 (4/5)

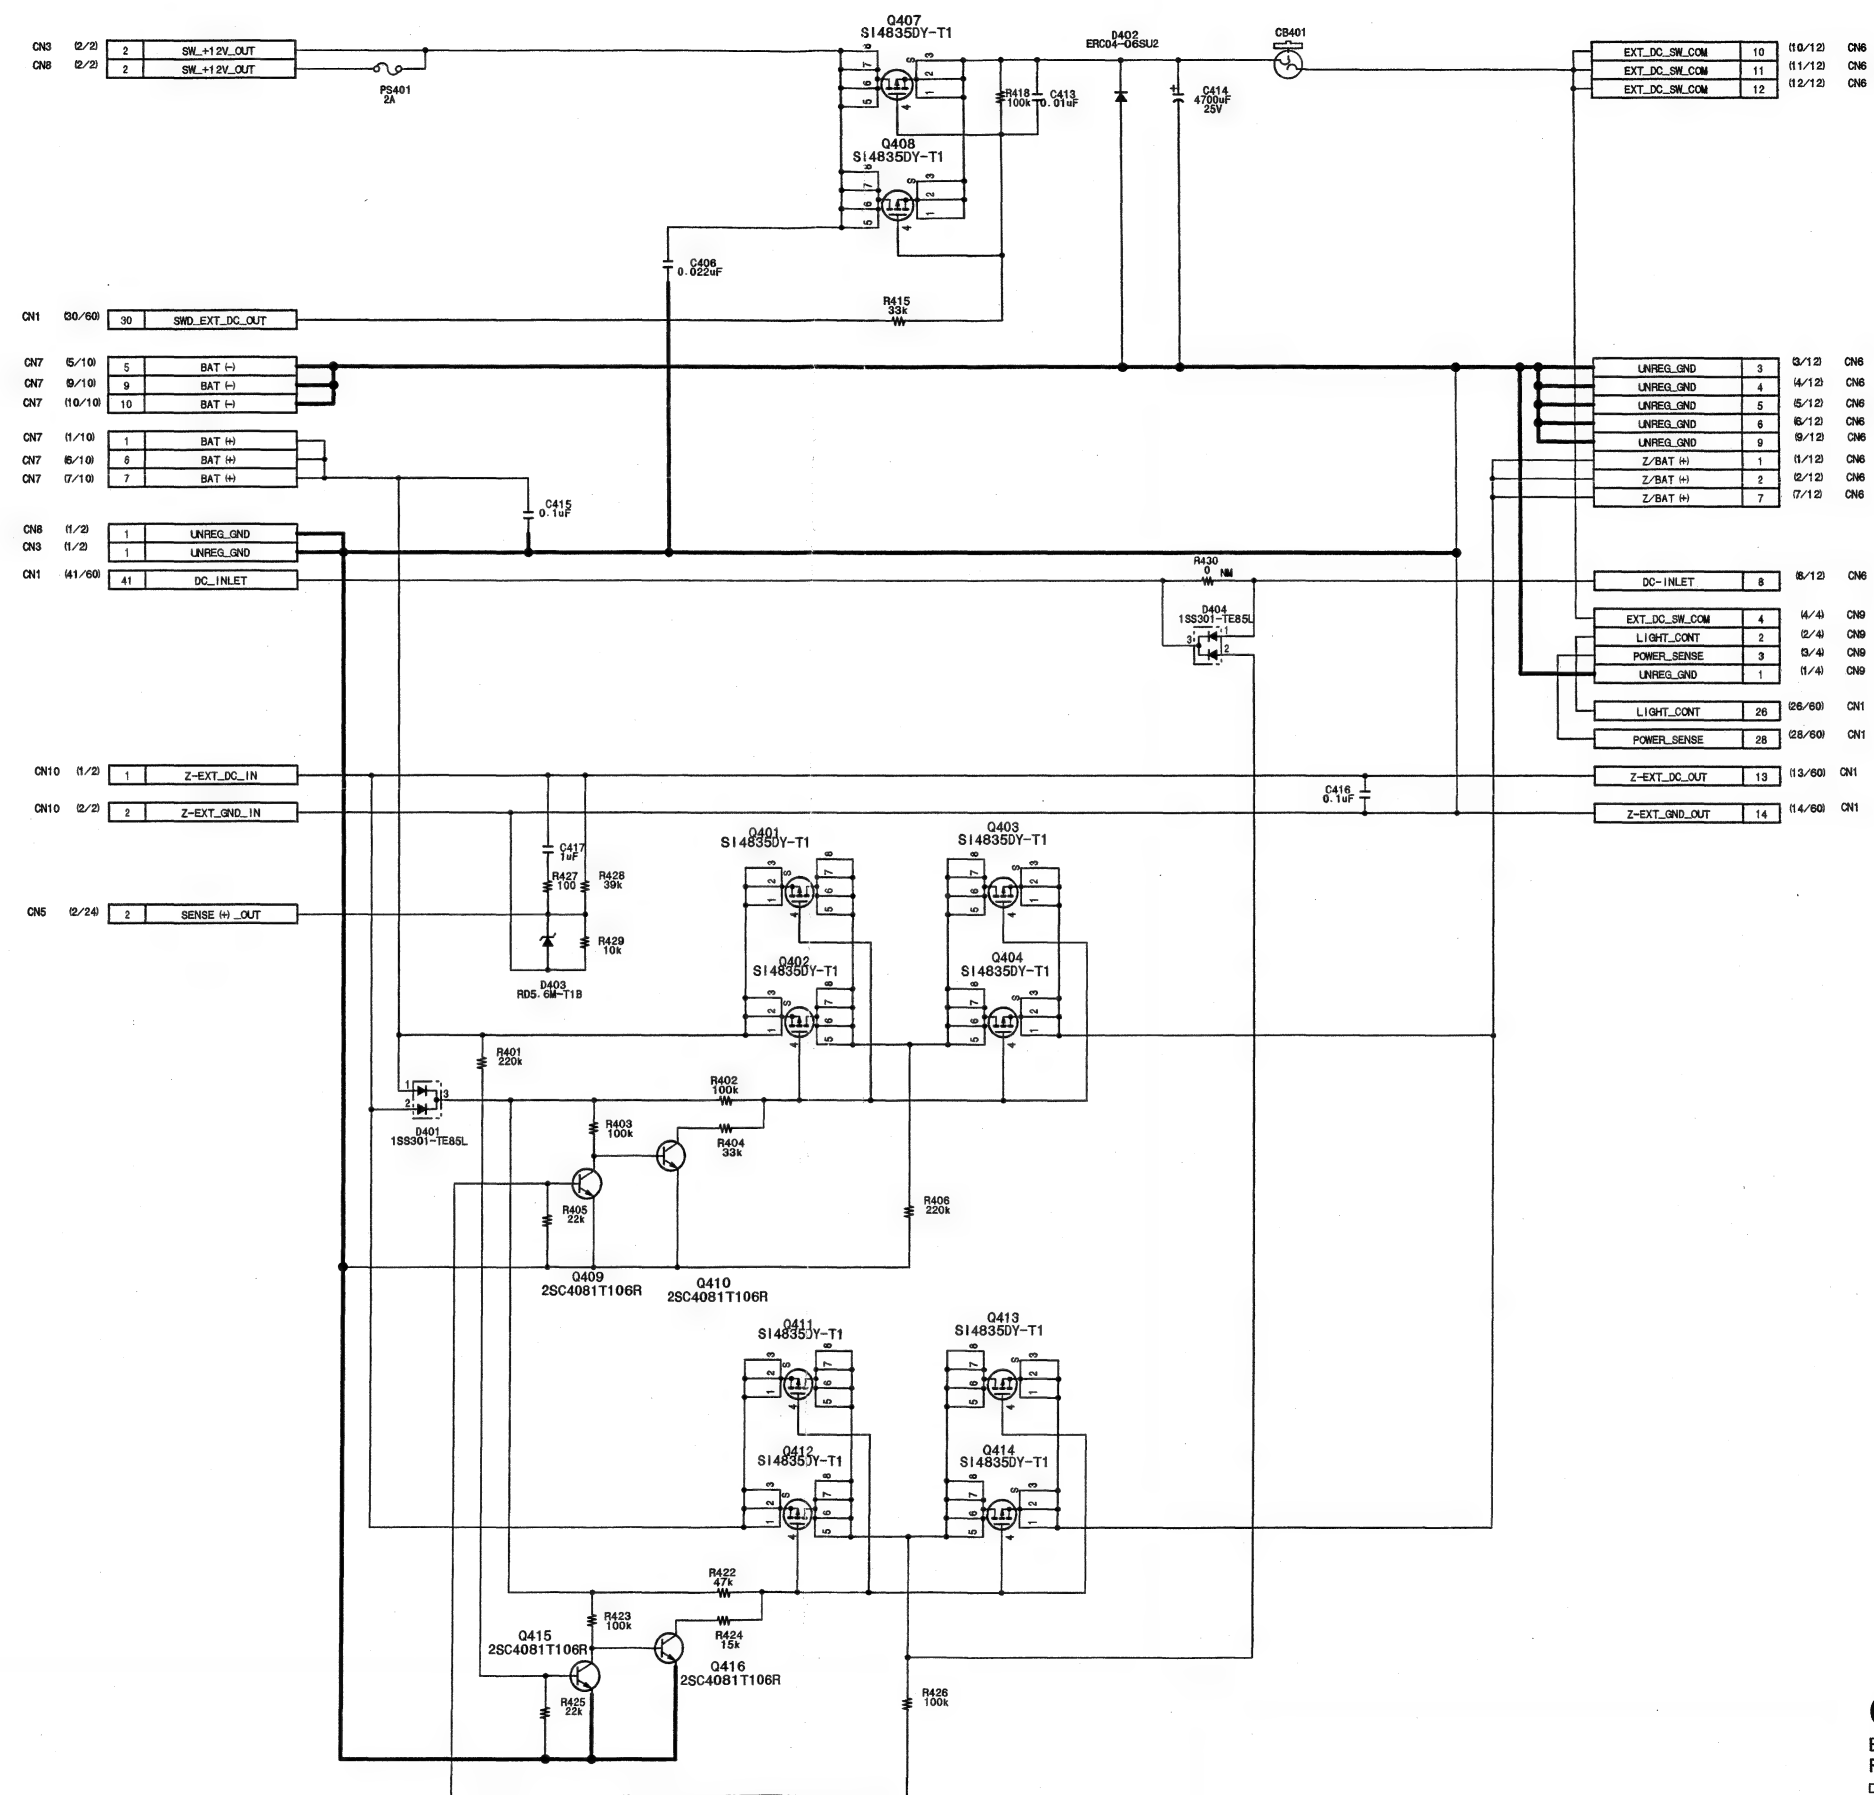


**CP-373 (4/5)**  
BOARD NO. 1-683-382-11, 12  
FOR DSR-390/390P/370/370P  
DSR-370\_CP-373\_005\_4

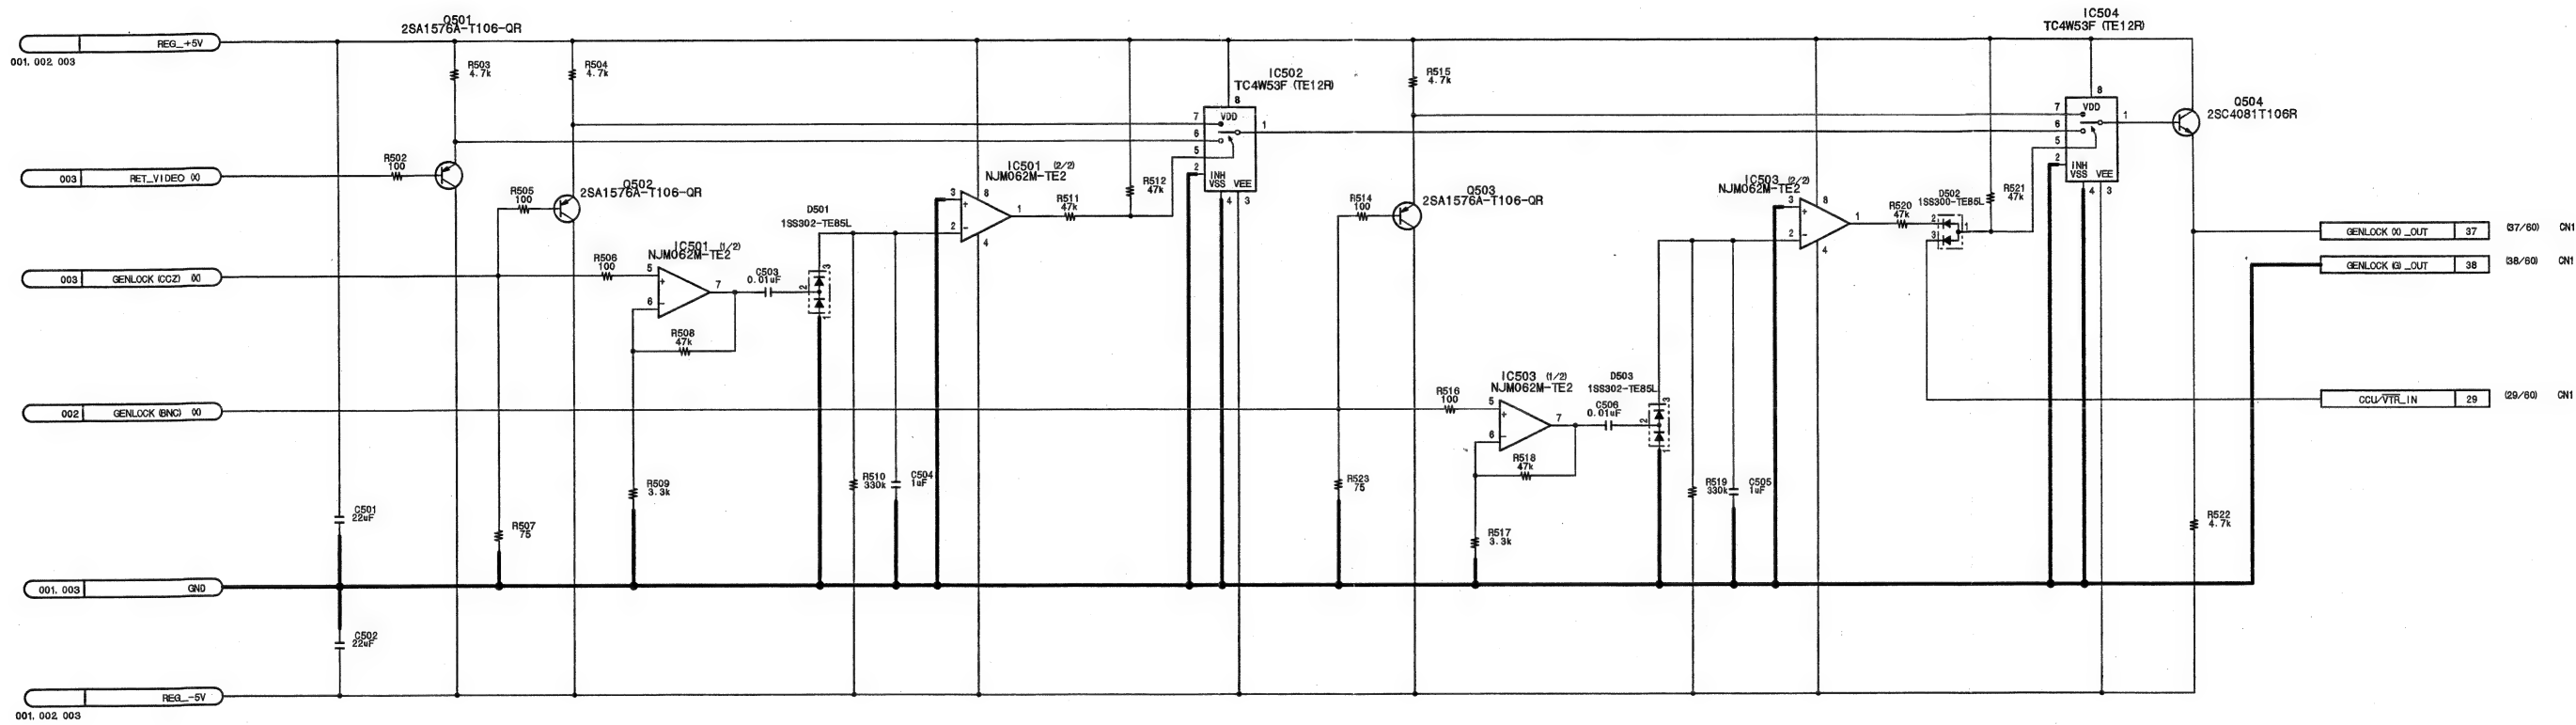



# CN-2277 CN-2277

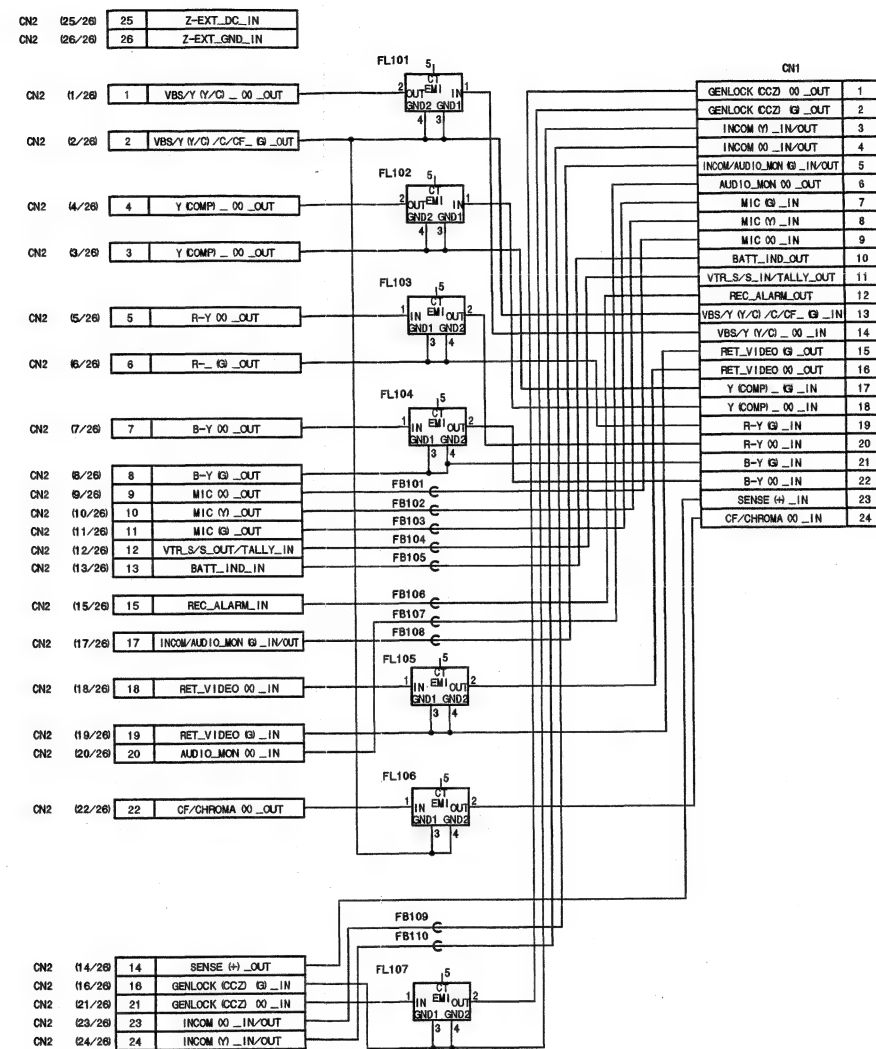


## CN-2277

BOARD NO. 1-683-383-11, 12  
FOR DSR-390/390P/370/370P  
DSR-370\_CN-2277\_003\_1


DSR-390/390P/370/370P/300A/300AP V2


CH1  
AUDIO IN

CH2  
AUDIO IN

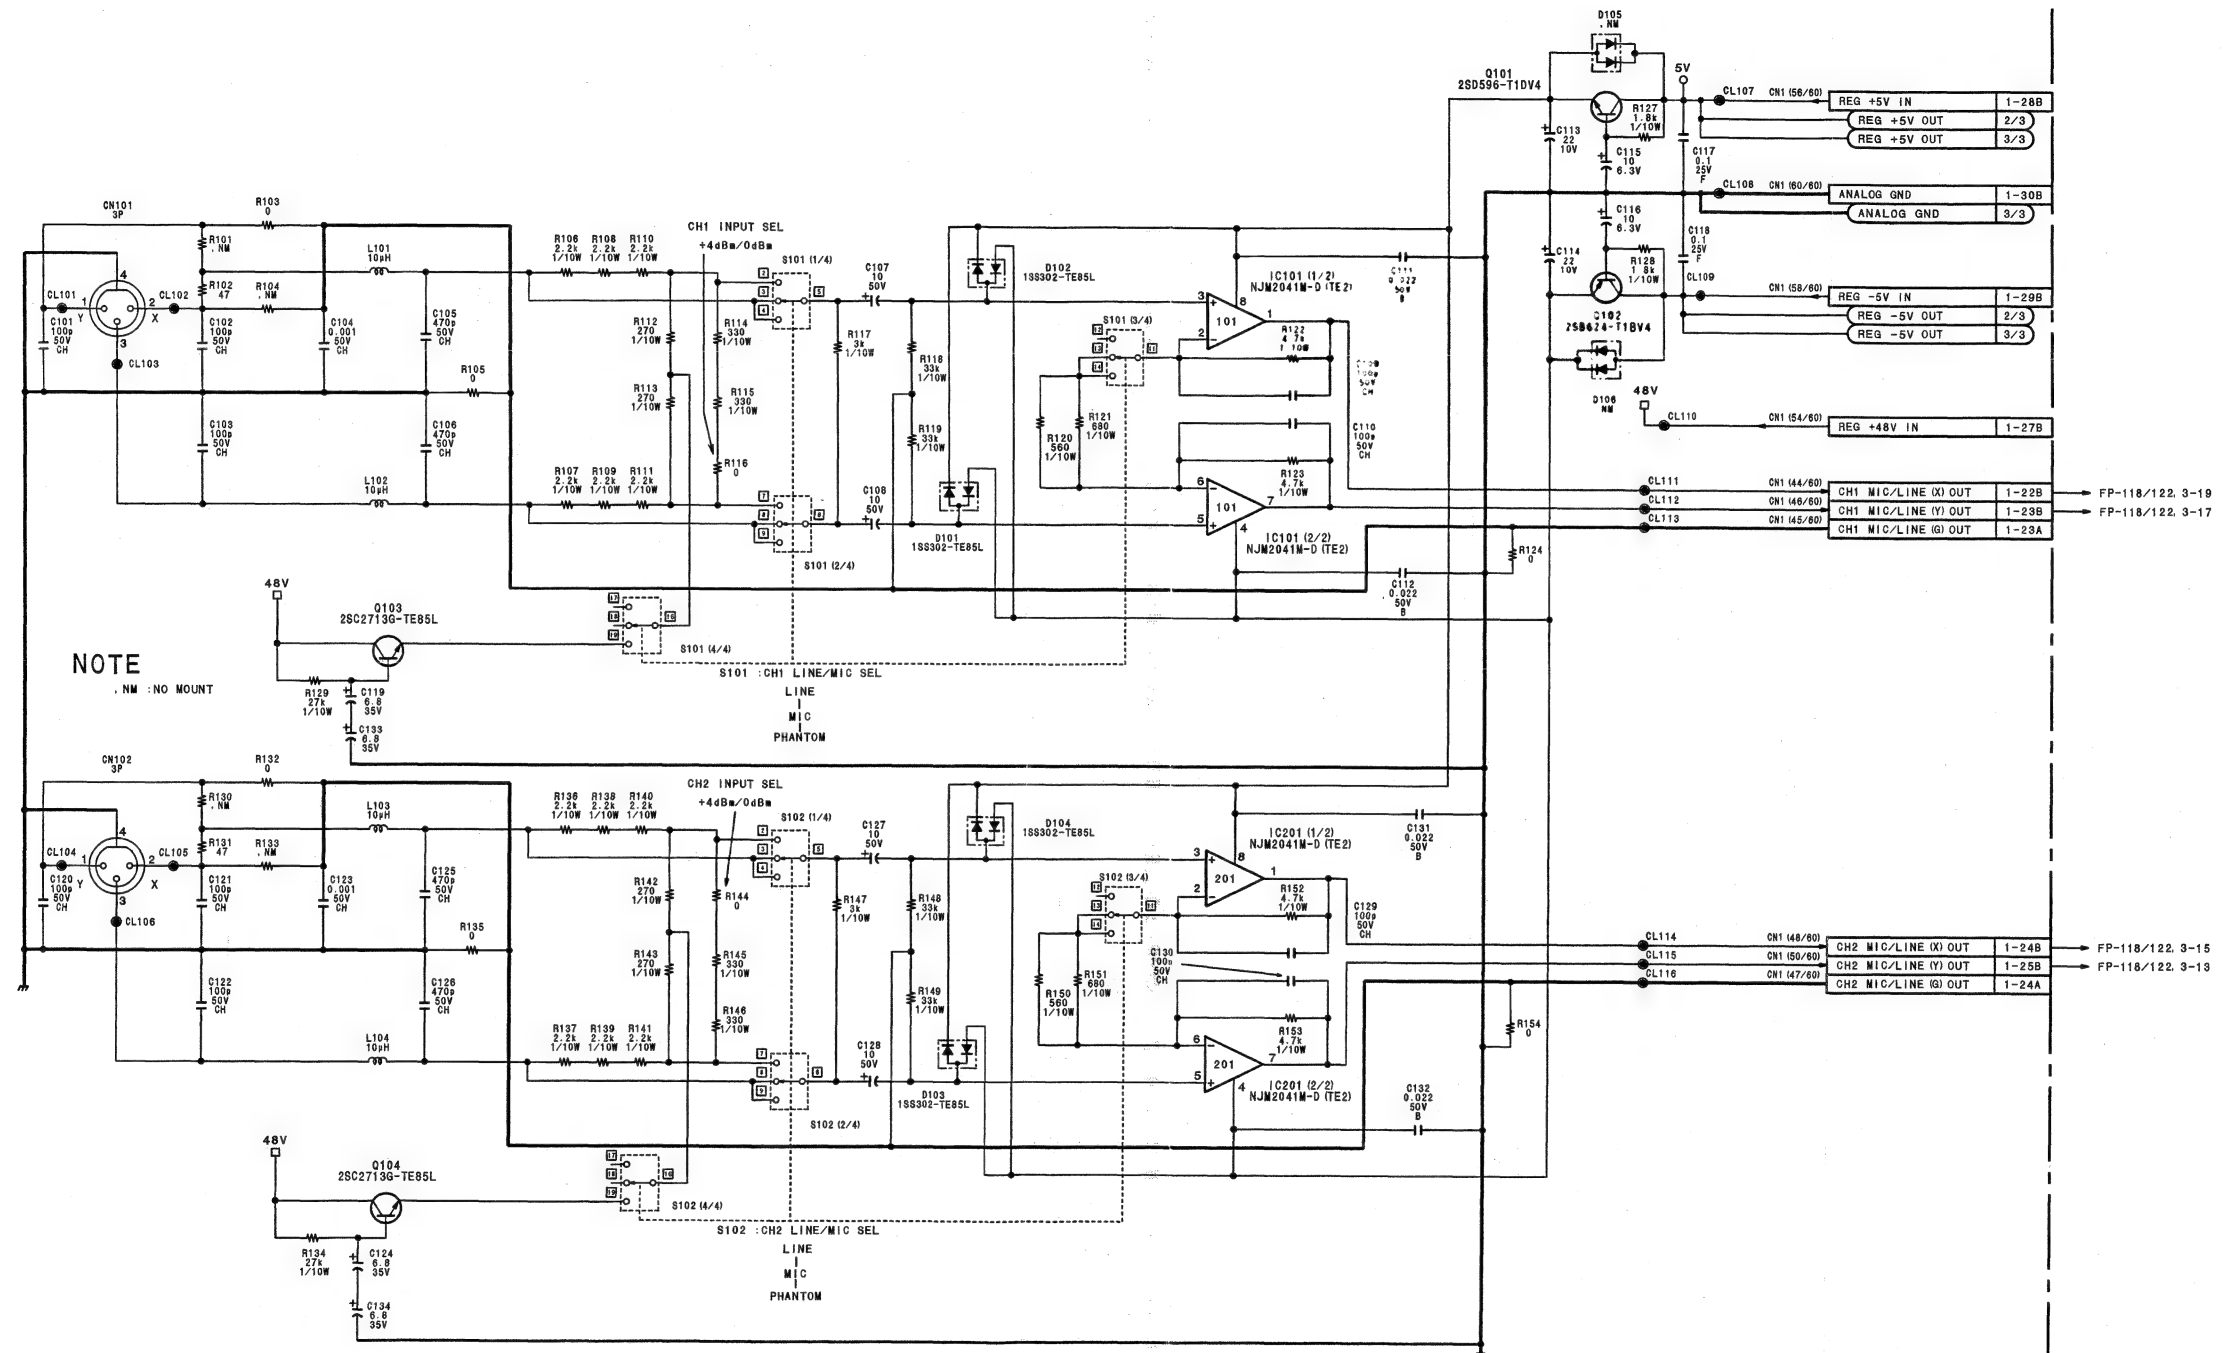

**CP-315 (1/3)**  
BOARD NO. 1-668-841-13, 14  
FOR DSR-300A/300AP  
B-DSR500WS-CP315-SM

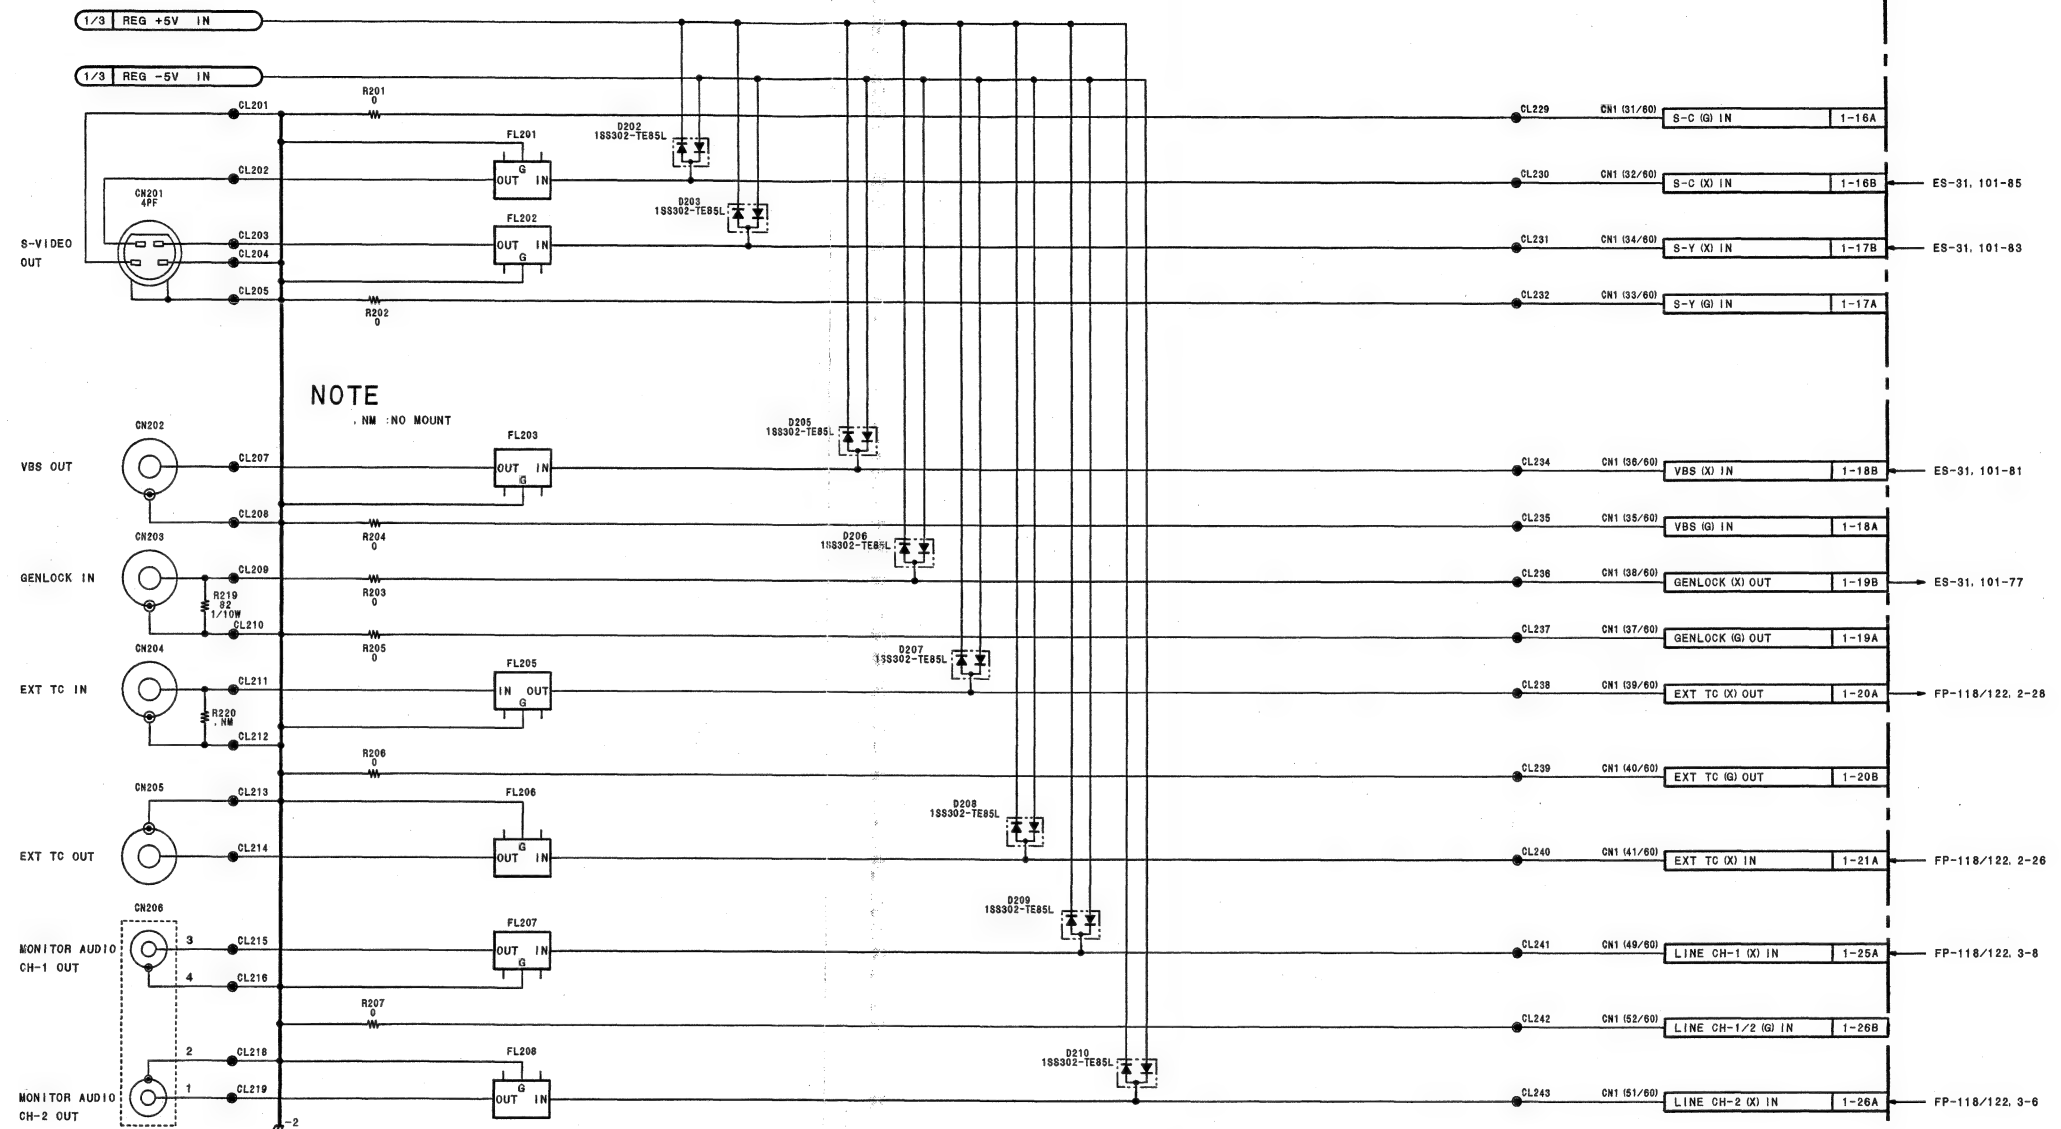

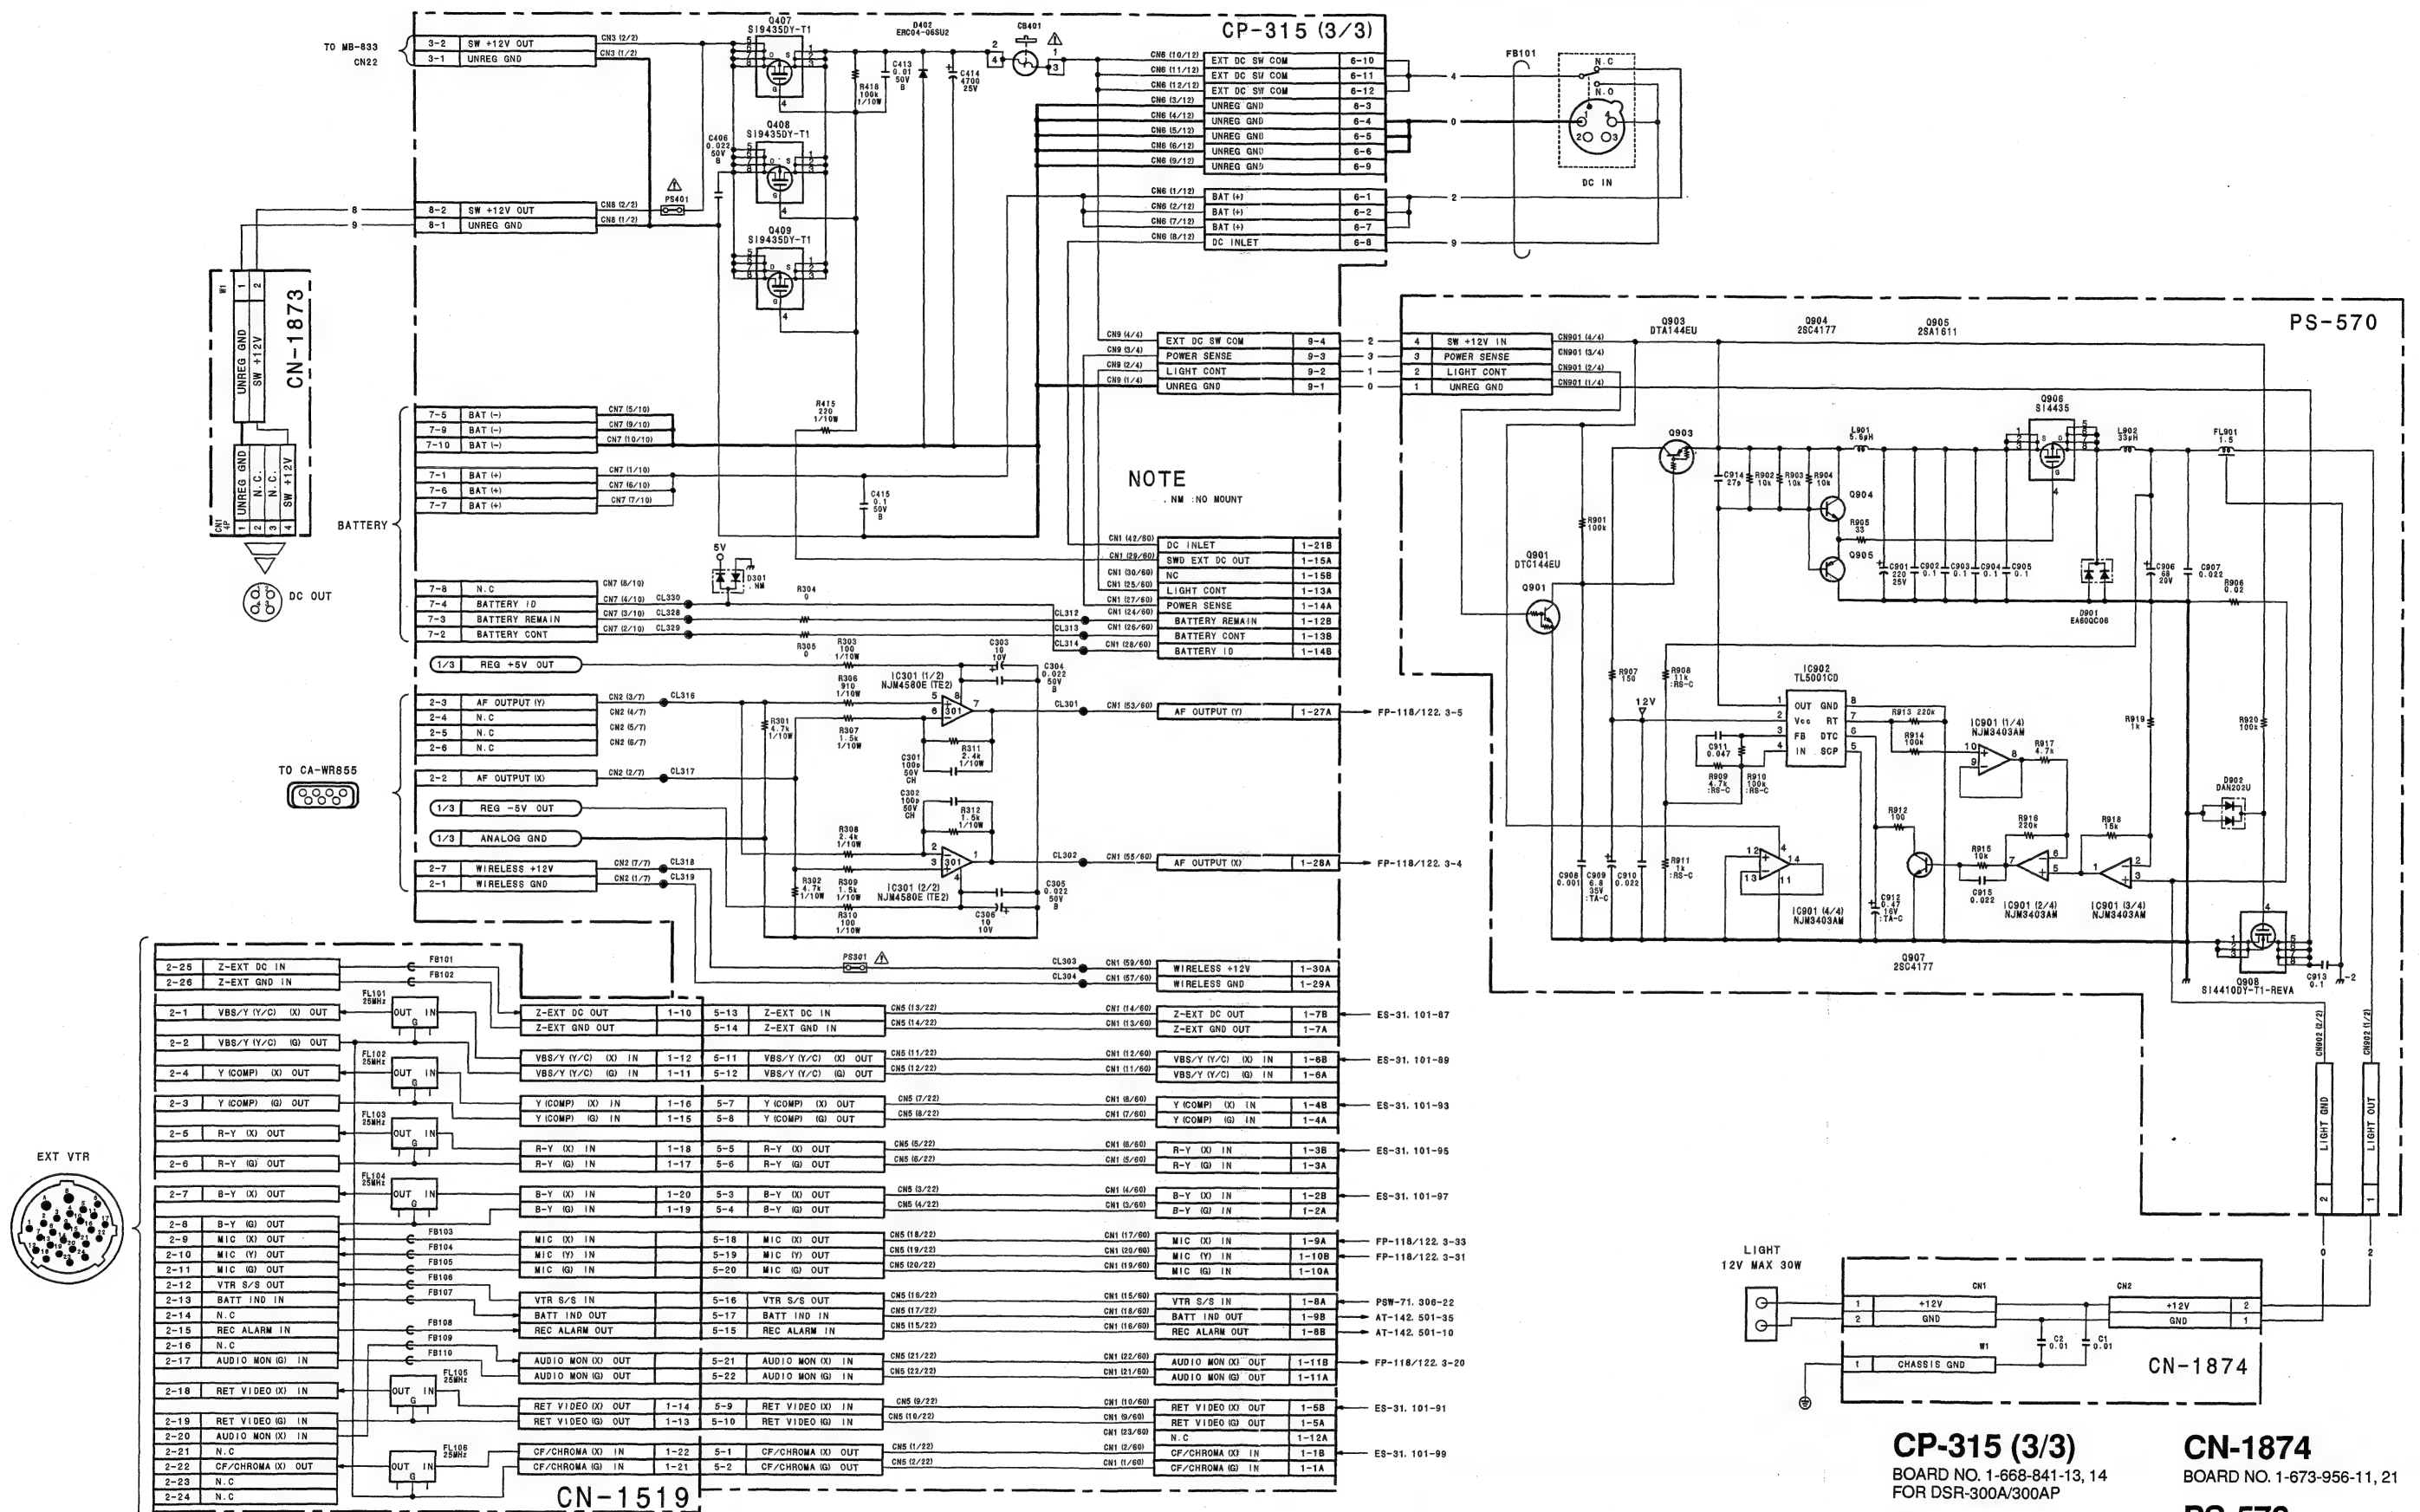


**CP-315 (3/3)**  
BOARD NO. 1-668-841-13, 14  
FOR DSR-300A/300AP


**CN-1519**  
BOARD NO. 1-668-842-12, 13  
FOR DSR-300A/300AP

**CN-1873**  
BOARD NO. 1-673-955-11, 21

**CN-1874**  
BOARD NO. 1-673-956-11, 21

**PS-570**  
BOARD NO. 1-673-952-11, 21  
B-DSR500WS-CP315-SM

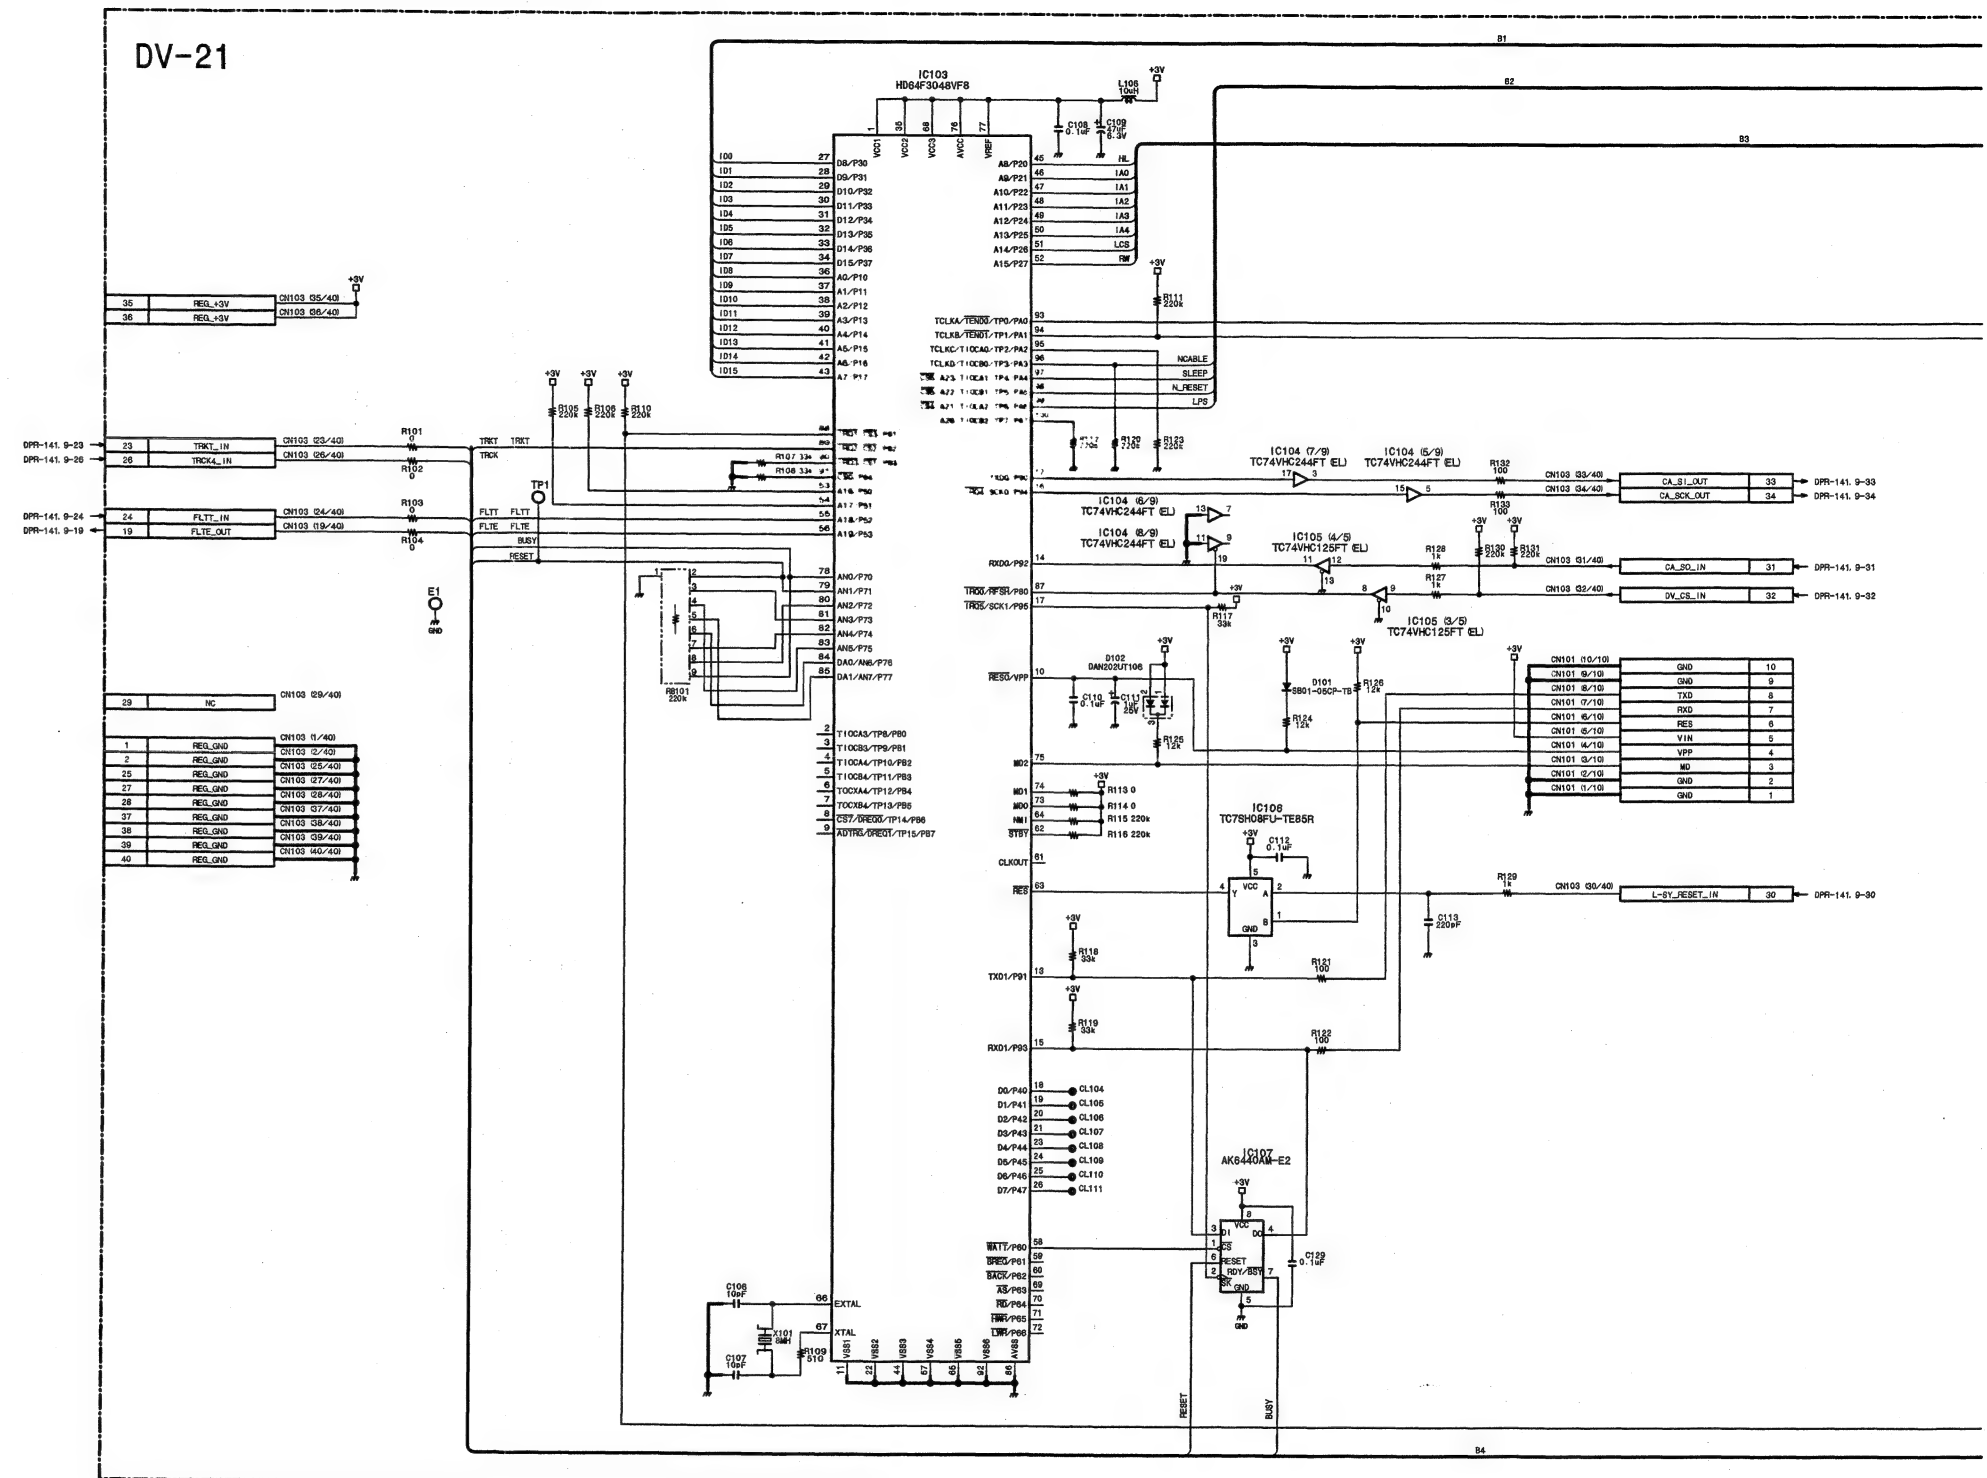

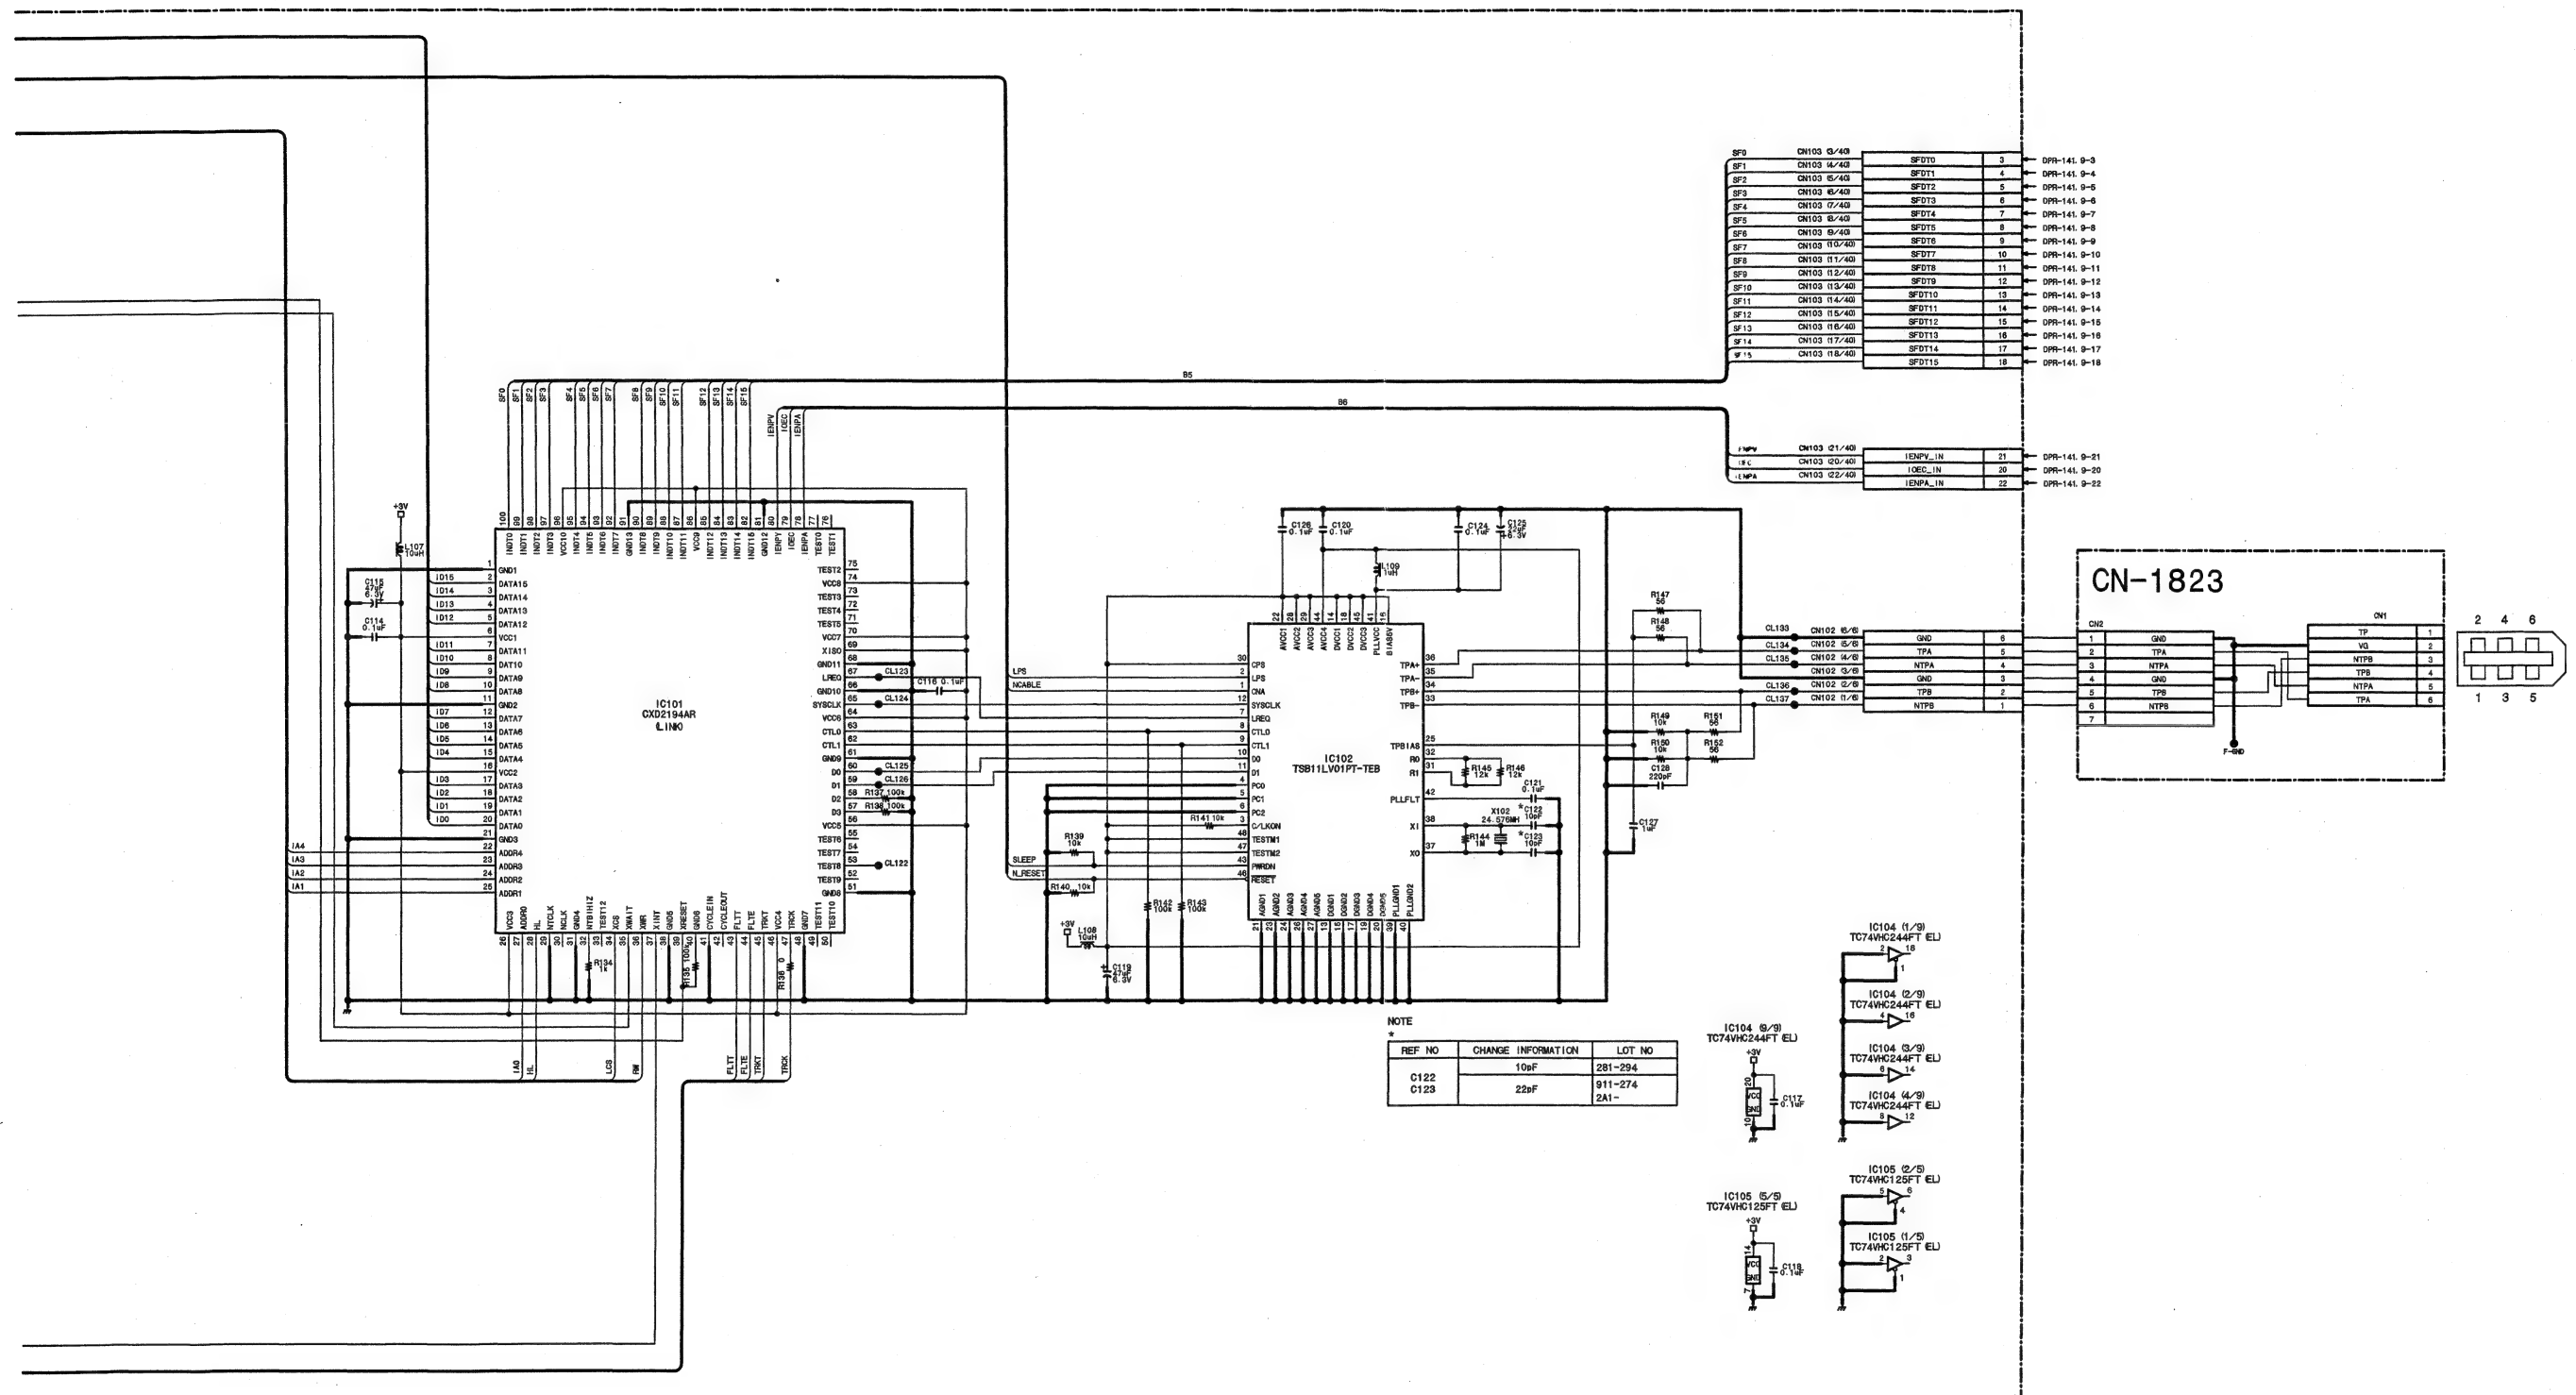

**CN-1823**

BOARD NO. 1-673-973-13

**DV-21C/21A**

BOARD NO. 1-673-972-21

DSR-500WSL\_DV-21\_001



FP-118A/122

FP-118A/122 BOARD SIDE (CN1) MB-833 BOARD SIDE

CN1		
50	1	REG GND
49	2	REG GND
48	3	REG +4.9V
47	4	REG +4.9V
46	5	VJ MIC (G)
45	6	VJ MIC (G)
44	7	AUDIO VOLUME
43	8	VTR TRIG
42	9	SDA (S-P) (PSW/FP)
41	10	G
40	11	SCLK (S/P)
39	12	SHIFT/LOAD
38	13	RCK
37	14	LIGHT SW
36	15	SDA (S-P) (FP/AA)
35	16	SDA (P-S) (FP/AA)
34	17	FAN ON
33	18	N.C
32	19	MIC1 (X)
31	20	MIC1 (Y)
30	21	MIC1 (G)
29	22	EARPHONE SW (Y)
28	23	EARPHONE (X)
27	24	EARPHONE (G)
26	25	L:YC CS
25	26	L:VBI CS
24	27	BACK TALLY
23	28	BACK TALLY GND
22	29	BACK TALLY SW
21	30	INT VTR TALLY
20	31	CS VTR
19	32	SDA (C/V)
18	33	SDA (V/C)
17	34	SCLK VTR
16	35	BATT ALARM
15	36	REG +9.0V
14	37	REG +9.0V
13	38	N.C
12	39	L:DV CS
11	40	H:YC BUSY
10	41	L:RESET
9	42	1/2 VD
8	43	SV TRKD
7	44	SV SCK
6	45	SV SO
5	46	SV S1
4	47	L:FS CONT CS
3	48	CSVNC (VTR)
2	49	L:IP LI OFF
1	50	L:SV-SV CS

FP-118A/122

FP-118A/122 BOARD SIDE (CN2) MB-833 BOARD SIDE

CN2		
50	1	L:SV READY
49	2	MIC GND
48	3	MIC VDD
47	4	MIC SCL
46	5	MIC SDA
45	6	L:SP SV CS
44	7	L:SV CTLO CS
43	8	L:NFIL CS
42	9	H:DA LD
41	10	L:SV EEPROM BUSY
40	11	L:SV EEPROM CS
39	12	L:SV EEPROM WE
38	13	H:BASE PWR ON
37	14	H:BASE MUTE
36	15	CA SCK
35	16	CA SO
34	17	CA S1
33	18	L:AUX CS
32	19	L:IP CS
31	20	L:IP CONNECT
30	21	L:IP PWR ON
29	22	H:POWER SAVE
28	23	EXT TO INPUT (X)
27	24	EXT TO (G)
26	25	EXT TO OUTPUT (X)
25	26	H:MAIN SW ON
24	27	DC INLET
23	28	L:POWER ON (FP-PSW)
22	29	LIGHT CONT
21	30	BATTERY ID
20	31	REG -5.0V
19	32	REG +5.0V
18	33	REG +5.0V
17	34	REG +6.6V
16	35	REG +6.6V
15	36	REG GND
14	37	REG GND
13	38	REG GND
12	39	REG +3.4V
11	40	REG +3.4V
10	41	REG GND
9	42	REG GND
8	43	REG GND
7	44	LITHIUM
6	45	SWD EXT DC
5	46	SWD EXT DC
4	47	SWD EXT DC
3	48	UNREG GND
2	49	UNREG GND
1	50	UNREG GND

FP-118A/122

FP-118A/122 BOARD SIDE (CN3) MB-833 BOARD SIDE

CN3		
40	1	CH-1 REC AUDIO (X)
39	2	CH-1/2 REC AUDIO (G)
38	3	CH-2 REC AUDIO (G)
37	4	H:AUDIO PS
36	5	AUDIO CH-1 (X)
35	6	AUDIO CH1/2 (G)
34	7	AUDIO CH-2 (X)
33	8	CCZ MIC (X)
32	9	CCZ MIC (Y)
31	10	CCZ MIC (G)
30	11	REG -5.0V
29	12	REG -5.0V
28	13	REG -5.0V
27	14	REG GND
26	15	REG GND
25	16	REG GND
24	17	REG +5.0V
23	18	REG +5.0V
22	19	REG +5.0V
21	20	CCZ AUDIO MON1 (G)
20	21	CCZ AUDIO MON1 (X)
19	22	CH-1 MIC/LINE (X)
18	23	CH-1 MIC/LINE (G)
17	24	CH-1 MIC/LINE (Y)
16	25	REG GND
15	26	CH-2 MIC/LINE (X)
14	27	CH-2 MIC/LINE (G)
13	28	CH-2 MIC/LINE (Y)
12	29	N.C
11	30	REG +5.3V
10	31	REG +5.3V
9	32	M +8V
8	33	LINE CH-1 (X)
7	34	LINE CH-1/2 (G)
6	35	LINE CH-2 (X)
5	36	AF OUTPUT (Y)
4	37	AF OUTPUT (X)
3	38	ANTON V
2	39	REG GND
1	40	ANTON AUTO

VA-199

VA-199 BOARD SIDE (CN4) MB-833 BOARD SIDE

CN4		
30	1	R VA (G)
29	2	R VA (X)
28	3	G VA (G)
27	4	G VA (X)
26	5	B VA (G)
25	6	B VA (X)
24	7	FB CLP GND
23	8	R FB CLP
22	9	G FB CLP
21	10	B FB CLP
20	11	CLP1
19	12	P BLKG
18	13	VA ENABLE
17	14	AVD
16	15	AHD
15	16	LSI RESET
14	17	SDA (D/A)
13	18	SCL (D/A)
12	19	LD (VA2)
11	20	LD (VA1)
10	21	+180B ON/OFF
9	22	DPR
8	23	REG -5.0V
7	24	REG -5.0V
6	25	REG +5.3V
5	26	REG +5.3V
4	27	REG +9.0V
3	28	REG +9.0V
2	29	REG GND
1	30	REG GND

SV-213

SV-213 BOARD SIDE (CN502) MB-833 BOARD SIDE

CN502		
50	1	REG GND
49	2	REG GND
48	3	REG +5.0V
47	4	REG +5.0V
46	5	REG +5.0V
45	6	REG GND
44	7	REG GND
43	8	REG +3.4V
42	9	REG +3.4V
41	10	M GND
40	11	M GND
39	12	M GND
38	13	M GND
37	14	M GND
36	15	M +5V BACKUP
35	16	M +5V
34	17	M +5V
33	18	M +5V
32	19	M +5V
31	20	N.C
30	21	MIC SDA
29	22	MIC SCL
28	23	MIC VDD
27	24	MIC GND
26	25	L:SV READY
25	26	L:SV-SV CS
24	27	L:SP-SV CS
23	28	SP S1
22	29	SP SO
21	30	SP SCK
20	31	TRKD
19	32	FLTD
18	33	L:SV-SFY CS
17	34	SV SCK
16	35	SV SO
15	36	SV S1
14	37	TSC REN
13	38	DRUM BANK
12	39	JAWP
11	40	SV S1
10	41	SV SO
9	42	SV SCK
8	43	SV TRKD
7	44	N.C
6	45	1/2 VD
5	46	L:RESET
4	47	L:SV-JIG READY
3	48	JIG SO
2	49	JIG S1
1	50	JIG SCK

RP-91

RP-91 BOARD SIDE (CN773) MB-833 BOARD SIDE

CN773		
1	1	CLK135
2	2	REG GND
3	3	DRCK REF
4	4	REG GND
5	5	TRPCS
6	6	FRPCS
7	7	REG GND
8	8	VRCCKS
9	9	REG GND
10	10	DTSC0
11	11	DTSC1
12	12	DTSC2
13	13	DTSC3
14	14	DTSC4
15	15	DTSC5
16	16	DTSC6
17	17	DTSC7
18	18	REG GND
19	19	AFREF
20	20	SVCS
21	21	SCDVCS
22	22	VADVCS
23	23	REG GND
24	24	VPCCKS
25	25	REG GND
26	26	DTCS0
27	27	DTCS1
28	28	DTCS2
29	29	DTCS3
30	30	DTCS4
31	31	DTCS5
32	32	DTCS6
33	33	DTCS7
34	34	N.C
35	35	REG GND
36	36	REG GND
37	37	REG GND
38	38	REG +5.1V
39	39	REG +3.4V
40	40	REG +3.1V
41	41	REG +3.4V
42	42	REG +5.0V
43	43	REG +6.6V
44	44	REG +5.0V
45	45	REG +6.6V

SELF CHECK

CN9		
1	SWD EXT DC	
2	UNREG GND	
3	JIG SCK	10-50
4	JIG S1	10-49
5	JIG SO	10-48
6	L:SV-JIG READY	10-47
7	1/2 VD	1-42, 6-1, 10-45

MB-833 (1/2) MB-833 (1/2)

DPR-141C/141A

DPR-141C/141A BOARD SIDE (CN2) MB-833 BOARD SIDE

CN2		CN2		CN2	
1-42, 9-7, 10-45	OUT	1/2 VD	1	2	SV TRKD
		N.C	3	4	L:RESET
5-16, 20-69	OUT	LSI RESET	5	6	LD (DPR)
20-71	OUT	LD (PP)	7	8	LD (PR)
20-73	OUT	LD (RC)	9	10	SCL (DSP)
20-75	OUT	SDA2 (DSP)	11	12	SDA2 (DSP)
20-77	OUT	SDA1 (DSP)	13	14	SDA2 (DSP)
20-79	OUT	TITLE	15	16	TITLE BACK
1-26	OUT	L:VBI CS	17	18	N.C
8-78, 19-38	OUT	GENLOCK (X)	19	20	GENLOCK (X)
1-25	OUT	L:YC CS	21	22	H:YC BUSY
		N.C	23	24	CAL
		N.C	25	26	H:WIDE ID ON
8-73	IN	H:EE	27	28	H:WIDE MODE
20-55	IN	L:YC CONNECT	29	30	N.C
8-69	IN	BFG (VTR)	31	32	CLP P (VTR)
		N.C	33	34	BF (VTR)
1-48, 6-65	IN	CSYNC (VTR)	35	36	LALT (VTR)
8-63	IN	VDAC GND	37	38	VDAC CB
8-61	IN	VDAC Y	39	40	VDAC CR
8-59	IN	COMP GND	41	42	T
8-57	IN	R-Y	43	44	S-Y
8-55	IN	BLKG	45	46	CF
8-53	OUT	27MHz (X)	47	48	27MHz (X)
8-51	IN	VF-Y	49	50	MARKER
8-49, 20-57	OUT	HD	51	52	VD
8-47	IN	14MHz (X)	53	54	14MHz (X)
5-21, 20-68	IN	+180B ON/OFF	55	56	16:9/4:3
5-17, 8-43, 15-43, 20-20	OUT	SDA (D/A)	57	58	SCL (D/A)
8-41, 15-45, 20-18	OUT	SDA (EEPROM)	59	60	SCL (EEPROM)
5-22, 16-50	IN	DPR	61	62	HTSG
5-15, 15-34	IN	AHD	63	64	AVD
15-32	OUT	30MHz (X)	65	66	30MHz (X)
15-29	OUT	15MHz (X)	67	68	15MHz (X)
5-12, 15-27	IN	P BLKG	69	70	CLP1
5-10	IN	G FB CLP	71	72	G FB CLP
5-8	IN	R FB CLP	73	74	FB CLP GND
5-6	OUT	B VA (X)	75	76	B VA (X)
5-4	OUT	G VA (X)	77	78	G VA (X)
5-2	OUT	R VA (X)	79	80	R VA (X)

DPR-141C/141A

DPR-141C/141A BOARD SIDE (CN1) MB-833 BOARD SIDE

CN1		CN1		CN1	
		REG GND	1	2	REG GND
		REG GND	3	4	REG GND
		REG GND	5	6	REG GND
		REG GND	7	8	REG GND
		REG -5.0V	9	10	REG -5.0V
		REG +5.0V	11	12	REG +5.0V
		REG +5.3V	13	14	REG +5.3V
		REG +6.6V	15	16	REG +6.6V
		REG +3.4V	17	18	REG +3.4V
		REG +3.1V	19	20	REG +3.1V
3-7	IN	AUDIO CH-2 (X)	21	22	AUDIO CH1/2 (X)
3-5	IN	AUDIO CH-1 (X)	23	24	H:AUDIO PB
3-3	OUT	CH-2 REC AUDIO (X)	25	26	CH-1/2 REC AUDIO (X)
3-1	OUT	CH-1 REC AUDIO (X)	27	28	REG GND
		REG GND	29	30	REG GND
11-1	IN	CLK135	31	32	REG GND
11-3	IN	DRCK REF	33	34	REG GND
11-5	IN	TRPDS	35	36	REG GND
		REG GND	37	38	FRPCS
		REG GND	39	40	VRCKCS
11-11	IN	DTSC1	41	42	DTSC0
11-13	IN	DTSC3	43	44	DTSC2
11-15	IN	DTSC5	45	46	DTSC4
11-17	IN	DTSC7	47	48	DTSC6
11-19	OUT	AFREF	49	50	REG GND
11-21	OUT	SCVCS	51	52	SVCS
		REG GND	53	54	VAOVCS
		REG GND	55	56	VPCKCS
11-27	OUT	DTCS1	57	58	DTCS0
11-29	OUT	DTCS3	59	60	DTCS2
11-31	OUT	DTCS5	61	62	DTCS4
11-33	OUT	DTCS7	63	64	DTCS6
2-21	OUT	L:IP PWR ON	65	66	N.C
2-19	OUT	L:IP CS	67	68	L:IP CONNECT
2-17	IN	CA S1	69	70	L:LAUX CS
2-15	OUT	CA SCK	71	72	CA S0
2-13	OUT	L:SY EEPROM WE	73	74	REG GND
2-11	IN	L:SY EEPROM BUSY	75	76	L:SY EEPROM CS
2-9	OUT	L:INFIL CS	77	78	L:DV CS
2-7	OUT	L:SP SV CS	79	80	L:SY CTGL CS
10-28	OUT	SP S1	81	82	L:SP-SV CS
10-30	IN	SP SCK	83	84	SP S0
10-32	OUT	FLTD	85	86	TRND
2-44	OUT	L:THLM	87	88	L:SV-SFY CS
10-35	OUT	SV S0	89	90	SV SCK
10-37	OUT	TBC REN	91	92	SV S1
10-39	OUT	JSWP	93	94	DRUM BANK
		N.C	95	96	L:IP LI OFF
1-46, 10-40	IN	SV S1	97	98	L:FS CONT CS
1-44, 10-42	OUT	SV SCK	99	100	SV S0

ES-31

ES-31 BOARD SIDE (CN101) MB-833 BOARD SIDE

CN101		CN101		CN101	
		REG GND	1	2	REG GND
		REG GND	3	4	REG GND
		REG GND	5	6	REG GND
		REG -5.0V	7	8	REG -5.0V
		REG +5.0V	9	10	REG +5.0V
		REG +5.3V	11	12	REG +5.3V
		REG +6.6V	13	14	REG +6.6V
		REG +9.0V	15	16	REG +9.0V
		REG +3.4V	17	18	REG +3.4V
		N.C	19	20	N.C
16-38	IN	VBS (BNC) (X)	21	22	VBS (BNC) (X)
16-36	IN	VBS (RM) (X)	23	24	VBS (RM) (X)
14-15	IN	VF VIDEO (X)	25	26	VF VIDEO (X)
14-17	IN	B-Y (VF)	27	28	R-Y (VF)
14-19	IN	SYNC (VF)	29	30	WIDE DET
15-23	IN	VOC CTL	31	32	FLO
20-65	OUT	LD (ES2)	33	34	LD (ES1)
20-63	OUT	LD (ES4)	35	36	LD (ES3)
20-61	OUT	VF CHR BACK	37	38	VF CHR
20-59	IN	NTSC/PAL	39	40	GENLOCK INT/EXT
6-59, 15-45, 20-18	I/O	SDA (EEPROM)	41	42	SCL (EEPROM)
6-57, 15-43, 20-20	OUT	SDA (D/A)	43	44	SCL (D/A)
		N.C	45	46	N.C
6-53	OUT	14MHz (X)	47	48	14MHz (X)
6-51, 20-57	IN	HD	49	50	VD
6-49	OUT	VF-Y	51	52	MARKER
6-47	OUT	27MHz (X)	53	54	27MHz (X)
6-45	OUT	BLKG	55	56	CF
6-43	OUT	R-Y	57	58	S-Y
6-41	IN	COMP GND	59	60	Y
6-39	IN	VDAC Y	61	62	VDAC CR
6-37	IN	VDAC GND	63	64	VDAC CB
6-35, 1-48	IN	CSYNC (VTR)	65	66	LALT (VTR)
N.C		SELH	67	68	BF (VTR)
6-31	IN	BFG (VTR)	69	70	CLP P (VTR)
		N.C	71	72	N.C
6-27	OUT	H:EE	73	74	H:WIDE MODE
2-14	OUT	H:BASE MUTE	75	76	H:WIDE ID ON
6-20, 19-37	OUT	GENLOCK (X)	77	78	GENLOCK (X)
		N.C	79	80	AF ON
19-35	IN	VBS/MON (X)	81	82	VBS/MON (X)
19-33	IN	S-Y (X)	83	84	S-Y (X)
19-31	IN	S-C (X)	85	86	S-C (X)
19-29, 19-30	IN	CCZ DC	87	88	CCZ DC GND
19-27	IN	VBS/Y (CCZ) (X)	89	90	VBS/Y (CCZ) (X)
19-25	OUT	RET (CCZ) (X)	91	92	RET (CCZ) (X)
19-23	IN	Y (CCZ) (X)	93	94	Y (CCZ) (X)
19-21	IN	R-Y (CCZ) (X)	95	96	R-Y (CCZ) (X)
19-19	IN	B-Y (CCZ) (X)	97	98	B-Y (CCZ) (X)
19-17	IN	CF/C (CCZ) (X)	99	100	CF/C (CCZ) (X)

DC-DC CONVERTER


MB-833 BOARD SIDE

CN1		CN1		CN1	
		UNREG GND	1	2	UNREG GND
		SWD EXT DC	3	4	SWD EXT DC
		REG GND	5	6	REG GND
		REG +3.4V	7	8	REG +3.4V
		REG +3.1V	9	10	REG +3.1V
		REG GND	11	12	REG GND
		REG -5.0V	13	14	REG -5.0V
		REG +5.0V	15	16	REG +5.0V
		REG +5.3V	17	18	REG +5.3V
		REG +6.6V	19	20	REG +6.6V
		REG +9.0V	21	22	REG +9.0V
		M GND	23	24	M GND
		M +6V	25	26	M +6V
		N.C	27	28	REG -10.5V
		REG +16.1V	29	30	REG +48.0V

CP-373/315

CP-315 BOARD SIDE (CN1) CP-373 BOARD SIDE (CN1)

CN1		CN1		CN1	
1	18	8-99	OUT	CF/C (CCZ) (X)	1
3	28	8-97	OUT	B-Y (CCZ) (X)	3
5	38	8-95	OUT	R-Y (CCZ) (X)	5
7	48	8-93	OUT	Y (CCZ) (X)	7
9	58	8-91	IN	RET (CCZ) (X)	9
11	68	8-89	OUT	VBS/Y (CCZ) (X)	11
13	78	8-87, 20-9	IN	CCZ DC	13
15	88	20-10	IN	REC ALARM	15
17	98	20-11	IN	CCZ BATT IND	17
19	108	3-9	OUT	CCZ MIC (Y)	19
21	118	3-21	IN	CCZ AUDIO MON1 (X)	21
23	128	3-38	IN	ANTON Y	23
25	138	3-40	OUT	ANTON AUTO	25
27	148	2-30, 20-8	IN	BATTERY ID	27
29	158			N.C	29
31	168	8-85	OUT	S-C (X)	31
33	178	8-83	OUT	S-Y (X)	33
35	188	8-81	OUT	VBS/MON (X)	35
37	198	6-20, 8-77	IN	GENLOCK (X)	37
39	208	2-24	EXT TC (X)		39
41	218	2-27, 20-7	IN	DC INLET	41
43	228	3-22	IN	CH-1 MIC/LINE (X)	43
45	238	3-24	IN	CH-1 MIC/LINE (Y)	45
47	248	3-26	IN	CH-2 MIC/LINE (X)	47
49	258	3-28	IN	CH-2 MIC/LINE (Y)	49
51	268	3-34	OUT	LINE CH-1/2 (X)	51
53	278			REG +48.0V	53
55	288			REG +5.0V	55
57	298			REG -5.0V	57
59	308			REG GND	59

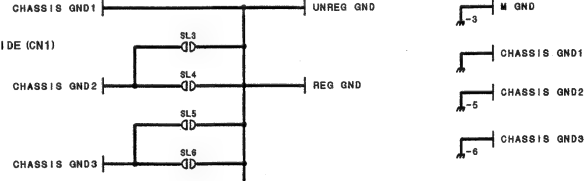

MB-833 (1/2)  
BOARD NO. 1-673-965-11, 12  
B-DSR500WS-MB833-SM

# DU-36, MB-833 (2/2)

# DU-36, MB-833 (2/2)

## AA-104

AA-104 BOARD SIDE (CN504) MB-833 BOARD SIDE

58	1	1KHZ	OUT	20-41
49	2	PEAKING CONT	IN	20-40
48	3	ZOOM CONT	IN	20-46, 16-5
47	4	REMOTE1	IN	20-38
46	5	LD (VF)	OUT	20-37
45	6	FOCUS CONT	IN	20-51, 16-41
44	7	BATT IND	OUT	20-35
43	8	SDA (S-P) (AT/AA, PSW)	OUT	16-10, 20-34
42	9	REC TALLY	OUT	20-33
41	10	RCK	OUT	1-13, 16-12, 20-32
40	11	SHIFT/LOAD	OUT	1-12, 16-13, 20-31
39	12	SCLK (S/P)	OUT	1-11, 16-14, 20-30
38	13	G	OUT	1-10, 16-15, 20-29
37	14	SDA (P-S) (AA/PSW)	IN	16-16
36	15	VF VIDEO (X)	OUT	8-25
35	16	VF VIDEO (G)	OUT	8-26
34	17	B-Y (VF)	OUT	8-27
33	18	R-Y (VF)	OUT	8-28
32	19	SYNC (VF)	OUT	8-29
31	20	BACK TALLY SW	IN	1-29
30	21	BACK TALLY GND	IN	1-28
29	22	BACK TALLY	OUT	1-27
28	23	EARPHONE (G)	OUT	1-24
27	24	EARPHONE (X)	OUT	1-23
26	25	EARPHONE SW (Y)	IN	1-22
25	26	MIC1 (G)	IN	1-21
24	27	MIC1 (Y)	IN	1-20
23	28	MIC1 (X)	IN	1-19
22	29	CONV LENS	IN	16-39
21	30	SDA (P-S) (FP/AA)	OUT	1-16
20	31	SDA (S-P) (FP/AA)	OUT	1-15
19	32	LIGHT SW	IN	1-14
18	33	REG GND		
17	34	REG GND		
16	35	REG +48.0V		
15	36	REG +48.0V		
14	37	REG -5.0V		
13	38	REG -5.0V		
12	39	REG +9.0V		
11	40	REG +9.0V		
10	41	REG +4.0V		
9	42	REG +4.0V		
8	43	SWD EXT DC		
7	44	SWD EXT DC		
6	45	SWD EXT DC		
5	46	UNREG GND		
4	47	UNREG GND		
3	48	UNREG GND		
2	49	REG GND		
1	50	REG GND		

## PSW-71

PSW-71 BOARD SIDE (CN306) MB-833 BOARD SIDE

58	1	RS232C (C/RM)	OUT	20-59
49	2	RS232C (RM/C)	IN	20-49
48	3	S DATA (RM)	I/O	20-48
47	4	SDA (P-S) (PSW/AT)	IN	20-47
46	5	ZOOM CONT	OUT	20-46, 14-3
45	6	IRIS CONT	OUT	20-45
44	7	AUTO/MANU	OUT	20-44
43	8	IRIS POS1	IN	20-43
42	9	VJ CONNECT	IN	20-8
41	10	SDA (S-P) (AT/AA, PSW)	OUT	14-8, 20-34
40	11	REC TALLY 2	OUT	20-36
39	12	RCK	OUT	1-13, 14-16, 20-32
38	13	SHIFT/LOAD	OUT	1-12, 14-11, 20-31
37	14	SCLK (S/P)	OUT	1-11, 14-12, 20-30
36	15	G	OUT	1-10, 14-13, 20-29
35	16	SDA (P-S) (AA/PSW)	OUT	14-14
34	17	REG -5.0V		
33	18	REG +9.0V		
32	19	REG +4.0V		
31	20	REG +4.0V		
30	21	SWD EXT DC		
29	22	SWD EXT DC		
28	23	SWD EXT DC		
27	24	UNREG GND		
26	25	UNREG GND		
25	26	UNREG GND		
24	27	REG GND		
23	28	REG GND		
22	29	EXT VTR TRG	IN	19-18
21	30	L POWER ON (PSW-CP)	IN	19-30
20	31	L POWER ON (FP-PSW)	OUT	2-28
19	32	H MAIN SW ON	IN	2-26
18	33	SDA (C/LENS)	OUT	20-52
17	34	SDA (LENS/C)	IN	20-53
16	35	VBS (RM) (G)	OUT	8-24
15	36	VBS (RM) (X)	OUT	8-23
14	37	VBS (BNC) (G)	OUT	8-22
13	38	VBS (BNC) (X)	OUT	8-21
12	39	CONV LENS	OUT	16-39
11	40	CAL	IN	8-24
10	41	FOCUS CONT	OUT	20-51, 14-6
9	42	FOCUS POS1	N.C.	
8	43	ZOOM POS1	N.C.	
7	44	EXTEND ON/OFF	N.C.	
6	45	SDA (S-P) (PSW/FP)	IN	1-9
5	46	VTR TRIG	IN	1-8
4	47	AUDIO VOLUME	IN	1-7
3	48	VJ MIC (G)	IN	1-6
2	49	VJ MIC (X)	IN	1-5
1	50	DPR	IN	5-22, 6-61

## AT-150/142

AT-150/142 BOARD SIDE (CN501) MB-833 BOARD SIDE

		REG GND	N.C.	1 2
		REG GND	N.C.	3 4
		REG GND	N.C.	5 6
19-41, 2-27	OUT	DC INLET	7 8	VJ CONNECT
19-13, 8-87	OUT	CCZ DC	9 10	REC ALARM
19-17	OUT	CCZ BATT IND	11 12	BATT ALARM
1-34	OUT	SCLK VTR	13 14	SDA (V/C)
1-32	IN	SDA (C/V)	15 16	CS VTR
1-30	OUT	INT VTR TALLY	17 18	SDA (EEPROM)
15-44, 6-60, 8-42	IN	SDA (C/A)	19 20	SDA (I/A)
15-42, 6-58, 8-44, 5-18	IN	SCL (I/A)	21 22	LD (I/G)
15-40	IN	LD (SHUT)	23 24	SDA (SHUT)
15-38	IN	SCL (SHUT)	25 26	TEMP DATA
5-19	IN	LD (VA2)	27 28	LD (VA1)
14-13, 18-15, 1-10	IN	G	29 30	SCLK (S/P)
14-11, 18-13, 1-12	IN	SHIFT/LOAD	31 32	RCK
14-9	IN	REC TALLY	33 34	SDA (S-P) (AT/AA, PSW)
14-7	OUT	BATT IND	35 36	HFC TALLY 2
14-5	IN	LD (VF)	37 38	HFC TALLY 1
15-38	OUT	SCL (I/A)	39 40	PSW (FP/AA)
14-1	IN	IRIS	41 42	IRIS POS1
18-6	IN	IRIS POS2	43 44	IRIS POS3
18-4	IN	SDA (P-S) (FP/AA)	45 46	S DATA (RM)
16-2	OUT	RS232C (C/RM)	47 48	RS232C (RM/C)
16-41, 14-6	IN	FOCUS CONT	49 50	SDA (C/LENS)
16-34	OUT	SDA (LENS/C)	51 52	LD (I/G)
6-29	OUT	L VJ CONNECT	53 54	LD (I/G)
8-49, 6-51	OUT	HD	55 56	GENLOCK INT/EXT
8-39	OUT	HTSG/PAL	57 58	VF CHB
8-37	IN	VF CHB BACK	59 60	LD (ESS)
8-35	IN	LD (ES4)	61 62	LD (ES1)
8-33	IN	LD (ES2)	63 64	N.C.
5-13	IN	VA ENABLE	65 66	+1800 ON/OFF
6-5, 5-18	IN	LS1 RESET	67 68	LD (DPR)
6-7	IN	LD (IPP)	69 70	LD (IPR)
6-9	IN	LD (IRC)	71 72	SCL (DSP)
6-11	I/O	SDA3 (DSP)	73 74	SDA2 (DSP)
6-13	I/O	SDA1 (DSP)	75 76	SDA0 (DSP)
6-15	IN	TITLE	77 78	TITLE BACK
N.C.	TEST1	81 82	TEST2	N.C.
	SWD EXT DC	83 84	SWD EXT DC	
	UNREG GND	85 86	UNREG GND	
	REG GND	87 88	N.C.	
	REG +4.0V	89 90	REG +4.0V	
	REG +9.0V	91 92	REG +9.0V	
	REG +5.3V	93 94	REG +5.3V	
	REG +3.1V	95 96	REG +3.1V	
	REG -5.0V	97 98	REG -5.0V	
	REG GND	99 100	REG GND	

## TG-187

TG-187 BOARD SIDE (CN1) MB-833 BOARD SIDE


45	1	REG +48.0V		
44	2	REG +48.0V		
43	3	REG +6.0V		
42	4	REG +6.0V		
41	5	REG +6.0V		
40	6	REG GND		
39	7	REG GND		
38	8	REG GND		
37	9	REG GND		
36	10	REG GND		
35	11	REG -10.0V		
34	12	REG -10.0V		
33	13	REG -5.0V		
32	14	REG -5.0V		
31	15	REG +5.3V		
30	16	REG +5.3V		
29	17	REG +5.3V		
28	18	REG +5.3V		
27	19	REG +9.0V		
26	20	REG +9.0V		
25	21	REG +18.1V		
24	22	REG +18.1V		
23	23	VCO CTL	OUT	8-31
22	24	CLP1	IN	5-11, 6-70
21	25	FLD	OUT	8-32
20	26	DOUBLE PIX	IN	N.C.
19	27	P BLK	OUT	5-12, 6-69
18	28	18MHz (G)	IN	6-69
17	29	18MHz (G)	IN	6-67
16	30	REG GND		
15	31	36MHz (G)	IN	6-66
14	32	36MHz (G)	IN	6-65
13	33	AVD	OUT	6-64, 5-14
12	34	AHD	OUT	6-63, 5-15
11	35	HTSG	OUT	6-62
10	36	SCL (DEF)	OUT	20-39
9	37	TEMP DATA	IN	20-26
8	38	SCL (SHUT)	OUT	20-25
7	39	SDA (SHUT)	OUT	20-24
6	40	LD (SHUT)	OUT	20-23
5	41	LD (I/G)	OUT	20-22
4	42	SCL (I/A)	OUT	20-21, 6-58, 8-44, 5-18
3	43	SDA (I/A)	OUT	20-20, 6-57, 8-43, 5-17
2	44	SCL (EEPROM)	OUT	20-19, 6-60, 8-42
1	45	SDA (EEPROM)	I/O	20-18, 6-59, 8-41

## CP-373/315

1	UNREG GND	13-1, 13-2		
2	SWD EXT DC	13-3, 13-4, 21-28, 21-29, 19-60		
		2-45, 2-46, 2-47		
		14-43, 14-44, 14-45		
		16-21, 16-22, 16-23		

## BACKUP

1	M +6V BACKUP	10-15		
2	M GND			



## MB-833

## DU-36

BOARD NO. 1-673-954-11, 21

## MB-833 (2/2)

BOARD NO. 1-673-965-11, 12

B-DSR500WS-MB833-SM


**Section 5**  
**Board Layouts**

**Index**


Board	Page	Remarks
AA-104	5-2	
AT-142	5-4	DSR-300A/300AP
AT-150	5-3	DSR-390/390P/370/370P
CC-68	5-6	
CN-1519	5-6	DSR-300A/300AP
CN-1823	5-5	
CN-1864	5-5	
CN-1865	5-5	
CN-1866	5-6	
CN-1867	5-6	
CN-1873	5-6	
CN-1874	5-6	
CN-2277	5-5	DSR-390/390P/370/370P
CP-315	5-9	DSR-300A/300AP
CP-373	5-8	DSR-390/390P/370/370P
DPR-141	5-10	
DU-36	5-7	
DV-21	5-7	
ES-31	5-12	
FP-118	5-14	DSR-390/390P/370/370P
FP-122	5-16	DSR-300A/300AP
FP-99	5-7	
GCN-16	5-7	
HN-227	5-19	
IR-33	5-18	
KY-405	5-18	
LE-221	5-18	
MB-833	5-21	
MT-114	5-19	
PA-205	5-18	
PA-206	5-18	
PA-207	5-18	
PS-570	5-20	
PSW-71	5-20	
RP-91	5-24	
SE-295	5-19	
SE-297	5-19	
SE-298	5-19	
SE-566	5-20	
SV-213	5-22	

Board	Page	Remarks
SW-18	5-24	
SW-19	5-24	
SW-929	5-24	
TG-187	5-25	
VA-199	5-26	




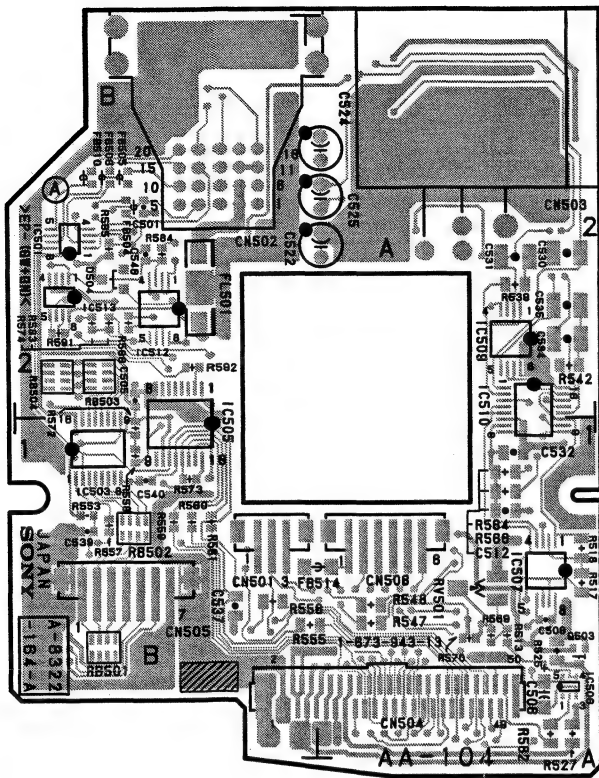


AA-104 -A SIDE-  
SUFFIX: -13, 21

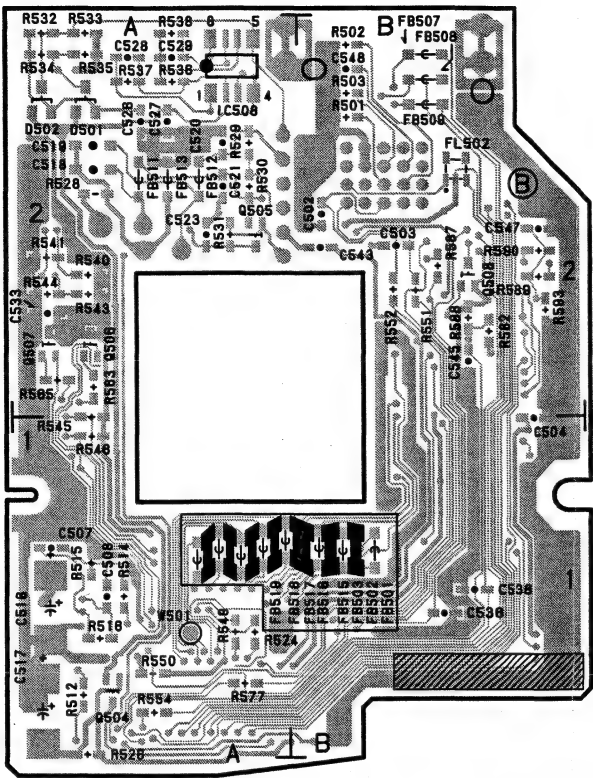

AA-104 -B SIDE-  
SUFFIX: -13, 21

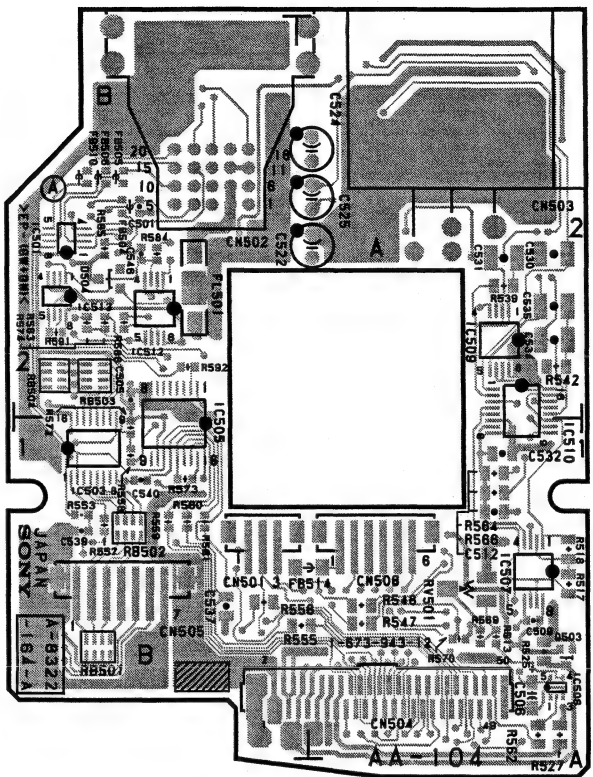

AA-104 -A SIDE-  
SUFFIX: -12

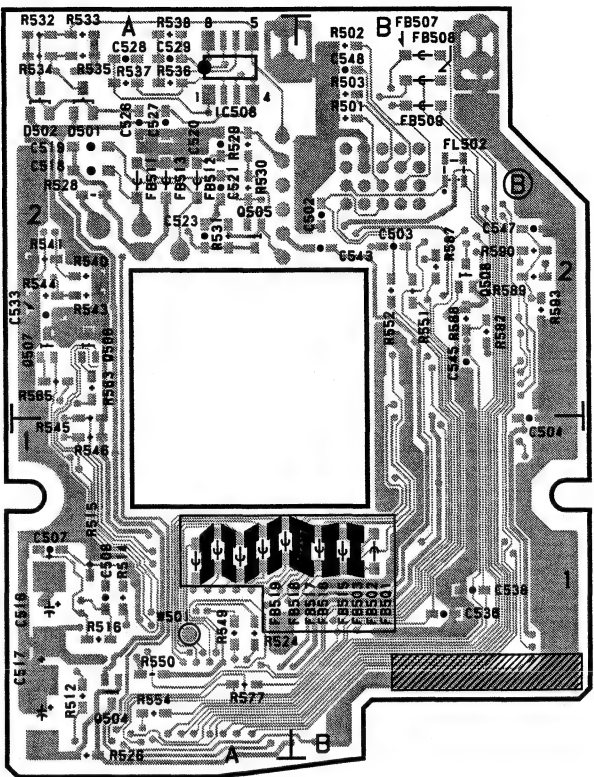

AA-104 -B SIDE-  
SUFFIX: -12

AA-104 (1-673-943-13, 21)


C501	B2	C547	*A2	IC503	B1	R535	*A2	R589	*A2
C502	*A2			IC505	B1	R536	*A2	R590	*A2
C503	*A2	CN501	B1	IC506	A1	R537	*A2	R591	B2
C504	*A1	CN502	B2	IC507	A1	R538	*A2	R592	B2
C505	B2	CN503	A2	IC508	*A2	R539	A2	R593	*A2
C506	A1	CN504	A1	IC509	A2	R540	*A2	RB501	B1
C507	*A1	CN505	B1	IC510	A2	R541	*A2	RB502	B1
C508	*A1	CN506	A1	IC512	B2	R542	A2	RB503	B2
C509	A1			IC513	B2	R544	*A2	RB504	B2
C512	A1	D501	*A2			R547	A1	RV501	A1
C516	*A1	D502	*A2	Q503	A1	R548	A1		
C517	*A1	D504	B2	Q504	*A1	R549	*A1		
C518	*A2			Q505	*A2	R550	*A1		
C519	*A2	FB501	*A1	Q506	*A2	R551	*A2		
C520	*A2	FB502	*A1	Q507	*A2	R552	*A2		
C521	*A2	FB503	*A1			R553	B1		
C522	A2	FB504	B2	R501	*A2	R554	*A1		
C523	*A2	FB505	B2	R502	*A2	R555	B1		
C524	A2	FB506	B2	R503	*A2	R556	B1		
C525	A2	FB507	*A2	R504	*A2	R557	B1		
C526	*A2	FB508	*A2	R512	*A1	R558	B1		
C527	*A2	FB509	*A2	R513	A1	R559	B1		
C528	*A2	FB510	B2	R514	*A1	R560	B1		
C529	*A2	FB511	*A2	R515	*A1	R561	B1		
C530	A2	FB512	*A2	R516	*A1	R562	A1		
C531	A2	FB513	*A2	R517	A1	R563	*A2		
C532	A1	FB514	A1	R518	A1	R564	A1		
C533	*A2	FB515	*A1	R524	*A1	R565	*A2		
C534	A2	FB516	*A1	R525	A1	R566	A1		
C535	A2	FB517	*A1	R526	*A1	R572	B1		
C536	*A1	FB518	*A1	R527	A1	R573	B1		
C537	B1	FB519	*A1	R528	*A2	R582	*B2		
C538	*A1			R529	*A2	R583	B2		
C540	B1	FL501	B2	R530	*A2	R584	B2		
C543	*A2	FL502	*A2	R531	*A2	R585	B2		
C545	*A2			R533	*A2	R586	B2		
C546	B2	IC501	B2	R534	*A2	R587	*A2		

AA-104 (1-673-943-12)


C501	B2	C546	B2	IC501	B2	R533	*A2	R573	B1
C502	*B2	C547	*B2	IC503	B1	R534	*A2	R574	B2
C503	*B2	C548	*B2	IC505	B1	R535	*A2	R577	*A1
C504	*B1			IC506	A1	R536	*A2	R582	*B2
C505	B2	CN501	B1	IC507	A1	R537	*A2	R583	B2
C506	A1	CN502	B2	IC508	*A2	R538	*A2	R584	B2
C507	*A1	CN503	A2	IC509	A2	R539	A2	R585	B2
C508	*A1	CN504	A1	IC510	A2	R540	*A2	R586	B2
C509	A1	CN505	B1	IC512	B2	R541	*A2	R587	*B2
C512	A1	CN506	A1	IC513	B2	R542	A2	R588	*B2
C516	*A1					R543	*A2	R589	*B2
C517	*A1	D501	*A2	Q503	A1	R544	*A2	R590	*B2
C518	*A2	D502	*A2	Q504	*A1	R545	*A2	R591	B2
C519	*A2	D504	B2	Q505	*A2	R546	*A1	R592	B2
C520	*A2			Q506	*A2	R547	A1	R593	*B2
C521	*A2	FB501	*B1	Q507	*A2	R548	A1		
C522	A2	FB502	*B1	Q508	*B2	R549	*A1	RB501	B1
C523	*A2	FB503	*B1			R550	*A1	RB502	B1
C524	A2	FB504	B2	R501	*B2	R551	*B2	RB503	B2
C525	A2	FB505	B2	R502	*B2	R552	*B2	RB504	B2
C526	*A2	FB506	B2	R503	*B2	R553	B1		
C527	*A2	FB507	*B2	R512	*A1	R554	*A1	RV501	A1
C528	*A2	FB508	*B2	R513	A1	R555	B1		
C529	*A2	FB509	*B2	R514	*A1	R556	B1	W501	*A1
C530	A2	FB510	B2	R515	*A1	R557	B1		
C531	A2	FB511	*A2	R516	*A1	R558	B1		
C532	A1	FB512	*A2	R517	A1	R559	B1		
C533	*A2	FB513	*A2	R518	A1	R560	B1		
C534	A2	FB514	A1	R524	*A1	R561	B1		
C535	A2	FB515	*A1	R525	A1	R562	A1		
C536	*A1	FB516	*A1	R526	*A1	R563	*A2		
C537	B1	FB517	*A1	R527	A1	R564	A1		
C538	*A1	FB518	*A1	R528	*A2	R565	*A2		
C540	B1	FB519	*A1	R529	*A2	R566	A1		
C543	*A2			R530	*A2	R569	A1		
C545	*A2	FL501	B2	R531	*A2	R570	A1		
C546	B2	FL502	*B2	R532	*A2	R572	B1		

AT-150 (1-683-381-12, 21)

C501	C4	C740	*A1	L513	C3
C502	*B4	C741	*A1	L701	C2
C503	*C4	C742	*A3	L702	*A2
C504	C4	C743	*A4	L704	*B2
C505	C4	C744	*A4	L706	*A2
C506	*C4	C745	*A1	L707	*A4
C507	*C4	C746	A4		
C508	*C4	C747	B4	Q501	*B4
C509	B4	C748	B3	Q502	C4
C510	B4			Q503	C4
C511	*B3	CN501	B4	Q504	*A3
C512	B4	CN503	*C4	Q505	*C3
C513	C4			Q506	*C4
C514	*C4	CV501	C3	Q508	*C4
C515	C4	CV502	C3	Q509	*C4
C516	*A3	CV701	A1	Q510	C3
C517	*C3			Q511	C3
C518	*C3	D501	C4	Q512	*C4
C519	*C3	D502	B3	Q513	*B4
C520	*C3	D503	*C3	Q517	*C3
C521	*C3	D504	*C3	Q701	*A3
C522	B3	D505	A4		
C523	*B2	D506	*A4	R501	C4
C524	*C3	D507	A4	R502	*C4
C525	*C3	D508	*C4	R503	*C4
C526	*C3	D509	*C4	R504	*C4
C527	C3	D511	*B4	R505	*C4
C528	*C3	D512	*C4	R506	*C4
C529	*A4	D702	*A1	R507	C3
C530	*A3	D703	*A1	R508	B3
C531	A4	D704	*A2	R509	*B3
C532	*A4	D705	*B3	R510	C4
C533	A4			R511	B4
C534	*A4	E1	A3	R512	C4
C536	*A4			R513	C4
C537	*A4	IC501	C4	R514	C4
C538	*A3	IC502	*C4	R515	C4
C539	*A3	IC504	*B3	R516	C4
C540	C3	IC506	B3	R517	C4
C541	*C4	IC507	*C4	R518	C4
C542	*C3	IC508	A3	R519	C4
C543	C3	IC509	*C3	R520	*B3
C544	*C4	IC510	C3	R521	*A3
C545	C4	IC511	*C2	R522	*A3
C546	*C4	IC512	B3	R523	*A3
C547	*C3	IC513	B4	R524	A3
C548	*A4	IC514	*C3	R525	A3
C549	*A4	IC515	C3	R526	*A3
C550	*C3	IC516	C3	R527	*A3
C551	C3	IC517	*C3	R528	*C3
C552	*C3	IC518	*A4	R529	*C3
C553	*C3	IC519	A4	R530	*C3
C554	*C3	IC520	*A4	R531	B3
C555	C4	IC521	C4	R532	*C3
C556	*C4	IC522	C4	R533	*B3
C557	*C4	IC524	C4	R534	*B3
C558	*B4	IC525	B3	R535	C3
C559	B3	IC526	*C3	R536	B4
C560	*B3	IC527	*C3	R537	*B3
C576	C3	IC528	C4	R538	*C3
C577	C3	IC529	*C4	R539	*C3
C578	*A4	IC530	B4	R540	*C3
C579	*B4	IC531	C3	R541	*C3
C580	*A4	IC550	*B4	R542	*C3
C701	C2	IC551	*B4	R543	*A4
C702	C2	IC701	*C2	R544	*A4
C703	*B2	IC702	*C2	R545	*A4
C704	*A2	IC703	B2	R546	*A4
C705	A2	IC708	A2	R547	A4
C706	A3	IC709	*A1	R548	*A4
C707	*B3	IC710	A1	R549	A4
C710	*A2	IC711	*B2	R550	*A4
C711	*A2	IC712	B2	R551	*A4
C712	*A1	IC718	*A1	R552	*A4
C713	*A1	IC719	*A1	R553	*A4
C714	*A2	IC720	*A3	R554	A4
C715	*A2	IC721	*A4	R555	*A3
C716	A1	IC722	*A1	R556	A3
C717	A1	IC723	*A2	R557	*C3
C718	A1	IC724	B2	R558	*C4
C720	B2			R559	*C3
C721	B2	L501	B4	R560	*C3
C729	*A2	L502	*B4	R561	*C3
C730	*A2	L503	B4	R562	*C3
C731	*A2	L504	*C4	R563	*C4
C732	*A2	L505	*A3	R564	*C4
C733	*A2	L506	C3	R565	C4
C734	*A2	L507	*C3	R566	C4
C735	*A2	L508	*C3	R567	C4
C736	*A3	L509	*A4	R568	C4
C737	*B2	L510	C3	R569	*C4
C738	*B2	L511	C4	R570	*C4
C739	*B2	L512	C4	R571	*C4

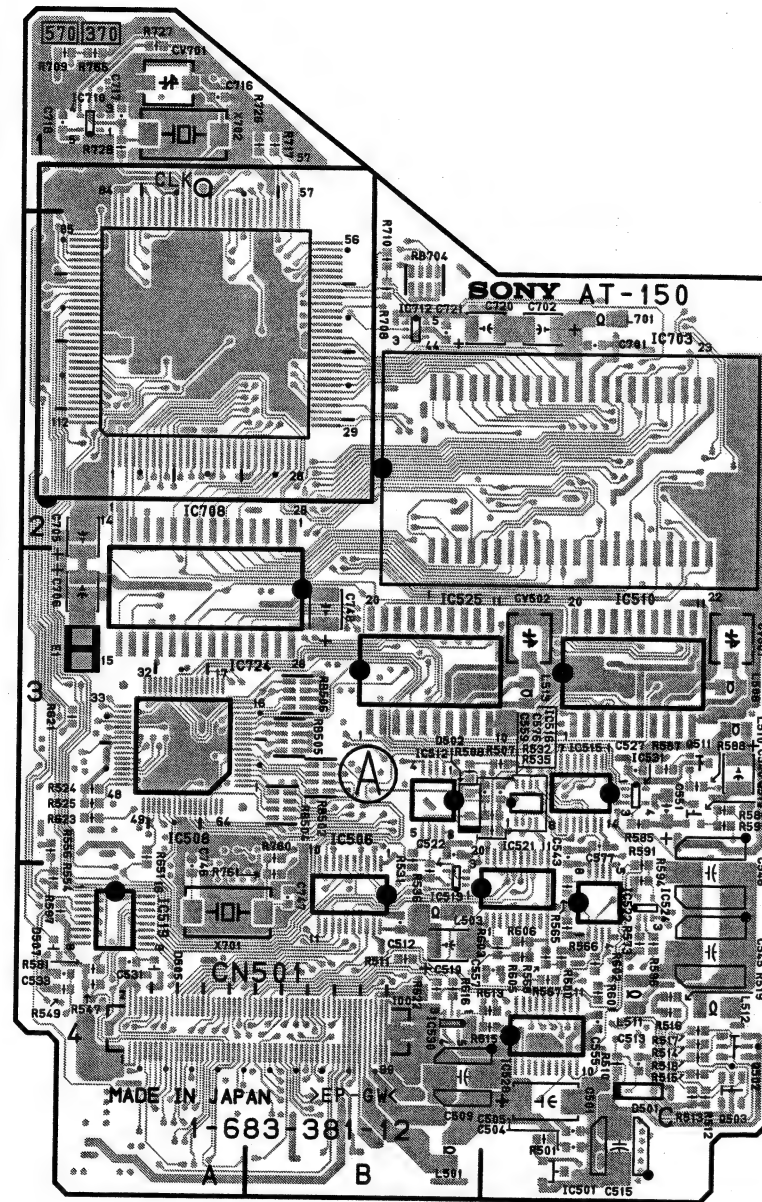

AT-150 -A SIDE-  
SUFFIX: -12, 21  
FOR DSR-390/390P/370/370P

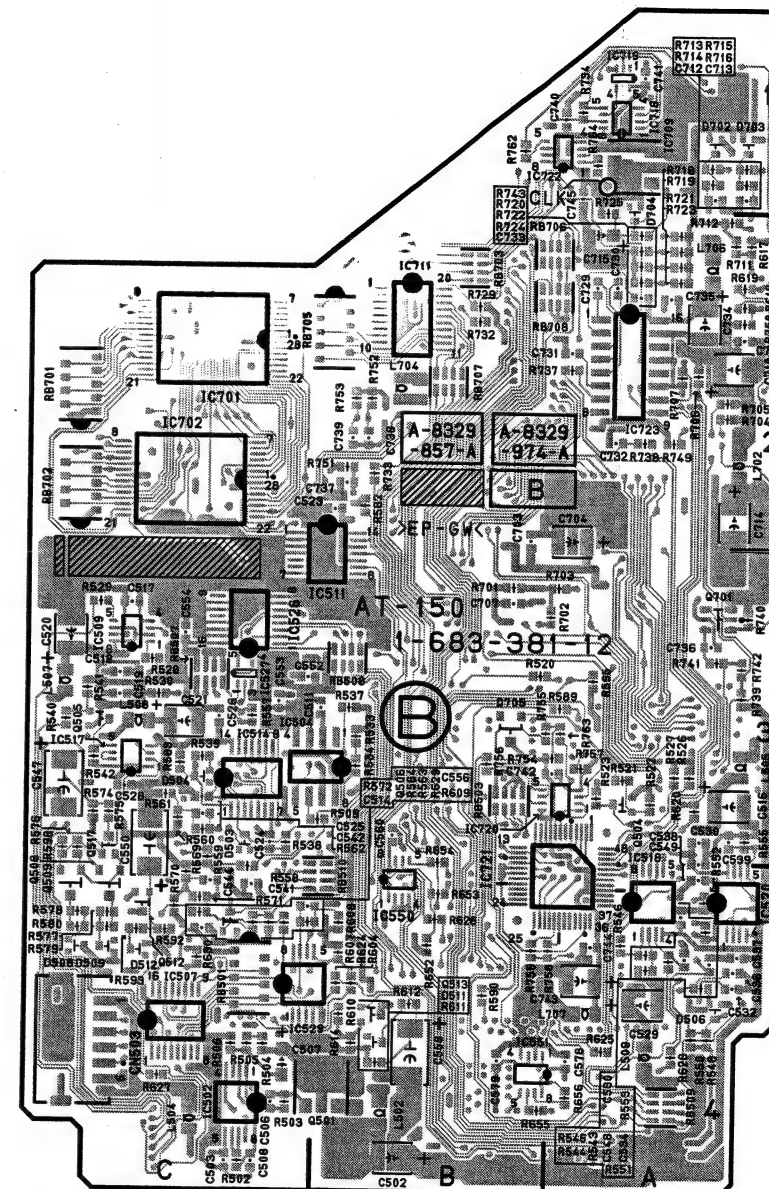

AT-150 -B SIDE-  
SUFFIX: -12, 21  
FOR DSR-390/390P/370/370P


R572	*C4	R732	*B2
R573	C4	R733	*B2
R574	*C3	R734	*A1
R575	*C3	R737	*A2
R576	*C3	R738	*A2
R577	*C4	R739	*A3
R578	*C4	R740	*A3
R579	*C4	R741	*A3
R580	*C4	R742	*A3
R581	A4	R743	*A2
R582	*B2	R749	*A2
R583	*C3	R750	*A2
R585	C3	R751	*B2
R586	C3	R752	*B2
R587	C3	R753	*B2
R588	C3	R754	*A3
R589	*A3	R755	*B3
R590	*B4	R756	*B3
R591	C3	R757	*A3
R592	*C4	R758	*A4
R593	*C4	R759	*B4
R594	C4	R760	B3
R595	*A3	R761	B4
R596	C4	R762	*B1
R597	A4	R763	*A3
R598	*C3	R764	*A1
R599	C3	R765	A1
R600	C4		
R601	C4	RB501	*C4
R602	C4	RB502	*B3
R603	C4	RB503	*B3
R604	*B4	RB504	B3
R605	C4	RB505	B3
R606	C4	RB506	B3
R607	*B4	RB507	*C3
R608	*B4	RB508	*B3
R609	*C4	RB509	*A4
R610	*B4	RB510	*B4
R611	*B4	RB701	*C2
R612	*B4	RB702	*C2
R613	C4	RB703	*B2
R614	*B4	RB704	B2
R615	C4	RB705	*A2
R616	B4	RB706	*A2
R617	*A2	RB707	*B2
R618	*A2	RB708	*A2
R619	A2		
R620	*A3	X701	A4
R621	A3	X702	A1
R622	B4		
R623	A3		
R624	*B4		
R625	*A4		
R626	*B4		
R627	*C4		
R628	*A4		
R629	*C4		
R630	*C4		
R651	A3		
R652	*B4		
R653	*B4		
R654	*B4		
R655	*B4		
R656	*A4		
R701	*B3		
R702	*A3		
R703	*A3		
R704	*A2		
R705	*A2		
R706	*A2		
R707	*A2		
R708	B2		
R709	A1		
R710	B2		
R711	*A2		
R712	*A2		
R713	*A1		
R714	*A1		
R715	*A1		
R716	*A1		
R717	B1		
R718	*A2		
R719	*A2		
R720	*A2		
R721	*A2		
R722	*A2		
R723	*A2		
R724	*A2		
R725	*A2		
R726	B1		
R727	A1		
R728	A1		
R729	*B2		

\*: B SIDE




AT-142 (1-677-374-11, 12)


C501	C4	C745	*B1	Q503	C4
C502	*B4	C746	A3	Q504	*A3
C503	*C4	C747	B3	Q505	*C3
C504	C4			Q506	*C4
C505	C4	CN501	B4	Q507	*C3
C506	*C4	CN503	*C4	Q508	*C3
C507	*C4	CV501	C2	Q509	*C3
C508	*C4	CV502	C2	Q510	C3
C509	C4	CV701	A1	Q511	C3
C510	B3			Q512	*C3
C511	*C3	D501	C4	Q513	*B4
C512	B3	D502	C3	Q701	*A2
C513	C4	D503	*C3		
C514	*C4	D504	*C3	R501	C4
C515	C4	D505	A4	R502	*C4
C516	*A3	D506	*A4	R503	*C4
C517	*C2	D507	A4	R504	*C4
C518	*C3	D508	*C4	R505	*C4
C519	*C3	D509	*C4	R506	*C4
C520	*C3	D510	*C4	R507	C3
C521	*C3	D511	*B4	R508	C3
C522	C3	D701	*A2	R509	*C3
C523	*C2	D702	*A1	R510	C4
C524	*C3	D703	*A1	R511	B4
C525	*C3	D704	*A1	R512	C4
C526	C3	D705	*B3	R513	C4
C527	C3			R514	C4
C528	*C3	IC501	C4	R515	C4
C529	*A4	IC502	*C4	R516	C4
C530	*A3	IC504	*C3	R517	C4
C531	A4	IC506	B3	R518	C4
C532	*A4	IC507	*C4	R519	C4
C533	A4	IC508	A3	R520	B3
C534	*A4	IC509	*C3	R521	*A3
C535	*A4	IC510	C3	R522	*A3
C536	*A4	IC511	*C2	R523	*A3
C537	*A4	IC512	C3	R524	A3
C538	*A3	IC513	C3	R525	A3
C539	*A3	IC514	*C3	R526	*A3
C540	C3	IC515	C3	R527	*A3
C541	*C3	IC516	C3	R528	*C3
C542	*C3	IC517	*C3	R529	*C2
C543	C3	IC518	*A3	R530	*C3
C544	*C3	IC519	A3	R531	B3
C545	C4	IC520	*A3	R532	C3
C546	C3	IC521	C3	R533	*C3
C547	*C3	IC522	C3	R534	*C3
C548	*A4	IC523	C3	R535	C3
C549	*A3	IC524	C3	R536	C3
C550	*C3	IC525	B3	R537	*C3
C551	C3	IC526	*C2	R538	*C3
C552	*C3	IC527	*C3	R539	*C3
C553	*C3	IC528	C4	R540	*C3
C554	*C3	IC529	*C4	R541	*C3
C555	C4	IC530	C4	R542	*C3
C556	*C3	IC701	*C2	R543	*A4
C557	C4	IC702	*C2	R544	*A4
C558	*B4	IC703	C2	R545	*A4
C559	B3	IC704	*B2	R546	*A4
C701	C2	IC705	A2	R547	A4
C702	C2	IC708	A2	R548	*A4
C703	*A2	IC709	*A1	R549	A4
C704	*A2	IC710	A1	R550	*A4
C705	A2	IC711	*B2	R551	*A4
C706	A2	IC712	B2	R552	*A3
C707	*B2	IC717	*A2	R553	*A4
C710	*A2	IC718	*A1	R554	A3
C711	*A2	IC719	*A1	R555	*A3
C712	*A1	IC720	*B3	R556	A3
C713	*A1	IC721	*B3	R557	*C3
C714	*A2	IC722	*B1	R558	*C3
C715	*A1			R559	*C3
C716	B1	L501	C4	R560	*C3
C717	A1	L502	*B4	R561	*C3
C718	A1	L503	C4	R562	*C3
C719	C2	L504	*C4	R563	*C4
C720	C2	L505	*A3	R564	*C3
C721	B2	L506	C3	R565	C3
C729	*A2	L507	*C3	R566	C3
C730	*A2	L508	*C3	R567	C4
C731	*B2	L509	*A4	R568	C4
C732	*A2	L510	C3	R569	*C3
C733	*A2	L511	C4	R570	*C3
C734	*A2	L512	C4	R571	*C3
C735	*A2	L513	C3	R572	*C3
C736	*A3	L701	C2	R573	C3
C737	*C2	L702	*A2	R574	*C3
C738	*C2	L703	C2	R575	*C3
C739	*C2	L704	*B2	R576	*C3
C740	*B1	L706	*A1	R577	*C3
C741	*A1	L707	*A4	R578	*C3
C742	*B3			R579	*C4
C743	*B4	Q501	*C4		
C744	*A4	Q502	C4		

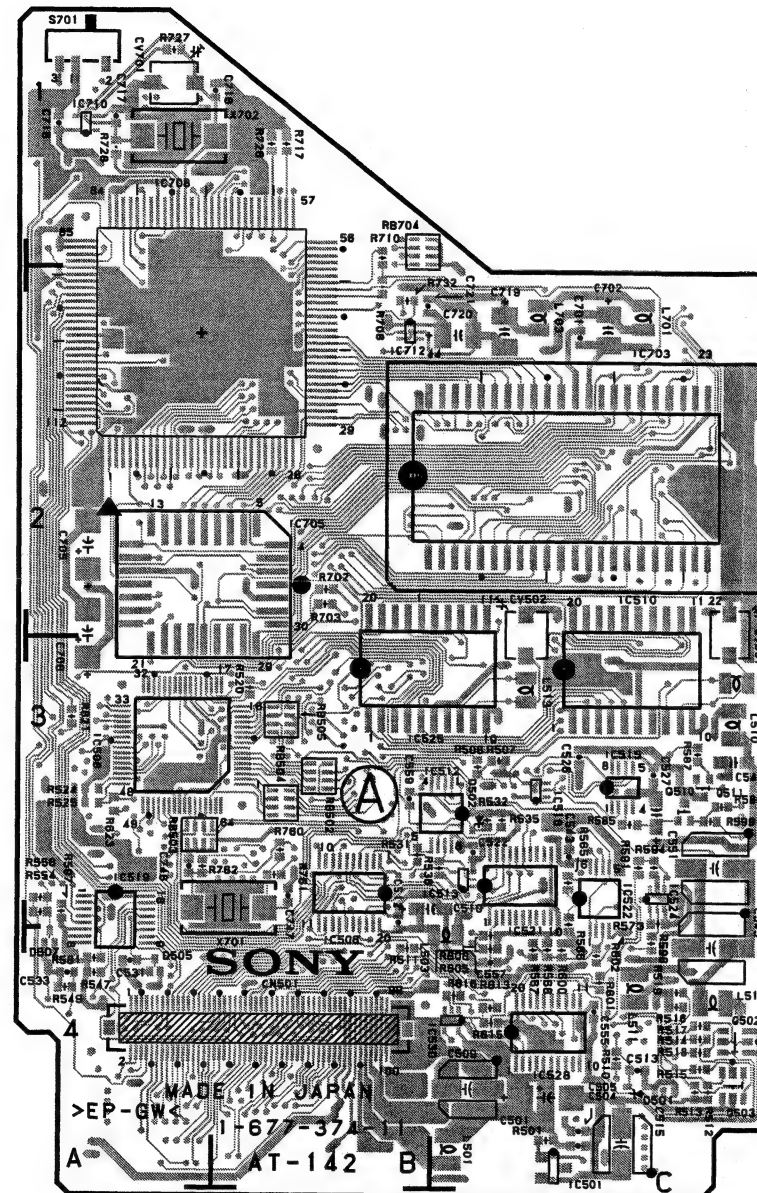




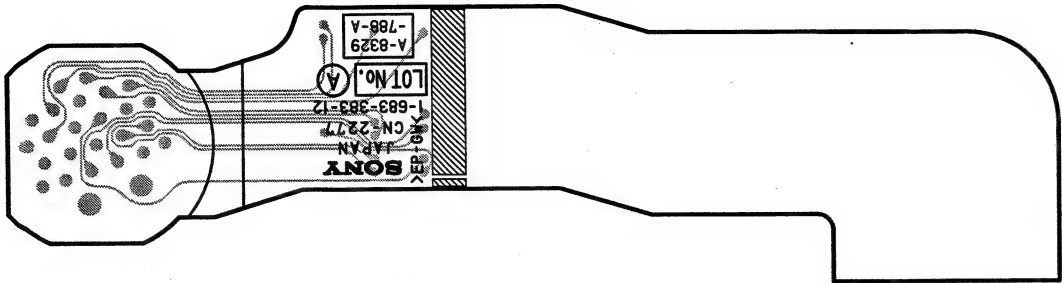


**CN-2277 -A SIDE-**  
SUFFIX: -11, 12  
FOR DSR-390/390P/370/370P

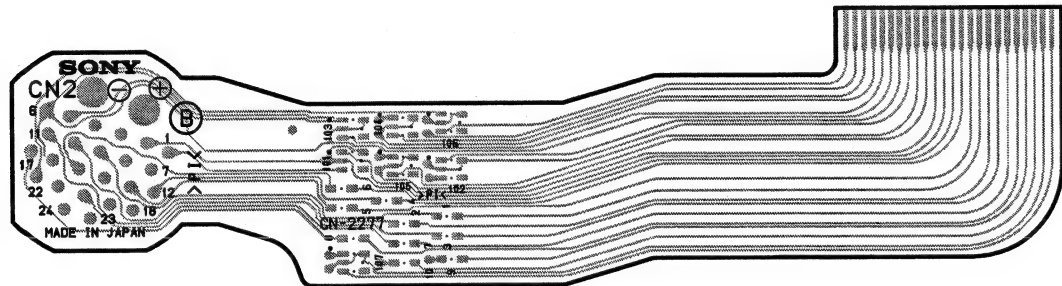


**CN-2277 -B SIDE-**  
SUFFIX: -11, 12  
FOR DSR-390/390P/370/370P




**CN-1823 -A SIDE-**  
SUFFIX: -13




**CN-1823 -B SIDE-**  
SUFFIX: -13




**CN-1864 -A SIDE-**  
SUFFIX: -11, 21



**CN-1864 -B SIDE-**  
SUFFIX: -11, 21

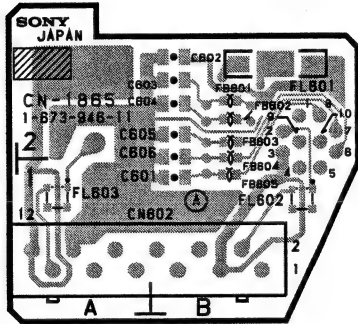

**CN-1865 -A SIDE-**  
SUFFIX: -11, 21

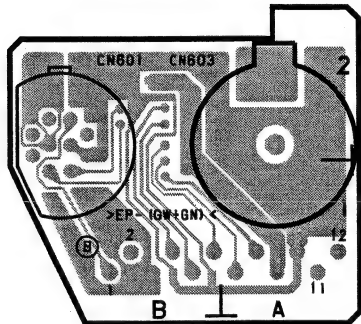

**CN-1865 -B SIDE-**  
SUFFIX: -11, 21

CN-1865 (1-673-946-11, 21)


C601 B1  
C602 B2  
C603 B2  
C604 B2  
C605 B2  
C606 B2

CN601 \*B2  
CN602 B1  
CN603 \*A2


FB601 B2  
FB602 B2  
FB603 B2  
FB604 B1  
FB605 B1

FL601 B2  
FL602 B1  
FL603 A1


\*: B SIDE




**CN-1866 -A SIDE-**  
SUFFIX: -12, 21



**CN-1866 -B SIDE-**  
SUFFIX: -12, 21




**CN-1867 -A SIDE-**  
SUFFIX: -11, 21




**CN-1867 -B SIDE-**  
SUFFIX: -11, 21




**CN-1873 -A SIDE-**  
SUFFIX: -11, 21




**CN-1873 -B SIDE-**  
SUFFIX: -11, 21



**CN-1874 -A SIDE-**  
SUFFIX: -11, 21




**CN-1874 -B SIDE-**  
SUFFIX: -11, 21

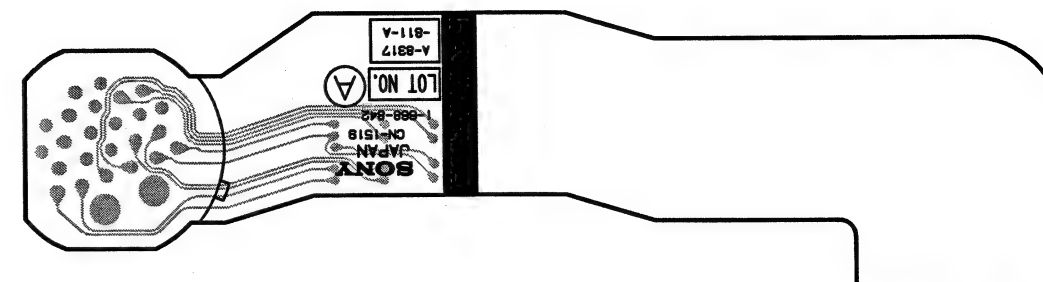


**CN-1519 -A SIDE-**  
SUFFIX: -12, 13  
FOR DSR-300A/300AP




**CN-1519 -B SIDE-**  
SUFFIX: -12, 13  
FOR DSR-300A/300AP

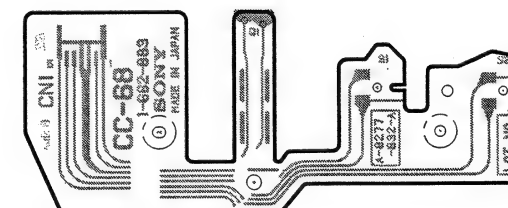


**CC-68 -A SIDE-**  
SUFFIX: -12

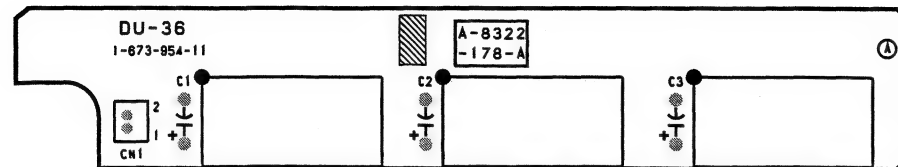


**DU-36 -A SIDE-**  
SUFFIX: -11, 21

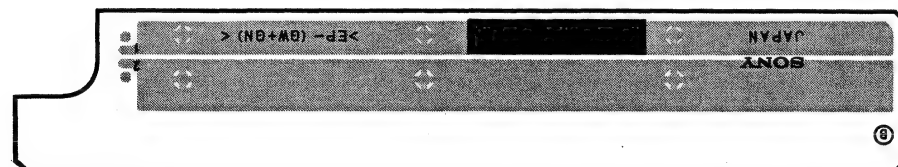


**DU-36 -B SIDE-**  
SUFFIX: -11, 21

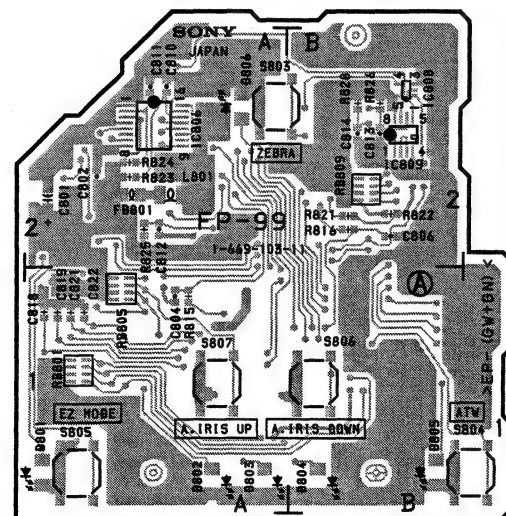


**FP-99 -A SIDE-**  
SUFFIX: -11, 21

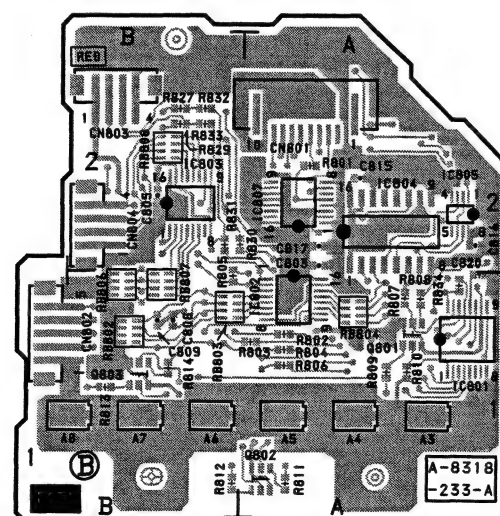


**FP-99 -B SIDE-**  
SUFFIX: -11, 21




**DV-21 -A SIDE-**  
SUFFIX: -21



**DV-21 -B SIDE-**  
SUFFIX: -21

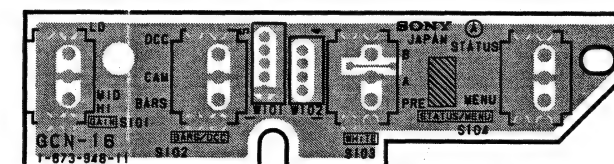


**GCN-16 -A SIDE-**  
SUFFIX: -11, 21

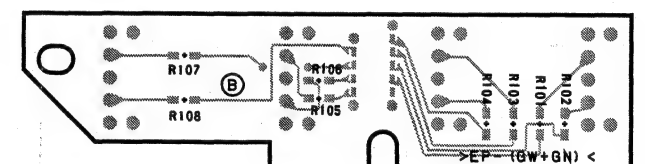


**GCN-16 -B SIDE-**  
SUFFIX: -11, 21

CP-373 (1-638-382-11,12)

C101	*B1	CL236	*D2
C102	*B1	CL238	*D2
C103	*B1	CL240	*D2
C104	*B1	CL241	*D2
C105	*B1	CL242	*D2
C106	*A1	CL243	*D2
C107	A2	CL301	*C2
C108	A1	CL302	*C2
C109	*A1	CL303	*C2
C110	*A1	CL304	*C2
C111	*A1	CL312	*D1
C112	*A1	CL313	*D1
C113	*D1	CL314	*D2
C114	*C1	CL316	*C2
C115	*D1	CL317	*C2
C116	*C1	CL318	*C2
C117	*D1	CL319	*C2
C118	*C1	CL328	*E2
C119	*C1	CL329	*E2
C120	*B2	CL330	*E2
C121	*B2		
C122	*B2	CN1	D2
C123	*B2	CN2	B2
C124	*C2	CN3	F1
C125	*B2	CN5	E2
C126	*A2	CN6	E2
C127	A2	CN7	E2
C128	A2	CN8	F2
C129	*A2	CN9	E1
C130	*A2	CN10	E1
C131	*A2	CN101	B1
C132	*A2	CN102	B2
C133	*C1	CN201	D3
C134	*C2	CN202	C3
C301	*C2	CN203	C3
C302	*C2	CN204	C3
C303	*C2	CN205	D3
C304	*C2	CN206	B3
C305	*C2		
C306	*C2	D101	*A1
C406	*F2	D102	*A1
C413	*F2	D103	*A2
C414	F2	D104	*A2
C415	*E2	D201	*D2
C416	*D2	D202	*D2
C417	*E2	D203	*D2
C501	*C3	D204	*D2
C502	*C3	D205	*D2
C503	*D2	D206	*D2
C504	*D2	D207	*C2
C505	*C3	D208	*D2
C506	*C3	D301	*D2
CB401	F1	D401	*E2
		D402	F1
		D403	*E2
		D404	*E2
CL101	*B1	D501	*E2
CL102	*B1	D502	*D2
CL103	*B1	D503	*B3
CL104	*B2		
CL105	*B2	FL201	*C3
CL106	*B2	FL202	*D3
CL107	*C2	FL203	*C3
CL108	*C2	FL204	*B3
CL109	*C2	FL205	*C3
CL110	*C2	FL206	*D3
CL111	*D2	FL207	*B3
CL112	*D2	FL208	*B3
CL113	*D2		
CL114	*C2		
CL115	*C2	IC101	*A1
CL116	*D2	IC201	*A2
CL201	*C3	IC301	*C2
CL202	*C3	IC501	*D2
CL203	*D3	IC502	*C3
CL204	*D3	IC503	*C3
CL205	*D3	IC504	*D2
CL207	*B3		
CL208	*B3	L101	*B1
CL209	*B3	L102	*A1
CL210	*B2	L103	*B2
CL211	*C3	L104	*A2
CL212	*C2		
CL213	*D3	PS301	*C2
CL214	*D3	PS401	*F2
CL215	*B3		
CL216	*B3	Q101	*D1
CL218	*B3	Q102	*C1
CL219	*B3	Q103	*C1
CL229	*D2	Q104	*C2
CL230	*D2	Q401	*E2
CL231	*D2	Q402	*F2
CL232	*D2	Q403	*F2
CL234	*D2	Q404	*E2

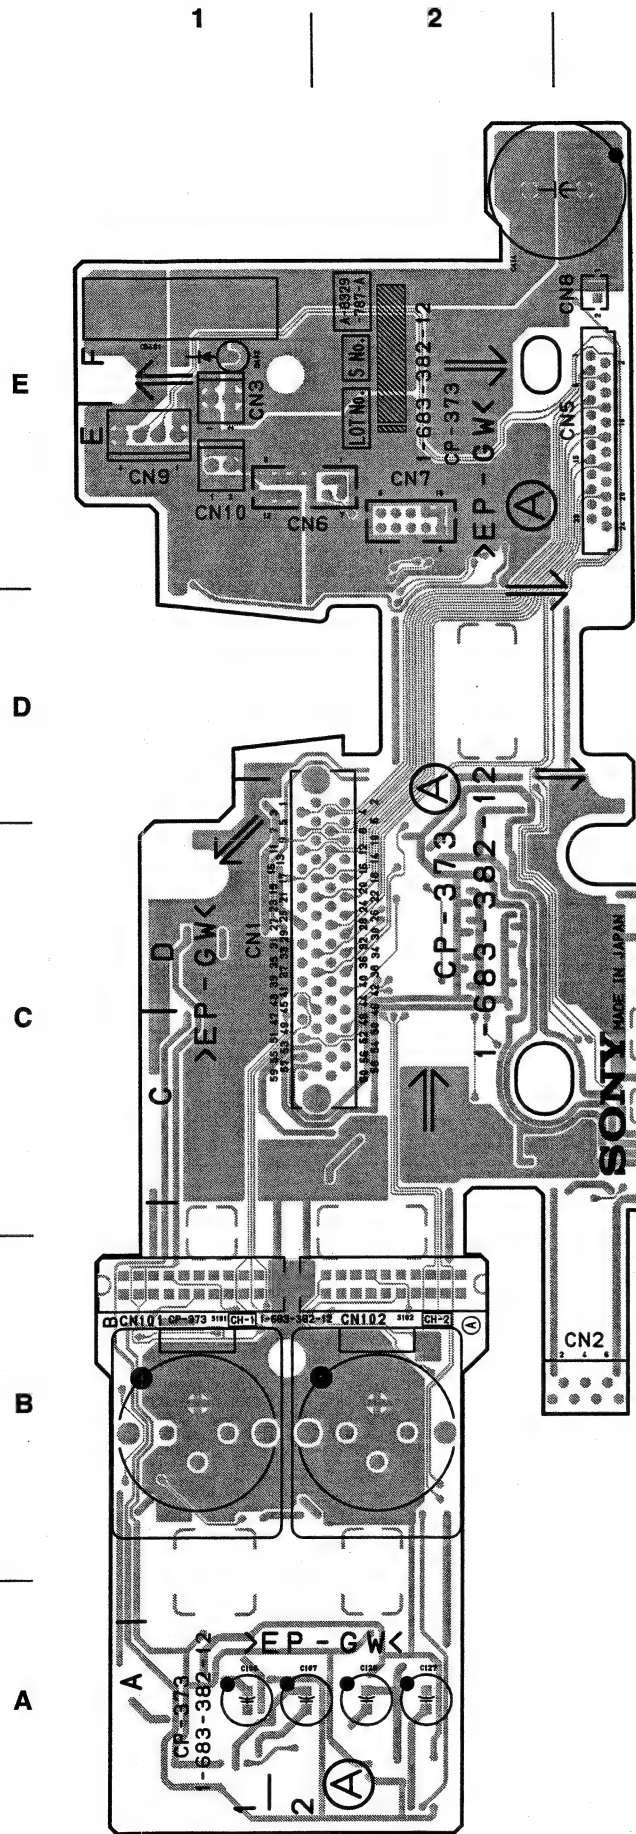

CP-373 -A SIDE-  
SUFFIX: -11, 12  
FOR DSR-390/390P/370/370P

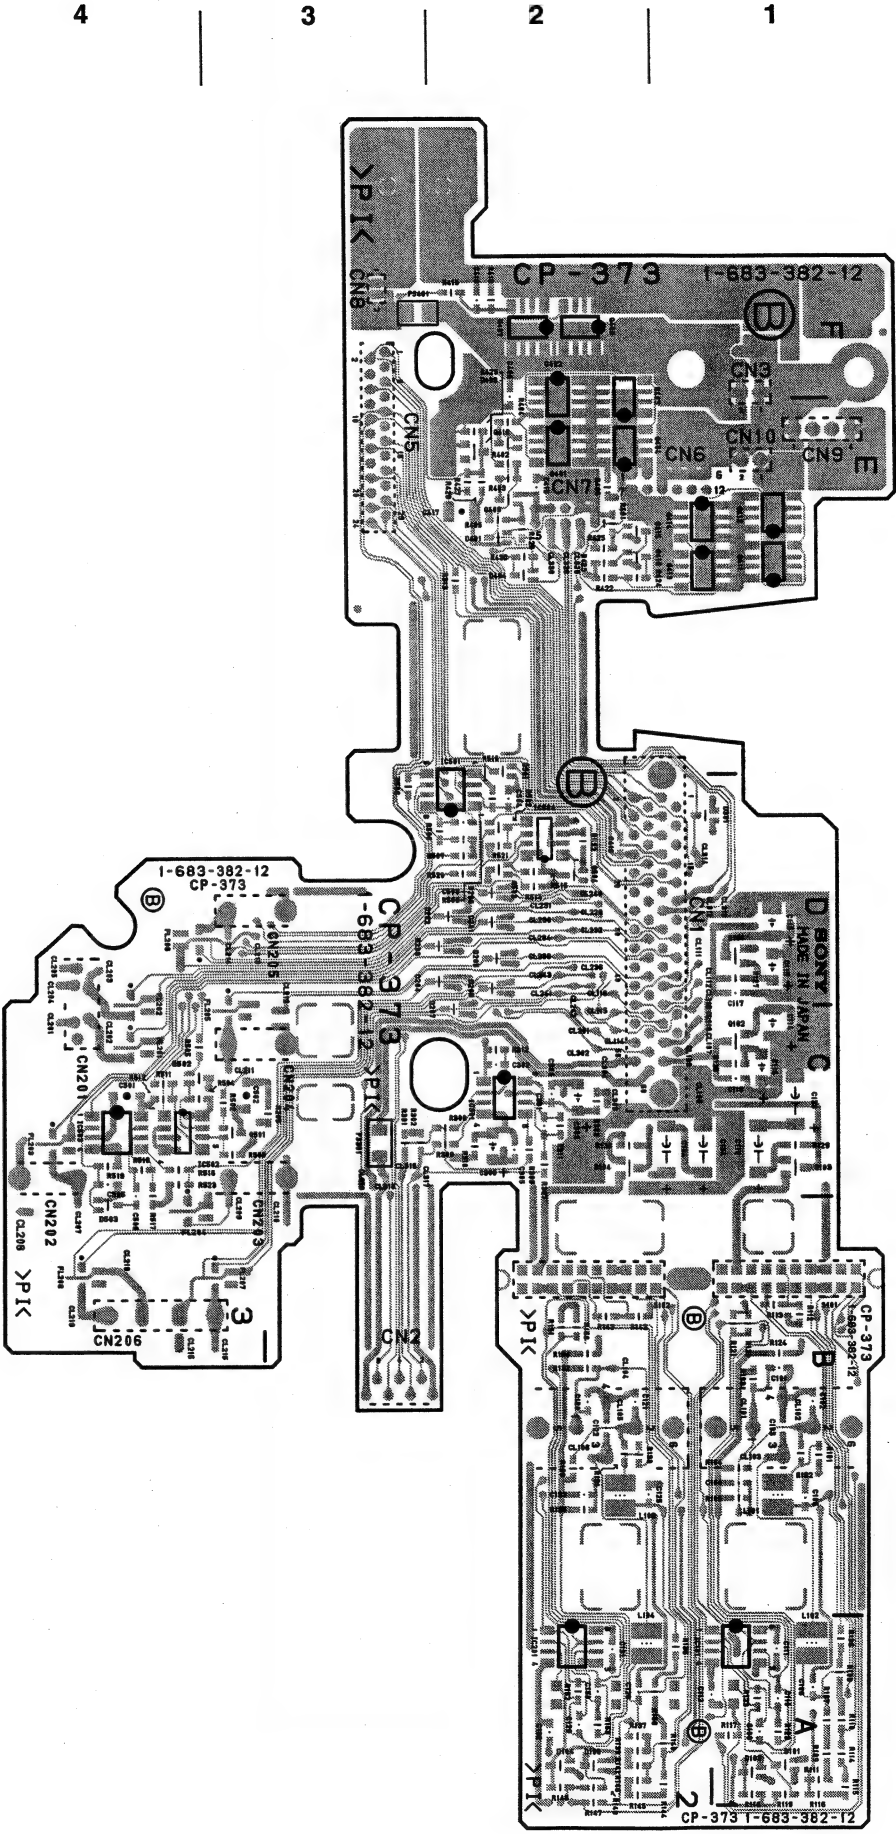


CP-373 -B SIDE-  
SUFFIX: -11, 12  
FOR DSR-390/390P/370/370P




CP-315 (1-668-841-13,14)

C101	*B1
C102	*B1
C103	*B1
C104	*B1
C105	*B1
C106	*A1
C107	A1
C108	A1
C109	*A1
C110	*A1
C111	*A1
C112	*A1
C113	*C1
C114	*C1
C115	*C1
C116	*C1
C117	*C1
C118	*C1
C119	*C1
C120	*B2
C121	*B2
C122	*B2
C123	*B2
C124	*C1
C125	*B2
C126	*A2
C127	A2
C128	A2
C129	*A2
C130	*A2
C131	*A2
C132	*A2
C133	*C1
C134	*C1
C301	*C2
C302	*C2
C303	*C2
C304	*C2
C305	*C2
C306	*C2
C406	*E2
C413	*E2
C414	E3
C415	*E2
CB401	E1
CN1	C1
CN2	B3
CN3	E1
CN5	E3
CN6	E1
CN7	E2
CN8	E3
CN9	E1
CN101	B1
CN102	B2
D101	*A1
D102	*A1
D103	*A2
D104	*A2
D202	*C2
D203	*C3
D205	*C2
D206	*C3
D207	*C3
D208	*C2
D209	*C3
D210	*C2
D402	E1
FL201	*C4
FL202	*C4
FL203	*C4
FL205	*C3
FL206	*C3
FL207	*B3
FL208	*B4
IC101	*A1
IC201	*A2
IC301	*C2
L101	*B1
L102	*A1
L103	*B2
L104	*A2
PS301	*C3
PS401	*E3

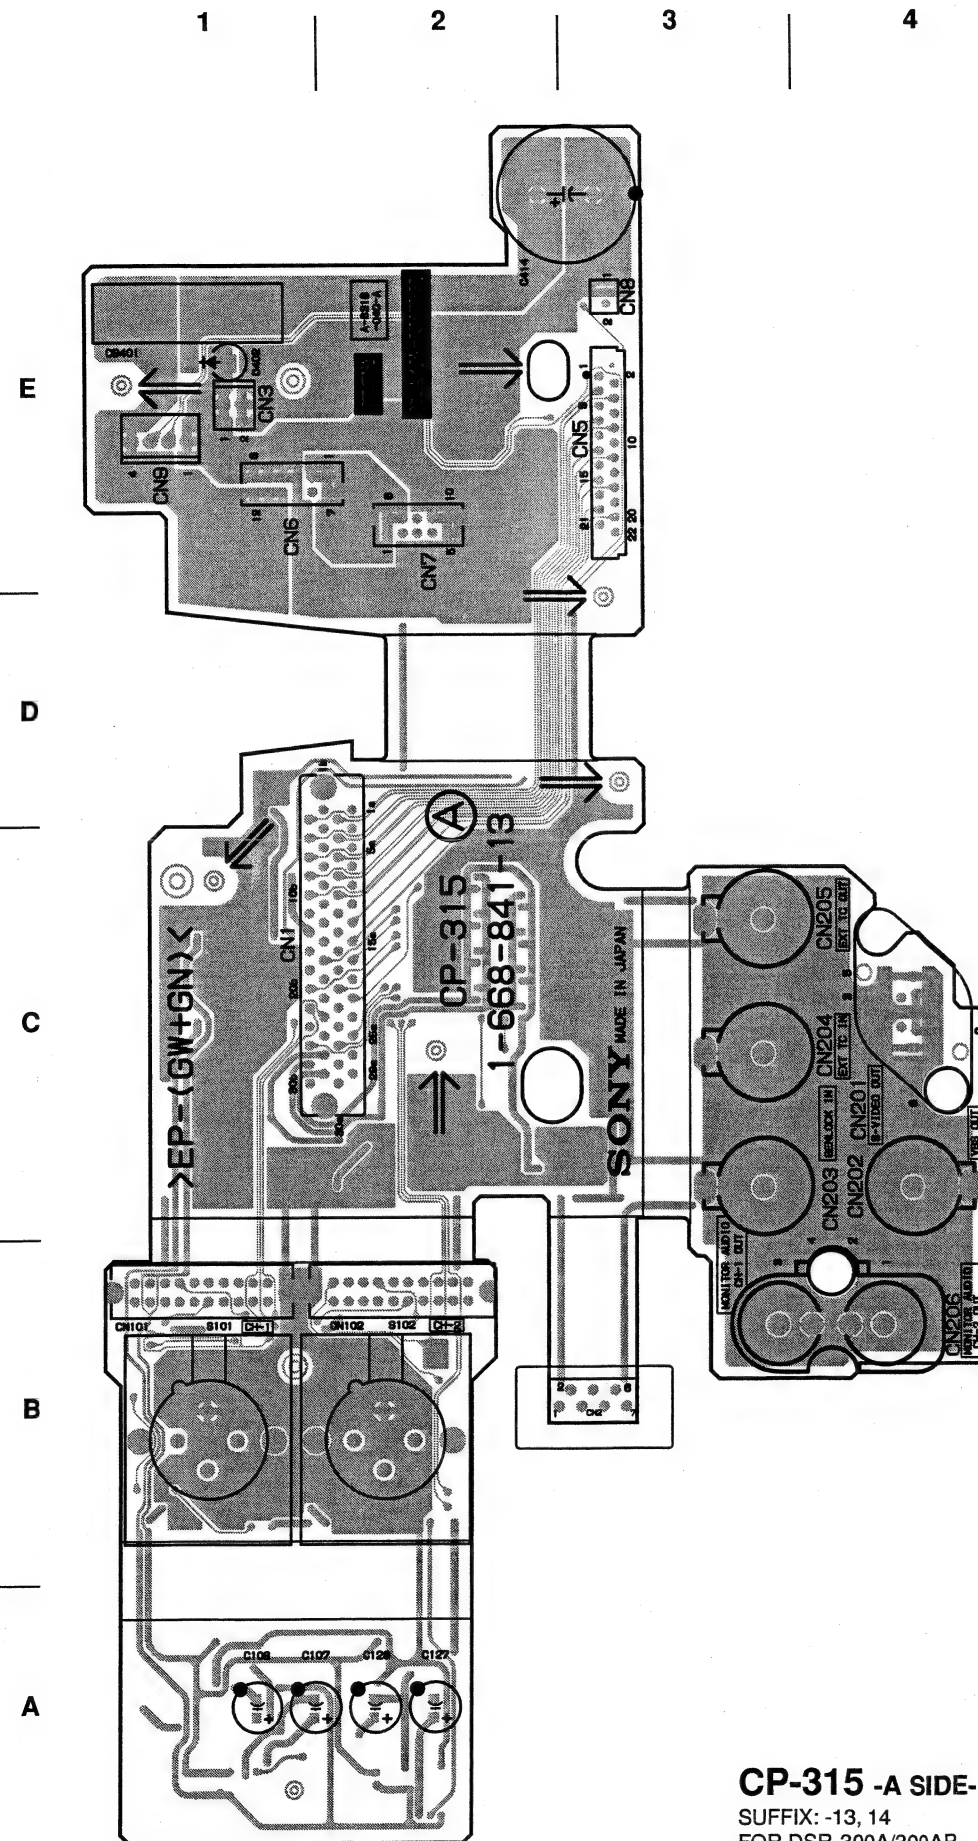

CP-315 -A SIDE-  
SUFFIX: -13, 14  
FOR DSR-300A/300AP

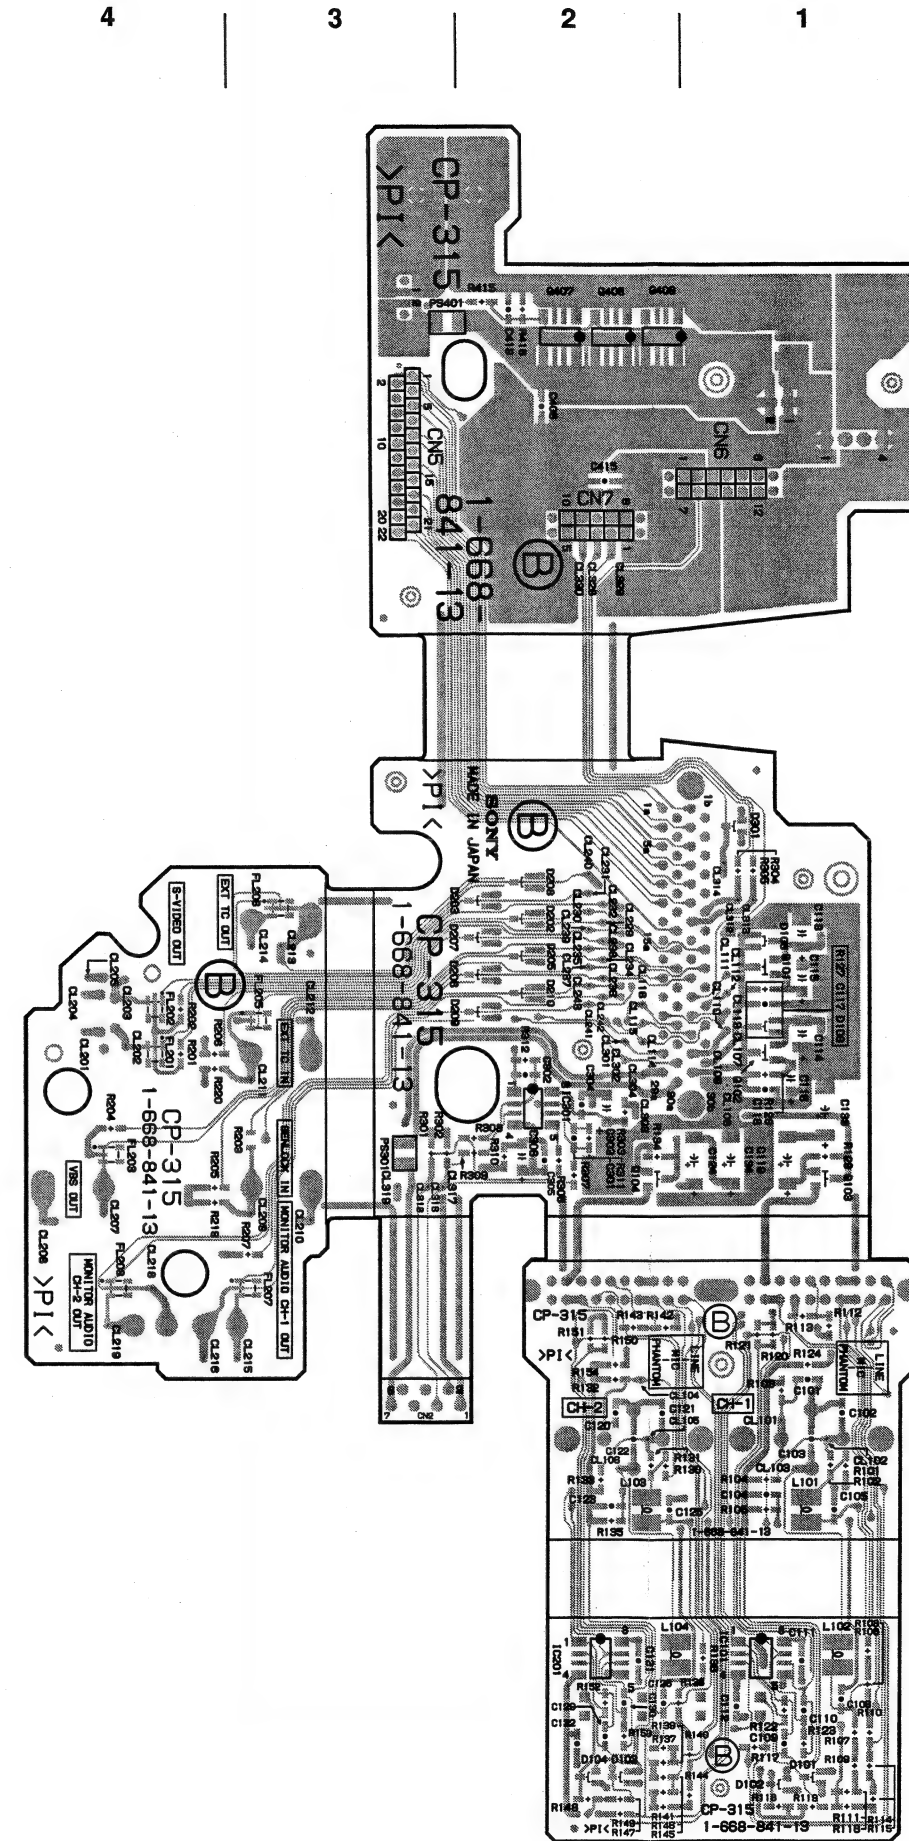

CP-315 -B SIDE-  
SUFFIX: -13, 14  
FOR DSR-300A/300AP

Q101	*C1
Q102	*C1
Q103	*C1
Q104	*C2
Q407	*E2
Q408	*E2
Q409	*E2
R102	*B1
R103	*B1
R105	*B1
R106	*A1
R107	*A1
R108	*A1
R109	*A1
R110	*A1
R111	*A1
R112	*B1
R113	*B1
R114	*A1
R115	*A1
R116	*A1
R117	*A1
R118	*A1
R119	*A1
R120	*B1
R121	*B1
R122	*A1
R123	*A1
R124	*B1
R127	*C1
R128	*C1
R129	*C1
R131	*B2
R132	*B2
R134	*C2
R135	*B2
R136	*A1
R137	*A2
R138	*A2
R139	*A2
R140	*A2
R141	*A2
R142	*B2
R143	*B2
R144	*A2
R145	*A2
R146	*A2
R147	*A2
R148	*A2
R149	*A2
R150	*B2
R151	*B2
R152	*A2
R153	*A2
R154	*B2
R201	*C4
R202	*C4
R203	*C4
R204	*C4
R205	*C4
R206	*C4
R207	*C4
R219	*C4
R301	*C3
R302	*C3
R303	*C2
R304	*C1
R305	*C1
R306	*C2
R307	*C2
R308	*C2
R309	*C3
R310	*C2
R311	*C2
R312	*C2
R415	*E2
R418	*E2
S101	B1
S102	B2

\*: B SIDE

## DPR-141

SUFFIX: -14

## DPR-141

SUFFIX: -14


DPR-141 (1-673-975-14)

C101	* C7	C227	* A4	C365	* D2	C623	* F2	C837	* G2	CL127	* D1	IC206	A4	L101	* C4	R102	* C7	R243	* B7	R379	* C6	R532	C6	R818	* G3	R1010	* F6	RB755	* E7
C102	* A7	C228	A4	C366	* D3	C631	F1	C901	* F6	CL128	* D1	IC207	* A4	L102	* A6	R103	* B7	R244	C4	R380	* C5	R533	D6	R819	G4	R1011	* F6	RB756	* F4
C103	* A7	C229	* A4	C367	* D3	C632	E1	C902	F6	CL129	* D1	IC208	* A4	L103	A6	R104	* B7	R245	A4	R381	* C5	R534	D6	R820	G4	R1012	* F6	RB771	* D7
C104	* C7	C231	A6	C368	* C3	C633	F1	C903	F6	CL130	* D1	IC209	* C3	L104	* A6	R105	* B7	R246	A4	R382	C6	R535	D6	R821	G3	R1014	F4	RB772	E5
C105	* A7	C232	B4	C369	* C3	C651	* E2	C904	F6	CL131	* D1	IC210	A5	L105	A6	R106	* C7	R247	* B7	R383	C6	R536	C6	R822	G4	R1015	* G6	RB774	E5
C106	* A7	C233	* A5	C370	* C3	C652	F3	C923	* F4	CL132	* D1	IC211	* A2	L106	* B6	R107	* C7	R248	* B7	R384	C6	R537	D6	R823	* G3	R1016	* G6	RB775	* E7
C107	* C7	C234	A4	C371	* C3	C653	E3	C924	* F4	CL133	* D1	IC212	* A2	L107	A6	R108	* C7	R249	* B7	R385	* B6	R538	D6	R824	* G3	R1017	* F4	RB802	* G3
C108	A7	C235	* A6	C372	* C2	C654	F3	C925	* G5	CL135	* D1	IC213	* A3	L201	A7	R109	* B7	R250	* A4	R386	* B6	R539	D6	R825	G4	R1018	* F4		
C109	* C7	C236	B4	C373	* C2	C655	E3	C926	* G5	CL136	* D1	IC214	* A3	L301	* C5	R110	* C7	R251	* C4	R387	A6	R540	* C5	R826	F4	R1019	* G6	TP201	A3
C110	* C7	C237	* A5	C374	D2	C656	* E2	C927	* G5	CL137	* D1	IC215	* A2	L302	* C5	R111	* C7	R252	* C4	R388	A6	R541	* C5	R827	G3	R1020	* G6	TP501	C6
C111	* C7	C238	* A2	C375	* D3	C657	* E2	C928	* G5	CL139	* D1	IC216	A2	L303	* B5	R112	* C7	R253	* C4	R389	B6	R542	* C5	R828	G4			TP502	C6
C112	* C7	C239	* A3	C376	D2	C658	* F2	C929	* G5	CL140	* D1	IC217	C4	L305	B6	R113	* B7	R254	A4	R390	* D2	R543	* C6	R829	* G3	RB101	* A5	TP503	D6
C113	* A7	C240	A4	C377	* D3	C701	* E4	C930	* G5	CL141	* D1	IC218	* A4	L306	C3	R114	* B7	R255	* B7	R391	* D2	R544	C5	R830	* G2	RB102	* A5		
C114	* C7	C241	* A3	C378	* D3	C702	* E4	C931	* G5	CL142	* D1	IC219	* A2	L307	* D3	R115	* B7	R256	* A4	R392	* C1	R545	C5	R901	* F6	RB103	* A5	X401	D3
C115	* B7	C242	* B2	C379	* D3	C703	* E4	C932	* G5	CL143	* D1	IC301	C4	L308	D2	R116	* A7	R257	* A4	R393	* C1	R548	D2	R902	* F6	RB104	* A5		
C116	* C7	C243	* A3	C380	* D3	C704	* E4	C933	* G6	CL144	* D1	IC302	* C4	L309	D3	R117	* A7	R258	* A3	R394	D3	R551	C1	R903	* F6	RB105	* A5	X711	D4
C117	* A7	C244	* A3	C381	* E2	C705	* A4	C934	* G6	CL145	* D1	IC303	C4	L310	* E3	R118	* A7	R259	* A4	R395	* D2	R552	D1	R904	* F6	RB106	* A5	X751	* F5
C118	* C7	C245	* A2	C382	* D3	C711	D4	C935	* G6	CL146	* D1	IC304	* C3	L501	* D5	R119	* A7	R301	D5	R396	* D2	R553	D1	R905	* F6	RB107	* B5		
C119	A7	C246	A4	C383	* D2	C712	D4	C936	* G6	CL147	* D1	IC305	* C4	L502	* D5	R120	* A7	R302	D4	R397	* D2	R559	* D5	R906	* F6	RB108	* B5		
C120	* A7	C247	* B1	C384	* D2	C714	D4	C937	* G6	CL148	* D1	IC306	C3	L503	B1	R121	* C7	R303	D4	R398	* D2	R560	C6	R913	* G5	RB109	* A5		
C121	* A7	C248	* A3	C385	E3	C715	E5	C938	* G6	CL149	* D1	IC307	C5	L601	* E1	R122	* C7	R304	* D4	R399	* D2	R561	* F7	R914	* F5	RB201	* A6		
C122	A7	C249	A2	C386	E3	C716	* E4	C939	* G6	CL150	* D1	IC308	B6	L611	E1	R123	C4	R305	* D4	R401	* D3	R563	* C1	R916	* G5	RB202	* C6		
C123	* C4	C250	* A2	C387	D3	C717	* E4	C940	* G6	CL151	* D1	IC309	* D2	L651	F3	R124	B4	R306	* D4	R402	* D2	R564	* D1	R917	* G5	RB203	* D6		
C124	C4	C251	B4	C388	D3	C727	F4	C941	* G6	CL152	* D1	IC310	* C2	L701	* E4	R125	* B4	R307	* D4	R403	* D3	R565	* D1	R918	* G5	RB204	A5		
C125	B4	C252	* A1	C389	* D3	C728	F5	C942	* G6	CL153	* C1	IC311	* D2	L711	E5	R126	B4	R308	* D4	R404	* D2	R568	* E7	R919	* G6	RB205	A5		
C126	* C7	C253	* A2	C390	D3	C729	F4	C943	G6	CL154	* C1	IC312	* D3	L713	* E4	R127	* B4	R309	* D4	R405	* D2	R569	* F7	R920	* G6	RB206	A5		
C127	* B4	C255	* C4	C391	D3	C730	F4	C944	G6	CL155	* C1	IC313	* D3	L751	F5	R128	* B4	R310	* D3	R406	* D2	R571	C3	R921	* G6	RB207	A5		
C128	* B4	C256	* C4	C392	D4	C731	F4	C945	* G6	CL156	* C1	IC314	D3	L771	D5	R129	* C4	R311	* C4	R407	* E2	R572	* C6	R922	* G6	RB208	A4		
C129	* B4	C257	* C4	C393	* C4	C732	* E4	C946	* G6	CL501	* C3	IC315	* D3	L772	F6	R130	* B4	R312	* D3	R408	* B7	R573	* D6	R923	* G6	RB209	* C6		
C130	* A4	C258	* A4	C394	* C4	C733	* E4	C947	* G6	CL712	* D4	IC316	E4	L781	* D7	R131	B4	R313	* D3	R409	* B7	R574	B1	R924	* G6	RB210	A4		
C131	* B4	C301	D4	C395	* C4	C734	* E4	C948	* G6	CL771	* E7	IC317	* D3	L801	F2	R132	* B4	R314	* C3	R410	* B7	R602	D1	R925	* G6	RB211	A4		
C132	* C4	C302	C4	C396	* C5	C735	* E4	C949	* G7	CL801	* G2	IC318	C4	L811	F3	R133	* B4	R315	* C4	R411	D3	R616	E3	R926	* G6	RB212	* D6		
C133	* C4	C303	C4	C397	* C4	C736	* E4	C950	* G7	CL802	* G2	IC319	* C5	L821	G4	R134	* A4	R317	* C4	R412	D3	R651	* E2	R927	* G6	RB213	A4		
C134	* A6	C304	D4	C398	* C4	C751	F5	C951	G6	CL811	* G3	IC320	C4	L823	F4	R135	* B4	R318	* C4	R413	* C3	R658	* D1	R928	* G6	RB214	* A2		
C135	* A6	C305	* D3	C399	C4	C752	* D5	C952	* G7	CL812	* G4	IC321	* D2	L824	G4	R136	* B4	R319	* C3	R414	* C3	R701	* D4	R929	* G6	RB215	* A2		
C136	* A6	C306	* D4	C400	C4	C753	* F5	C954	* G2	CL821	* G3	IC322	C4	L826	G2	R137	* A6	R320	* C3	R415	* D3	R702	* D7	R930	* G6	RB216	* A1		
C137	* A6	C307	* C4	C401	C4	C754	* F5	C955	* G2	CL980	* F7	IC323	C3	L827	G2	R138	* A6	R321	B4	R416	* D4	R703	* D7	R931	* G6	RB217	* B2		
C138	* A6	C308	* D3	C402	C4	C755	* F5	C956	* G2	CL981	* F7	IC324	D4	L901	F6	R139	* A6	R322	* B5	R417	* B3	R704	* E4	R932	* G6	RB218	* B2		
C139	* A6	C309	* C4	C403	* C4	C756	* F6	C957	G6	CL982	* E1	IC325	* B4	L902	F6	R140	* A6	R323	* C5	R418	* B3	R705	* E4	R933	* G6	RB219	* A2		
C140	* A6	C310	* C4	C404	* D2	C757	* D6	C958	G6			IC501	* F7	L903	* F4	R141	* A6	R324	* C5	R419	* D4	R706	* E4	R934	G6	RB220	* A2		
C141	* A6	C311	* C4	C405	D3	C758	* F7	C959	* F5	CN1	F7	IC502	* C6	L904	* G5	R142	* A6	R325	* B5	R420	D3	R707	* E4	R935	G6	RB221	B4		
C142	* A6	C312	* C3	C406	C4	C759	* F6	C960	G2	CN2	B7	IC503	* D6	L905	* G6	R143	* A6	R326	* B5	R421	* D4	R708	* E4	R936	G6	RB222	B4		
C143	* A5	C313	* C3	C408	D4	C771	D5	C961	* G5	CN3	A1	IC504	D3	L906	* G6	R144	* A6	R327	* B5	R422	D3	R709	* D7	R937	G6	RB223	* A2		
C144	* A5	C314	* B5	C409	* E4	C772	D5	C962	F3	CN4	D1	IC505	C2	L907	* G7	R145	* A6	R328	* B5	R423	* D4	R711	D4	R938	G6	RB224	* A3		
C145	A6	C315	B5	C410	* C4	C773	E5	C965	* F5	CN5	C1	IC506	C3	L908	* G7	R146	* A6	R329	* C6	R425	* D3	R712	* D4	R939	* G6	RB225	* A3		
C146	* A6	C316	B5	C411	* B5	C774	D6	C966	* F5	CN6	C6	IC509	C1	L909	* G2	R147	* A6	R330	* C6	R426	D3	R713	* E3	R940	G6	RB226	* A3		
C147	* A6	C317	B5	C501	* C6	C775	F6	C971	* F4	CN7	B2	IC510	C1	L980	* F7	R148	* A6	R331	* C6	R427	* D4	R715	D4	R941	G6	RB227	* B4		
C148	* A6	C318	* C5	C502	* D6	C776	* E6	C972	F4	CN9	F6	IC511	D3	L981	* F7	R149	* A6	R332	* C6	R429	* C4	R720	* D7	R942	G6	RB228	* B4		
C149	* A6	C319	* C5	C503	* C6	C777	* E6	C973	F5			IC512	* C1	L982	* G7	R150	* A6	R333	* C6	R430	* C4	R723	F4	R943	G6	RB229	* B3		
C150	* A6	C320	* C3	C504	* D6	C778	* E6	C980	* F7	D101	* A7	IC513	C3	L983	* G7	R151	* A6	R334	* C6	R431	* C4	R724	F4	R944	G2	RB230	* B3		
C151	* A6	C321	* C5	C507	* F7	C779	F6	C981	* F7	D102	* A7	IC514	D3	L984	* G7	R152	* A6	R335	* C6	R432	* C4	R725	* E4	R945	G2	RB231	* B3		
C152	* A6	C322	* D4	C508	C5	C780	* E6	C982	* G7	D301	* D4	IC517	* C1			R153	* B5	R336	* C6	R433	* C4	R726	* D7	R946	G2	RB232	* B3		
C153	* A6	C323	* D4	C509	C6	C781	* E6	C983	* G7	D302	* C4	IC518	B1	LV825	G3	R154	* B6	R337	* C6	R434	C4	R727	F4	R947	G2	RB233	* B3		
C154	* A6	C324	* D3	C510	C5	C782	D6	C984	* G7	D303	* C3	IC521	C2			R201	* A4	R338	* C6	R435	C4	R728	* E4	R950	F2	RB234	* B3		
C155	* A5	C325	* C6	C511	* D5	C783	* D7	C985	F6	D304	* B3	IC522	B1	Q101	* A7	R202	* A4	R339	* B6	R436	C5	R729	* E4	R951	G2	RB23			




DPR-141  
SUFFIX: -14

DPR-141  
SUFFIX: -14

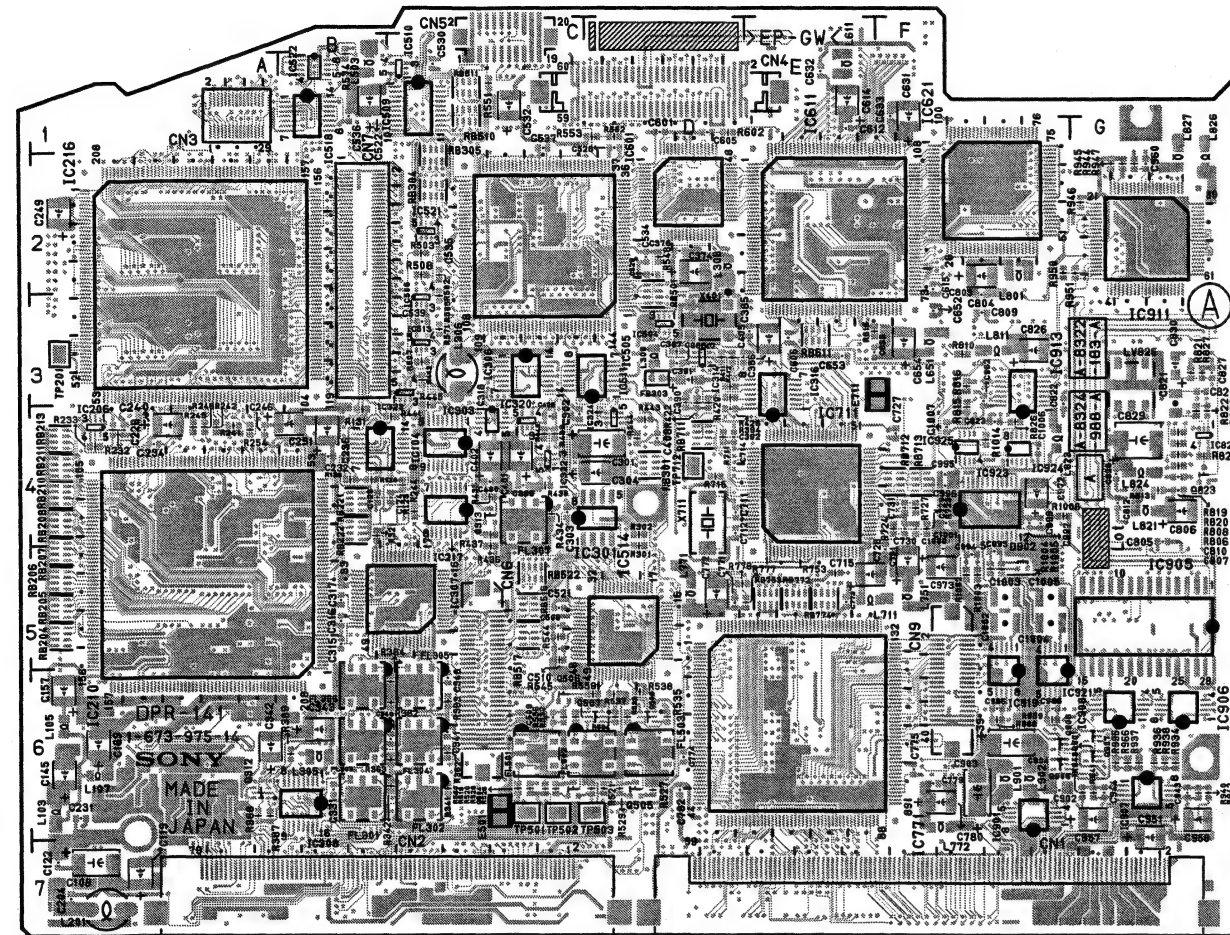

DPR-141 -A SIDE-  
SUFFIX: -14

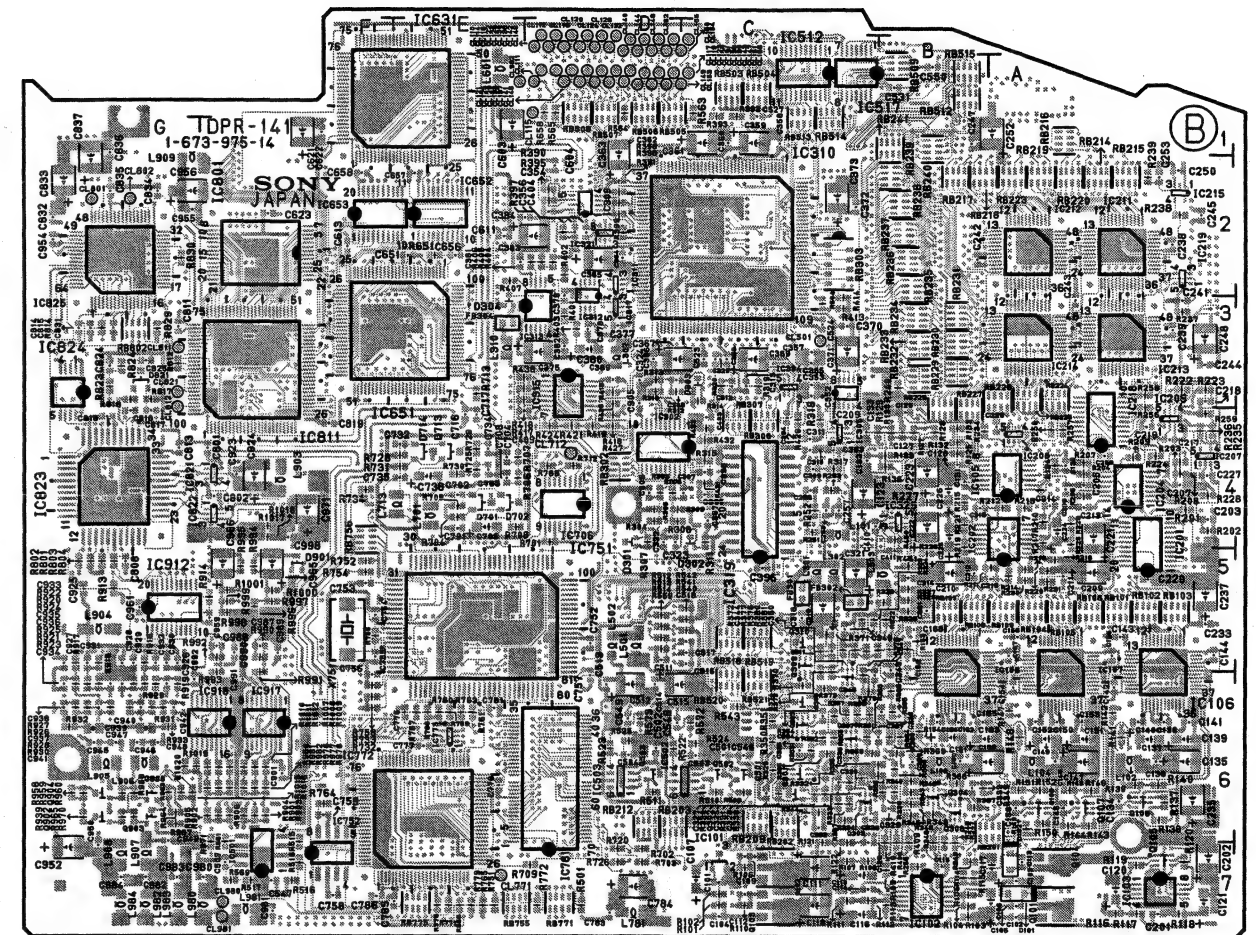

DPR-141 -B SIDE-  
SUFFIX: -14

## DPR-141

SUFFIX: -11


## DPR-141

SUFFIX: -11


DPR-141 (1-673-975-11)

C101	*C7	C227	*A4	C364	*D2	C631	F1	C901	*F6	CL137	*D1	IC215	*A2	L303	*B5	R114	*B7	R254	A4	R390	*D2	R542	*C5	R822	G4	RB204	A5
C102	*A7	C228	A4	C365	*D2	C632	E1	C902	*G6	CL139	*D1	IC216	A2	L305	B6	R115	*B7	R255	*B7	R391	*D2	R543	*C6	R823	*G3	RB205	A5
C103	*A7	C229	*A4	C366	*D3	C633	F1	C903	*F6	CL140	*D1	IC217	C4	L306	C3	R116	*A7	R256	*A4	R392	*C1	R544	C5	R824	*G3	RB206	A5
C104	*C7	C230	*A4	C367	*D3	C651	*E2	C904	*F6	CL141	*D1	IC218	*A4	L307	*D3	R117	*A7	R257	*A4	R393	*C1	R545	C5	R825	G4	RB207	A5
C105	*A7	C231	A6	C368	*C3	C652	F3	C905	*F6	CL142	*D1	IC219	*A2	L308	D2	R118	*A7	R258	*A3	R394	D3	R548	D2	R826	F4	RB208	A4
C106	*A7	C232	B4	C369	*C3	C653	E3	C906	*F6	CL143	*D1	IC301	C4	L309	D3	R119	*A7	R301	D4	R395	*D2	R550	*B1	R827	G3	RB209	*C6
C107	*C7	C233	*A5	C370	*C3	C654	F3	C907	F6	CL144	*D1	IC302	*C4	L310	*E3	R120	*A7	R302	D4	R396	*D2	R551	C1	R828	G4	RB210	A4
C108	A7	C234	A4	C371	*C3	C655	E3	C908	F6	CL145	*D1	IC303	C4	L501	*D5	R121	*C7	R303	*D4	R397	*D2	R552	D1	R829	*G3	RB211	A4
C109	*C7	C235	*A6	C372	*C2	C656	*E2	C909	*G6	CL146	*D1	IC304	*C3	L502	*D5	R122	*C7	R304	*D4	R398	*D2	R553	D1	R830	*G2	RB212	*D6
C110	*C7	C236	B4	C373	*C2	C657	*E2	C910	*F6	CL147	*D1	IC305	*C4	L503	B1	R123	C4	R305	*D4	R399	*D2	R559	*D5	R901	*F6	RB213	A4
C111	*C7	C237	*A5	C374	D2	C658	*F2	C911	G6	CL148	*D1	IC306	C3	L601	*E1	R124	B4	R306	*D4	R400	*D3	R560	C6	R902	*F6	RB214	*A2
C112	*C7	C238	*A2	C375	*D3	C701	*E4	C912	*F6	CL149	*D1	IC307	C5	L611	E1	R125	*B4	R307	*D4	R401	*D3	R561	*F7	R903	*F6	RB215	*A2
C113	*A7	C239	*A3	C376	D2	C702	*E4	C913	*F6	CL150	*D1	IC308	B6	L651	F3	R126	B4	R308	*D4	R402	*D2	R563	*C1	R904	*F6	RB216	*A1
C114	*C7	C240	A4	C377	*D3	C703	*E4	C914	G6	CL151	*D1	IC309	*D2	L701	*E4	R127	*B4	R309	*D4	R403	*D3	R564	*D1	R905	*F6	RB217	*B2
C115	*B7	C241	*A3	C378	*D3	C704	*E4	C915	F5	CL152	*D1	IC310	*C2	L711	E5	R128	*B4	R310	*D3	R404	*D2	R565	*D1	R906	*F6	RB218	*B2
C116	*C7	C242	*B2	C379	*D3	C705	*E4	C916	*F5	CL153	*D1	IC311	*D2	L713	*E4	R129	*C4	R311	*C4	R405	*D2	R568	*E7	R907	F6	RB219	*A2
C117	*A7	C243	*A3	C380	*D3	C711	D4	C917	*F5	CL154	*D1	IC312	*D3	L751	F5	R130	*B4	R312	*D3	R406	*D2	R569	*F7	R908	*F6	RB220	*A2
C118	*C7	C244	*A3	C381	*E2	C712	D4	C918	*F4	CL155	*C1	IC313	*D3	L771	D5	R131	B4	R313	*D3	R407	*E2	R571	C3	R909	*F5	RB221	B4
C119	A7	C245	*A2	C382	*D3	C714	D4	C919	*F5	CL156	*C1	IC314	D3	L772	F6	R132	*B4	R314	*C3	R408	*B7	R572	*C6	R910	*F4	RB222	B4
C120	*A7	C246	A4	C383	*D2	C715	E5	C920	*F5	CL501	*C3	IC315	*D3	L781	*D7	R133	*B4	R315	*C4	R409	*B7	R573	*D6	R911	*F6	RB223	*A2
C121	*A7	C247	*B1	C384	*E2	C716	*E4	C921	*F4	CL712	*D4	IC316	E4	L801	F2	R134	*A4	R316	D4	R410	*B7	R574	B1	R912	F6	RB224	*A3
C122	A7	C248	*A3	C385	E3	C717	*E4	C922	*F4	CL771	*E7	IC317	*D3	L811	F3	R135	*B4	R317	*C4	R411	D3	R575	D3	R913	*G5	RB225	*A3
C123	*C4	C249	A2	C386	E3	C727	F4	C923	*F4	CL801	*G2	IC318	C4	L821	G4	R136	*B4	R318	*C4	R412	D3	R602	D1	R914	*F5	RB226	*A3
C124	C4	C250	*A2	C387	D3	C728	F5	C924	*F4	CL802	*G2	IC319	*C5	L823	F4	R137	*A6	R319	*C3	R413	*C3	R616	E3	R915	*F5	RB227	*B4
C125	B4	C251	B4	C388	D3	C729	F4	C925	*G5	CL811	*G3	IC320	C4	L824	G4	R138	*A6	R320	*C3	R414	*C3	R617	E3	R916	*G5	RB228	*B4
C126	*C7	C252	*A1	C389	*D3	C730	F4	C926	*G5	CL812	*G4	IC321	*D2	L826	G2	R139	*A6	R321	B4	R415	*D3	R651	*E2	R917	*G5	RB229	*B3
C127	*B4	C253	*A2	C390	D3	C731	F4	C927	*G5	CL827	G2	IC322	C4	L827	G2	R140	*A6	R322	*B5	R416	*D4	R658	*D1	R918	*G5	RB230	*B3
C128	*B4	C255	*C4	C391	D3	C732	*E4	C928	*G5	CL901	*F4	IC323	C3	L901	*F6	R141	*A6	R323	*C5	R417	*E3	R701	*D4	R919	*G6	RB231	*B3
C129	*B4	C256	*C4	C392	D4	C733	*E4	C929	*G5	CL902	*F4	IC324	D4	L902	*F6	R142	*A6	R324	*C5	R418	*E3	R702	*D7	R920	*G6	RB232	*B3
C130	*A4	C257	*C4	C393	*C4	C734	*E4	C930	*G5	CL980	*F7	IC501	*F7	L903	*F4	R143	*A6	R325	*B5	R419	*D4	R703	*D7	R921	*G6	RB233	*B3
C131	*B4	C258	*A4	C394	*C4	C735	*E4	C931	*G5	CL981	*F7	IC502	*C6	L904	*G5	R144	*A6	R326	*B5	R420	D3	R704	*E4	R922	*G6	RB234	*B3
C132	*C4	C301	D4	C395	*C4	C736	*E4	C932	*G5	CL982	*E1	IC503	*D6	L905	*G6	R145	*A6	R327	*B5	R421	*D4	R705	*E4	R923	*G6	RB235	*B2
C133	*C4	C302	C4	C396	*C5	C751	F5	C933	*G6			IC504	D3	L906	*G6	R146	*A6	R328	*B5	R422	D3	R706	*E4	R924	*G6	RB236	*B2
C134	*A6	C303	C4	C397	*C4	C752	*D5	C934	*G6	CN1	F7	IC505	C2	L907	*G7	R147	*A6	R329	*C6	R423	*E4	R707	*E4	R925	*G6	RB237	*B2
C135	*A6	C304	D4	C398	*C4	C753	*F5	C935	*G6	CN2	C7	IC506	C3	L908	*G7	R148	*A6	R330	*C6	R424	*D4	R708	*E4	R926	*G6	RB238	*B2
C136	*A6	C305	*D3	C399	C4	C754	*F5	C936	*G6	CN3	A1	IC509	C1	L909	*G2	R149	*A6	R331	*C6	R425	*D3	R709	*D7	R927	*G6	RB239	*B2
C137	*A6	C306	*D4	C400	C4	C755	*F5	C937	*G6	CN4	D1	IC510	C1	L980	*F7	R150	*A6	R332	*C6	R426	D3	R711	D4	R928	*G6	RB240	*B1
C138	*A6	C307	*C4	C401	C4	C756	*F6	C938	*G6	CN5	C1	IC511	D3	L981	*F7	R151	*A6	R333	*C6	R427	*D4	R712	*D4	R929	*G6	RB241	*B1
C139	*A6	C308	*D3	C402	C4	C757	*D6	C939	*G6	CN6	C6	IC512	*C1	L982	*G7	R152	*A6	R334	*C6	R428	*C4	R713	*E3	R930	*G6	RB242	D4
C140	*A6	C309	*C4	C403	*C4	C758	*F7	C940	*G6	CN7	B2	IC513	C3	L983	*G7	R153	*B5	R335	*C6	R429	*C4	R715	D4	R931	*G6	RB302	*D4
C141	*A6	C310	*C4	C404	*D2	C759	*F6	C941	*G6	CN9	F6	IC514	D5	L984	*G7	R154	*B6	R336	*C6	R430	C4	R720	*D7	R932	*G6	RB303	*C2
C142	*A6	C311	*C4	C405	D3	C771	D5	C942	*G6			IC517	*C1			R155	*B6	R337	*C6	R431	*C4	R723	F4	R933	*G6	RB304	C2
C143	*A5	C312	*C3	C406	C4	C772	D5	C943	G6	D101	*A7	IC518	B1	Q101	*A7	R201	*A4	R338	*C6	R432	*C4	R724	F4	R934	G6	RB305	C2
C144	*A5	C313	*C3	C407	C3	C773	E5	C944	G6	D102	*A7	IC521	C2	Q102	*C7	R202	*A4	R339	*B6	R433	*C4	R725	*E4	R935	G6	RB306	*C4
C145	A6	C314	*B5	C408	D4	C774	D6	C945	*G6	D301	*D4	IC522	B1	Q103	*C7	R203	*A4	R340	*B6	R434	C4	R726	*D7	R936	G6	RB307	*C4
C146	*A6	C315	B5	C501	*C6	C775	F6	C946	*G6	D302	*C4	IC601	D2	Q104	*A7	R204	*A4	R341	C6	R435	C4	R727	F4	R937	G6	RB308	D3
C147	*A6	C316	B5	C502	*D6	C776	*E6	C947	*G6	D303	*C3	IC611	E2	Q105	*A7	R205	*A4	R342	C6	R436	C5	R728	*E4	R938	G6	RB309	*C1
C148	*A6	C317	B5	C503	*C6	C777	*E6	C948	*G6	D304	*E3	IC621	F2	Q106	*A6	R206	*A4	R343	*B6	R437	C4	R729	*E4	R939	*G6	RB310	*C1
C149	*A6	C318	*C5	C504	*D6	C778	*E6	C949	*G7	D701	*E4	IC631	*E1	Q107	*A6	R208	*A4	R344	*C6	R438	*E3	R730	*E4	R940	G6	RB311	*D1
C150	*A6	C319	*C5	C507	*F7	C779	F6	C950	*G7	D702	*E4	IC651	*E3	Q108	*A6	R209	*A4	R345	*B6	R439	C4	R731	*E4	R941	G6	RB312	*C5
C151	*A6	C320	*C3	C508	C5	C780	F6	C951	G6	D713	*E4	IC652	*E2	Q109	*A6	R210	*A4	R346	*B6	R440	C4	R732	*F6	R942	G6	RB313	*D1
C152	*A6	C321	*C5	C509	C6	C781	*E6	C952	*G7	D714	*E4	IC653	*F2	Q108	*A6	R211	*A5	R347	*B6	R441	C4	R733	*F6	R943	G6	RB314	*D1
C153	*A6	C322	*D4	C510	C5	C782	D6	C954	*G2	D821	*G3	IC706	*D4	Q301	*C6	R212	*A4	R348	*B6	R442	C3	R734	*F4	R944	G2	RB315	*B1
C154	*A6	C323	*D4	C511	*D5	C783	*D7	C955	*G2			IC707	*D4	Q302	*C6	R213	*A4	R349	*B6	R443	D4	R751	*E7	R945	G2	RB316	*C1
C155	*A5	C324	*D3	C512	*D6	C784	*D7	C956	*G2	E501	C6	IC711	E4	Q303	*C6	R214	*A5	R350	*C6	R444	D4	R752	*F5	R946	G2	RB317	*B1
C156	*A5	C325	*C6	C513	*D6	C785	*E7	C957	G6	E711	F3	IC751	*E5	Q304	*B6	R215	*B4	R351	*C6	R501	*D7	R753	E5	R947	G2	RB318	*C1
C157	A6	C326	*C6	C514	*D6	C786	*F7	C958	G6			IC752	*F7	Q305	*C6	R216	*A5	R352	*C6	R502	C2	R754	*F5	R948	F4	RB319	*C1
C158	*A6	C327	*C6	C515	*D6	C801	*F4	C959	*F5																		



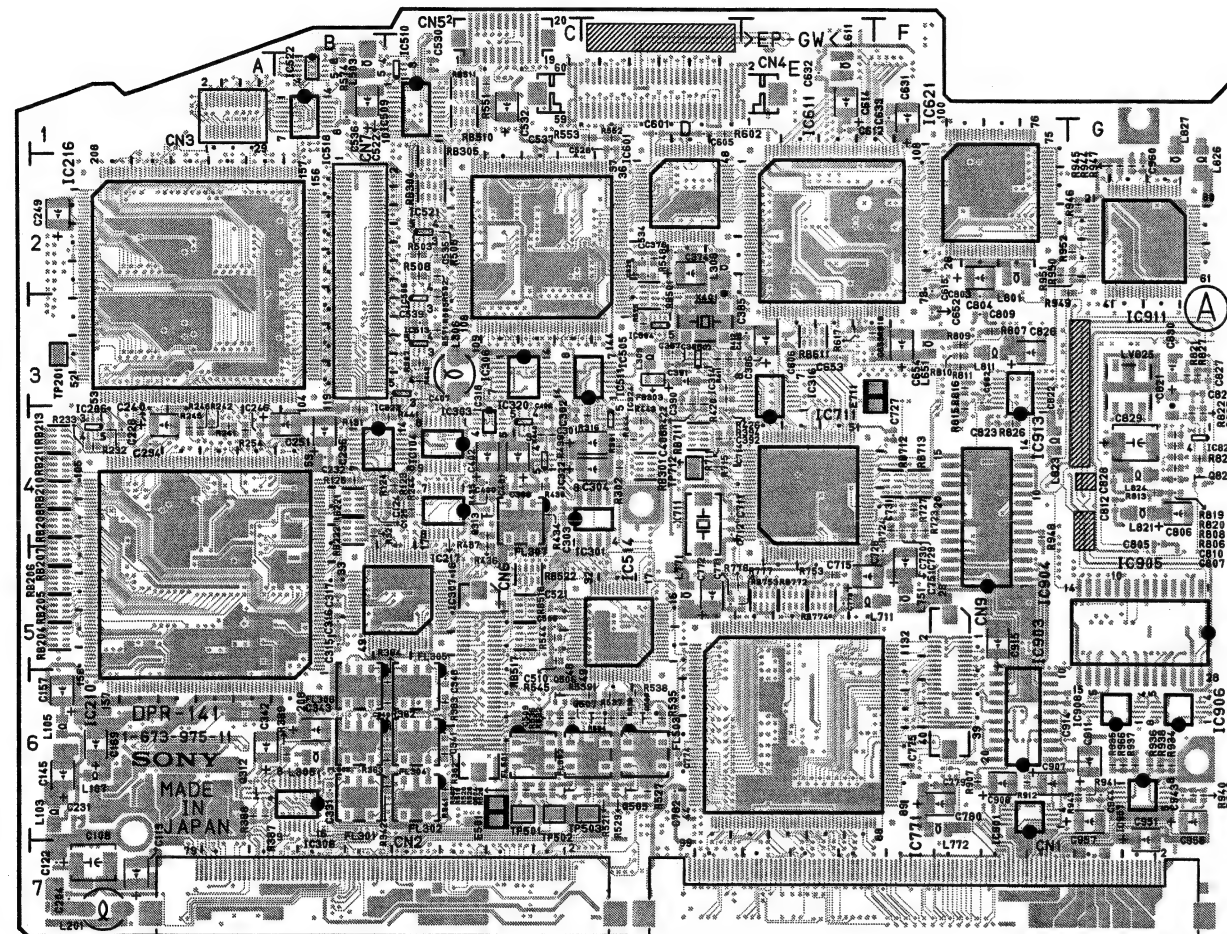

DPR-141 -A SIDE-  
SUFFIX: -11

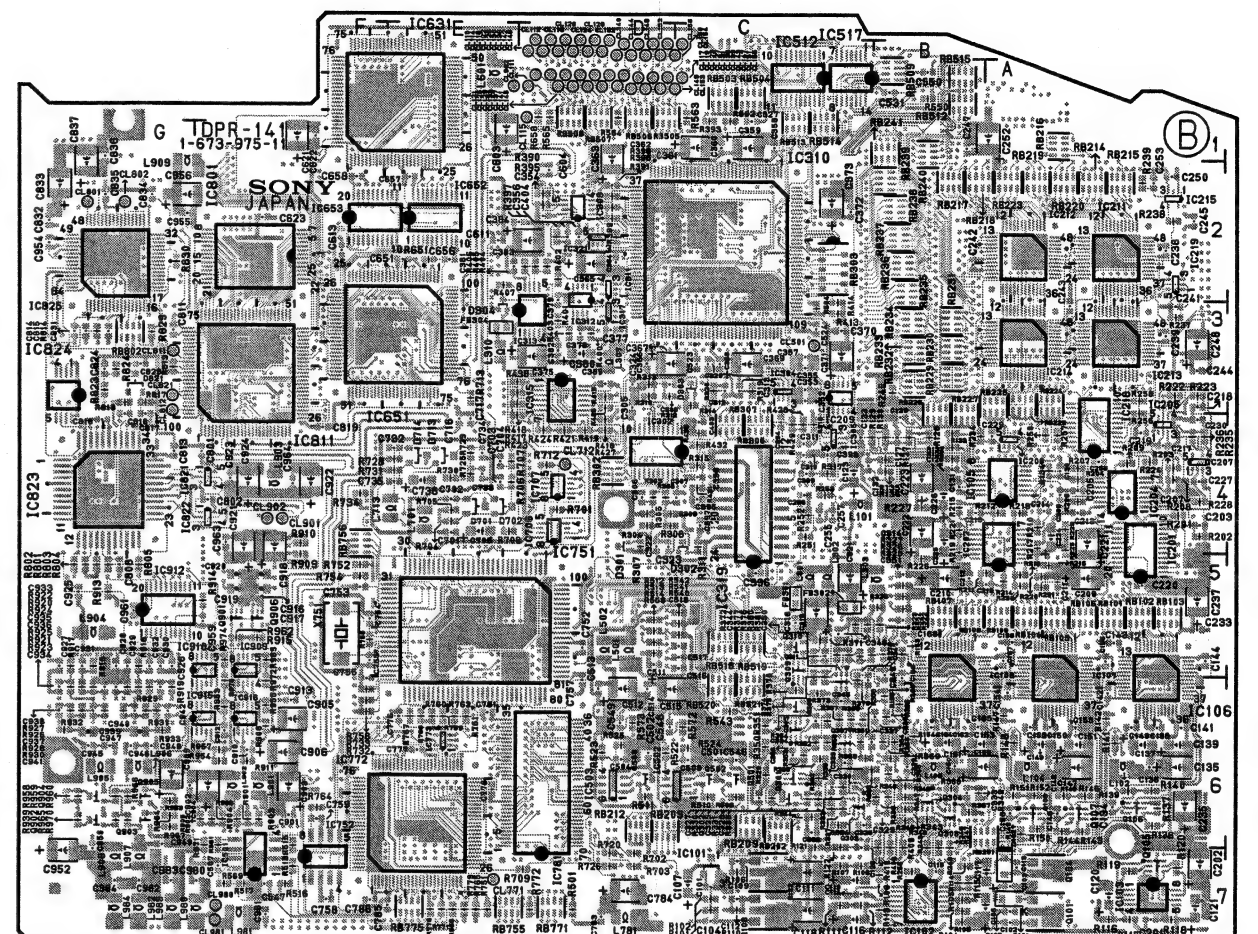

DPR-141 -B SIDE-  
SUFFIX: -11


ES-31 (1-677-371-11)

C101	*G5	C193	*E2	C650	C5	C850	B3	IC405	E4	Q110	*C3	Q808	A1	R187	*D1	R280	F2	R407	*F4	R501	*A5	R636	*D5	R819	B1	R913	*B2
C102	*F5	C194	*E2	C651	C4	C851	*B3	IC406	E4	Q111	*B2	Q809	*A2	R188	*D1	R281	*F2	R408	*F4	R502	*A5	R637	*E5	R820	B1	R914	*B4
C103	*F5	C195	*E2	C652	*C5	C852	*B3	IC407	E4	Q112	*C1	Q810	*A3	R189	*D1	R282	*F2	R409	*F4	R503	*A4	R638	*E5	R821	*B1	R915	*A4
C104	*G5	C196	D1	C653	*C4	C853	*B3	IC408	E4	Q113	*C2	Q811	*B2	R190	*D1	R283	*F2	R410	*F4	R504	*A5	R639	*E5	R822	*A2	R916	*A2
C105	*G5	C197	*E1	C654	*C5	C854	*B3	IC409	F4	Q114	*C1			R191	*D1	R284	*F2	R411	*F4	R505	*A5	R640	D5	R823	*A2	R917	*A3
C106	*G5	C198	*D1	C655	D5	C855	B3	IC410	A5	Q115	*C1	R101	*G5	R192	*D2	R285	*E2	R412	*F3	R506	*A5	R641	D5	R824	*A2	R918	*A3
C107	F5	C199	*D1	C656	D5	C856	*B3	IC411	B5	Q116	*D1	R102	*G5	R193	*D2	R286	*E2	R413	*F3	R507	*A5	R642	*D4	R825	*A1	R919	*B3
C108	*F4	C200	*D1	C657	D5	C857	*B2	IC412	B5	Q117	*D1	R103	*G5	R194	*D2	R287	E2	R414	F3	R508	*A5	R643	*D4	R826	*A2	R920	*B3
C109	*G4	C201	*D1	C658	D5	C858	*B2	IC413	B5	Q118	*D2	R104	*G5	R195	*D2	R288	*E2	R415	F3	R509	*A5	R644	*D4	R827	*A2	R921	B4
C110	*F4	C202	*D1	C659	C5	C859	B2	IC414	F3	Q119	*D2	R105	*G5	R196	*D2	R289	*E2	R416	*F3	R510	*A4	R645	*D4	R828	*A2	R922	*A3
C111	*G4	C203	*E1	C660	C5	C860	*B2	IC415	F3	Q120	*C2	R106	*D3	R197	*D2	R290	*E2	R417	*F3	R511	*A5	R650	*C4	R829	A1	R923	*B4
C112	*F4	C204	D1	C661	*C5	C861	*B2	IC601	C4	Q121	*C2	R107	*G4	R198	C2	R291	*E2	R418	F3	R512	*A5	R651	*C4	R830	A1	R924	*A3
C113	*G4	C205	E1	C662	*D5	C862	*B2	IC602	C4	Q122	*C2	R108	*G4	R199	C2	R292	*E2	R419	F3	R513	*A5	R652	*C4	R831	*A1	R925	A4
C114	*D3	C206	D1	C663	D5	C863	*B2	IC603	C4	Q123	*C2	R109	*G4	R200	C2	R293	*E2	R420	F3	R514	*A5	R653	C4	R832	*B1	R926	*A4
C115	D2	C207	*E2	C664	*D5	C864	*B2	IC604	D4	Q124	*B1	R110	*G4	R201	C2	R294	*D1	R421	F3	R515	*A5	R654	*C4	R833	*A2	R927	*A2
C116	E2	C208	*E1	C665	*D5	C865	*B2	IC605	D5	Q125	*C1	R111	*G4	R202	*C2	R295	*D1	R422	*F3	R516	*A5	R655	C4	R834	*B2	R928	*A2
C117	E2	C209	*E2	C680	C5	C866	B3	IC606	C3	Q126	*C1	R112	*E3	R203	*C2	R296	*D1	R423	F3	R517	*A4	R656	C4	R835	*B2	R929	*A2
C118	*E2	C210	*E1	C681	C5	C867	*B2	IC607	D5	Q127	F3	R113	D2	R204	*C2	R297	*E1	R424	F3	R518	*A5	R657	*C5	R836	*A2	R930	A4
C119	*D2	C211	*D2	C682	C5	C868	*B3	IC608	C5	Q128	F3	R114	*D2	R205	*C2	R298	*D1	R425	*F3	R519	*A5	R658	*C5	R837	*A2	R931	*A2
C120	*E2	C212	E5	C683	*C5	C869	A4	IC609	C4	Q129	*G2	R115	D2	R206	*C2	R299	*D1	R426	*E3	R520	*A5	R659	*C5	R838	*A2	R932	B4
C121	*D3	C213	E5	C684	C5	C870	*A4	IC610	D4	Q130	*F2	R116	*D2	R207	*C2	R300	*D1	R427	*E3	R521	*A4	R660	*C5	R839	*A2	R933	B4
C122	*D3	C214	*D4	C685	D4	C871	A4	IC701	C4	Q131	F2	R117	*E2	R208	*C2	R301	*E1	R428	F3	R522	*A4	R661	*C5	R840	*A2	R934	*B4
C123	*E3	C215	*D3	C686	D4			IC702	C4	Q132	*F2	R118	*E2	R209	*C2	R302	*E1	R429	F3	R523	*A5	R662	*C5	R841	*A2	R935	B4
C124	*F3	C216	D3	C687	C4	CL001	*E5	IC801	*B1	Q133	F2	R119	*D2	R210	*C2	R303	*F2	R430	F3	R524	*A4	R663	*C5	R842	*A2	R936	A2
C125	*D3	C217	*E2	C688	C5			IC802	B2	Q134	*F2	R120	*E3	R211	*C2	R304	*F1	R431	F3	R525	*A5	R664	*C5	R843	A2		
C126	D3	C218	*D1	C689	D4	CN101	E5	IC803	B4	Q135	*F2	R121	*E3	R212	*C2	R305	*F1	R432	F3	R526	*A5	R665	C5	R844	*A2	RB101	*D3
C127	D2	C219	*G4	C690	*D4	CP801	A3	IC804	A2	Q136	*F2	R122	*D3	R213	*C2	R306	*F1	R433	*E3	R527	*A5	R666	*C5	R845	*A2	RB102	*E3
C128	*D3	C220	F4	C691	*C4			IC805	A2	Q137	*F2	R123	*D3	R214	*C2	R307	*F1	R434	*E3	R528	*B5	R667	*D5	R846	*A2	RB103	*E3
C129	D3	C221	F4	C692	C4			IC806	A2	Q138	*F2	R124	*E3	R215	*C2	R308	*E1	R435	*E3	R529	*B5	R668	*D5	R847	*A2	RB104	*D3
C130	*D3	C401	F4	C693	*D4	D101	*F5	IC807	A3	Q139	*E2	R125	*E3	R216	*C2	R309	*E1	R436	*E3	R530	*B5	R669	*D5	R848	*A2	RB601	D4
C131	*D2	C402	F4	C694	*D4	D102	*G4	IC808	A4	Q140	*E2	R126	*D3	R217	*B1	R310	*E1	R437	F3	R531	*B5	R670	*D5	R849	*A2		
C132	C2	C403	*F4	C695	*D4	D103	*G4	IC809	A4	Q141	E2	R127	*D3	R218	*B1	R311	*E1	R438	F3	R532	*B5	R671	*D5	R850	*A3	RV101	D1
C133	C3	C404	F4	C696	*D4	D104	*G3	IC810	A4	Q142	E2	R128	*D3	R219	*B1	R312	*E1	R439	*F3	R533	*B5	R672	*D5	R851	*A3	RV102	D1
C134	*C2	C405	F4	C697	*D4	D105	*D1	IC811	A4	Q143	*D1	R129	*D2	R220	*C1	R313	*D1	R440	*F3	R534	*B5	R673	*C5	R852	*A3	RV103	C1
C135	*C3	C406	*F3	C698	*D4	D106	*E1	IC812	A4	Q144	D1	R130	*D3	R221	*C1	R314	E1	R441	*F3	R535	*B4	R674	*D5	R853	*A3	RV104	D1
C136	*C3	C407	F3	C701	C3	D401	*E1	IC813	B3	Q145	*E1	R131	*D3	R222	*C1	R315	E1	R442	*E3	R536	*B5	R678	*D5	R854	*A3	RV105	E1
C137	*C3	C408	F3	C702	D4	D402	*E4	IC814	B3	Q146	*F1	R132	C3	R223	*C1	R316	E1	R443	E3	R537	*B5	R680	*B5	R855	*A3		
C138	*C3	C409	*E3	C703	*C3	D403	*E4	IC815	B3	Q147	*E1	R133	C3	R224	*C1	R317	*E2	R444	E3	R538	B5	R681	*B5	R856	*A3		
C139	*C3	C410	*E3	C704	*C4	D404	*E4	IC816	B3	Q148	E1	R134	C3	R225	*C1	R318	*E1	R445	*E3	R539	*B5	R682	C5	R857	*A3		
C140	*B1	C411	*E3	C705	*C4	D405	*A5	IC817	B2	Q149	*E1	R135	C3	R226	*C1	R319	*E2	R446	*E3	R540	*B5	R683	*B5	R858	*A3	TP801	B3
C141	*B1	C412	*E4	C706	*C4	D406	*A5	IC818	B2	Q150	*E2	R136	*C3	R227	*C1	R320	*E2	R447	E3	R541	*B5	R684	*B5	R859	*A3		
C142	*C2	C413	E4	C707	*C5	D407	*F3	IC819	B2	Q151	*E2	R137	*C3	R228	*G3	R321	*E1	R448	*E3	R542	*B5	R685	C5	R860	*A3		
C143	*C2	C414	*E4	C708	*B5	D701	*D4	IC820	B2	Q152	*D1	R138	*C3	R229	*G3	R322	*E2	R449	*E3	R543	*B5	R686	*D4	R861	*A3		
C144	C2	C415	*E4	C709	*C5	D702	*C3	IC821	*B3	Q153	*D2	R139	*C3	R230	*G3	R323	*E2	R450	*E3	R544	*B5	R687	*D4	R862	*A3		
C145	C1	C416	*E4	C709	*D5	D703	*C4	IC822	B3	Q154	*E2	R140	*C3	R231	*G3	R324	*E2	R451	*E4	R545	*B5	R688	*D4	R863	*A3		
C146	*C1	C417	E4	C710	*D4	D801	*A1	IC823	B3	Q155	*E2	R141	*C3	R232	*F3	R325	*E1	R452	*E3	R546	*B5	R689	*D4	R864	*A3		
C147	*C2	C418	*E4	C801	B1	D802	*A2	IC824	B4	Q156	*D1	R142	*C3	R233	*G3	R326	*E1	R453	E3	R547	*B5	R690	*D4	R865	*A4		
C148	C2	C419	*E4	C802	B1	D803	*A3	IC825	A4	Q401	*F4	R143	*C3	R234	*G3	R327	D2	R454	*E4	R548	E3	R691	*D5	R866	*A3		
C149	C1	C420	*E4	C803	*A1	D804	*B4	IC826	A4	Q402	*F4	R144	*C3	R235	*G4	R328	D2	R455	*E3	R549	E3	R692	*D5	R867	*A3		
C150	*C1	C421	*F5	C804	A1			IC827	A2	Q403	*F4	R145	*C3	R236	*G4	R329	*E2	R456	*E4	R550	*E3	R701	*D4	R868	*A4		
C151	*C1	C422	*F4	C805	A1	DL101	E1			Q404	*F4	R146	*C3	R237	*G4	R330	D2	R457	E4	R551	*E3	R702	*D3	R869	*A3		
C152	*C1	C423	*A5	C806	*A1	DL102	F1	L101	B1	Q405	*F4	R147	*C2	R238	*G4	R331	D2	R458	*E4	R552	E2	R703	*D3	R870	A3		
C153	C1	C424	A5	C807	*A1	DL401	E3	L102	C1	Q406	*F3	R148	*C3	R239	*F3	R332	D2	R459	*E4	R553	*F2	R704	*D4	R871	*A4		
C154	*D1	C425	A5	C808	B1	DL402	E4	L103	C2	Q407	*F3	R149	*C3	R240	*G3	R333	D2	R460	*E4	R554	*F3	R705	*D3	R872	A4		
C155	D1	C426	*A5	C809	B1			L104	C1	Q408	*F3	R150	*C3	R241	*G4	R334	D2	R461	*E4	R555	*F3	R706	*D4	R873	*A4		
C156	*C1	C427	*A4	C810	*B1	E601	C3	L105	B1	Q410	*F3	R151	B2	R242	*F4	R335	*D2	R462	*E4	R556	F3	R707	*C3	R874	*A4		
C156	*D1	C428	*B5	C811	*A1	E801	B3	L106	E2	Q411	*F3	R152	B2	R243	*G4	R336	*D2	R463	*E4	R557	*F3	R708	*C4	R875	*A4		
C157	*D1	C429	*B5	C812	A2			L107	E1	Q412	*E3	R153	*B1	R244	*G2	R337	*D2	R464	*E4	R558	*F3	R709	*C4	R876	*A4		
C158	D2	C430	B5	C813	A1	FL101	D1	L108	D1	Q413	*B3	R154	*C1	R245	*G2	R338	*D2	R465	*E4	R559	*F4	R7					




ES-31

ES-31

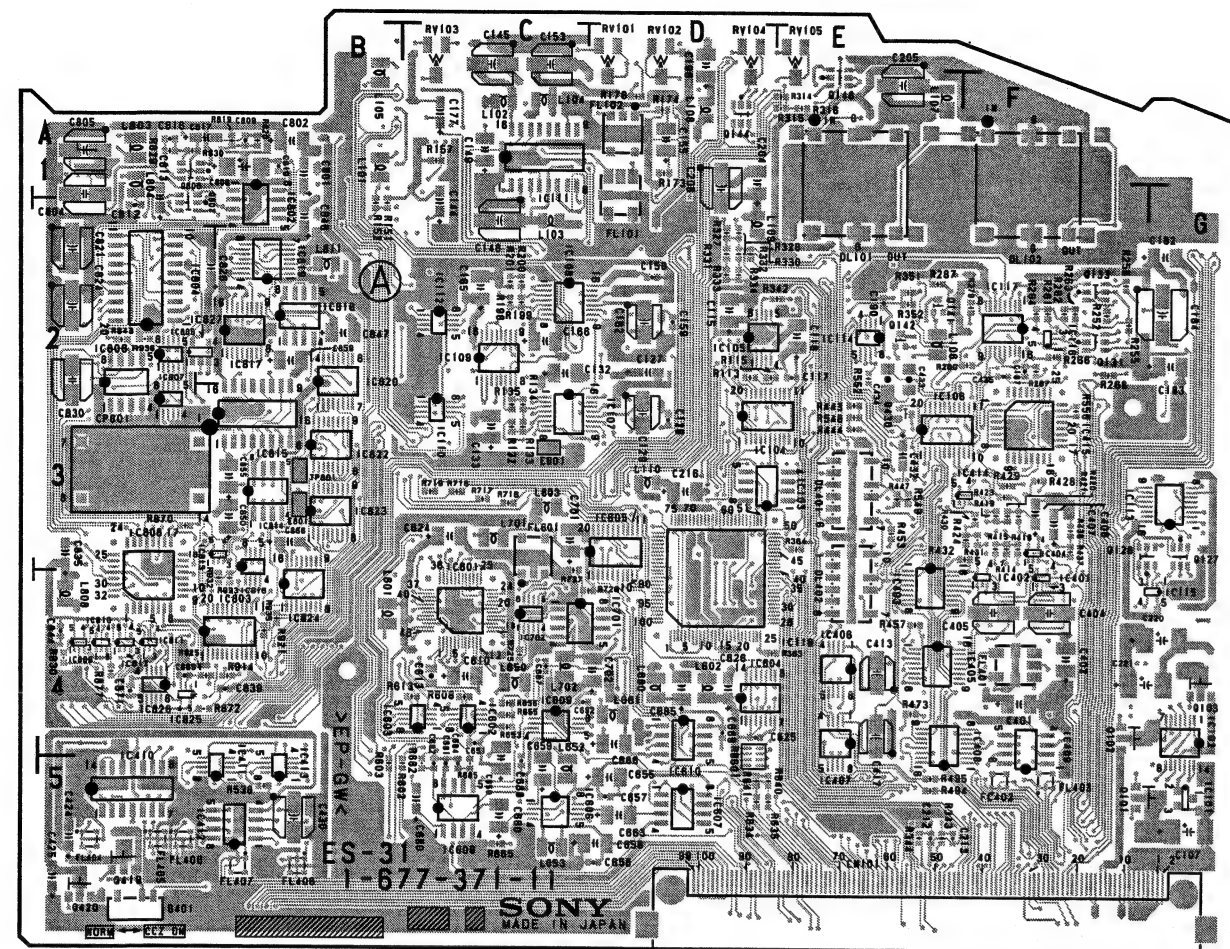

ES-31 -A SIDE-  
SUFFIX: -11

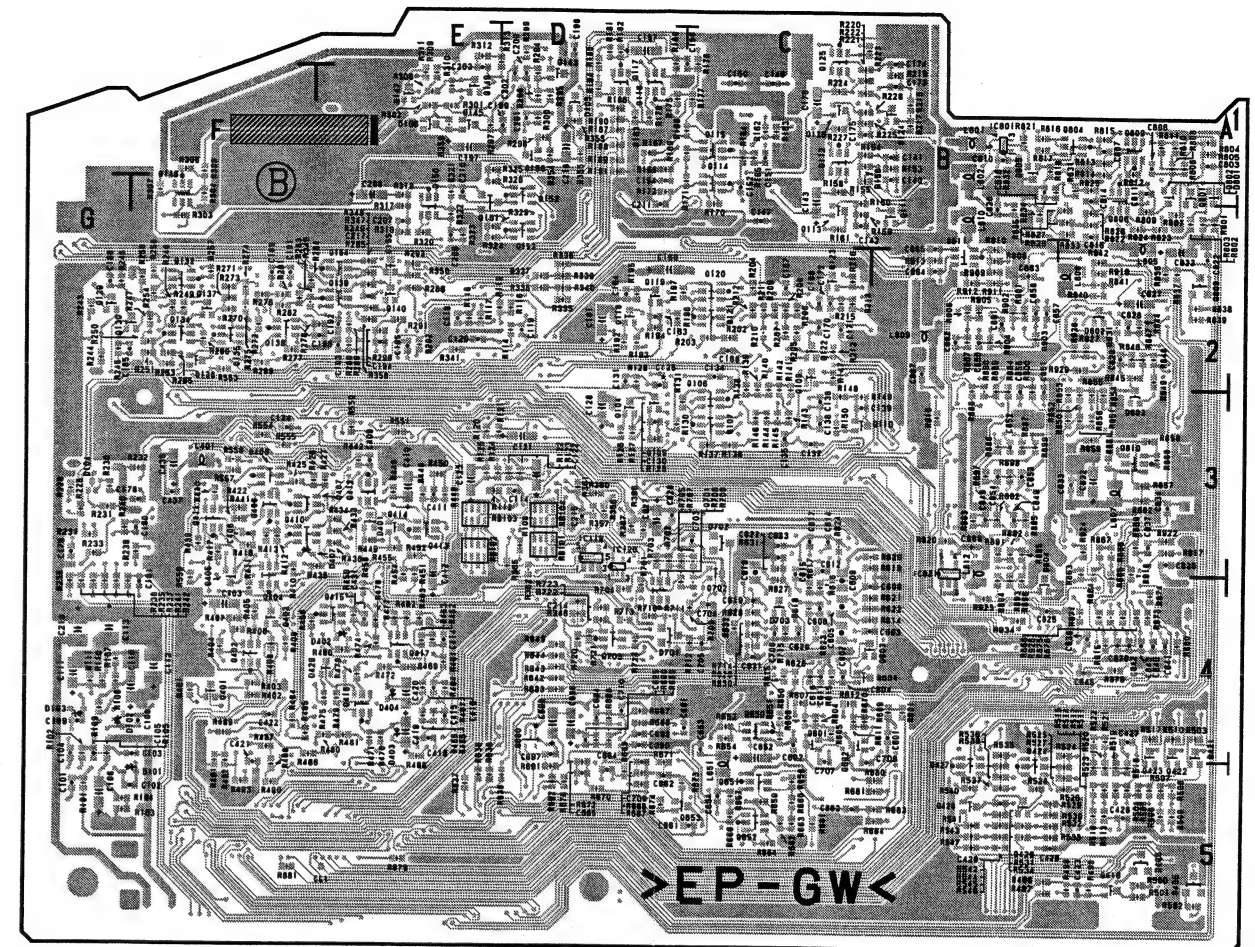

ES-31 -B SIDE-  
SUFFIX: -11


FP-118 (1-673-967-13)

C001	C4	C425	*E3	D301	*A1	Q008	*C2	R037	B4	R235	*D2	R415	*E4	R524	*E4	RB007	B3
C002	*C4	C426	*E3	D302	*B2	Q009	*A3	R038	B4	R236	*D1	R416	*B4	R601	*B2	RB008	B3
C003	*C3	C427	*E3	D303	B1	Q010	B3	R039	*B3	R237	*E2	R417	*B4	R602	*B2	RB009	B3
C004	C4	C428	E4	D401	*E3	Q011	B3	R040	*B3	R238	*E2	R420	*B4	R603	*B2	RB010	*C3
C005	C4	C429	E4	D402	*E3	Q012	*B3	R041	*B3	R239	*E2	R421	*B4	R604	*B2	RB011	*C3
C007	C4	C430	*E3	D403	*B4	Q013	*A3	R042	*B3	R240	B1	R423	*B4	R605	*B2	RB012	*A3
C008	C4	C431	*E3	D501	*B2	Q201	C2	R043	*B3	R241	B1	R425	*E4	R608	*D3	RB202	D2
C009	*B3	C434	E3	D502	*D4	Q202	D2	R044	*B3	R242	B1	R426	*E4	R609	*D3	RB203	*C1
C010	*B4	C435	E3	D503	*D4	Q203	*E1	R045	*A3	R243	B1	R427	*E4	R610	*B2	RB204	*B1
C011	*B4	C436	*E3	D504	*A2	Q204	*E1	R047	*B3	R244	B1	R428	*E4	R611	B2	RB207	*B1
C012	B3	C437	*E3	D605	*B2	Q205	*C1	R048	*B3	R245	B1	R429	*B4	R612	B2	RB208	C1
C013	*B4	C438	*E3	D703	D3	Q300	*B1	R049	*B3	R246	B1	R430	*E3	R613	B2	RB209	C1
C014	*B3	C439	*E3	D704	D3	Q301	*B2	R050	*B3	R247	*B1	R431	*B4	R614	B2	RB210	B1
C015	B4	C440	E3	D801	E1	Q302	B2	R051	B3	R248	*B1	R432	*B4	R615	*B2	RB211	B1
C016	B3	C441	E3			Q303	*B2	R052	*B3	R249	D2	R433	*B4	R616	*C4	RB212	B1
C017	*B3	C442	E3	E001	*C4	Q304	*B2	R053	B3	R250	D2	R434	*B4	R617	*D4	RB801	B4
C018	B4	C443	E4	E002	*C4	Q305	*C2	R054	*B3	R251	*D2	R435	*E4	R618	*A2	RB802	*A3
C019	B3	C444	E4	E401	*E3	Q306	*B2	R055	*A3	R252	*D3	R436	*E2	R619	*C4	RB803	A3
C020	*C3	C445	B4	E501	*D4	Q307	*B2	R056	B3	R253	*D3	R437	*E4	R620	*D4	RB804	*A3
C021	C3	C446	B4			Q308	*C2	R057	*B3	R254	*D3	R438	*E2	R621	*D4	RB805	*A3
C200	*C2	C447	*E2	F801	*E1	Q401	*E3	R058	*A3	R255	D3	R439	*E2	R622	*D4	RB806	*A4
C201	C2	C448	*E4			Q402	*E3	R059	*A3	R256	*D3	R440	E3	R623	*A2	RB807	A4
C202	*B1	C449	*E3	FB801	B4	Q403	*E3	R060	*C1	R257	C2	R441	E3	R624	*D3	RB808	A3
C203	B1	C451	E4			Q404	*E3	R061	*C3	R258	D2	R442	B4	R625	*D3	RB809	*A3
C204	*D2	C453	*E4	IC002	*B3	Q405	*E3	R062	*C3	R259	D2	R443	B4	R626	*D4		
C205	*D2	C454	*E4	IC003	*B3	Q406	*E3	R063	*C3	R260	*D2	R444	E4	R627	*D3	RV401	E3
C206	*C2	C455	*E4	IC004	*C3	Q407	*E3	R064	*C3	R261	*D2	R445	E3	R628	*D3	RV402	E3
C207	*D2	C456	*E4	IC006	*C3	Q408	*E3	R065	*C4	R262	*E1	R446	E3	R629	*D3	RV403	*E3
C208	D2	C457	E4	IC200	*C1	Q409	*E3	R066	B3	R263	*E1	R447	E3	R630	A2	RV601	*D4
C209	C1	C601	*D3	IC201	*B1	Q410	*E3	R067	*C2	R264	*E1	R448	E3	R631	A2	RV602	*D4
C210	B1	C602	*D3	IC202	*E1	Q411	*E3	R068	*C3	R265	*E1	R451	*E3	R632	*A2	RV603	A2
C211	*D1	C603	*D4	IC203	B2	Q412	*E3	R069	*C2	R266	*E1	R452	*E3	R633	A2	RV604	B2
C212	*E2	C604	*D4	IC204	*D1	Q413	*E3	R070	*B3	R267	*E1	R453	E3	R635	*D4		
C213	*E2	C605	*A2	IC205	B1	Q414	*E3	R071	*A3	R268	*C2	R454	E3	R636	*D4	S001	B2
C214	*B1	C606	*D4	IC206	D2	Q415	*E3	R072	B3	R269	C2	R455	*E4	R637	*A2	S002	B3
C215	B1	C607	*D4	IC207	D3	Q501	*B2	R073	B3	R270	C2	R456	*E4	R638	*A2	S003	C3
C216	B1	C608	A2	IC208	D2	Q502	*B2	R074	*A3	R271	*E2	R457	*E4	R639	B2	S004	C3
C217	B1	C609	*D4	IC209	C2	Q504	*D3	R075	*B3	R272	*E2	R458	*E4	R640	*D3	S005	C3
C218	*B1	C610	*D3	IC210	*D2	Q505	*D3	R076	*B3	R273	*E2	R459	*E4	R641	B2	S006	C3
C219	*B1	C611	B2	IC300	A1	Q506	*D3	R077	*B3	R274	*D1	R460	*E4	R642	*D3	S200	E2
C220	D2	C613	B2	IC301	B1	Q507	*D3	R078	*C3	R275	*D1	R461	*E3	R643	B2	S201	B4
C221	D2	C614	A1	IC302	B1	Q508	*A2	R079	*C3	R276	*D1	R462	*E3	R644	*A2	S203	E1
C222	*D3	C615	*A1	IC303	A1	Q509	*D3	R080	*C3	R277	*D1	R463	*E3	R645	*D3	S401	E4
C223	*D3	C616	A1	IC401	*E4	Q510	*D4	R081	*C3	R278	*D1	R464	*E3	R646	*A2	S402	E4
C224	C2	C617	*A1	IC403	*E4	Q511	*D3	R082	*B3	R279	*D1	R467	E3	R647	*A1	S403	E3
C225	C2	C618	A2	IC404	*E4	Q512	*A2	R083	B3	R280	*D1	R468	E3	R649	A2	S404	E3
C226	D2	C619	A2	IC405	*B4	Q513	*D4	R084	*C4	R281	*D1	R469	E3	R650	*A2	S501	B3
C227	*D2	C620	*A1	IC406	*E4	Q514	*A2	R085	*C3	R282	*D1	R470	E3	R651	*D4	S801	A3
C228	D2	C621	*D4	IC407	*E4	Q515	*D4	R086	*C3	R283	*D1	R471	*E3	R652	*E3	S802	A3
C229	*C2	C622	D4	IC408	*E2	Q516	*D4	R087	*C3	R300	*B1	R472	*E3	R653	*A2	S803	C4
C300	*B2	C623	B2	IC409	*E4	Q701	D3	R088	B3	R301	*B2	R474	E3	R654	A2	S804	B4
C301	B2	C624	D4	IC410	*E4	Q702	D3	R089	B4	R302	B2	R475	*E3	R656	*A3	S805	B4
C302	*B1	C625	B4	IC411	*E3	Q801	E2	R090	B4	R303	B2	R476	E3	R657	D4	S806	A4
C303	*A1	C706	D3	IC412	*E3	Q802	E2	R091	*C3	R304	*B2	R477	*E3	R658	*E4	S807	B3
C304	A1	C707	D3	IC413	*E3	Q803	*E2	R092	B4	R305	*B2	R478	*E3	R659	D4	S808	B3
C305	B1	C718	D3	IC414	*E3	Q804	*E2	R093	*B4	R306	*B2	R479	*E3	R660	*D3	S809	B3
C306	B2	C719	D3	IC415	*E3			R094	*B4	R307	*B2	R480	*E3	R661	*B2	S810	B3
C307	B2	C801	B4	IC416	*E4	R001	*B3	R095	*B4	R308	*B1	R481	*E3	R702	*D3	S811	*A4
C308	*B2	C802	A3	IC601	*D3	R002	*B3	R200	C2	R309	*B2	R482	*E3	R703	*D3		
C309	B2	C804	A3	IC602	*D3	R003	*B3	R201	C2	R310	*B2	R483	*E3	R705	*D3	TP001	*B3
C310	*B2	C806	E1	IC605	*B2	R004	*C3	R202	C2	R311	*C2	R484	*E3	R707	*D3	TP002	*A3
C311	B2	C807	*E2	IC606	*A2	R005	D3	R203	*C2	R312	B1	R485	*E3	R708	*D3	TP200	*C1
C312	B2			IC607	*A2	R006	*A3	R204	*C2	R313	B1	R486	*E3	R715	*C3	TP201	*D1
C313	*B2	CN001	*B4	IC701	*D3	R007	*B3	R205	*C2	R314	*B2	R487	*E3	R717	*D3	TP401	*E3
C314	*C1	CN002	*C4	IC705	*D3	R008	*B3	R206	*C2	R315	*C1	R488	*E3	R718	*D3	TP402	*E3
C315	*A1	CN003	*D4	IC801	B4	R009	*B3	R207	*C2	R316	*B2	R489	*E3	R719	*C3	TP601	*D3
C316	*B1	CN004	*C2	IC802	B4	R010	*B3	R208	*C2	R317	*B2	R490	*E3	R720	D3	TP602	*D3
C317	*A1	CN005	*A3	IC803	A3	R011	*B3	R209	*C2	R318	*B2	R491	*E3	R721	*D3	TP603	*A1
C318	*C1	CN006	*E1	IC804	A4	R012	*B3	R210	*C2	R319	*B2	R492	*E3	R722	D3		
C401	*E4	CN008	*A3			R013	*B3	R211	*C1	R320	*B2	R493	*E3	R728	D3	X001	*B4
C402	*E4			L001	*C3	R014	*B3	R212	*C2	R321	*B2	R494	*E3	R729	D3	X002	*B3
C403	*E4	CV200	*C2	L002	*B3	R015	*B3	R213	C2	R322	*B2	R497	*E3	R730	D3	X200	*D2
C404	*E4			L003	*B4	R016	*B3	R214	*D1	R323	*B2	R498	*E3	R731	*D3	X201	*C2
C405	*E4	D001	B1	L200	B2	R017	*B3	R215	*D1	R324	*C1	R499	*E3	R733	D3	X202	*B1
C406	*E4	D200	*C2	L300	*B2	R018	C3	R216	*D3	R325	*C1	R500	*E3	R736	D3		
C407	*E4	D201	C1	L301	B2	R019	*B3	R217	*D3	R326	*C1	R501	*E3	R738	D3		
C408	*E4	D202	*C1	L501	A2	R020	*B3	R218	*D2	R327	D4	R502	*E3	R801	A3		
C409	*E4	D203	B1	L601	*D4	R021	*B3	R219	*C1	R328	C2	R503	*E3	R802	A3		
C410	*E4	D204	*B1	L701	B4	R022	*B3	R220	*B1	R329	*C1	R504	*E3	R803	A3		
C411	*B4	D205	*D2			R023	*A3	R221	*B1	R330	*D2	R505	E3	R804	*E2		
C412	*B4	D206	D3	LI300	D4	R024	*C3	R222	*C1	R331	*D2	R506	*E4	R805	E2		
C413	*B4	D207	C2			R025	*B3	R223	*B1	R332	*D2	R507	*E2	R806	E2		
C414	*B4	D208	C2	ND200	C1	R026	*B3	R224	*B1	R333	B2	R508	E4	R807	E2		
C415	*B4	D209	C1			R027	*B3	R225	*B1	R401	*E4	R510	*E4	R808	*E2		
C416	*B4	D210	D1	PH401	*E2	R028	*B3	R226	*C1	R402	*E4	R512	*E4	R809	E1		
C417	*B4	D211	D1			R029	*B3	R227	*C1	R404	*E4	R513	*E4	R812	E1		
C418	*B4	D212	E1			R030	*B3	R228	*C1	R405	*E4	R514	*E4				
C419	*E4	D213	C2			R031	*B3	R229	*C1	R406	*E4	R515	E4	RB001	C3		
C420	*E4	D214	D2			R032	*B3	R230	C2	R407	*E4	R516	*E4	RB002	*C3		
C421	*E2	D215	D2			R033	B3	R231	*E2	R408	*E4						




FP-118  
SUFFIX: -13

FP-118  
SUFFIX: -13

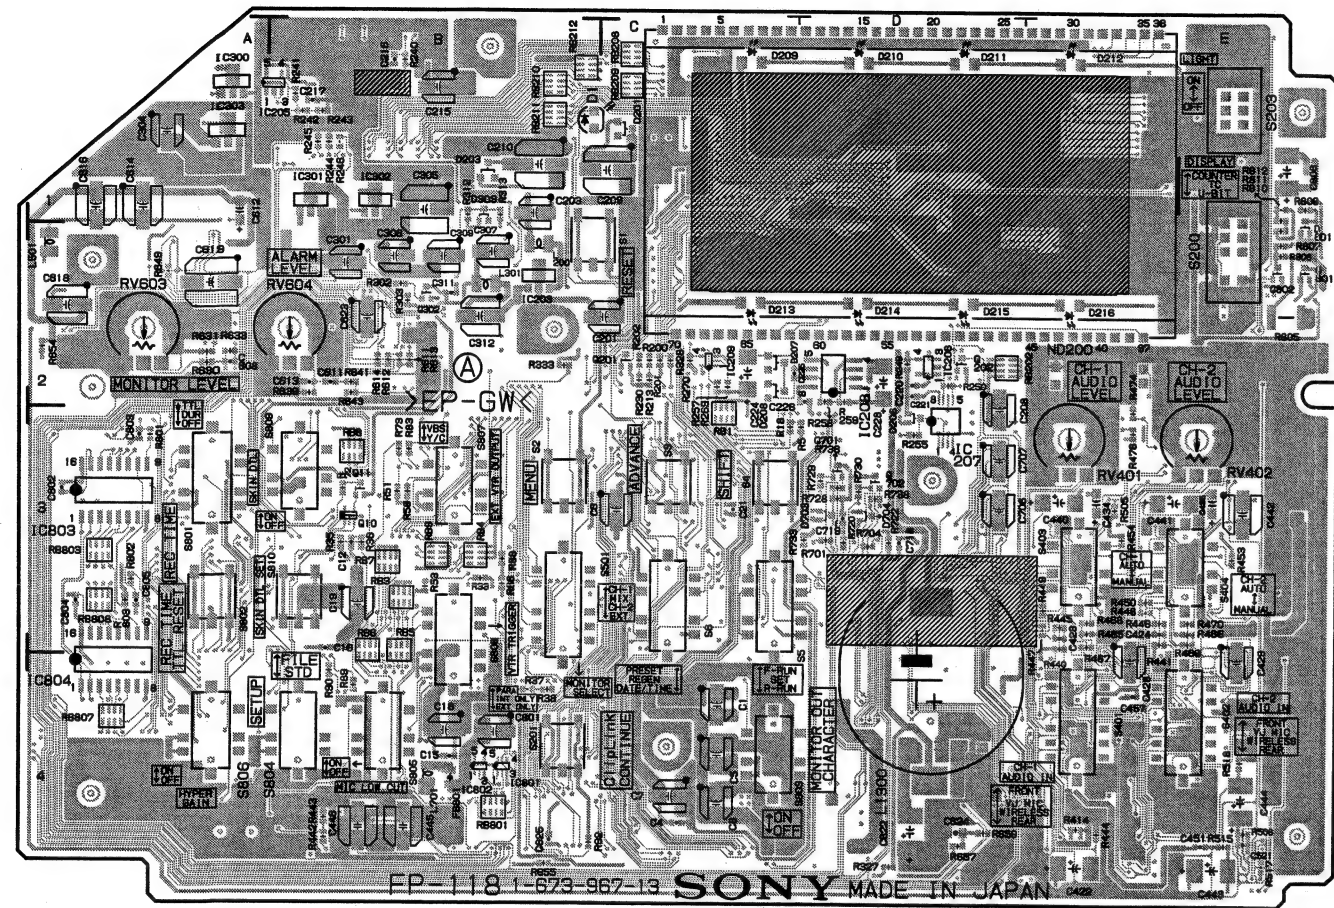

FP-118 -A SIDE-  
SUFFIX: -13  
FOR DSR-390/390P/370/370P

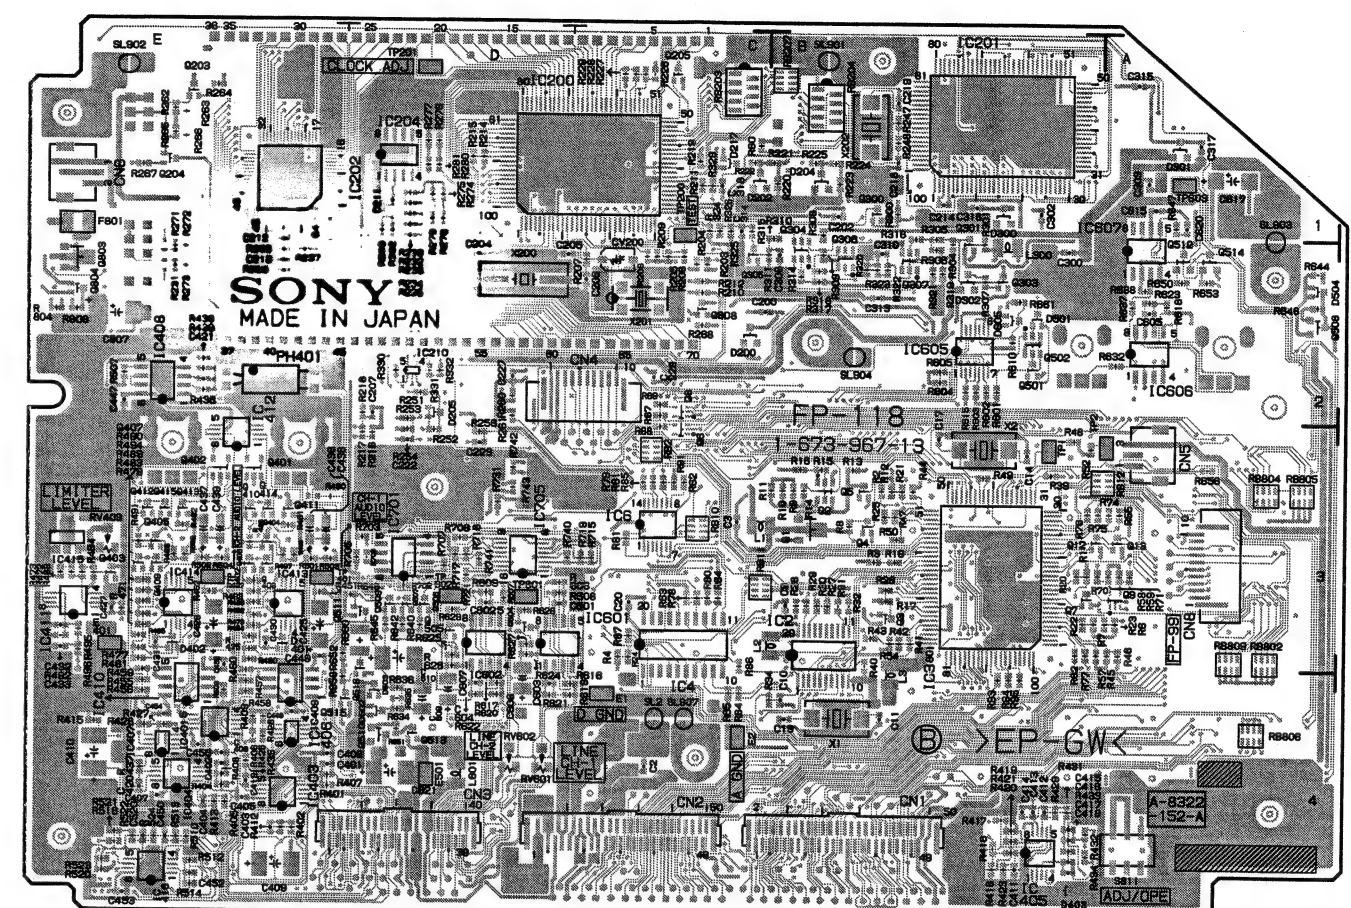

FP-118 -B SIDE-  
SUFFIX: -13  
FOR DSR-390/390P/370/370P

FP-118  
SUFFIX: -11, -12

FP-118  
SUFFIX: -11, -12

FP-118 (1-673-967-11,12)

C1	C4	C424	E3	CL21	*C4	CL709	*D4	IC302	B1	Q508	*A2	R78	*C3	R275	*D1	R456	*E4	R628	*D3	RB212	B1
C2	*C4	C425	*E3	CL22	*C4	CL710	*D4	IC303	A1	Q509	*D3	R79	*C3	R276	*D1	R457	*E4	R629	*D3	RB801	B4
C3	*C3	C426	*E3	CL23	*D4	CL801	*B4	IC401	*E4	Q510	*D4	R80	*C3	R277	*D1	R458	*E4	R630	A2	RB802	*A3
C4	C4	C427	*E3	CL24	*C4	CL802	*B4	IC403	*E4	Q511	*D3	R81	*C3	R278	*D1	R459	*E4	R631	A2	RB803	A3
C5	C4	C428	E4	CL25	*C4	CL803	*B4	IC404	*E4	Q512	*A2	R82	*B3	R279	*D1	R460	*E4	R632	*A2	RB804	*A3
C6	C3	C429	E4	CL26	*D4	CL804	*B4	IC405	*B4	Q513	*D4	R83	B3	R280	*D1	R461	*E3	R633	A2	RB805	*A3
C7	C4	C430	*E3	CL27	*B4	CL805	*B4	IC406	*E4	Q514	*A2	R84	*C4	R281	*D1	R462	*E3	R634	*D4	RB806	*A4
C8	C4	C431	*E3	CL28	*B4	CL806	*A3	IC407	*E4	Q515	*D4	R85	*C3	R282	*D1	R463	*E3	R635	*D4	RB807	A4
C9	*B3	C432	*E3	CL29	*C3	CL807	*A3	IC408	*E2	Q516	*D4	R86	*C3	R283	*D1	R464	*E3	R636	*D4	RB808	A3
C10	*B4	C433	*E3	CL30	*C3	CL808	*A3	IC409	*E4	Q701	D3	R87	*C3	R300	*B1	R465	E3	R637	*A2	RB809	*A3
C11	*B4	C434	E3	CL31	*C3	CL809	*B4	IC410	*E4	Q702	D3	R88	B3	R301	*B2	R466	E3	R638	*A2		
C12	B3	C435	E3	CL34	*B4	CL810	*B4	IC411	*E3	Q801	E2	R89	B4	R302	B2	R467	E3	R639	B2	RV401	E3
C13	*B4	C436	*E3	CL35	*B4	CL811	*B4	IC412	*E3	Q802	E2	R90	B4	R303	B2	R468	E3	R640	*D3	RV402	E3
C14	*B3	C437	*E3	CL36	*B4	CL812	*B4	IC413	*E3	Q803	*E2	R91	*C3	R304	*B2	R469	E3	R641	B2	RV403	*E3
C15	B4	C438	*E3	CL37	*C4	CL813	*A3	IC414	*E3	Q804	*E2	R92	B4	R305	*B2	R470	E3	R642	*D3	RV601	*D4
C16	B3	C439	*E3	CL38	*C4	CL814	*A3	IC415	*E3			R93	*B4	R306	*B2	R471	*E3	R643	B2	RV602	*D4
C17	*B3	C440	E3	CL39	*C4	CL815	*A3	IC416	*E4	R1	*B3	R94	*B4	R307	*B2	R472	*E3	R644	*A2	RV603	A2
C18	B4	C441	E3	CL40	*C4	CL816	*A3	IC601	*D3	R2	*B3	R95	*B4	R308	*B1	R473	*E3	R645	*D3	RV604	B2
C19	B3	C442	E3	CL41	*C4	CL817	*D4	IC602	*D3	R3	*B3	R200	C2	R309	*B2	R474	E3	R646	*A2		
C20	*C3	C443	E4	CL42	*C4	CL818	*E1	IC605	*B2	R4	*C3	R201	C2	R310	*B2	R475	*E3	R647	*A1	S1	B2
C21	C3	C444	E4	CL43	*C4	CL819	*D4	IC606	*A2	R5	D3	R202	C2	R311	*C2	R476	E3	R648	*D3	S2	B3
C200	*C2	C445	B4	CL44	*C4	CL820	*D4	IC607	*A2	R6	*A3	R203	*C2	R312	B1	R477	*E3	R649	A2	S3	C3
C201	C2	C446	B4	CL45	*C4			IC701	*D3	R7	*B3	R204	*C2	R313	B1	R478	*E3	R650	*A2	S4	C3
C202	*B1	C447	*E2	CL46	*B4	CN1	*B4	IC705	*D3	R8	*B3	R205	*C2	R314	*B2	R479	*E3	R651	*D4	S5	C3
C203	B1	C448	*E4	CL47	*B4	CN2	*C4	IC801	B4	R9	*B3	R206	*C2	R315	*C1	R480	*E3	R652	*E3	S6	C3
C204	*D2	C449	*E3	CL48	*B4	CN3	*D4	IC802	B4	R10	*B3	R207	*C2	R316	*B2	R481	*E3	R653	*A2	S200	E2
C205	*D2	C450	*E4	CL49	*B4	CN4	*C2	IC803	A3	R11	*B3	R208	*C2	R317	*B2	R482	*E3	R654	A2	S201	B4
C206	*C2	C451	E4	CL50	*C4	CN5	*A3	IC804	A4	R12	*B3	R209	*C2	R318	*B2	R483	*E3	R655	B4	S203	E1
C207	*D2	C452	*E4	CL51	*C4	CN6	*E1			R13	*B3	R210	*C2	R319	*B2	R484	*E3	R656	*A3	S401	E4
C208	D2	C453	*E4	CL52	*B4	CN8	*A3	L1	*C3	R14	*B3	R211	*C1	R320	*B2	R485	*E3	R657	D4	S402	E4
C209	C1	C454	*E4	CL53	*B4			L2	*B3	R15	*B3	R212	*C2	R321	*B2	R486	*E3	R658	*E4	S403	E3
C210	B1	C455	*E4	CL54	*C4	CV200	*C2	L3	*B4	R16	*B3	R213	C2	R322	*B2	R487	*E3	R659	D4	S404	E3
C211	*D1	C456	*E4	CL55	*B4			L200	B2	R17	*B3	R214	*D1	R323	*B2	R488	*E3	R660	*D3	S501	B3
C212	*E2	C457	E4	CL56	*C4	D1	B1	L300	*B2	R18	C3	R215	*D1	R324	*C1	R489	*E3	R661	*B2	S801	A3
C213	*E2	C520	*E4	CL57	*B4	D200	*C2	L301	B2	R19	*B3	R216	*D3	R325	*C1	R490	*E3	R701	D3	S802	A3
C214	*B1	C521	E4	CL58	*C4	D201	C1	L501	A2	R20	*B3	R217	*D3	R326	*C1	R491	*E3	R702	*D3	S803	C4
C215	B1	C601	*D3	CL59	*C4	D202	*C1	L601	*D4	R21	*B3	R218	*D2	R327	D4	R492	*E3	R703	*D3	S804	B4
C216	B1	C602	*D3	CL60	*C4	D203	B1	L701	B4	R22	*B3	R219	*C1	R328	C2	R493	*E3	R704	D3	S805	B4
C217	B1	C603	*D4	CL61	*C4	D204	*B1			R23	*A3	R220	*B1	R329	*C1	R494	*E3	R705	*D3	S806	A4
C218	*B1	C604	*D4	CL62	*B4	D205	*D2	LI300	D4	R24	*C3	R221	*B1	R330	*D2	R495	*E3	R706	*D3	S807	B3
C219	*B1	C605	*A2	CL63	*B4	D206	D3			R25	*B3	R222	*C1	R331	*D2	R496	*E3	R707	*D3	S808	B3
C220	D2	C606	*D4	CL64	*B4	D207	C2	ND200	C1	R26	*B3	R223	*B1	R332	*D2	R497	*E3	R708	*D3	S809	B3
C221	D2	C607	*B4	CL65	*B4	D208	C2			R27	*B3	R224	*B1	R333	B2	R498	*E3	R715	*C3	S810	B3
C222	*D3	C608	A2	CL201	*C4	D209	C1	PH401	*E2	R28	*B3	R225	*B1	R401	*E4	R499	*E3	R717	*D3	S811	*A4
C223	*D3	C609	*D4	CL202	*D4	D210	D1			R29	*B3	R226	*C1	R402	*E4	R500	*E3	R718	*D3		
C224	C2	C610	*D3	CL203	*E4	D211	D1	Q1	*B3	R30	*B3	R227	*C1	R404	*E4	R501	*E3	R719	*C3	SL2	*C4
C225	C2	C611	B2	CL204	*E4	D212	E1	Q2	*B3	R31	*B3	R228	*C1	R405	*E4	R502	*E3	R720	D3	SL901	*B1
C226	D2	C612	A1	CL205	*E4	D213	C2	Q3	*B3	R32	*B3	R229	*C1	R406	*E4	R503	*E3	R721	*D3	SL902	*E1
C227	*D2	C613	B2	CL206	*D4	D214	D2	Q4	*B3	R33	B3	R230	C2	R407	*E4	R504	*E3	R722	D3	SL903	*A1
C228	D2	C614	A1	CL207	*D4	D215	D2	Q5	*B3	R34	*B4	R231	*E2	R408	*E4	R505	E3	R723	D3	SL904	*B2
C229	*C2	C615	*A1	CL208	*D1	D216	E2	Q6	*C3	R35	B3	R232	*D1	R409	*E4	R506	*E2	R724	D3	SL907	*C4
C300	*B2	C616	A1	CL209	*C4	D217	*C1	Q7	*B3	R36	B3	R233	*D1	R412	*E4	R507	*E2	R730	D3		
C301	B2	C617	*A1	CL210	*C4	D300	*B1	Q8	*C2	R37	B4	R234	*D1	R413	*E4	R508	E4	R731	*D3	TP1	*B3
C302	*B1	C618	A2	CL211	*C4	D301	*A1	Q9	*A3	R38	B4	R235	*D2	R414	E4	R510	*E4	R733	D3	TP2	*A3
C303	*A1	C619	A2	CL212	*C4	D302	*B2	Q10	B3	R39	*B3	R236	*D1	R415	*E4	R512	*E4	R736	D3	TP200	*C1
C304	A1	C620	*A1	CL213	*C4	D303	B1	Q11	B3	R40	*B3	R237	*E2	R416	*B4	R513	*E4	R738	D3	TP201	*D1
C305	B1	C621	*D4	CL214	*B4	D401	*E3	Q12	*B3	R41	*B3	R238	*E2	R417	*B4	R514	*E4	R740	*D3	TP401	*E3
C306	B2	C622	D4	CL215	*C4	D402	*E3	Q13	*A3	R42	*B3	R239	*E2	R418	*B4	R515	*E4	R741	*D3	TP402	*E3
C307	B2	C623	B2	CL401	*B4	D501	*B2	Q201	C2	R43	*B3	R240	B1	R419	*B4	R516	*E4	R742	*D3	TP601	*D3
C308	*B2	C624	D4	CL402	*B4	D502	*D2	Q202	D2	R44	*B3	R241	B1	R420	*B4	R517	E4	R743	*D3	TP602	*D3
C309	B2	C625	B4	CL403	*B4	D503	*D4	Q203	*E1	R45	*A3	R242	B1	R421	*B4	R518	E4	R801	A3	TP603	*A1
C310	*B2	C706	D3	CL404	*B4	D504	*A2	Q204	*E1	R46	*A3	R243	B1	R422	*B4	R520	*E4	R802	A3		
C311	B2	C707	D3	CL405	*D4	D605	*B2	Q205	*C1	R47	*B3	R244	B1	R425	*E4	R521	*E4	R803	A3	X1	*B4
C312	B2	C718	D3	CL406	*D4	D703	D3	Q300	*B1	R48	*B3	R245	B1	R426	*E4	R522	*E4	R804	*E2	X2	*B3
C313	*B2	C719	D3	CL407	*D4	D704	D3	Q301	*B2	R49	*B3	R246	B1	R427	*E4	R523	*E4	R805	E2	X200	*D2
C314	*C1	C801	B4	CL408	*D4	D801	E1	Q302	B2	R50	*B3	R247	*B1	R428	*E4	R524	*E4	R806	E2	X201	*C2
C315	*A1	C802	A3	CL409	*D4			Q303	*B2	R51	B3	R248	*B1	R429	*B4	R601	*B2	R807	E2	X202	*B1
C316	*B1	C803	A3	CL410	*D4	E1	*C4	Q304	*B2	R52	*B3	R249	D2	R430	*E3	R602	*B2	R808	*E2		
C317	*A1	C804	A3	CL411	*E4	E2	*C4	Q305	*C2	R53	B3	R250	D2	R431	*B4	R603	*B2	R809	E1		
C318	*C1	C805	A3	CL412	*D4	E401	*E3	Q306	*B2	R54	*B3	R251	*D2	R432	*B4	R604	*B2	R810	E2		
C401	*E4	C806	E1	CL413	*D4	E501	*D4	Q307	*B2	R55	*A3	R252	*D3	R433	*B4	R605	*B2	R811	E1		
C402	*E4	C807	*E2	CL414	*D4			Q308	*C2	R56	B3	R253	*D3	R434	*B4	R606	*D3	R812	E1		
C403	*E4			CL415	*E4	F801	*E1	Q401	*E3	R57	*B3	R254	*D3	R435	*E4	R607	*D3				
C404	*E4	CL1	*D3	CL416	*E4			Q402	*E3	R58	*A3	R255	D3	R436	*E2	R608	*D3	RB1	C3		
C405	*E4	CL2	*D3	CL41																	



**FP-118****FP-118**

SUFFIX: -11, 12  
FOR DSR-370/370P




SUFFIX: -11, 12  
FOR DSR-370/370P


FP-122 (1-677-372-11)

C001	C4	C423	E3	D208	C2	PH401	*E2	R028	*B3	R225	*B1	R401	*E4	R499	*E3	R717	*D3	S811	*A4
C002	*C4	C424	E3	D209	C1			R029	*B3	R226	*C1	R402	*E4	R500	*E3	R718	*D3		
C003	*C3	C425	*E3	D210	D1	Q001	*B3	R030	*B3	R227	*C1	R404	*E4	R501	*E3	R719	*C3	SL002	*C4
C004	C4	C426	*E3	D211	D1	Q002	*B3	R031	*B3	R228	*C1	R405	*E4	R502	*E3	R720	D3	SL901	*B1
C005	C4	C427	*E3	D212	E1	Q003	*B3	R032	*B3	R229	*C1	R406	*E4	R503	*E3	R721	*D3	SL902	*E1
C006	C3	C428	E4	D213	C2	Q004	*B3	R033	B3	R230	C2	R407	*E4	R504	*E3	R722	D3	SL903	*A1
C007	C4	C429	E4	D214	D2	Q005	*B3	R034	*B4	R231	*E2	R408	*E4	R505	E3	R728	D3	SL903	*A2
C008	C4	C430	*E3	D215	D2	Q006	*C3	R035	B3	R232	*D1	R409	*E4	R506	*E4	R729	D3	SL904	*B2
C009	*B3	C431	*E3	D216	E2	Q007	*B3	R036	B3	R233	*D1	R412	*E4	R507	*E2	R730	D3	SL907	*C4
C010	*B4	C432	*E3	D217	*C1	Q008	*C2	R037	B4	R234	*D1	R413	*E4	R508	E4	R731	*D3		
C011	*B4	C433	*E3	D300	*B1	Q009	*A3	R038	B4	R235	*D2	R414	E4	R510	*E4	R733	D3	TP001	*B3
C012	B3	C434	E3	D301	*A1	Q010	B3	R039	*B3	R236	*D1	R415	*E4	R512	*E4	R736	D3	TP002	*A3
C013	*B4	C435	E3	D302	*B2	Q011	B3	R040	*B3	R237	*E2	R416	*B4	R513	*E4	R738	D3	TP200	*C1
C014	*B3	C436	*E3	D303	B1	Q012	*B3	R041	*B3	R238	*E2	R417	*B4	R514	*E4	R740	*D3	TP200	*C2
C015	B4	C437	*E3	D401	*E3	Q013	*A3	R042	*B3	R239	*E2	R418	*B4	R515	E4	R741	*D3	TP201	*D1
C016	B3	C438	*E3	D402	*E3	Q201	C2	R043	*B3	R240	B1	R419	*B4	R516	*E4	R742	*D3	TP401	*E3
C017	*B3	C439	*E3	D501	*B2	Q202	D2	R044	*B3	R241	B1	R420	*B4	R517	E4	R743	*D3	TP402	*E3
C018	B4	C440	E3	D502	*D4	Q203	*E1	R045	*A3	R242	B1	R421	*B4	R518	E4	R801	A3	TP601	*D3
C019	B3	C441	E3	D503	*D4	Q204	*A3	R046	*A3	R243	B1	R423	*B4	R520	*E4	R802	A3	TP602	*D3
C020	*C3	C442	E3	D504	*A2	Q205	*C1	R047	*B3	R244	B1	R425	*E4	R521	*E4	R803	A3	TP603	*A1
C021	C3	C443	E4	D605	*B2	Q300	*B1	R048	*B3	R245	B1	R426	*E4	R522	*E4	R804	*E2		
C200	*C2	C444	E4	D703	D3	Q301	*B2	R049	*B3	R246	B1	R427	*E4	R523	*E4	R805	E2	X001	*B4
C201	C2	C445	B4	D704	D3	Q302	B2	R050	*B3	R247	*B1	R428	*E4	R524	*E4	R806	E2	X002	*B3
C202	*B1	C446	B4	D801	E1	Q303	*B2	R051	B3	R248	*B1	R429	*B4	R601	*B2	R807	E2	X200	*D2
C203	B1	C447	*E2			Q304	*B2	R052	*B3	R249	D2	R430	*E3	R602	*B2	R808	*E2	X201	*C2
C204	*D2	C448	*E4	E001	*C4	Q305	*C2	R053	B3	R250	D2	R431	*B4	R603	*B2	R809	E1	X202	*B1
C205	*D2	C449	*E3	E002	*C4	Q306	*B2	R054	*B3	R251	*D2	R432	*B4	R604	*B2				
C206	*C2	C450	*E4	E401	*E3	Q307	*B2	R055	*A3	R252	*D3	R433	*B4	R605	*B2				
C207	*D2	C451	E4	E501	*D4	Q308	*C2	R056	B3	R253	*D3	R434	*B4	R606	*D3				
C208	D2	C452	*E4			Q401	*E3	R057	*B3	R254	*D3	R435	*E4	R607	*D3				
C208	D3	C453	*E4	F801	*E1	Q402	*E3	R058	*A3	R255	D3	R436	*E2	R608	*D3	RB001	C3		
C209	C1	C454	*E4	FB801	B4	Q403	*E3	R059	*A3	R256	*D3	R437	*E4	R609	*D3	RB002	*C3		
C210	B1	C455	*E4			Q404	*E3	R060	*C1	R257	C2	R438	*E2	R610	*B2	RB003	B3		
C211	*D1	C456	*E4	IC002	*B3	Q405	*E3	R061	*C3	R258	D2	R439	*E2	R611	B2	RB004	B3		
C212	*E2	C457	E4	IC003	*B3	Q406	*E3	R062	*C3	R259	D2	R440	E3	R612	B2	RB005	B3		
C213	*E2	C520	*E4	IC004	*C3	Q407	*E3	R063	*C3	R260	*D2	R441	E3	R613	B2	RB006	B3		
C214	*B1	C521	E4	IC006	*C3	Q408	*E3	R064	*C3	R261	*D2	R442	B4	R614	B2	RB007	B3		
C215	B1	C601	*D3	IC200	*C1	Q409	*E3	R065	*C4	R262	*E1	R443	B4	R615	*B2	RB008	B3		
C216	B1	C602	*D3	IC201	*B1	Q410	*E3	R066	B3	R263	*E1	R444	E4	R616	*C4	RB009	B3		
C217	B1	C603	*D4	IC202	*E1	Q411	*E3	R067	*C2	R264	*E1	R445	E3	R617	*D4	RB010	*C3		
C218	*B1	C604	*D4	IC203	B2	Q412	*E3	R068	*C3	R265	*E1	R446	E3	R618	*A2	RB011	*C3		
C219	*B1	C605	*A2	IC204	*D1	Q413	*E3	R069	*C2	R266	*E1	R447	E3	R619	*C4	RB012	*A3		
C220	D2	C606	*D4	IC205	B1	Q414	*E3	R070	*B3	R267	*E1	R448	E3	R620	*D4	RB202	D2		
C221	D2	C607	*D4	IC206	D2	Q415	*E3	R071	*A3	R268	*C2	R449	E3	R621	*D4	RB203	*C1		
C222	*D3	C608	A2	IC207	D3	Q501	*B2	R072	B3	R269	C2	R450	E3	R622	*D4	RB204	*B1		
C223	*D3	C609	*D4	IC208	D2	Q502	*B2	R073	B3	R270	C2	R451	*E3	R623	*A2	RB207	*B1		
C224	C2	C610	*D3	IC209	C2	Q504	*D3	R074	*A3	R271	*E2	R452	*E3	R624	*D3	RB208	C1		
C225	C2	C611	B2	IC210	*D2	Q505	*D3	R075	*B3	R272	*E2	R453	E3	R625	*D3	RB209	C1		
C226	D2	C612	A1	IC300	A1	Q506	*D3	R076	*B3	R273	*E2	R454	E3	R626	*D4	RB210	B1		
C227	*D2	C613	B2	IC301	B1	Q507	*D3	R077	*B3	R274	*D1	R455	*E4	R627	*D3	RB211	B1		
C228	D2	C614	A1	IC302	B1	Q508	*A2	R078	*C3	R275	*D1	R456	*E4	R628	*D3	RB212	B1		
C229	*C2	C615	*A1	IC303	A1	Q509	*D3	R079	*C3	R276	*D1	R457	*E4	R629	*D3	RB801	B4		
C300	*B2	C616	A1	IC401	*E4	Q510	*D4	R080	*C3	R277	*D1	R458	*E4	R630	A2	RB802	*A3		
C301	B2	C617	*A1	IC403	*E4	Q511	*D3	R081	*C3	R278	*D1	R459	*E4	R631	A2	RB803	A3		
C302	*B1	C618	A2	IC404	*E4	Q512	*A2	R082	*B3	R279	*D1	R460	*E4	R632	*A2	RB804	*A3		
C303	*A1	C619	A2	IC405	*B4	Q513	*D4	R083	B3	R280	*D1	R461	*E3	R633	A2	RB805	*A3		
C304	A1	C620	*A1	IC406	*E4	Q514	*A2	R084	*C4	R281	*D1	R462	*E3	R634	*D4	RB806	*A4		
C305	B1	C621	*D4	IC407	*E4	Q515	*D4	R085	*C3	R282	*D1	R463	*E3	R635	*D4	RB807	A4		
C306	B2	C622	D4	IC408	*E2	Q516	*D4	R086	*C4	R283	*D1	R464	*E3	R636	*D4	RB808	A3		
C307	B2	C623	B2	IC409	*E4	Q701	D3	R087	*C3	R300	*B1	R465	E3	R637	*A2	RB809	*A3		
C308	*B2	C624	D4	IC410	*E4	Q702	D3	R088	B3	R301	*B2	R466	E3	R638	*A2				
C309	B2	C625	B4	IC411	*E3	Q801	E2	R089	B4	R302	B2	R467	E3	R639	B2	RV401	E3		
C310	*B2	C706	D3	IC412	*E3	Q802	E2	R090	B4	R303	B2	R468	E3	R640	*D3	RV402	E3		
C311	B2	C707	D3	IC413	*E3	Q803	*E2	R091	*C3	R304	*B2	R469	E3	R641	B2	RV403	*E3		
C312	B2	C718	D3	IC414	*E3	Q804	*E2	R092	B4	R305	*B2	R470	E3	R642	*D3	RV601	*D4		
C313	*B2	C719	D3	IC415	*E3			R093	*B4	R306	*B2	R471	*E3	R643	B2	RV602	*D4		
C314	*C1	C801	B4	IC416	*E4	R001	*B3	R094	*B4	R307	*B2	R472	*E3	R644	*A2	RV603	A2		
C315	*A1	C802	A3	IC601	*D3	R002	*B3	R095	*B4	R308	*B1	R473	*E3	R645	*D3	RV604	B2		
C316	*B1	C803	A3	IC602	*D3	R003	*B3	R200	C2	R309	*B2	R474	E3	R646	*A2				
C317	*A1	C804	A3	IC605	*B2	R004	*C3	R201	C2	R310	*B2	R475	*E3	R647	*A1	S001	B2		
C318	*C1	C805	A3	IC606	*A2	R005	D3	R202	C2	R311	*C2	R476	E3	R648	*D3	S002	B3		
C401	*E4	C806	E1	IC607	*A2	R006	*A3	R203	*C2	R312	B1	R477	*E3	R649	A2	S003	C3		
C402	*E4	C807	*E2	IC701	D3	R007	*B3	R204	*C2	R313	B1	R478	*E3	R650	*A2	S004	C3		
C403	*E4			IC705	*D3	R008	*B3	R205	*C2	R314	*B2	R479	*E3	R651	*D4	S005	C3		
C404	*E4	CN001	*B4	IC801	B4	R009	*B3	R206	*C2	R315	*C1	R480	*E3	R652	*E3	S006	C3		
C405	*E4	CN002	*C4	IC802	B4	R010	*B3	R207	*C2	R316	*B2	R481	*E3	R653	*A2	S200	E2		
C406	*E4	CN003	*D4	IC803	A3	R011	*B3	R208	*C2	R317	*B2	R482	*E3	R654	A2	S201	B4		
C407	*E4	CN004	*C2	IC804	A4	R012	*B3	R209	*C2	R318	*B2	R483	*E3	R655	B4	S203	E1		
C408	*E4	CN005	*A3			R013	*B3	R210	*C2	R319	*B2	R484	*E3	R656	*A3	S401	E4		
C409	*E4	CN006	*E1	L001	*C3	R014	*B3	R211	*C1	R320	*B2	R485	*E3	R657	D4	S402	E4		
C410	*E4	CN008	*A3	L002	*B3	R015	*B3	R212	*C2	R321	*B2	R486	*E3	R658	*E4	S403	E3		
C411	*B4			L003	*B4	R016	*B3	R213	C2	R322	*B2	R487	*E3	R659	D4	S404	E3		
C412	*B4	CV200	*C2	L200	B2	R017	*B3	R214	*D1	R323	*B2	R488	*E3	R660	*D3	S501	B3		
C413	*B4			L300	*B2														




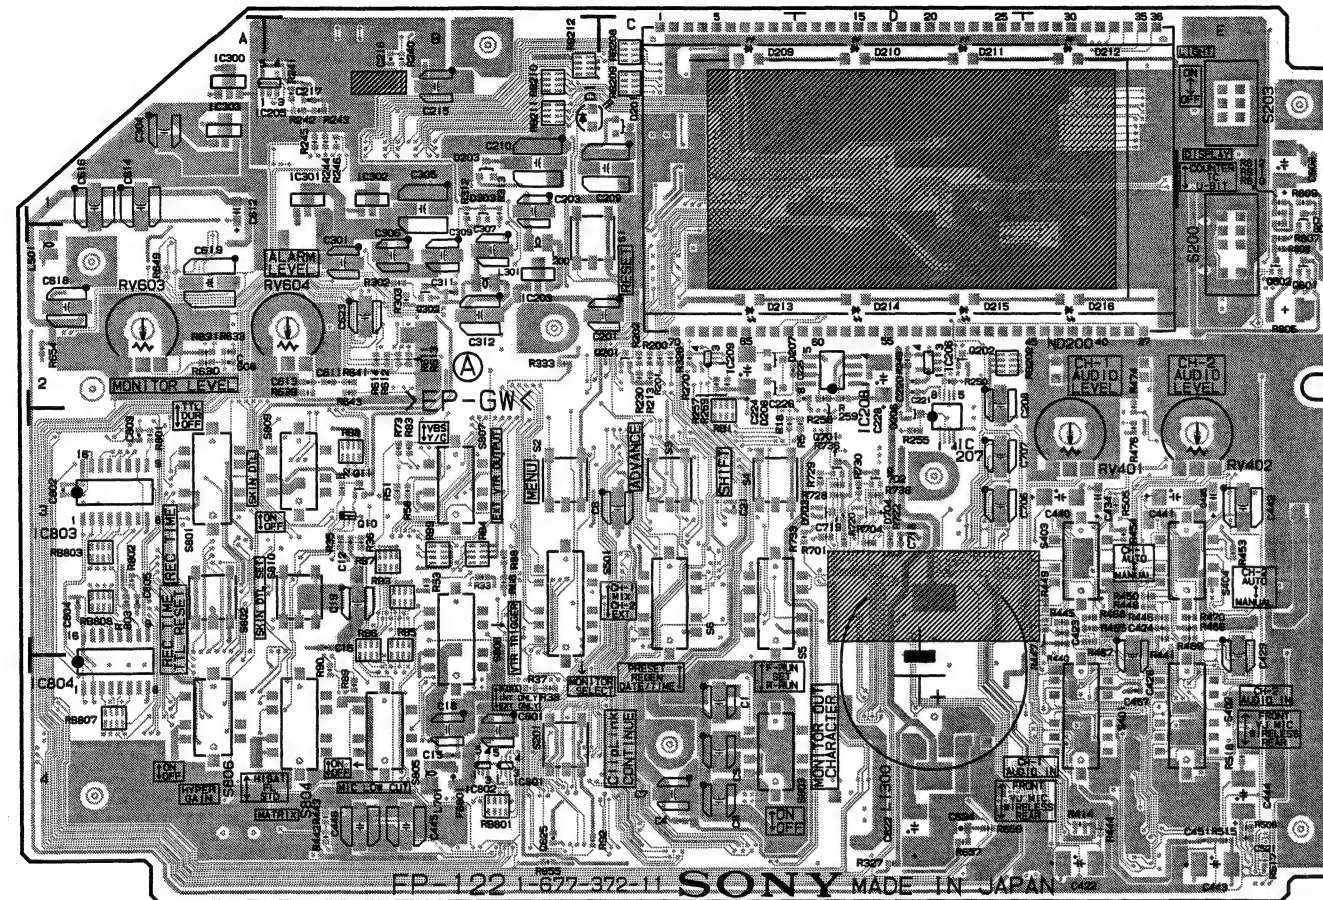

**FP-122 -A SIDE-**  
SUFFIX: -11  
FOR DSR-300A/300AP

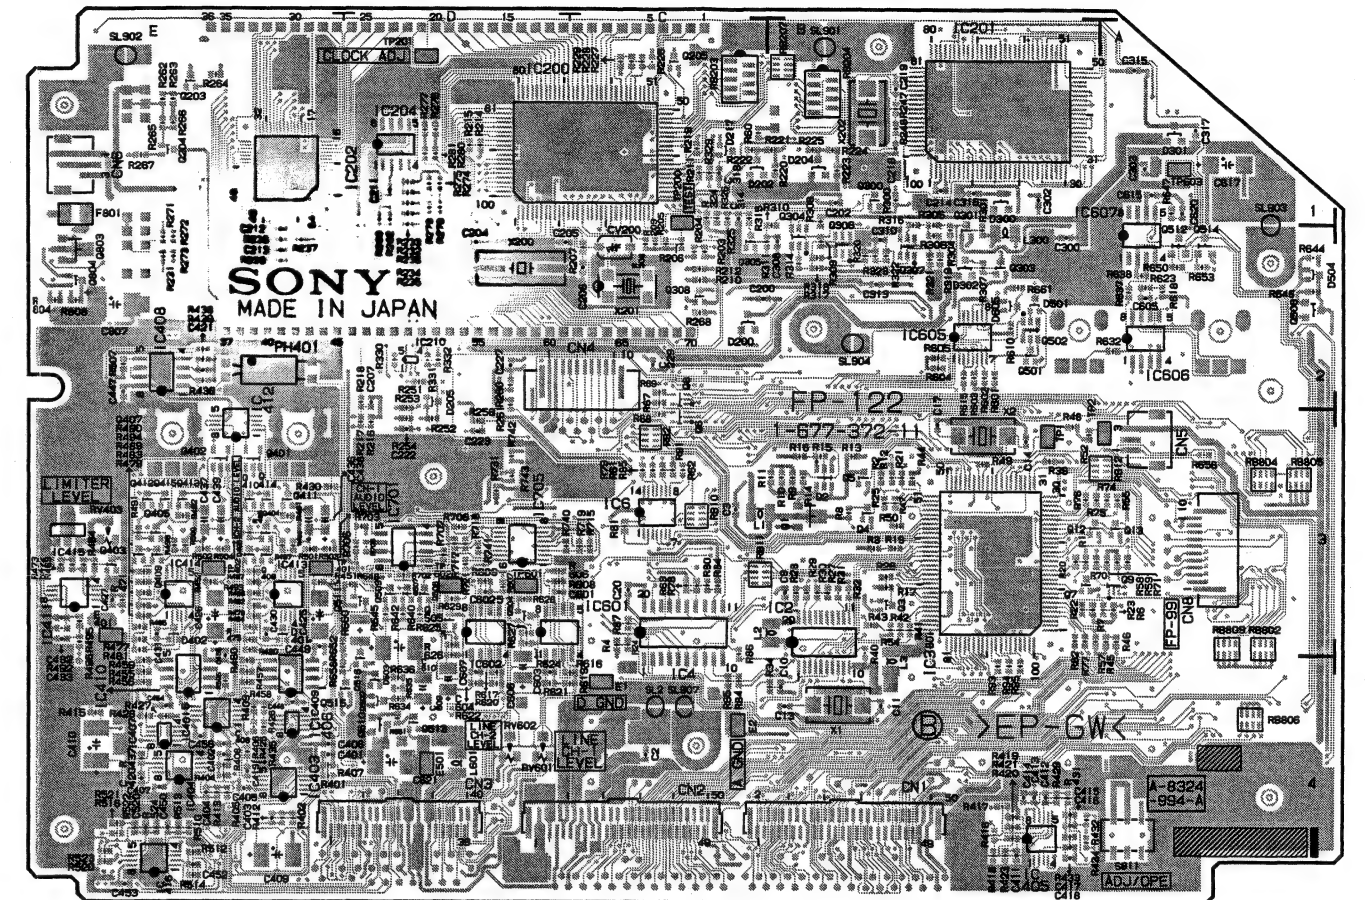


**FP-122 -B SIDE-**  
SUFFIX: -11  
FOR DSR-300A/300AP




**KY-405 -A SIDE-**  
SUFFIX : -11, 21




**KY-405 -B SIDE-**  
SUFFIX : -11, 21




**LE-221 -A SIDE-**  
SUFFIX: -11, 21




**LE-221 -B SIDE-**  
SUFFIX: -11, 21

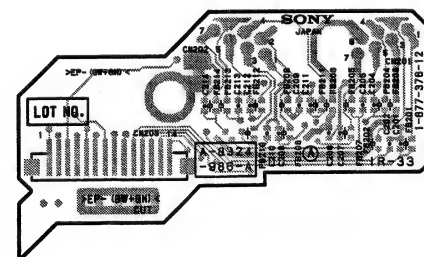


**IR-33 -A SIDE-**  
SUFFIX: -12, 21

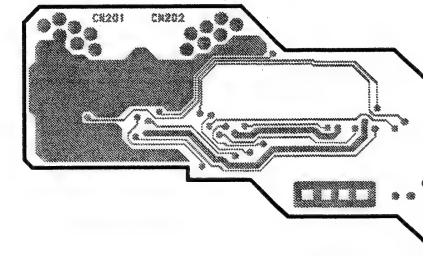


**IR-33 -B SIDE-**  
SUFFIX: -12, 21

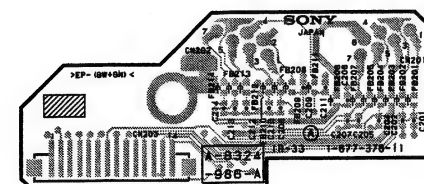


**IR-33 -A SIDE-**  
SUFFIX: -11

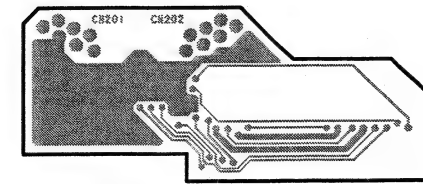


**IR-33 -B SIDE-**  
SUFFIX: -11

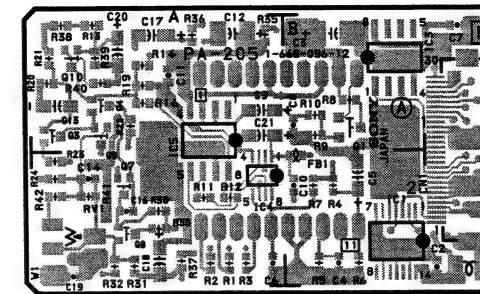


**PA-205 -A SIDE-**  
SUFFIX : -12

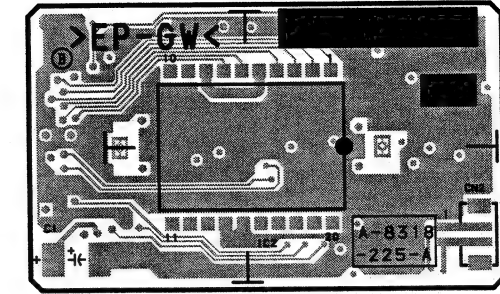


**PA-205 -B SIDE-**  
SUFFIX : -12

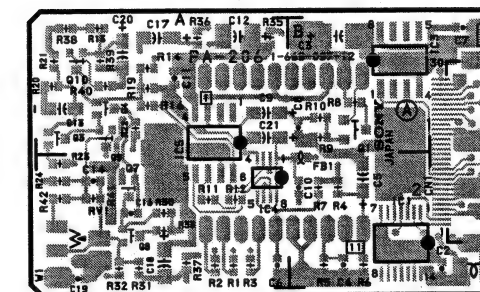


**PA-206 -A SIDE-**  
SUFFIX : -12

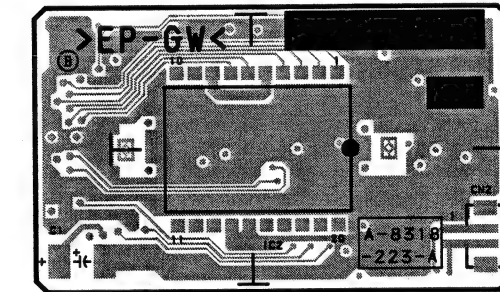

**PA-206 -B SIDE-**  
SUFFIX : -12

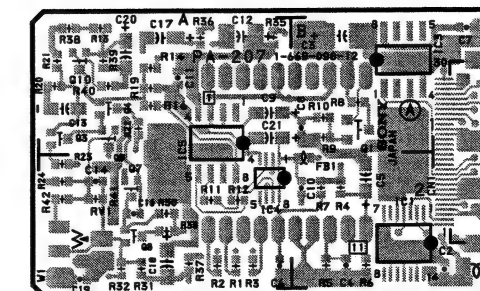


**PA-207 -A SIDE-**  
SUFFIX : -12

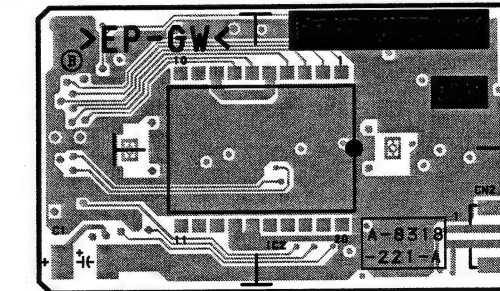

**PA-207 -B SIDE-**  
SUFFIX : -12




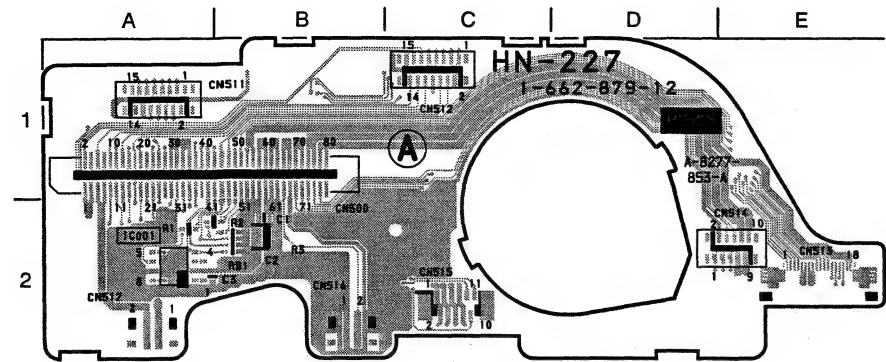


**HN-227 -A SIDE-**  
SUFFIX : -12

HN-227 (1-662-879-12)


CN500	B1
CN511	A1
CN512	C1
CN513	E2
CN514	D2
CN515	C2
CN516	B2
CN517	A2
IC1	A2
RB1	B2

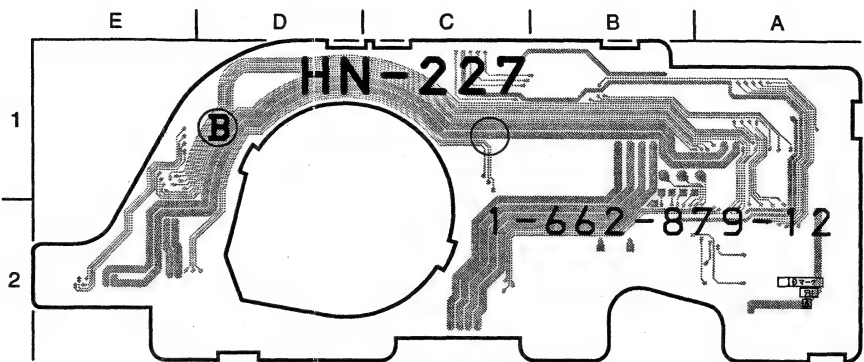


**HN-227 -B SIDE-**  
SUFFIX : -12

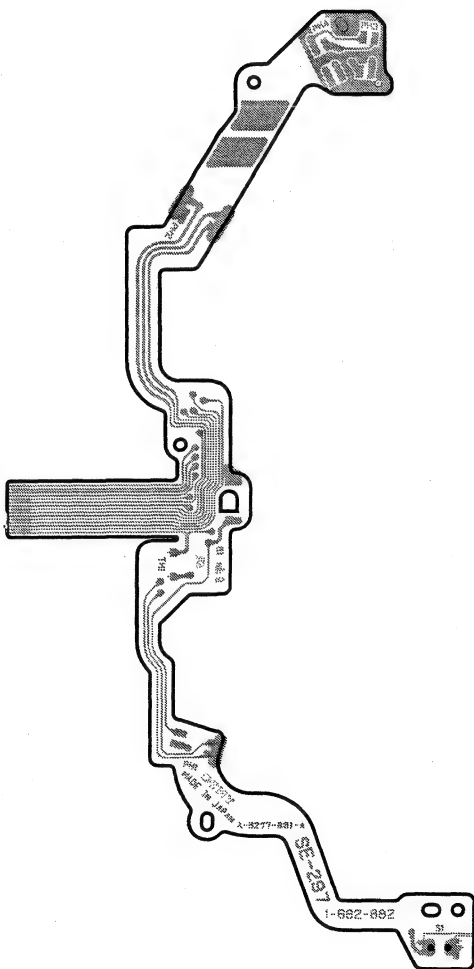


**SE-297 -A SIDE-**  
SUFFIX : -13

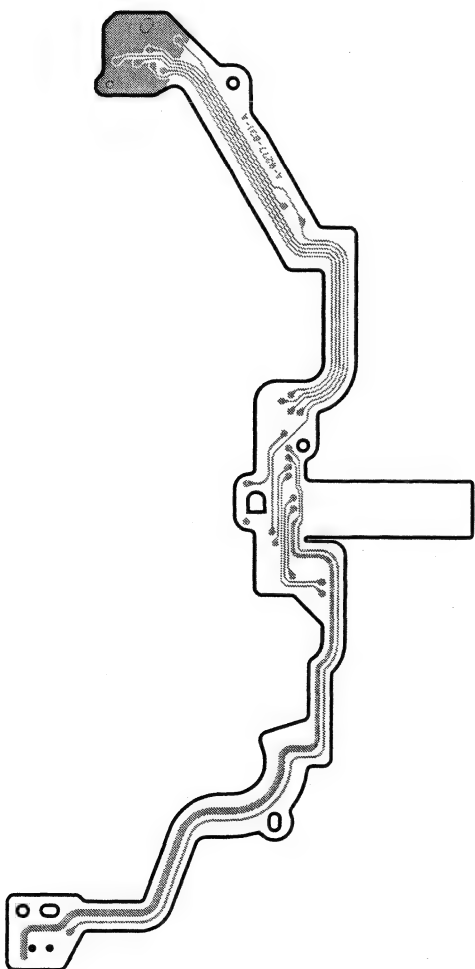


**SE-297 -B SIDE-**  
SUFFIX : -13

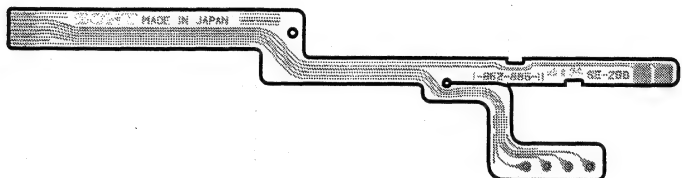


**SE-298 -A SIDE-**  
SUFFIX : -11

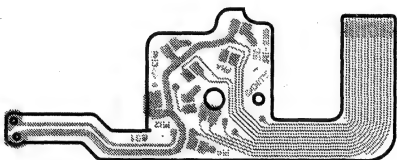


**SE-295 -A SIDE-**  
SUFFIX : -13, 14

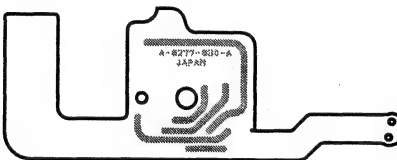


**SE-295 -B SIDE-**  
SUFFIX : -13, 14

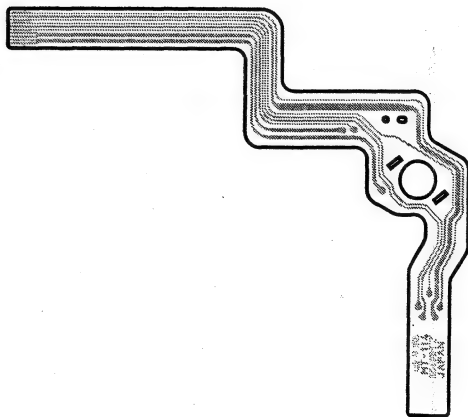


**MT-114 -A SIDE-**  
SUFFIX : -12

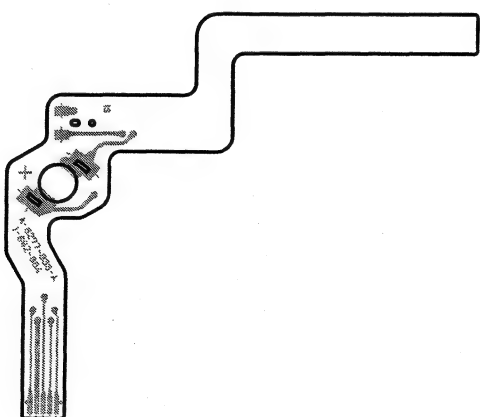

**MT-114 -B SIDE-**  
SUFFIX : -12

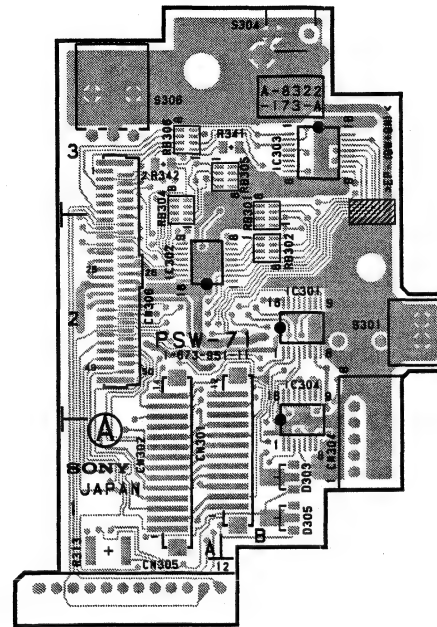

**PSW-71 -A SIDE-**  
SUFFIX: -11, 21

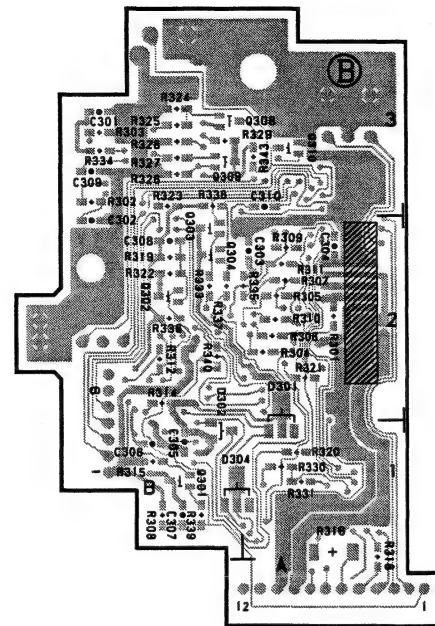


**PSW-71 -B SIDE-**  
SUFFIX: -11, 21


PSW-71 (1-673-951-11, 21)

C301	*B3	Q308	*B3	R329	*B3
C302	*B2	Q309	*B3	R330	*A1
C303	*A2	Q310	*A3	R331	*A1
C304	*A2			R333	*B2
C305	*B1	R301	*A2	R334	*B3
C306	*B1	R302	*B3	R335	*A2
C307	*B1	R303	*B3	R336	*B2
C308	*B2	R304	*A2	R337	*B2
C309	*B3	R305	*A2	R338	*B3
C310	*A3	R306	*A2	R339	*B1
		R307	*A2	R340	*B2
CN301	B1	R308	*B1	R341	B3
CN302	A1	R309	*A2	R342	A3
CN304	B1	R310	*A2	R343	*A3
CN305	A1	R311	*A2		
CN306	A2	R312	*B2	RB301	B2
		R313	A1	RB302	B2
D301	*A2	R314	*B2	RB304	A3
D302	*B1	R315	*B1	RB305	B3
D303	B1	R316	*A1	RB306	A3
D304	*B1	R318	*A1		
D305	B1	R319	*B2	S301	B2
		R320	*A1	S304	B3
IC301	B2	R321	*A2	S306	A3
IC302	A2	R322	*B2		
IC303	B3	R323	*B3		*: B SIDE
IC304	B1	R324	*B3		
		R325	*B3		
Q301	*B1	R326	*B3		
Q302	*B2	R327	*B3		
Q303	*B2	R328	*B3		
Q304	*B2				

\*: B SIDE

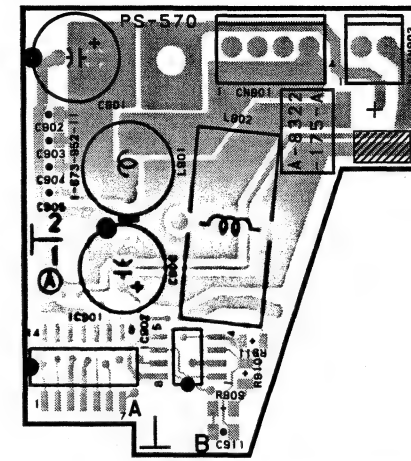

**PS-570 -A SIDE-**  
SUFFIX: -11, 21

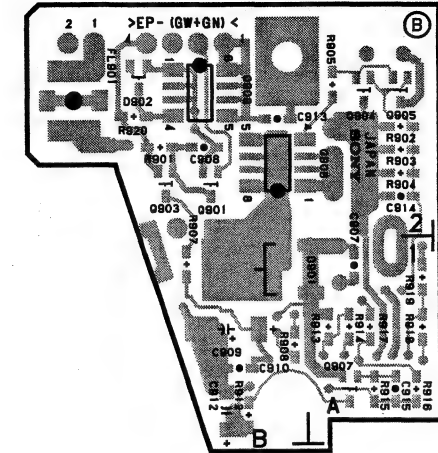


**PS-570 -B SIDE-**  
SUFFIX: -11, 21


PS-570 (1-673-952-11, 21)

C901	A2	CN902	B2	Q906	*B2	R914	*A1
C902	A2			Q907	*A1	R915	*A1
C903	A2	D901	*B1	Q908	*B2	R916	*A1
C904	A2	D902	*B2			R917	*A1
C905	A2			R901	*B2	R918	*A1
C906	A1	FL901	*B2	R902	*A2	R919	*A1
C907	*A1			R903	*A2	R920	*B2
C908	*B2	IC901	A1	R904	*A2		
C909	*B1	IC902	B1	R905	*A2		*: B SIDE
C910	*B1			R906	B2		
C911	B1	L901	A2	R907	*B1		
C912	*B1	L902	B2	R908	*B1		
C913	*B2			R909	B1		
C914	*A2	Q901	*B2	R910	B1		
C915	*A1	Q903	*B2	R911	B1		
		Q904	*A2	R912	*B1		
CN901	B2	Q905	*A2	R913	*A1		

\*: B SIDE

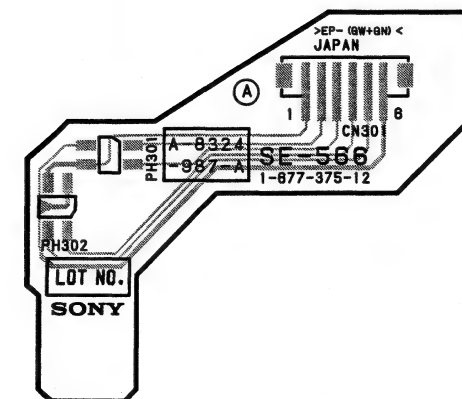


**SE-566 -A SIDE-**  
SUFFIX: -12, 21

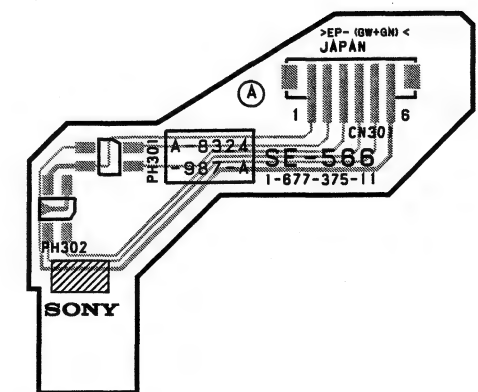


**SE-566 -A SIDE-**  
SUFFIX: -11

MB-833  
SUFFIX: -12

MB-833  
SUFFIX: -12

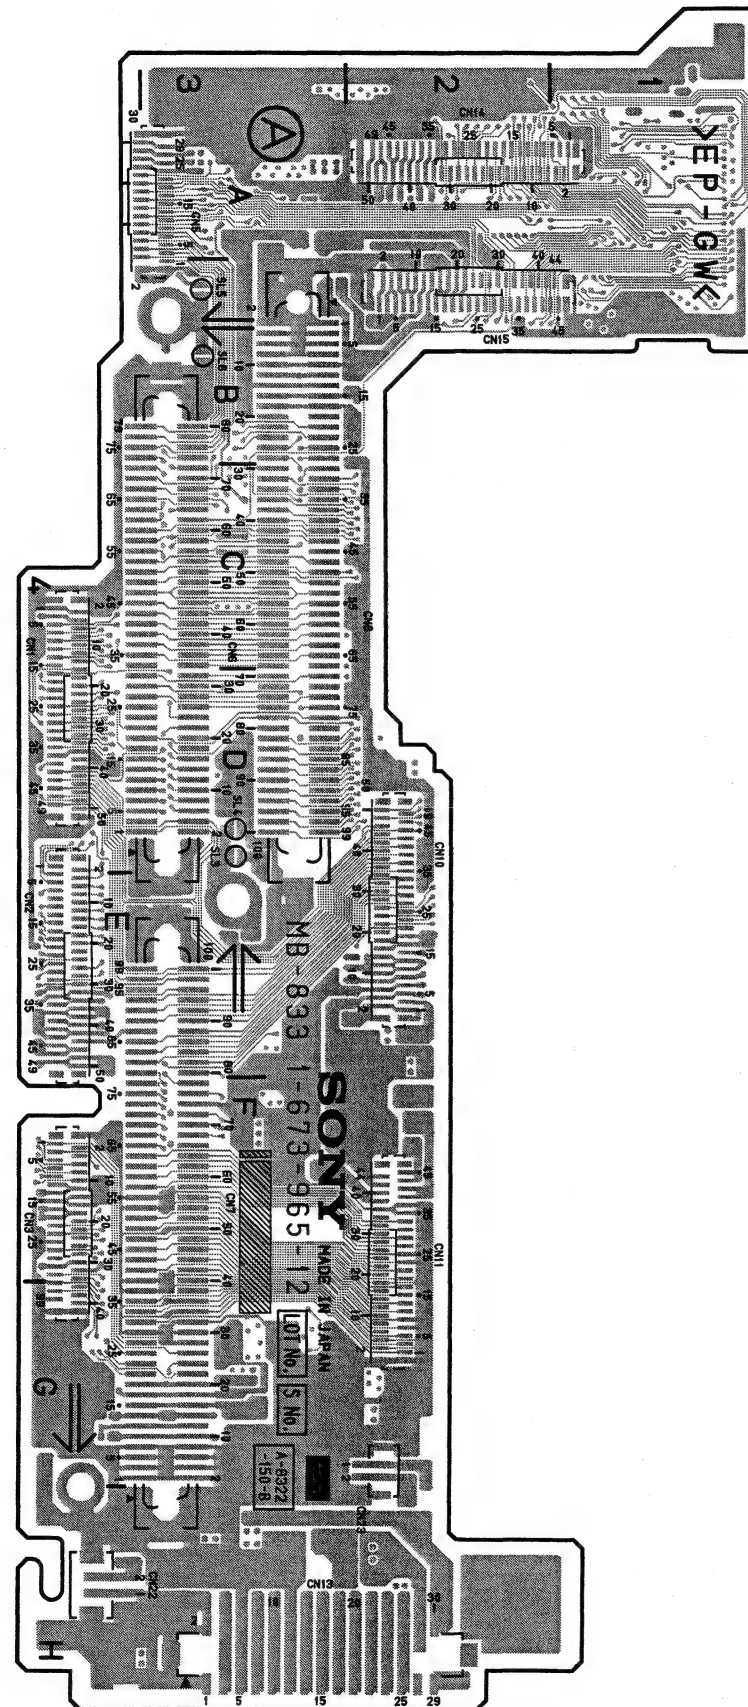

MB-833 -A SIDE-  
SUFFIX: -12

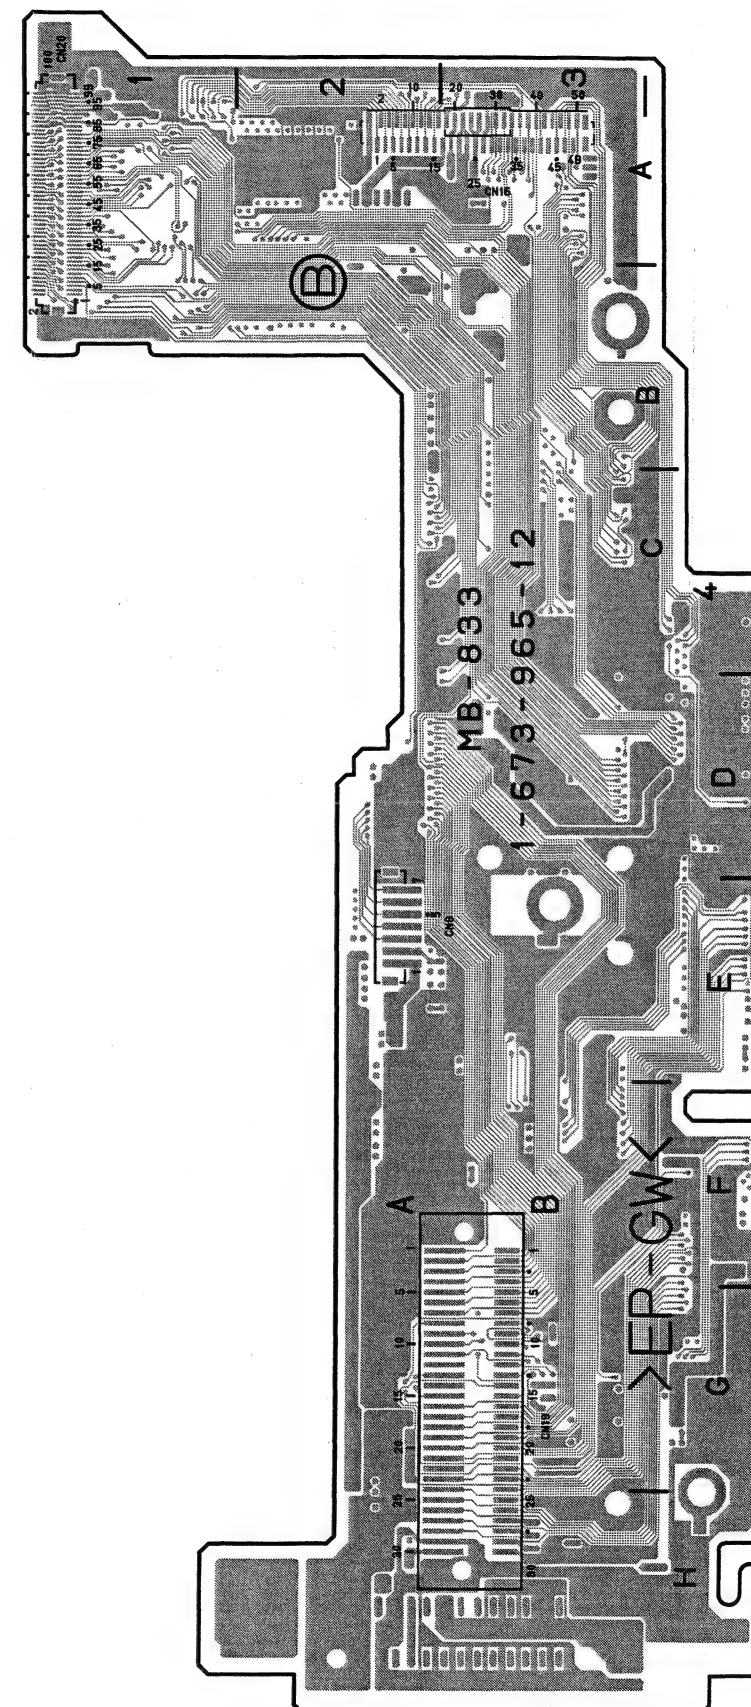

MB-833 -B SIDE-  
SUFFIX: -12

MB-833 (1-673-965-12)


CN1	D4
CN2	E4
CN3	F4
CN5	A3
CN6	C3
CN7	F3
CN8	C3
CN9	* E2
CN10	E2
CN11	F2
CN13	H3
CN14	A2
CN15	B2
CN16	* A3
CN19	* G3
CN20	* A1
CN22	H4
CN23	G2
SL3	D3
SL4	D3
SL5	B3
SL6	B3

\*: B SIDE




**MB-833**  
SUFFIX: -11

**MB-833**  
SUFFIX: -11

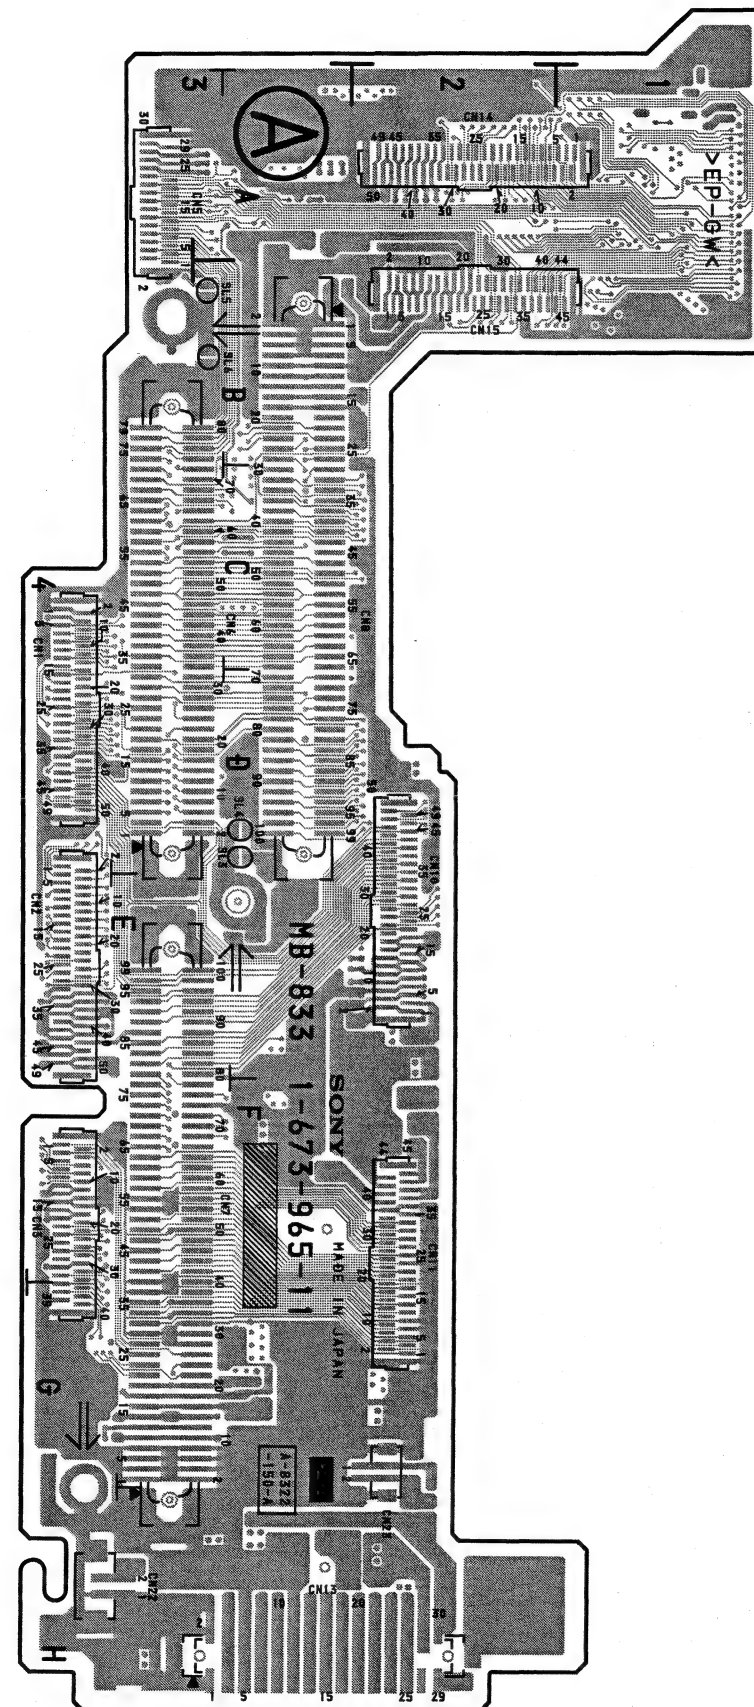

**MB-833 -A SIDE-**  
SUFFIX: -11

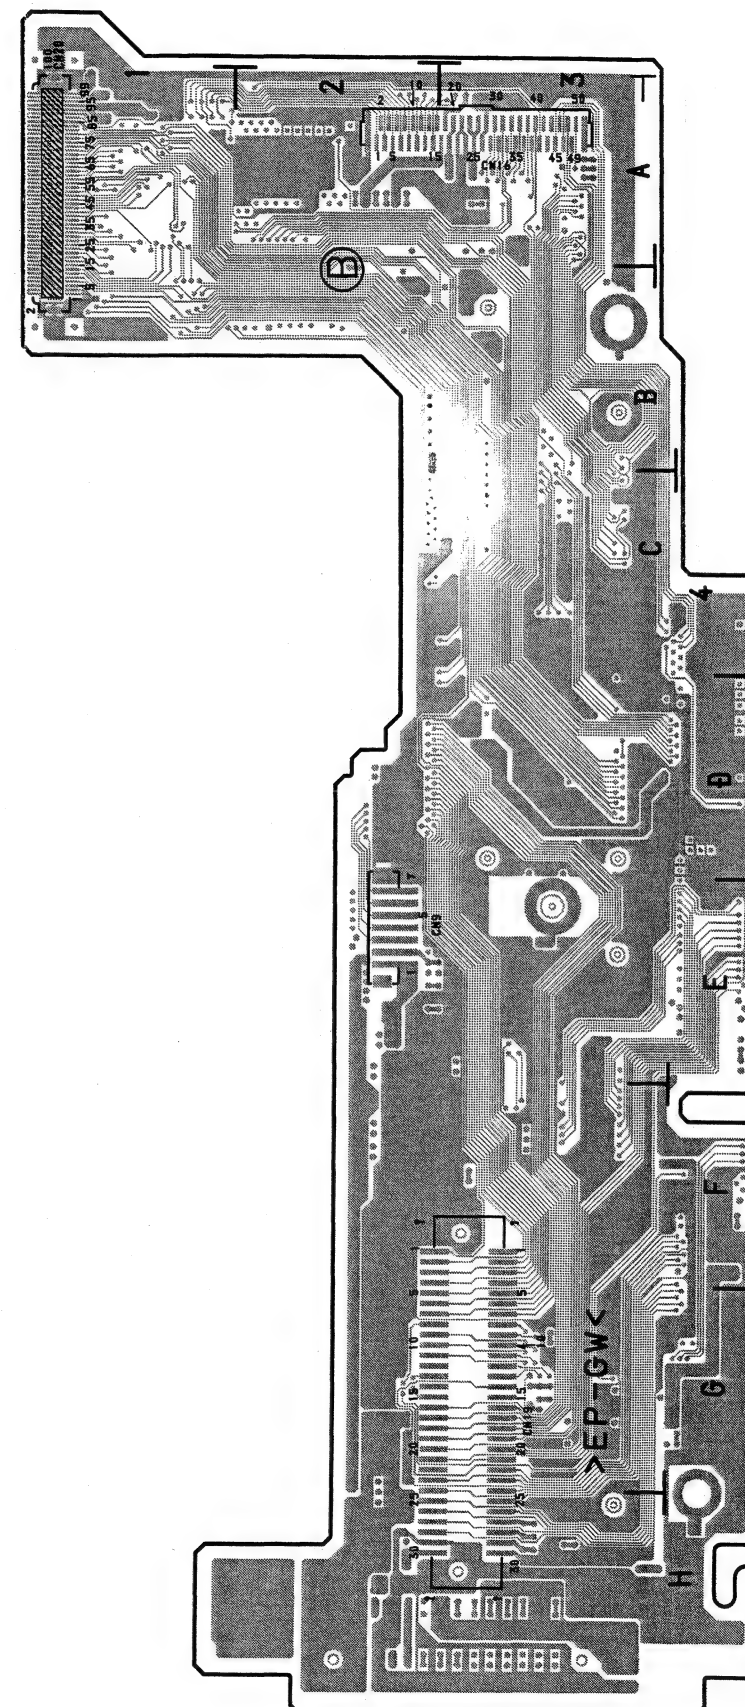

**MB-833 -B SIDE-**  
SUFFIX: -11

MB-833 (1-673-965-11)

CN1	D4
CN2	E4
CN3	F4
CN5	A4
CN6	C4
CN7	F4
CN8	C3
CN9	* E2
CN10	E2
CN11	F2
CN13	H3
CN14	A2
CN15	B2
CN16	* A3
CN19	* G3
CN20	* A1
CN22	H4
CN23	G2
SL3	D3
SL4	D3
SL5	B4
SL6	B4


\*: B SIDE

SV-213 (1-673-983-12)


C1	C1	C504	D2	CL36	*B4	CL504	*D1	IC500	C2	R222	C2	R421	B3	R750	A2	TP302	A4
C2	A1	C505	D2	CL37	*B4	CL505	*D1	IC501	D3	R223	C2	R422	B2	R751	A2	TP304	A3
C3	A1	C506	D2	CL38	*B4	CL506	*D1	IC502	D3	R225	A2	R423	B3	R752	A1	TP400	C2
C4	A2	C507	D2	CL40	*B4	CL507	*D1	IC505	C1	R226	A2	R424	B3	R753	A1	TP401	C3
C5	C1	C508	D2	CL41	*B4	CL508	*D1	IC507	D3	R227	A2	R425	B3	R754	B1	TP501	D2
C6	B1	C509	D2	CL42	*B4	CL1001	*D1	IC508	D3	R228	A2	R426	C2	R759	B1	TP502	D2
C7	C1	C510	D2	CL43	*B4	CL1002	*D3	IC509	D3	R229	B2	R427	B3	R760	B1	TP503	C3
C8	C1	C512	D2	CL44	*B4	CL1003	*D3	IC510	D3	R230	B2	R428	B3	R761	B1	TP504	D2
C9	C1	C516	C4	CL45	*B4	CL1300	*A3	IC512	C4	R231	B2	R429	B2	R762	A2	TP505	D2
C10	C1	C517	C3	CL46	*B4	CL1301	*A3	IC702	B3	R232	B2	R430	B2	R763	A2	TP506	D2
C11	C1	C518	C4	CL47	*B4	CL1302	*A3	IC740	A1	R233	B2	R431	B3	R764	A2	TP507	A4
C13	D1	C520	C4	CL48	*B4	CL1304	*A3	IC741	A2	R234	B2	R432	B3	R765	A2	TP508	A4
C16	D1	C522	C4	CL49	*B4	CL1400	*C2	IC801	D4	R235	B2	R433	B3	R766	A2	TP509	C3
C17	D4	C524	D1	CL50	*B4	CL1401	*C3	IC802	D4	R236	B2	R434	B3	R767	A2	TP510	C3
C18	B1	C525	D1	CL51	*B4	CL1502	*D2	IC901	A2	R238	A3	R436	B3	R768	A2	TP701	B1
C200	D4	C526	C1	CL52	*B4	CL1503	*C4	IC902	A2	R239	A3	R437	B3	R769	A1	TP704	B1
C201	D4	C527	C2	CL56	*B4	CL1504	*D2	IC903	A1	R241	A3	R438	B3	R770	A1		
C202	D4	C528	C2	CL57	*B4	CL1505	*D2	IC904	A2	R242	A3	R439	B3	R771	B2	X500	C2
C203	C2	C529	C2	CL60	*B4	CL1506	*C2			R244	A2	R440	B3	R772	B2		
C204	B2	C530	C2	CL64	*B4	CL1507	*A4	L500	C4	R245	A2	R441	B3	R773	B2		
C205	A2	C531	C2	CL65	*B4	CL1508	*A4	L501	C4	R246	A2	R442	B1	R774	B2		
C206	A2	C533	D3	CL67	*B4	CL1509	*C3	L502	C4	R247	A2	R443	C1	R775	B2		
C207	A3	C534	D3	CL68	*B4	CL1510	*C3	L700	B1	R248	A3	R444	C1	R776	B2		
C208	A2	C535	C3	CL69	*B4	CL1901	*C1	L740	B1	R249	A3	R445	C1	R777	B2		
C209	A2	C537	C4	CL71	*B4	CL1902	*D4	L741	B2	R250	A3	R501	C1	R778	B2		
C210	D1	C538	D3	CL72	*B4	CL1903	*D4			R251	A3	R502	C2	R801	D4		
C211	A2	C539	D3	CL73	*B4			LND1	D1	R252	A3	R503	C2	R802	C4		
C212	A3	C700	A2	CL74	*B4	CN500	*B4			R253	A3	R504	D2	R805	D4		
C300	A4	C701	A1	CL75	*B4	CN501	C4	Q700	A1	R254	A3	R505	C2	R806	D3		
C301	A4	C702	A1	CL77	*B4	CN502	C4	Q701	B3	R255	A3	R513	C1	R810	D3		
C302	A4	C705	B1	CL80	*B4	CN504	C1	Q740	B1	R300	A4	R514	C2	R811	C3		
C303	A4	C706	B1	CL104	*C4	CN505	D1	Q745	B2	R301	A4	R515	C1	R812	C3		
C304	A4	C707	B1	CL105	*C4			Q748	B2	R302	A4	R516	C1	R813	D3		
C305	A4	C740	A1	CL107	*C4	D1	B1	Q749	C2	R303	A4	R517	C4	R814	D4		
C306	A4	C741	A2	CL108	*C4	D2	B1	Q802	D3	R304	A4	R518	C3	R818	C3		
C309	A4	C742	A2	CL109	*C4	D300	A3	Q803	C3	R305	A4	R519	C1	R820	C3		
C310	B4	C746	B1	CL110	*C4	D302	B2	Q804	C3	R306	A3	R520	C1	R822	C3		
C311	B4	C747	B1	CL111	*C4	D303	B2	Q805	C3	R307	A3	R521	C2	R824	C3		
C312	C4	C748	B3	CL112	*C4	D400	A4	Q806	C4	R308	A3	R522	C2	R901	A1		
C313	C4	C749	A2	CL113	*C4	D401	B2	Q901	A1	R309	A4	R523	C2	R902	A2		
C314	B2	C750	A2	CL114	*C4	D402	B2			R310	A4	R524	C2	R903	A2		
C315	B2	C754	B2	CL115	*C4	D500	C3	R1	C1	R311	A3	R525	C2	R904	A2		
C317	B2	C755	B2	CL116	*C4	D501	C3	R3	C1	R312	A3	R526	C2	R905	A2		
C318	B2	C756	B2	CL117	*C4	D502	D2	R4	C1	R313	A3	R529	D2	R906	A2		
C319	B3	C757	A1	CL118	*C4	D503	D2	R5	C1	R314	A4	R533	B4	R907	A2		
C320	B3	C758	A2	CL119	*C4	D506	C1	R6	D1	R315	A4	R534	B4	R908	A2		
C321	B3	C759	B1	CL120	*C4	D507	D1	R7	D1	R316	A4	R535	B4	R909	B2		
C322	B3	C760	B2	CL201	*B4	D508	D1	R8	D1	R317	A4	R536	D4	R910	B2		
C323	B3	C761	A2	CL202	*B4	D701	C3	R10	D4	R318	D1	R537	D4	R911	B2		
C324	A4	C801	D3	CL203	*B4	D702	C3	R11	D4	R323	A4	R540	D4	R912	B2		
C325	A3	C802	D3	CL204	*B4	D801	D4	R12	D4	R324	A4	R541	B4	R913	B1		
C326	D1	C901	A2	CL205	*B4	D802	D4	R13	D4	R325	A3	R542	B4	R914	B1		
C327	D1	C902	A2	CL206	*B4	D803	D4	R14	D4	R326	A3	R543	B4	R915	B1		
C328	B4	C903	A2	CL207	*B4	D804	D4	R16	D4	R327	A3	R544	C4	R916	B2		
C329	A2	C904	A1	CL208	*B4	D805	D4	R17	D4	R328	B4	R545	C4	R917	A1		
C331	A4	C905	A2	CL209	*B4	D806	D4	R18	D4	R329	B4	R546	D3	R918	B2		
C332	A4	C906	A2	CL210	*B4	D807	D4	R19	D4	R330	A2	R547	D3	R919	A1		
C333	A3	C907	A2	CL211	*B4	D808	D4	R20	D4	R331	C3	R548	D3	R921	A1		
C334	A4	C908	B1	CL212	*B4	D809	D4	R21	D1	R332	C2	R549	D3	R922	A1		
C400	B4	C909	A1	CL213	*B4	D810	D4	R27	C1	R333	B2	R550	D3	R923	B2		
C401	A4	C910	A2	CL214	*B4	D811	D4	R28	C1	R337	B2	R551	D3				
C402	A4	C911	A1	CL218	*B4	D812	D4	R29	C2	R339	B2	R552	D3	RB500	C3		
C403	A4	C912	A2	CL219	*B4	D813	D4	R30	A1	R340	B2	R553	C2	RB501	D2		
C404	B4			CL220	*C4	D814	D4	R31	A2	R341	B2	R555	C2	RB502	D3		
C405	A4	CL2	*A4	CL221	*C4	D815	D4	R32	B1	R342	B2	R556	C2	RB503	D3		
C406	A4	CL3	*A4	CL222	*C4	D816	D4	R33	B1	R343	B2	R557	D3	RB504	D3		
C407	B2	CL4	*A4	CL223	*C4	D901	A1	R34	B1	R344	B3	R558	C2	RB506	C2		
C408	B3	CL5	*A4	CL224	*C4			R35	B1	R345	B3	R559	C2	RB507	C2		
C409	B3	CL6	*A4	CL225	*C4	E1	B4	R36	B1	R346	B3	R700	A1	RB508	C2		
C410	B3	CL8	*A4	CL233	*C4	E2	B4	R37	C1	R347	B3	R701	A1	RB510	D4		
C411	B3	CL9	*A4	CL236	*C3	E3	B1	R38	B1	R348	C3	R702	A2	RB511	D3		
C412	B3	CL10	*A4	CL238	*C4			R39	C1	R349	C2	R703	A2	RB512	D3		
C413	B3	CL11	*A4	CL243	*C4	IC1	C1	R40	C1	R400	B4	R704	A1	RB513	C3		
C414	B3	CL12	*A4	CL244	*C4	IC2	C1	R41	C1	R401	B4	R705	A1	RB514	C3		
C415	B3	CL13	*A4	CL246	*C4	IC3	D4	R42	C1	R402	A4	R706	A1	RB515	D2		
C416	B3	CL14	*A4	CL248	*C4	IC5	B1	R43	C1	R403	A4	R707	A1	RB516	D2		
C417	B3	CL15	*A4	CL250	*C4	IC6	D1	R44	C1	R404	A4	R708	A1	RB801	C4		
C418	B3	CL16	*A4	CL401	*C1	IC200	B2	R45	C1	R405	A4	R709	B1	RB802	D4		
C419	B3	CL17	*A4	CL402	*C1	IC201	A3	R46	D1	R406	A4	R710	C3	RB803	D3		
C420	B3	CL18	*B4	CL403	*C1	IC204	A2	R47	D4	R407	A4	R711	C3	RB804	D4		
C421	B3	CL19	*B4	CL405	*C1	IC300	B3	R48	D4	R408	A4	R714	B1	RB805	D3		
C422	B3	CL20	*B4	CL406	*C1	IC301	A4	R49	C2	R409	C2	R715	B1	RB806	D4		
C423	B3	CL21	*B4	CL407	*C1	IC302	A3	R203	D4	R410	B4	R716	B1	RB808	D4		
C424	B3	CL22	*D2	CL409	*C1	IC303	D1	R204	D4	R411	B4	R740	A1	RB810	C3		
C425	B3	CL23	*B4	CL410	*C1	IC304	D1	R205	D4	R412	B4	R741	A1	RB811	C3		
C426	B4	CL24	*B4	CL411	*C1	IC305	A4	R206	D4	R413	B4	R742	A1				
C427	A4	CL25	*B4	CL412	*C1	IC306	B4	R207	D4	R414	B4	R743	A1	S500	D2		
C428	B2	CL26	*B4	CL413	*C1	IC307	A2	R208	D4	R415	A4	R744	A1				
C429	B4	CL29	*B4	CL415	*C1	IC309	A4	R209	D4	R416	A4	R745	A2	TP1	C1		
C500	D2	CL31	*B4	CL416	*C1	IC400	B3	R210	D4	R417	A4	R746	A2	TP2	D2		
C501	D2	CL32	*B4	CL417	*C1	IC401	B4	R211	D4	R418	C3	R747	A2	TP3	D2		
C502	D2	CL33	*B4	CL418	*C1	IC402	A4	R219	B2	R419	B2	R748	A2	TP300	A3		
C503	D2	CL35	*B4	CL503	*D1	IC403	B2	R220	B2	R420	B3	R749	A2	TP301	A3		

\*: B SIDE



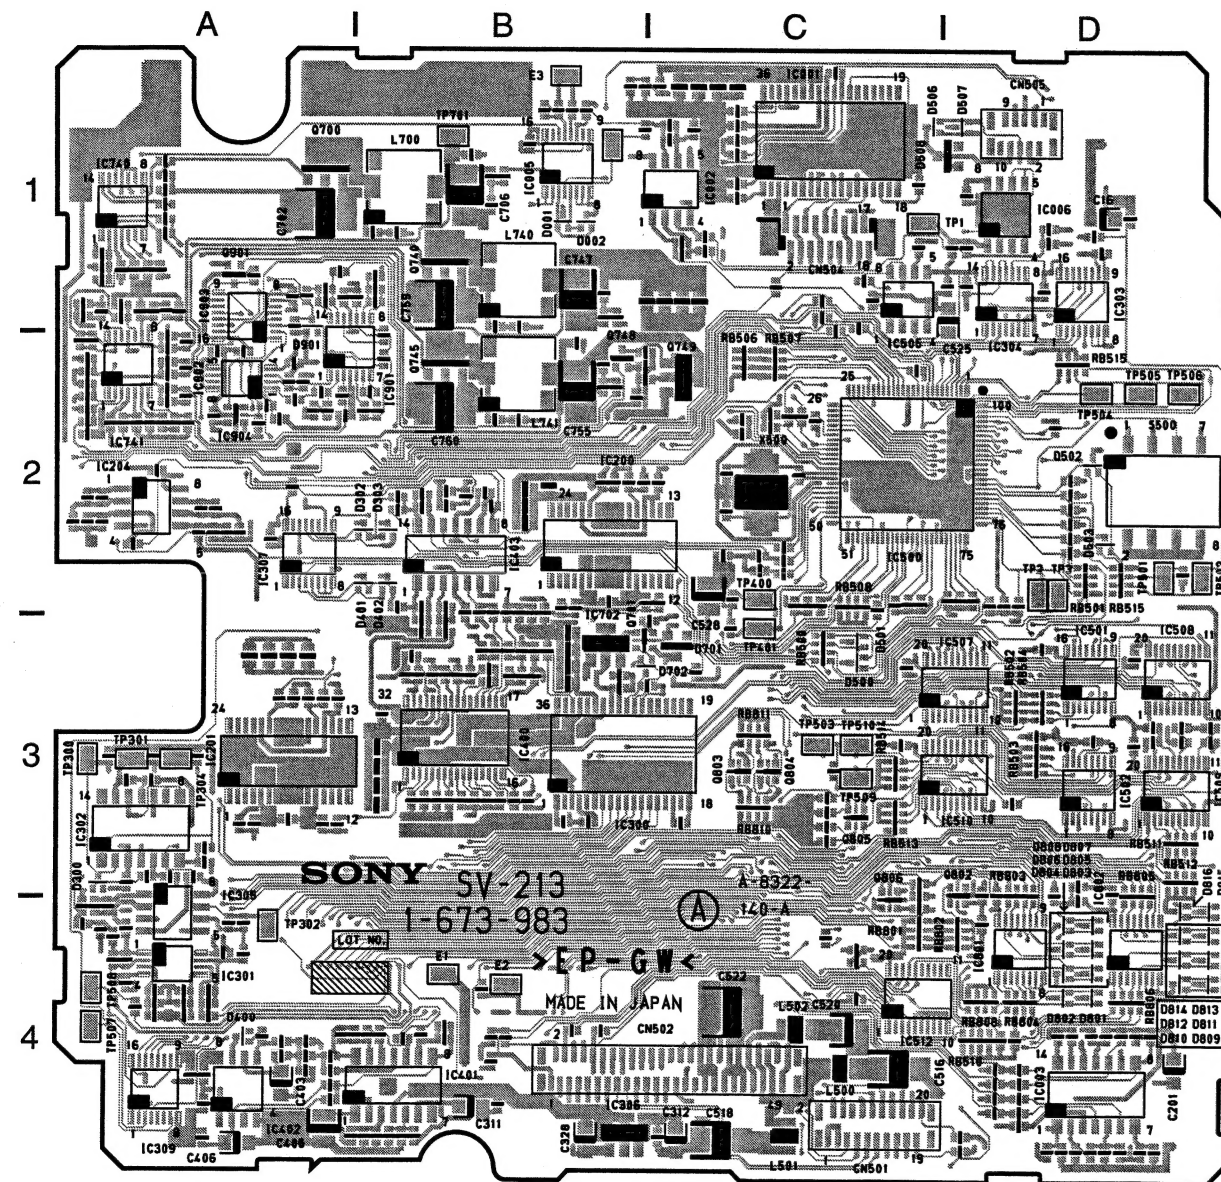

**SV-213 -A SIDE-**  
SUFFIX: -12

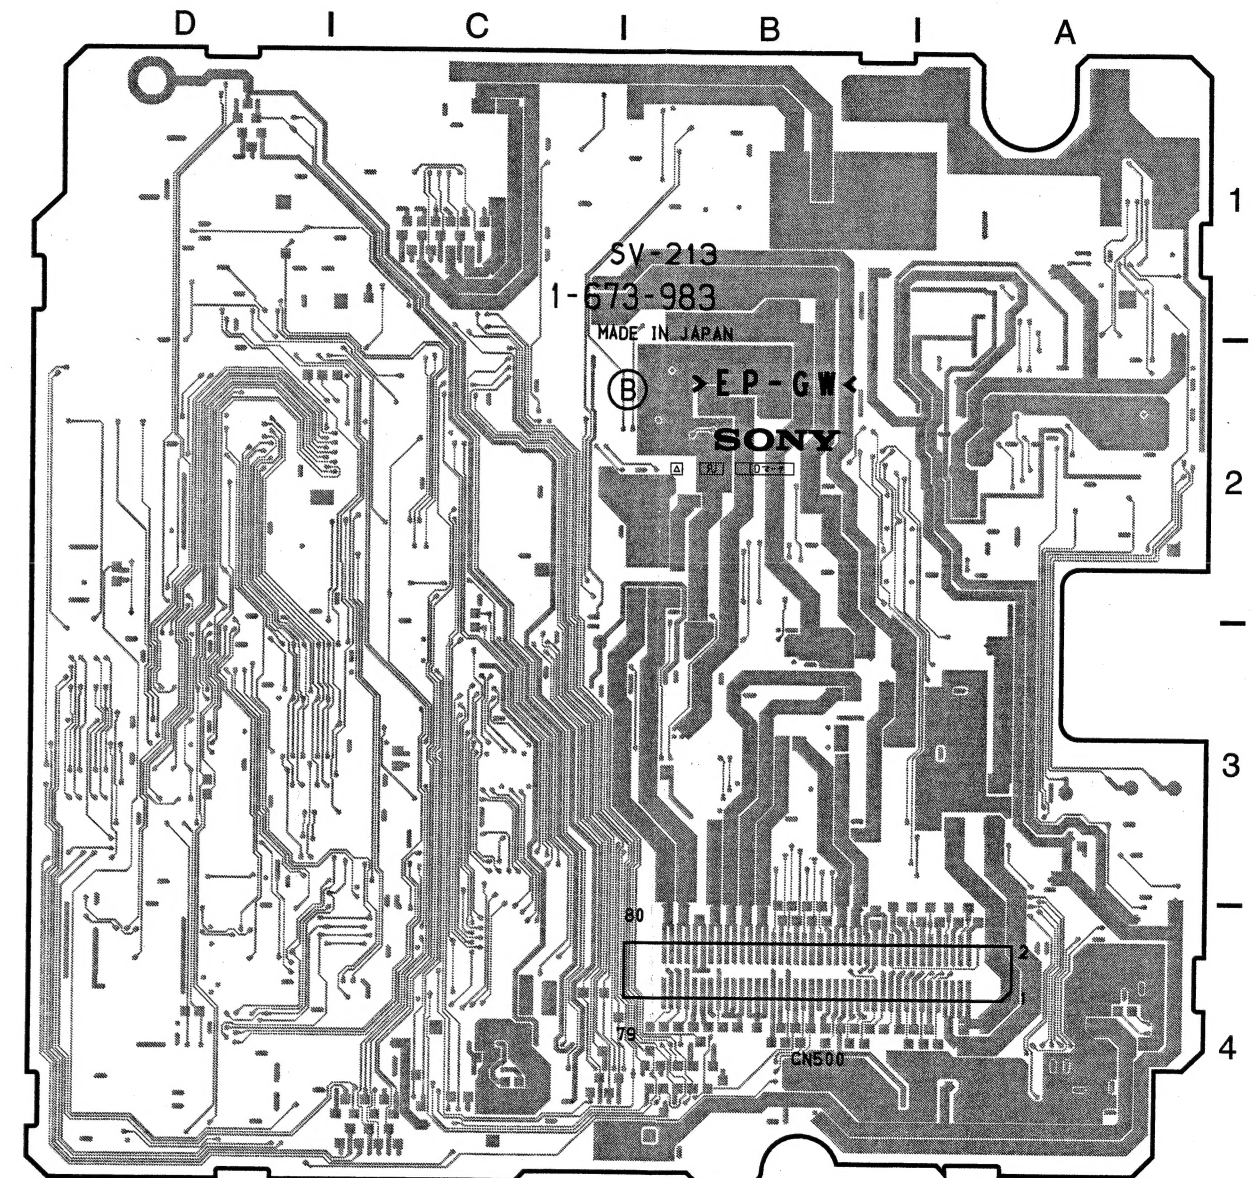

**SV-213 -B SIDE-**  
SUFFIX: -12



VA-199 (1-677-373-11)

C001 D5 C150 \*C5  
C002 D5 C151 \*C5  
C003 D5 C152 C5  
C004 \*D2 C166 \*C2  
C005 D3 C168 C4  
C006 \*D4 C169 C4  
C007 D2 C170 \*C3  
C008 D2 C171 \*C4  
C009 D1 C172 \*C3  
C010 D1 C173 \*C2  
C011 D1 C174 C2  
C012 D3 C175 \*C3  
C013 D3 C176 \*C4  
C014 D4 C177 C4  
C015 D4 C178 C4  
C016 D3 C179 C2  
C017 \*D4 C180 C1  
C018 \*D4 C181 C2  
C019 \*D4 C201 \*B2  
C033 B6 C202 \*B2  
C034 B6 C203 \*B2  
C035 \*B6 C207 \*B2  
C036 A6 C208 \*B2  
C037 \*B6 C209 B2  
C038 \*B6 C210 B2  
C039 B6 C211 \*B2  
C040 C6 C212 \*B2  
C044 A5 C213 \*C2  
C045 \*A5 C214 B2  
C045 \*A6 C215 \*B2  
C046 \*B6 C216 \*B2  
C047 C6 C217 \*B2  
C048 \*B6 C218 B2  
C050 C6 C219 \*B2  
C051 C6 C220 \*B3  
C052 C6 C221 B3  
C053 \*D3 C222 B3  
C054 D5 C223 B3  
C055 D4 C224 \*B3  
C056 B6 C225 \*B3  
C057 D5 C226 C3  
C058 D4 C227 \*B3  
C059 D4 C228 B3  
C060 D4 C229 \*B5  
C061 A6 C230 \*B5  
C062 A6 C231 \*B5  
C063 \*A6 C232 B3  
C101 \*C1 C233 \*B4  
C102 \*C1 C234 B3  
C103 \*C2 C235 \*B3  
C107 \*C2 C237 B5  
C108 \*C2 C238 \*B5  
C109 C2 C239 \*B3  
C110 \*C2 C240 C4  
C111 \*C2 C241 \*B4  
C112 \*C2 C242 \*B4  
C113 \*C2 C243 \*B5  
C114 \*C2 C244 \*B4  
C115 \*C2 C245 \*B4  
C116 \*C2 C246 B5  
C117 \*C3 C247 B5  
C118 C2 C248 \*B5  
C119 C3 C249 B5  
C120 \*C3 C250 \*B5  
C121 C3 C251 \*B5  
C122 C3 C252 B5  
C123 \*C3 C266 \*B2  
C124 \*C3 C268 B4  
C125 \*C3 C269 B4  
C126 \*C3 C270 \*B3  
C127 \*C3 C271 \*B4  
C128 C3 C272 \*B3  
C129 \*C5 C273 \*B2  
C130 \*C5 C274 B2  
C131 \*C5 C275 B2  
C132 C3 C276 \*B4  
C132 C4 C277 B4  
C133 \*C4 C278 C4  
C134 \*C3 C279 B2  
C135 \*C4 C280 B1  
C137 C5 C281 B2  
C138 \*C5 C301 \*A2  
C139 \*C3 C302 \*A2  
C140 C4 C303 \*A2  
C141 \*C4 C307 \*A2  
C142 \*C4 C308 \*A2  
C143 \*C5 C309 A2  
C144 \*C4 C310 \*A2  
C145 \*C4 C311 \*A2  
C146 C5 C312 \*A2  
C147 \*D5 C313 \*A2  
C148 \*C5 C314 \*A2  
C149 C5 C315 \*A2

C316 \*A2 IC201 B2  
C317 \*A3 IC202 B3  
C318 A2 IC203 B3  
C319 \*A2 IC205 B3  
C320 \*A3 IC206 \*B5  
C321 A3 IC207 B5  
C322 A3 IC301 A2  
C323 A3 IC302 A3  
C324 \*A3 IC303 A3  
C325 B3 IC305 A3  
C326 \*A4 IC306 \*A5  
C327 \*A3 IC307 A5  
C328 A3 IC309 \*B6  
C329 \*A5 L101 C2  
C330 \*A5 L102 C2  
C331 \*A5 L201 B2  
C332 A3 L202 B2  
C333 \*A4 L301 A2  
C334 A3 L302 A2  
C335 \*A3 Q001 D2  
C337 A5 Q002 \*D2  
C338 \*A5 Q003 \*D4  
C339 \*A3 Q006 B6  
C340 B4 Q007 C6  
C341 \*A4 Q009 C6  
C342 \*A4 Q101 \*C2  
C343 \*A5 Q102 C2  
C344 \*A4 Q103 \*C2  
C345 B4 Q104 \*C2  
C346 A5 Q105 \*C2  
C347 A5 Q106 C2  
C348 \*A5 Q107 C3  
C349 A5 Q108 C2  
C350 \*A5 Q109 \*C2  
C351 \*A5 Q110 \*C3  
C352 A5 Q111 C3  
C356 \*A2 Q112 C3  
C368 A4 Q113 \*C4  
C369 A4 Q114 C4  
C370 \*A3 Q115 C4  
C371 \*A4 Q116 C4  
C372 \*A3 Q117 C4  
C373 \*B2 Q118 C4  
C374 A2 Q119 \*C4  
C375 A2 Q120 C4  
C376 \*A4 Q121 C4  
C377 A4 Q122 C2  
C378 A5 Q123 C3  
C379 A2 Q124 C4  
C380 A2 Q201 \*B2  
C381 A2 Q202 C2  
C381 A2 Q203 \*B2  
C381 A2 Q204 \*B2  
C381 A2 Q205 \*B2  
C381 A2 Q206 C2  
C381 A2 Q207 \*B3  
C381 A2 Q208 B2  
C381 A2 Q209 \*B2  
C381 A2 Q210 \*B3  
C381 A2 Q211 B3  
C381 A2 Q212 \*B3  
C381 A2 Q213 \*B4  
C381 A2 Q214 B4  
C381 A2 Q215 B4  
C381 A2 Q216 B4  
C381 A2 Q217 B4  
C381 A2 Q218 B4  
C381 A2 Q219 \*B4  
C381 A2 Q220 B4  
C381 A2 Q221 B4  
C381 A2 Q222 B2  
C381 A2 Q223 C3  
C381 A2 Q224 B4  
C381 A2 Q301 \*A2  
C381 A2 Q302 A2  
C381 A2 Q302 B2  
C381 A2 Q303 \*A2  
C381 A2 Q304 \*A2  
C381 A2 Q305 \*A2  
C381 A2 Q306 A2  
C381 A2 Q307 \*A3  
C381 A2 Q308 A2  
C381 A2 Q309 \*A2  
C381 A2 Q310 \*A3  
C381 A2 Q311 A3  
C381 A2 Q312 \*A3  
C381 A2 Q313 \*A4  
C381 A2 Q314 A4  
C381 A2 Q315 A4  
C381 A2 Q316 A4  
C381 A2 Q317 A4  
C381 A2 Q318 A4  
C381 A2 Q319 \*A4

Q320 A4  
Q321 A4  
Q322 A2  
Q323 B3  
Q324 A4  
R002 \*D2  
R003 \*D2  
R004 \*D2  
R005 \*D2  
R006 \*D2  
R007 \*D1  
R008 \*D1  
R009 \*D2  
R010 \*D1  
R011 \*D1  
R012 \*D1  
R013 \*D2  
R014 \*D2  
R015 \*D2  
R016 \*D2  
R017 \*D2  
R018 \*D2  
R019 \*D2  
R021 D5  
R022 \*D2  
R023 \*D4  
R024 D4  
R025 D3  
R026 D4  
R027 \*C4  
R027 \*D4  
R028 D4  
R029 \*D4  
R030 \*D5  
R032 \*D4  
R033 \*D4  
R034 \*D4  
R035 \*D4  
R036 \*D4  
R037 D4  
R038 D4  
R040 \*D3  
R041 D3  
R042 D3  
R043 D2  
R058 \*B6  
R059 \*B6  
R060 A6  
R061 A6  
R062 A6  
R063 B6  
R068 \*A6  
R069 \*A6  
R070 \*A6  
R071 \*B6  
R072 \*D4  
R073 \*B6  
R075 \*B5  
R076 \*A5  
R077 \*C5  
R078 \*B6  
R079 \*C4  
R079 \*D4  
R081 D5  
R082 D4  
R083 \*B6  
R084 \*B6  
R085 \*B6  
R086 \*B6  
R087 \*B6  
R088 \*B6  
R089 \*B6  
R090 \*B6  
R091 \*B6  
R092 D5  
R093 D5  
R094 C1  
R101 \*C2  
R102 \*C2  
R103 \*C2  
R104 \*C2  
R105 \*C2  
R106 C1  
R106 C2  
R107 C2  
R109 C2  
R110 \*C2  
R111 \*C2  
R112 \*C2  
R113 \*C2  
R114 \*C2  
R115 \*C3

R116 \*C2  
R117 C2  
R118 \*C2  
R119 \*C2  
R120 \*C2  
R121 C2  
R122 \*C3  
R123 \*C2  
R125 \*C2  
R126 \*C2  
R127 \*C3  
R128 \*C3  
R129 C2  
R130 \*C3  
R131 C2  
R132 C2  
R133 \*C3  
R134 \*C3  
R135 C3  
R136 \*C3  
R137 \*C3  
R138 \*C3  
R139 C3  
R140 \*C3  
R141 \*C3  
R142 \*C3  
R143 \*C3  
R144 \*C3  
R145 \*C4  
R146 \*C3  
R147 \*C4  
R148 \*C4  
R149 \*C4  
R150 \*C4  
R154 \*C5  
R155 \*C4  
R156 C4  
R157 \*C4  
R158 C4  
R159 C4  
R160 C5  
R161 \*C4  
R162 C4  
R163 C4  
R164 \*C4  
R165 \*C4  
R166 \*C4  
R167 \*C5  
R168 \*C4  
R169 \*C4  
R170 C4  
R171 C4  
R172 \*C4  
R173 C4  
R174 C4  
R175 \*C5  
R176 \*C5  
R177 \*C5  
R178 \*C5  
R179 \*C4  
R180 \*C5  
R181 \*C5  
R182 \*C5  
R183 \*C5  
R191 \*C2  
R192 C2  
R194 \*C2  
R195 \*C3  
R196 \*C4  
R197 \*C5  
R198 C2  
R199 \*C2  
R201 \*B2  
R202 \*B2  
R203 \*B2  
R204 \*B2  
R205 \*B2  
R206 C2  
R207 B2  
R209 B2  
R210 B2  
R211 \*B2  
R212 \*B2  
R213 \*B3  
R214 \*B2  
R215 \*B3  
R216 \*B2  
R217 \*B2  
R218 \*B2  
R219 \*B2  
R220 \*B2  
R221 B2  
R222 \*B3


R223 B3  
R223 C3  
R225 \*B2  
R226 \*B2  
R227 \*B3  
R228 \*B3  
R229 \*B3  
R230 \*B3  
R231 \*B3  
R232 \*B3  
R233 B3  
R234 \*B3  
R235 B3  
R236 \*B3  
R237 \*B3  
R238 \*B3  
R239 B3  
R240 \*B3  
R241 \*B3  
R242 \*B3  
R243 \*B3  
R244 \*B3  
R245 \*B4  
R246 \*B3  
R247 \*B4  
R248 \*B3  
R249 \*B3  
R250 \*B4  
R254 \*B5  
R255 \*B4  
R256 B4  
R257 B4  
R258 B4  
R259 B4  
R260 B5  
R261 \*B4  
R262 B4  
R263 B4  
R264 \*B4  
R265 \*B4  
R266 \*B4  
R267 \*B5  
R268 \*B4  
R269 \*B4  
R270 B4  
R271 B4  
R272 \*B4  
R273 B4  
R274 B4  
R275 \*C5  
R276 \*B5  
R277 \*B5  
R278 \*B5  
R279 \*B4  
R280 \*B5  
R281 \*B5  
R282 \*B5  
R283 \*B5  
R291 \*C2  
R292 B2  
R294 \*B2  
R295 \*B3  
R296 \*B4  
R297 \*B5  
R298 B2  
R299 \*C2  
R301 \*A1  
R302 \*A2  
R303 \*A2  
R304 \*A1  
R305 \*A2  
R306 A2  
R307 A2  
R309 A2  
R310 \*A2  
R311 \*A2  
R312 \*A2  
R313 \*A3  
R314 \*A2  
R315 \*A3  
R316 \*A2  
R317 A2  
R318 \*A2  
R319 \*A2  
R320 \*A2  
R321 A2  
R322 \*A3  
R323 B3  
R325 \*A2  
R326 \*A2  
R327 \*A3  
R328 \*A3  
R329 \*A3

R330 \*A3  
R331 \*A3  
R332 \*A3  
R333 A3  
R334 \*A3  
R335 A3  
R336 \*A3  
R337 \*A3  
R338 \*A3  
R339 A3  
R340 \*A3  
R341 \*A3  
R342 \*A3  
R343 \*A3  
R344 \*A3  
R345 \*A4  
R346 \*A3  
R347 \*A4  
R348 \*A3  
R349 \*A3  
R350 A4  
R354 \*A5  
R355 \*A4  
R356 A4  
R357 \*A4  
R358 A4  
R359 A4  
R360 A5  
R361 A4  
R362 \*A4  
R363 A4  
R364 \*A4  
R365 \*A4  
R366 \*A4  
R367 \*A4  
R368 \*A4  
R369 \*A4  
R370 A4  
R371 \*A4  
R372 \*A4  
R373 A4  
R374 A4  
R375 \*B5  
R376 \*A5  
R377 \*A5  
R378 \*A5  
R379 \*A4  
R380 \*A5  
R381 \*A5  
R382 \*A5  
R383 \*A5  
R391 \*A2  
R392 A2  
R394 \*A2  
R395 \*A3  
R396 \*A4  
R397 \*A5  
R398 A2  
R399 \*B2  
R400 C1  
R401 C1  
R402 C2  
R403 C2  
R404 C3  
R405 \*C4  
R406 \*C4  
R407 C4  
R500 B1  
R501 B1  
R502 B2  
R503 B2  
R504 C3  
R505 \*B4  
R506 \*B4  
R507 B4  
R600 A2  
R601 A2  
R602 A2  
R603 A2  
R604 B3  
R605 \*A4  
R606 \*A4  
R607 A4  
R700 \*C3  
R701 C3  
R702 C3  
R703 C4  
R704 \*C4  
R707 \*C4  
R800 B2  
R801 B3  
R802 \*B3  
R803 B4


\*: B SIDE

VA-199V  
SUFFIX: -11

VA-199  
SUFFIX: -11

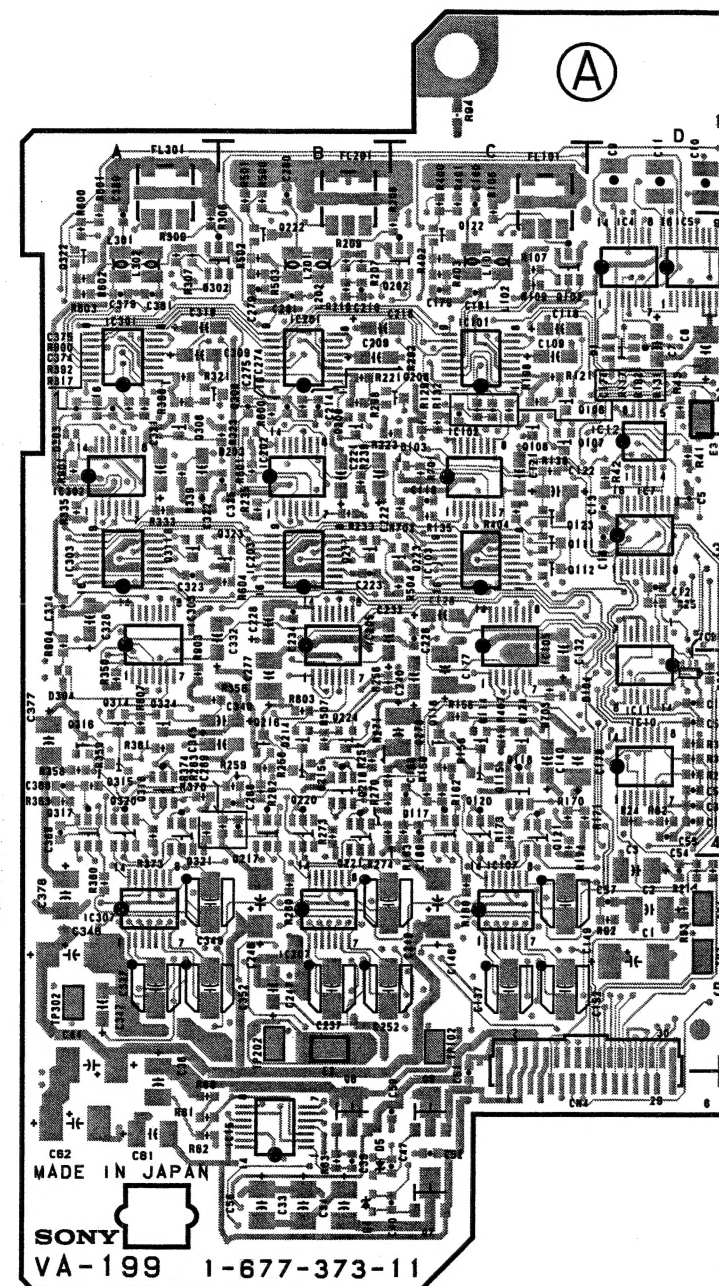

VA-199 -A SIDE-  
SUFFIX: -11

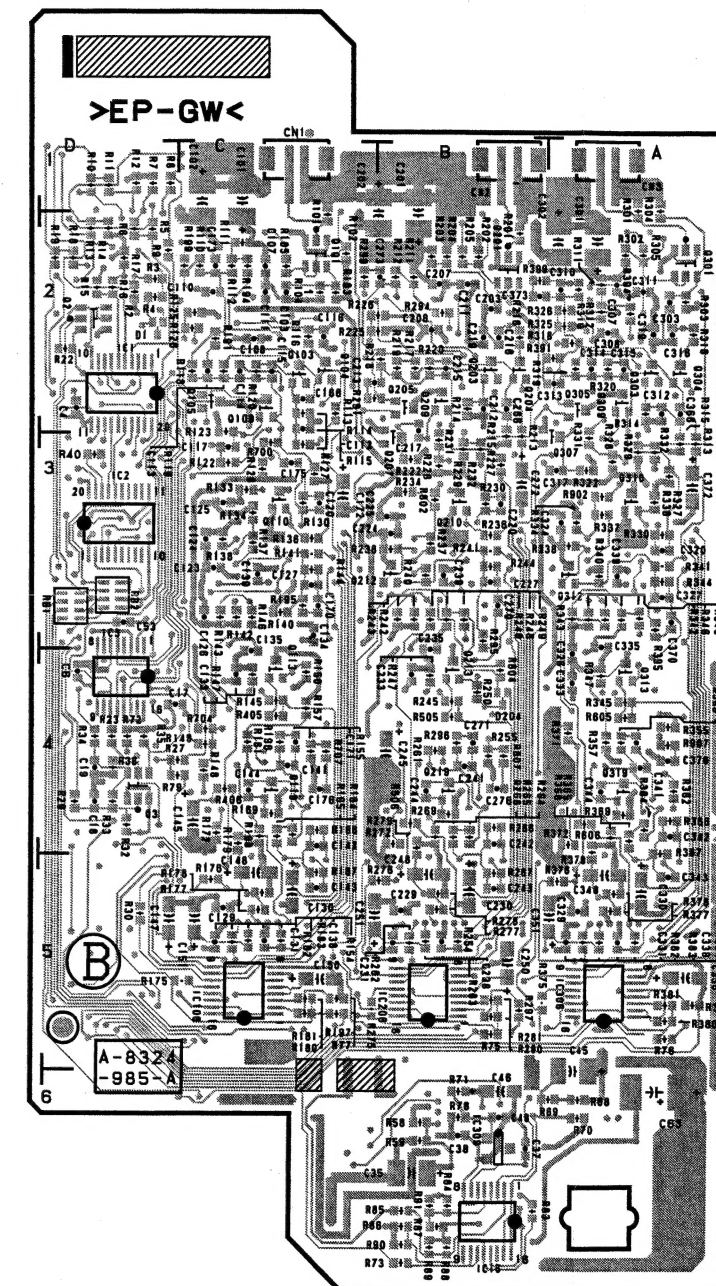

VA-199 -B SIDE-  
SUFFIX: -11